

CP12260 12V 26Ah (20hr) Sealed Lead Acid (SLA) Battery

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.



Battery Construction


| Component | Positive plate | Negative plate | Container | Cover | Safety valve | Terminal | Separator | Electrolyte |
|--------------|----------------|----------------|-----------|-------|--------------|----------|------------|---------------|
| Raw material | Lead dioxide | Lead | ABS | ABS | Rubber | Copper | Fiberglass | Sulfuric acid |

General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.
- Valve Regulated Lead Acid (VRLA) battery

Dimensions and Weight

| | |
|--------------------------|-------------|
| Length(mm / inch) | 166 / 6.54 |
| Width(mm / inch) | 175 / 6.89 |
| Height(mm / inch) | 125 / 4.92 |
| Total Height(mm / inch) | 125 / 4.92 |
| Approx. Weight(Kg / lbs) | 7.6 / 16.75 |

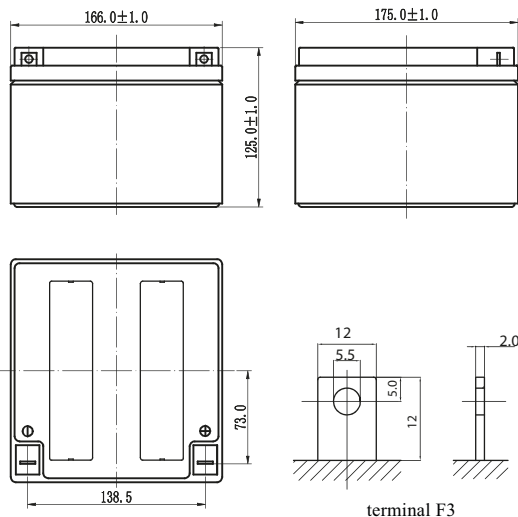

Performance Characteristics

| | |
|---|------------|
| Nominal Voltage | 12V |
| Number of cell | 6 |
| Design Life | 5 years |
| Nominal Capacity 77°F (25°C) | |
| 20 hour rate (1.30A, 10.5V) | 26Ah |
| 10 hour rate (2.58A, 10.5V) | 25.8Ah |
| 5 hour rate (4.9A, 10.5V) | 24.5Ah |
| 1 hour rate (18.4A, 9.6V) | 18.4Ah |
| Internal Resistance | |
| Fully Charged battery 77°F (25°C) | ≤ 12mOhms |
| Self-Discharge | |
| 3% of capacity declined per month at 20°C(average) | |
| Operating Temperature Range | |
| Discharge | -20~60°C |
| Charge | -10~60°C |
| Storage | -20~60°C |
| Max. Discharge Current 77°F (25°C) | 300A(5s) |
| Short Circuit Current | 1300A |
| Charge Methods: Constant Voltage Charge 77°F (25°C) | |
| Cycle use | 14.4-14.8V |
| Maximum charging current | 9.6A |
| Temperature compensation | -30mV/°C |
| Standby use | 13.5-13.8V |
| Temperature compensation | -20mV/°C |

Discharge Constant Current (Amperes at 77°F25°C)

| End Point Volts/Cell | 5min | 10min | 15min | 30min | 1h | 3h | 5h | 10h | 20h |
|----------------------|-------|-------|-------|-------|------|-----|-----|------|------|
| 1.60V | 119.2 | 82.3 | 56.3 | 33.6 | 18.4 | 8.2 | 5.3 | 2.74 | 1.34 |
| 1.65V | 112.7 | 78.4 | 53.8 | 32.3 | 17.8 | 8.0 | 5.2 | 2.69 | 1.33 |
| 1.70V | 106.5 | 74.3 | 51.2 | 30.9 | 17.0 | 7.7 | 5.0 | 2.63 | 1.32 |
| 1.75V | 99.9 | 70.1 | 48.6 | 29.4 | 16.3 | 7.4 | 4.9 | 2.58 | 1.30 |
| 1.80V | 93.3 | 66.0 | 45.9 | 27.8 | 15.5 | 7.1 | 4.7 | 2.51 | 1.28 |

Discharge Constant Power (Watts at 77°F25°C)

| End Point Volts/Cell | 5min | 10min | 15min | 30min | 1h | 3h | 5h | 10h |
|----------------------|-------|-------|-------|-------|------|------|------|------|
| 1.60V | 213.8 | 139.3 | 104.0 | 63.5 | 36.6 | 15.7 | 9.17 | 5.30 |
| 1.65V | 199.8 | 131.8 | 98.4 | 60.4 | 35.1 | 15.3 | 9.01 | 5.22 |
| 1.70V | 186.8 | 123.1 | 92.7 | 57.1 | 33.5 | 14.9 | 8.83 | 5.14 |
| 1.75V | 173.9 | 115.6 | 86.9 | 53.8 | 31.8 | 14.5 | 8.64 | 5.06 |
| 1.80V | 160.9 | 107.1 | 81.2 | 50.4 | 30.0 | 13.9 | 8.43 | 4.98 |









(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.

DENA ENGINEERING CO.,LTD.

185/1 Wongsawang Road, Wongsawang, Bangsue, Bangkok 10800 THAILAND

Tel. 02-587-7780, 02-910-9600 Fax. 02-587-1624, 02-910-9142 e-mail: d@dena.co.th www.dena.co.th

CP12260 12V 26Ah (20hr) Sealed Lead Acid (SLA) Battery

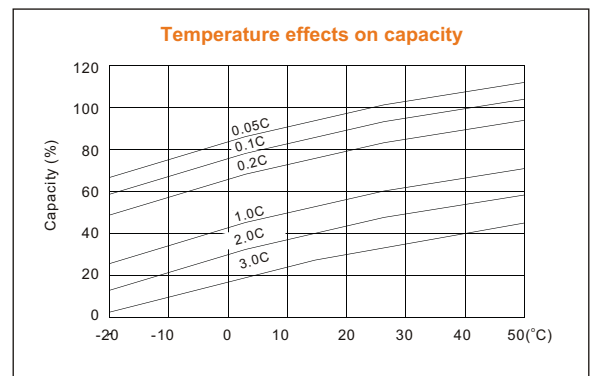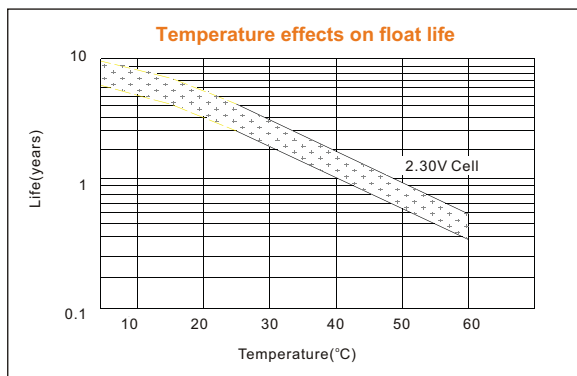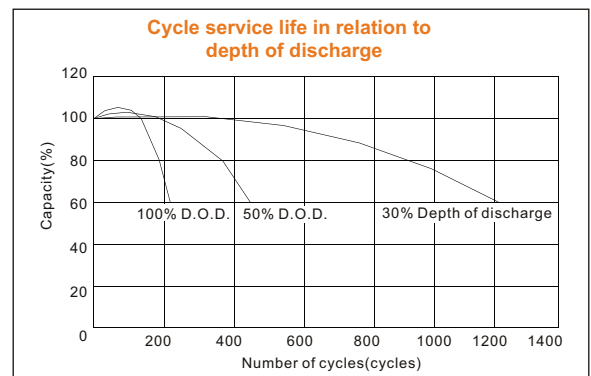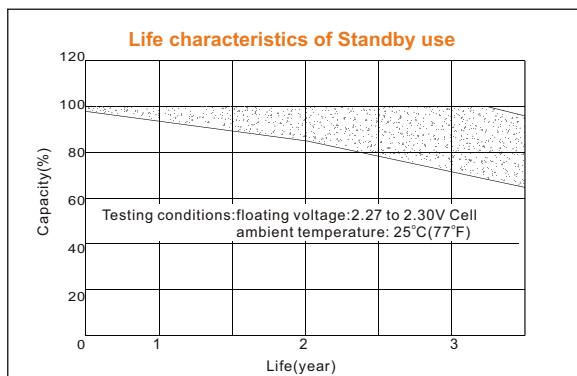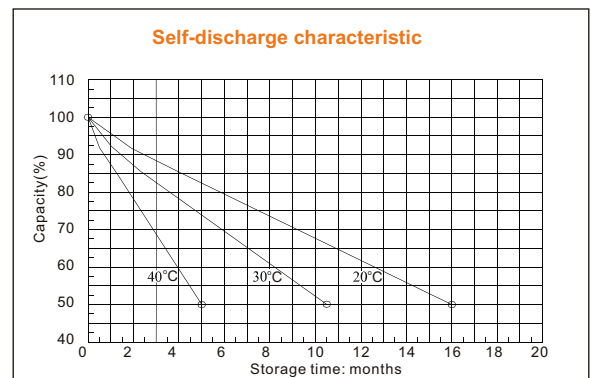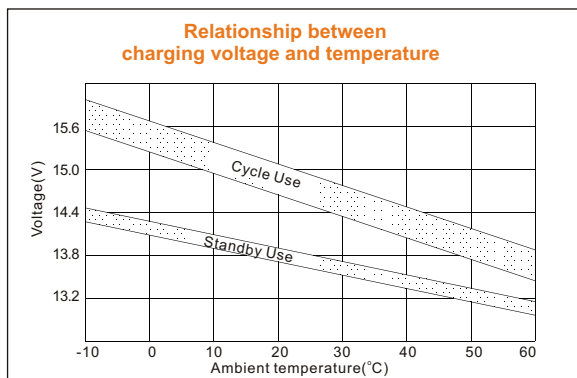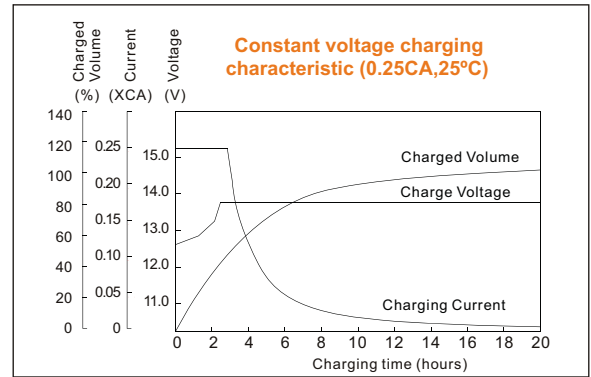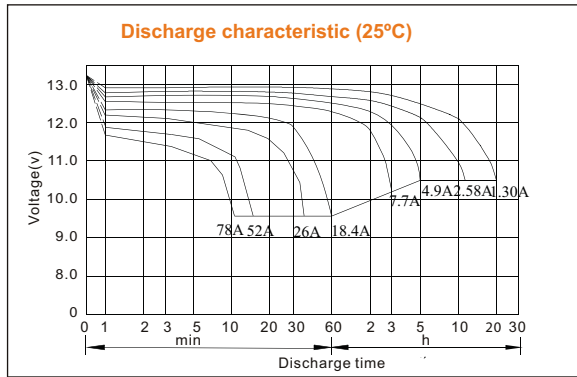

MH25860



G4M19906-9202-E-16

DENA ENGINEERING CO.,LTD.

185/1 Wongsawang Road, Wongsawang, Bangsue, Bangkok 10800 THAILAND

Tel. 02-587-7780, 02-910-9600 Fax. 02-587-1624, 02-910-9142 e-mail: d@dena.co.th www.dena.co.th