


Cross Cable Saddle



Code No.	Thread Size (in)	Cable Size (mm ²)	Material	Weight (kg)
LCRS 58	5/8	35-70	Copper Alloy	0.95
LCRS 34	3/4	35-70	Copper Alloy	0.95

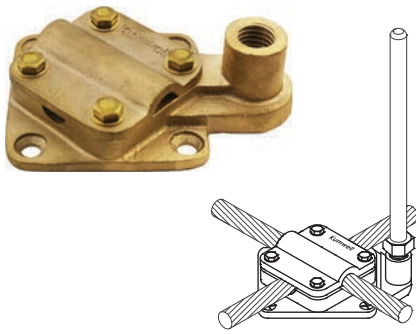

Test Certificate
IEC 62561 Part 1




Material
Copper Alloy - BS EN 1982
Bolt - Brass



Application
Support air terminal to connect with copper stranded or solid conductors.

Adjustable Saddle

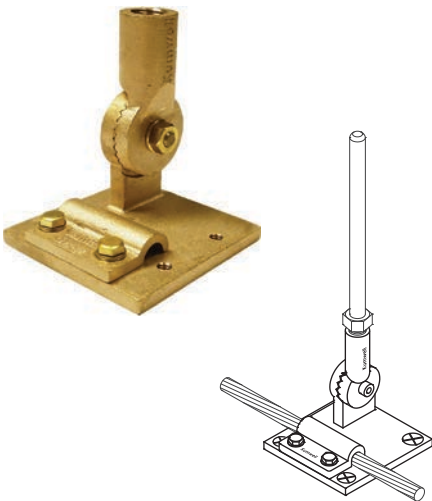

For Cable

Code No.	Thread Size (in)	Cable Size (mm ²)	Material	Weight (kg)
LDAS 58	5/8	50-70	Copper Alloy	0.72
LDAS 34	3/4	50-70	Copper Alloy	0.72
LDAS 58-C120	5/8	95-120	Copper Alloy	0.73
LDAS 34-C120	3/4	95-120	Copper Alloy	0.73
LDAS 58T	5/8	50-70	Tinned Copper Alloy	0.72
LDAS 34T	3/4	50-70	Tinned Copper Alloy	0.72
LDAS 58A	5/8	50-70	Aluminium Alloy	0.25
LDAS 34A	3/4	50-70	Aluminium Alloy	0.25



Test Certificate
IEC 62561 Part 1




Material
Copper Alloy - BS EN 1982, Bolt - Brass
Tinned Copper Alloy, Bolt - Stainless Steel
Aluminium Alloy-BS 2898



Application
Support air terminal onto adjustable angle to connect with copper stranded.

For Tape

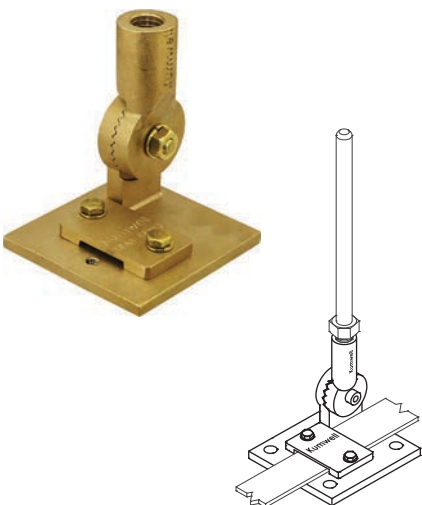

Code No.	Thread Size (in)	Tape Size (mm)	Material	Weight (kg)
LDAS 58-252	5/8	25x2	Copper Alloy	0.81
LDAS 58-253	5/8	25x3	Copper Alloy	0.81
LDAS 34-253	3/4	25x3	Copper Alloy	0.81
LDAS 58-254	5/8	25x4	Copper Alloy	0.81
LDAS 34-254	3/4	25x4	Copper Alloy	0.81
LDAS 58-253T	5/8	25x3	Tinned Copper Alloy	0.81
LDAS 34-253T	3/4	25x3	Tinned Copper Alloy	0.81
LDAS 58-253A	5/8	25x3	Aluminium Alloy	0.25
LDAS 34-253A	3/4	25x3	Aluminium Alloy	0.25
LDAS 58-254A	5/8	25x4	Aluminium Alloy	0.25
LDAS 34-254A	3/4	25x4	Aluminium Alloy	0.25



Test Certificate
IEC 62561 Part 1



Material
Copper Alloy - BS EN 1982, Bolt - Brass
Tinned Copper Alloy, Bolt - Stainless Steel
Aluminium Alloy-BS 2898



Application
Support air terminal onto adjustable angle to connect with copper or aluminium tape conductors.