POINT LIGHTING SPECIFICATION GUIDANCE

PRODUCT MOUNTING DETAILS

TYPICAL SINGLE WHITE BEACON ARRANGEMENT — OL24

- FAA L-865 FLASHING BEACON
- ICAO TYPE A
- FIXED MOUNT
- WELD BRACKET MOUNTED
- TYPICAL STACK DETAIL

LED:
PFB-37002-W-x-xx

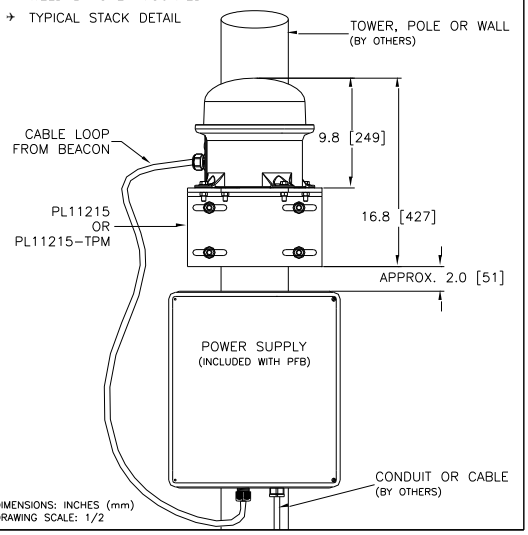

DIMENSIONS: INCHES (mm)
DRAWING SCALE: 1/2

TYPICAL SINGLE DUAL BEACON ARRANGEMENT — OL25

- FAA L-864/865 FLASHING BEACON
- ICAO TYPE B/A
- FIXED MOUNT
- WELD BRACKET MOUNTED
- TYPICAL STACK DETAIL

LED:
PFB-37002-RW-x-xx

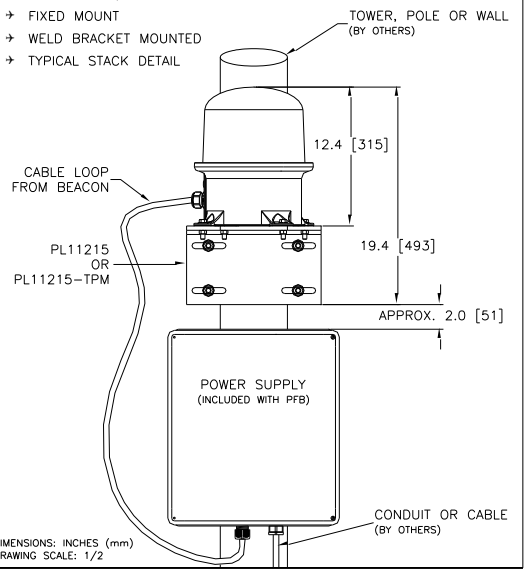

DIMENSIONS: INCHES (mm)
DRAWING SCALE: 1/2

TYPICAL DOUBLE BEACON ARRANGEMENT PRIMARY & STANDBY DUAL BEACONS — OL26

- FAA L-864/865 DUAL FLASHING BEACON
- ICAO TYPES A & B
- FIXED MOUNT
- BOLT-ON BRACKET MOUNTED
- ALUMINUM BRACKET
- TWO BEACON MOUNT

LED:
PFB-37002-RW-x-xx
PFB-37002-RW-x-xx-SB

NOTE: THIS ARRANGEMENT ALSO APPLIES TO WHITE PRIMARY-STANDBY BEACONS.

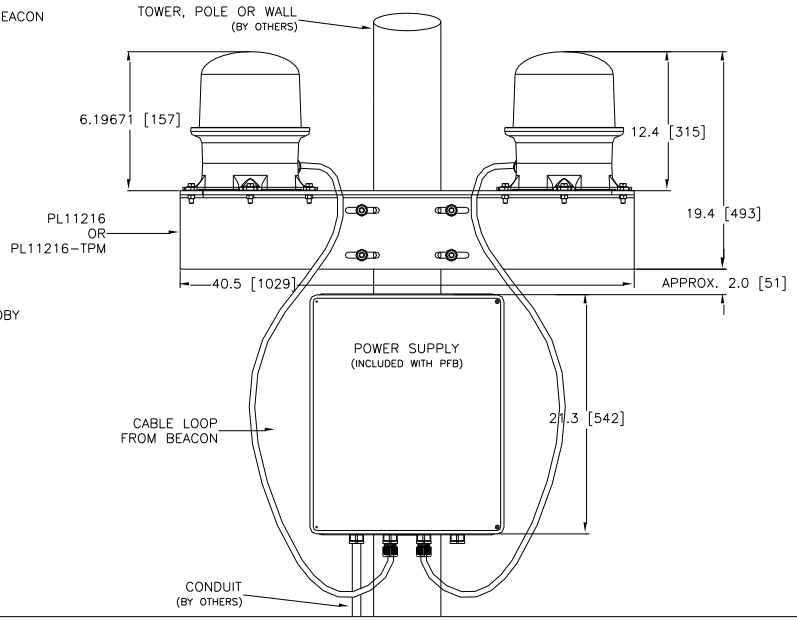

DIMENSIONS: INCHES (mm)
DRAWING SCALE: 1/2