


Tape Saddle



Code No.	Thread Size (in)	Tape Size (mm)	Material	Weight (kg)
LTAS 58	5/8	25x2 , 25x3 , 25x4	Copper Alloy	0.460
LTAS 34	3/4	25x2 , 25x3 , 25x4	Copper Alloy	0.440
LTAS 58T	5/8	25x2 , 25x3 , 25x4	Tinned Copper Alloy	0.460
LTAS 34T	3/4	25x2 , 25x3 , 25x4	Tinned Copper Alloy	0.440
LTAS 58A	5/8	25x3 , 25x4	Aluminium Alloy	0.134
LTAS 34A	3/4	25x3 , 25x4	Aluminium Alloy	0.132

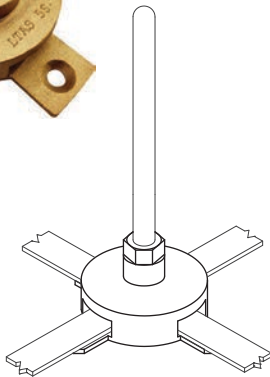

Test Certificate
IEC 62561 Part 1




Material
Copper Alloy - BS EN 1982
Aluminium Alloy - BS 2898



Application
Support air terminal to connect with copper or aluminium tape conductors.

Round Saddle

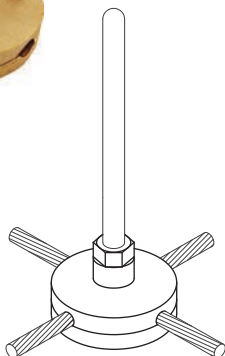

Code No.	Thread Size (in)	Cable Size (mm ²)	Material	Weight (kg)
LROS 58	5/8	50-70	Copper Alloy	0.60
LROS 34	3/4	50-70	Copper Alloy	0.60
LROS 58-C120	5/8	95-120	Copper Alloy	0.74
LROS 34-C120	3/4	95-120	Copper Alloy	0.74
LROS 58A	5/8	50-70	Aluminium Alloy	0.22
LROS 34A	3/4	50-70	Aluminium Alloy	0.21



Test Certificate
IEC 62561 Part 1



Material
Copper Alloy - BS EN 1982,
Bolt - Brass



Application
Support air terminal to connect with copper stranded or solid conductors.