

ECO Salt Chlorinator

เครื่องผลิตคลอรีนจากเกลือ รุ่น ECO **เหมาะสำหรับสระว่ายน้ำขนาดเล็ก สระสปา หรืออ่างสปา ขนาด 10-40m³**
 การผลิตคลอรีนโดยใช้เกลือมีความปลอดภัย ไม่ทำให้เกิดการระคายเคืองต่อผิวหนัง
 สามารถกำจัดแบคทีเรียในสระได้อย่างมีประสิทธิภาพ จึงทำให้ได้คุณภาพน้ำที่ปลอดภัยและมั่นใจได้
 นอกจากนี้ความกังวลเกี่ยวกับยาฆ่าเชื้อแบบดั้งเดิมไปได้เลย

- ✓ ให้การฆ่าเชื้อโรคที่มีประสิทธิภาพ
- ✓ การติดตั้งที่ง่าย
- ✓ มีสิทธิบัตรเฉพาะ



02-989-1111 / 02-130-6134-35



info@winwinpoolshop.com



@winwinpoolshop.com



www.winwinpoolshop.com



ECO Salt Chlorinator

▼ ECO Presentation

ECO salt chlorinator is a device to disinfect swimming pool water by producing hypochlorous acid through electrolytic salt. It is suitable for small private swimming pools of 10-40m³. The equipment outside This is a new method of chlorine production, using salt to make chlorine, can effectively eliminate the bacteria in the pool, micro-organisms Material and harmful organic matter, safe and assured water quality, let the pool bid farewell to the traditional disinfectant concerns.

- * Effective sterilization
- * Easy Installation
- * Exclusive Patent

▼ ECO Chlorinator Details






ECO Salt Chlorinator

ECO Chlorinator Specification

Model	Input	Working Volt	Capacity	Power	For Pools	Pack Size
ECO 2	AC 110-240V	DC 24V	2 g/Hr	12 W	≤10M ³	23*20*17cm
ECO 4	AC 110-240V	DC 24V	4 g/Hr	24 W	≤20M ³	23*20*17cm
ECO 6	AC 110-240V	DC 24V	6 g/Hr	36 W	≤30M ³	23*20*17cm
ECO 8	AC 110-240V	DC 24V	8 g/Hr	48 W	≤40M ³	23*20*17cm

Graphics & Installation

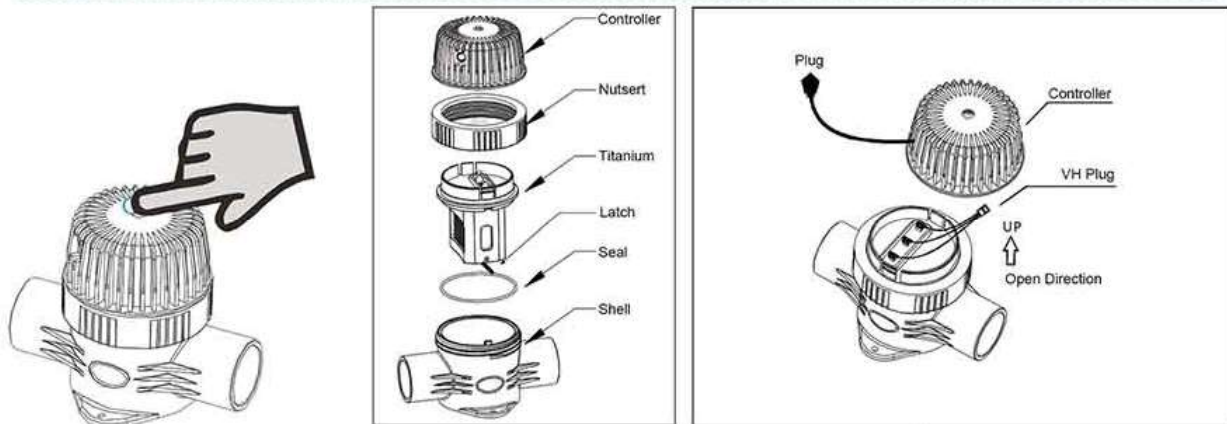

1. Installation and maintenance must be operated by professional electricians.
2. Before maintenance, ensure that the switch is disconnected from the power supply.
3. The power supply must be installed on the power supply with leakage switch protection.
4. Salt chlorinator generator should be installed in ventilated and dry place as far as possible.
5. Before installation, ensure the diameter of the pipeline to be installed. The interface of the salt and chlorine machine is double pipe. Both $\varnothing 50\text{mm}$ and $\varnothing 48\text{mm}$ are ok.
6. The pool pipe valve must be closed before installation.

