

VP SERIES

SALT AND MINERAL CHLORINATOR

SIMPLY RELIABLE



- SALT OR MINERAL SALT COMPATIBLE
- MULTI - FUNCTION MENU SYSTEM
- EAST TO USE TOUCH PAD
- EFFICIENT CHLORINE PRODUCTION
- ULTRA LONG LIFE SELF - CLEANING CELL
- FULLY AUTOMATED
- SIMPLE SET UP AND OPERATION
- QUICK CONNECT CELL
- HORIZONTAL OR VERTICAL INSTALL OPTION WITH CALL HOUSING
- VARIABLE SPEED PUMP COMPATIBLE
- SMART TEMPERATURE SENSORS (POWER SUPPLY & WATER)
- EAST INSTALLATION TO NEW OR EXISTING POOLS
- COMES WITH SAFETY FLOW SWITCH



HYDRON

2 YEARS*
WARRANTY
OR 10,000 OPERATING HOURS

*Domestic and Commercial installations, whichever comes first.


VP SERIES

SALT AND MINERAL CHLORINATOR

FEATURES

- LOW SALT OPERATION : 3000 – 3500 PPM (0.3% – 0.35%) WITH BUILT IN SELF - REGULATOR FOR HIGH SALT
- BACKLIT LCD INTERFACE DISPLAYING DETAILED OPERATOR INSTRUCTIONS CLEARLY
- SMART SELF - CLEANING CELL ELECTRODE
- PREMIUM GRADE QUICK CONNECT TITANIUM CELL FOR INCREASED LIFESPAN
- BASHWASH, SUPER CHLORINATE AND WINTER MODE FUNCTIONS
- SINGLE OR DUAL TIMER CYCLES
- BUILT IN SALT/TDS TEST, WATER FLOW AND PROTECTION
- AUTOMATIC BATTERY BACK - UP TIMER
- MODERN, SLIM LOOKING POWER PACK
- SUITABLE FOR ALL POOL SURFACES (CONCRETE, FIBREGLASS, VINYL & TILED)

CHLORINATOR SIZING CHART

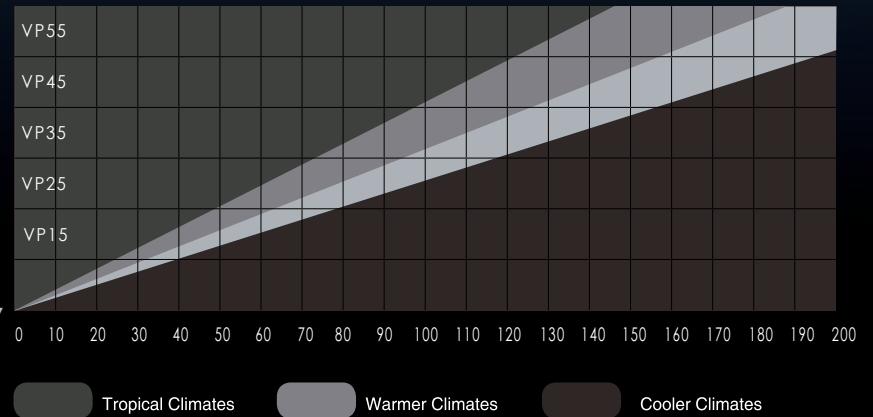

Sizing Chart provided as a guide only. Consult your Local dealer for the correct systems, size and specification to suit your needs.

CHLORINE PRODUCTION

Model	Per Hour			Over 8 hours		
	Chlorine Output	Cal.hypo Equivalent (65%)	Sod.hypo. Equivalent (12.5%)	Chlorine Output	Cal.hypo Equivalent (65%)	Sod.hypo. Equivalent (12.5%)
VP15	15g	23g	120ml	120g	184g	960ml
VP25	25g	38g	200ml	200g	304g	1600ml
VP35	35g	54g	280ml	280g	432g	2240ml
VP45	45g	69g	360ml	360g	552g	2880ml
VP55HD	55g	85g	440ml	440g	680g	3520ml

SPECIFICATION TABLE

Model	VOLTS (Vac) Input	AMPS* (Aac) Input	Power Consumption (Watts)	VOLTS* (Vdc) Output	AMPS* (Adc) Output	Frequency (Hz)	Weight (kg)	Dimensions (cm)
VP15	210 - 265	0.86	204.7	15.0	7.57	50/60	9.2	41L x 35W x 19H
VP25	210 - 265	1.25	293.0	25.0	7.38	50/60	10.9	41L x 35W x 19H
VP35	210 - 265	1.06	244.9	17.5	8.02	50/60	12.0	41L x 35W x 19H
VP45	210 - 265	1.30	292.2	22.5	7.98	50/60	13.5	41L x 35W x 19H
VP55HD	210 - 265	1.78	413.0	27.5	8.73	50/60	14.3	41L x 35W x 19H

Optional Extra: 15 000hr Heavy Duty Anode. Use HD on end of model number and specify when ordering.



Your Local Agent