

# Microcomputer Timer Switch




## Product Feature

DIN standard size, DIN35 Standard guide rail mounting, Applicable to the construction and industrial installation.

Set 16 opening and closing control cycle by the week or day, And with manual on or off.

Internal battery can be easily replaced for longer lifespan.

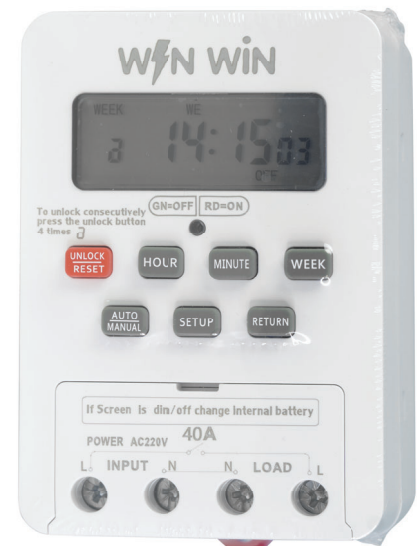

## Technical Data

ITEM	Parameter
Rated voltage	AC220V 50/60Hz
Voltage range	AC180V-250V
Timing error	$\leq 2$ sec/day(25°C)
Display device	LCD display
Electrical life	105(rated load)
Machinery life	107
Minimum setting interval	1 min
Humidity	35~ 85%RH
Contact number	1 groups of normally open
Control current	40A/250VAC
Resisive load	MAX 9000 W
Set ON/OFF times	16 times on and off
Power consumption	7 VA
Power-off memory	3 years
Weight	About 250g
Use temperature	-10 ~ 40°C

## Dimensions

