


HIGH PRESSURE FIBERGLASS FILTERS

POOL FILTERS

- High-performance material satisfies customers' different application
- Apply to water feeding and sewage water treatment, chemical, electronic, petroleum, food etc.
- $\Phi 150\text{mm}-\Phi 900\text{mm}$ filters are made of PE blow molding inner tank with fiberglass.
- $\Phi 1000\text{mm}-\Phi 1500\text{mm}$ filters are made of PE rotational molding innertank with fiberglass.
- Above $\Phi 700$ filters are specially equipped with destruction of negative pressure device.
- Strong ability of pressure-bearing

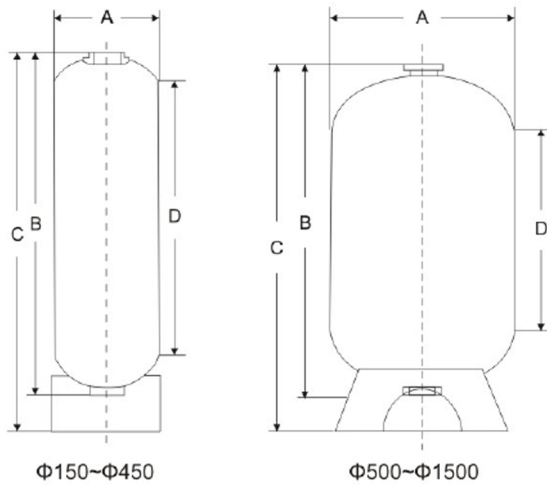

A (mm)	200	200	200	250	250	300	300	350	400	500	600	600	750	900	900	1000	1000	1200	1500
B (mm)	430	805	1090	855	1430	1430	1630	1630	1650	1650	1850	1850	1950	1950	2150	1650	2150	2150	2150
C (mm)	450	900	1100	900	1400	1450	1650	1650	1650	1800	1850	2000	2000	2000	2400	1850	2400	2400	2400
D (mm)	250	625	910	675	1250	1250	1450	1390	1390	1240	1180	1350	1300	1300	1500	1320	1500	1500	1500

Model	Volume(L)	Top opening	Bottom opening	Diameter (mm)	Filter height (mm)	A(mm)	B(mm)	C(mm)
WL-HA2045	11.5	2.5"-8NPSM	/	200	450	200	430	450
WL-HA2090	24.8	2.5"-8NPSM	/	200	900	200	805	900
WL-HA2011	35	2.5"-8NPSM	/	200	1100	200	1070	1100
WL-HA2590	38.4	2.5"-8NPSM	/	250	900	250	855	900
WL-HA2514	50	2.5"-8NPSM	/	250	1400	250	1430	1400
WL-HA3014	70	2.5"-8NPSM	/	300	1450	300	1430	1450
WL-HA3016	100	2.5"-8NPSM	/	300	1650	300	1630	1650
WL-HA3516	130	2.5"-8NPSM	/	350	1650	350	1630	1650
WL-HA4016	180	4"-8UN	/	400	1650	400	1630	1650
WL-HA4516	185	4"-8UN	/	400	1650	450	1620	1650
WL-HA5018	280	4"-8UN	4"-8UN	500	1800	500	1650	1800
WL-HA6018	400	4"-8UN	4"-8UN	600	1850	600	1650	1850
WL-HA6020	460	4"-8UN	4"-8UN	600	2000	600	1850	2000
WL-HA7518	650	4"-8UN	4"-8UN	750	1850	750	1620	1850
WL-HA7520	700	4"-8UN	4"-8UN	750	2000	750	1850	2000
WL-HA9020	1040	4"-8UN	4"-8UN	900	2000	900	1950	2000
WL-HA9024	1170	4"-8UN	4"-8UN	900	2400	900	2030	2400
WL-HA10018	1040	4"-8UN	4"-8UN	1000	1850	1000	1650	1850
WL-HA10024	1332	4"-8UN	4"-8UN	1000	2400	1000	2030	2400
WL-HA12024	1909	6" Flange	6" Flange	1200	2400	1200	2000	2400
WL-HA15024	2588	6" Flange	6" Flange	1500	2400	1500	2000	2400

Maximum Working Pressure: 600kpa/87psi/6.0bar
Max Vacuum: 127mmHg

Factory Testing Pressure: 900kpa/130psi/9.0bar
Filtration Media: silica sand, activated carbon, etc

Maximum Temperature: $\leq 49^{\circ}\text{C}$