

# CARTRIDGE FILTER

## POOL FILTERS




**Features:**

- Compact and light weight.
- UV resistant tank.
- Heavy duty ring-lock lid allows easy cleaning and replacement of the cartridge element.
- Screw type air bleeder for easy removal of trapped air inside the filter tank.
- High quality oil filled pressure gauge for easy inspection of the operation pressure.
- Application to swimming pool & spa.

- ◆ Maximum Working Pressure:250kpa/36psi/2.5bar
- ◆ Maximum Temperature:40°C(104F)



Cartridge Element

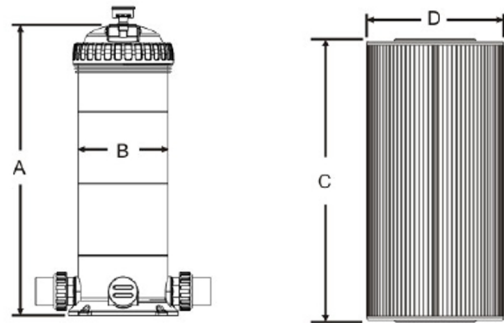

Model	WL-ZXG25	WL-ZXG50	WL-ZXG75	WL-ZXG100	WL-ZXG150	WL-ZXG200
A(mm)	368.3	548.3	728.3	908.3	1088.3	1268.3
B(mm)	225	225	225	225	225	225

Model	WL-ZXG25	WL-ZXG50	WL-ZXG75	WL-ZXG100	WL-ZXG150	WL-ZXG200
C(mm)	184.5	364.5	544.5	724.5	904.5	1091.0
D(mm)	183	183	183	183	183	183

Model	Pipe Size		Filter Area (m <sup>2</sup> )	Design Flow		Micron (μm)	Tank Diameter (mm)	Tank Height (mm)
	inches	mm		m <sup>3</sup> /h	lpm			
WL-ZXG25	1.5	50	2.25	5.50	92	≤20	225	368.3
WL-ZXG50	1.5	50	4.63	11.40	190	≤20	225	548.3
WL-ZXG75	1.5	50	7.00	17.00	283	≤20	225	728.3
WL-ZXG100	1.5	50	9.40	22.90	382	≤20	225	908.3
WL-ZXG150	2.0	63	13.72	33.40	556	≤20	225	1088.3
WL-ZXG200	2.0	63	16.82	40.90	681	≤20	225	1268.3