

# Cartridge Filter System

FSC SERIES

## EASY TO SETUP AND OPERATE

### For residential pool & spa

Max Operating Pressure

**36psi(2.5bar)**

Max Temperature

**40°C (104°F)**

Cartridge Size

**25ft<sup>2</sup>-200ft<sup>2</sup>**



### Product Features



1. UV resistant cartridge filter tank
2. Heavy duty ring-lock lid for easy-opening, cleaning and replacing cartridge element
3. Oil filled pressure gauge for easy inspection of the operation pressure
4. The pump which is IPX5 Waterproof Standard certified and has built-in thermal protection

 **Emaux**  
water technology

# Cartridge Filter System FSC SERIES

## FSC Filter System

Includes UV resistant cartridge filter tank

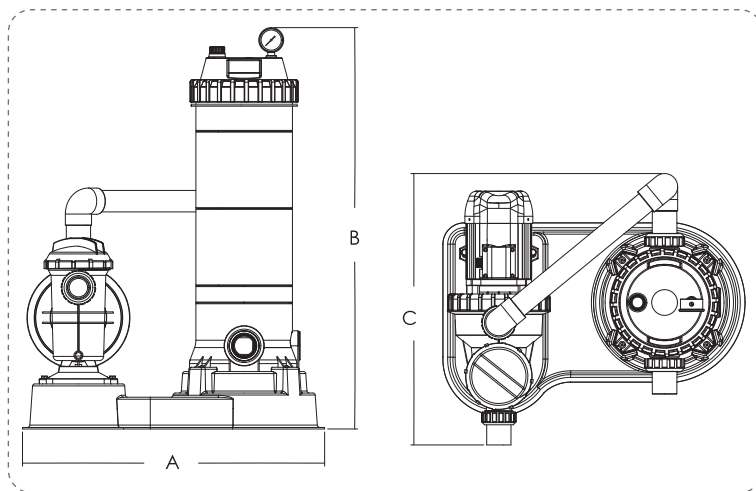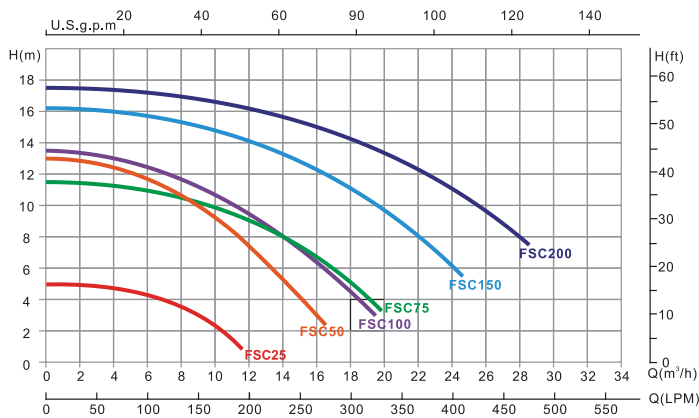

### FSC Series Filtration Combo

includes:

- 1) cartridge filter
- 2) cartridge filter element
- 3) SS, SC or SB Series Pump

## Product Information and Dimension

Code	Model	Cartridge Filter	Pump	Valve Connections	A (mm)	B (mm)	C (mm)	Max. Flow Rate
88340109	FSC025	CF25	SS033	1.5" / 50mm	705	580	490	92lpm 5.5m³/h
88340212	FSC050	CF50	SS100	1.5" / 50mm	705	760	490	190lpm 11.4m³/h
88340324	FSC075	CF75	SC100	1.5" / 50mm	705	940	532	283lpm 17.0m³/h
88340429	FSC100	CF100	SB10	2.0" / 63mm	705	1120	600	382lpm 22.9m³/h
88340540	FSC150	CF150	SB15	2.0" / 63mm	705	1300	600	555lpm 33.4m³/h
88340631	FSC200	CF200	SB20	2.0" / 63mm	705	1480	600	680lpm 40.9m³/h

### EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS: Flat A-D, 20/F., Kai Bo 22, 22 Wing Kin Road,  
Kwai Chung, Hong Kong

PHONE +852 2832 9880

www.emauxgroup.com

Pool & Spa Equipment

Available from:

YOUR PREMIER SUPPLIER

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE  
© 2021 EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.