




Pool technologies and solutions...

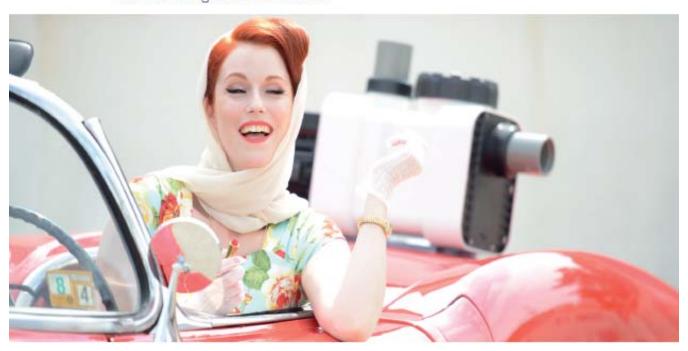

full speed ahead into the new pool season

# The new besteller based on our BADU Prime. Efficient, modern, thought out...



Performance

## **BADU**° Gamma

### Field of application

Swimming pool water circulation through a filter system. The pump can be installed max. 3 m above or below the water level.

#### Design

Monoblock-type pump with integrated strainer tank.


Motor/pump shaft has no contact with the pool water providing complete electrical separation.

Strainer tank capacity approx. 3 I
Strainer basket mesh size approx. 3.2 x 2.6 mm

#### Performance features

- Usual first-class material quality.
- Extremely quiet.
- Improved hydraulics.
- Optimised water flow.
- Optional inner or outer threads.
- Top efficiency.





Detailed information and dimensions available on request or at badu.de

Total dynamic head H (m) / Flow rate Q (m³/h) >