



# SMART AI-DRIVEN POOL MANAGEMENT

powered by



For modern residential pools

## CyberSync

Pool Station







## NEXT-GEN UX DESIGN FOR ADVANCED POOL MANAGEMENT

The CyberSync Pool Station collects real-time swimming pool data, including pH, ORP, salinity, and temperature, while controlling a complete range of pool equipment such as pumps, chlorinators, lighting, heating, and more. It supports scheduling and automation for effortless maintenance.



Monitor and control your pool system remotely via an internet connection

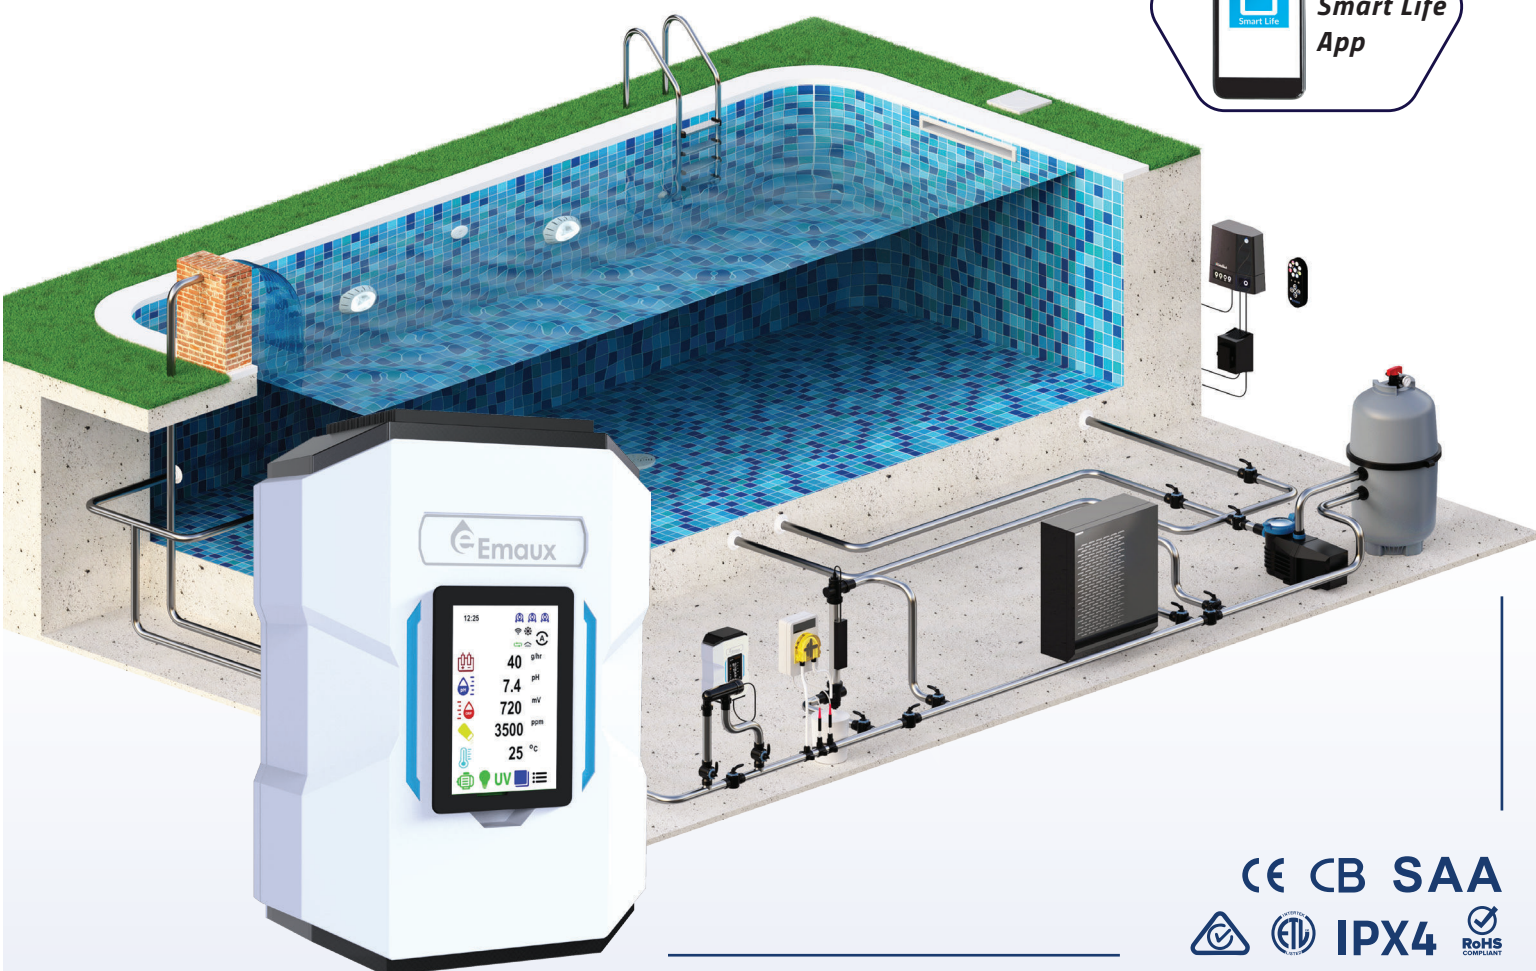

CE CB SAA  
IPX4 RoHS COMPLIANT

The CyberSync automation system can fully control the following products:



Pump



Chemical Control



UV Light



Dosing



Light



Heater

## SMART SYSTEMS FOR SUPERIOR WATER QUALITY

The advanced IoT-enabled pool monitoring system enhances your pool maintenance experience. Seamlessly connecting to the Smart Life app, it allows real-time monitoring to achieve optimal water conditions and vibrant effects. The system intelligently responds to sensor readings, automatically controlling your pool pump, disinfection system, and other equipment for the best water quality and safety. The Smart Life app also offers robust scheduling and automation, enabling effortless pool management from anywhere. Experience a smarter, more efficient way to maintain your pool with the Smart Life app.



**REAL-TIME  
ALERTS**



**PUMP OPERATION  
STATUS**



**CONNECTION  
STATUS ALERTS**



**REMOTE  
CONTROL**



**AUTOMATED  
SCHEDULING**



**SEAMLESS  
INTEGRATION**

**DOWNLOAD**

THE APP

**SMART LIFE**

**NEW**





# CyberSync

POOL STATION

SMART AI-DRIVEN POOL MANAGEMENT

powered by



## MASTERMIND STATION

### Pure Chlorine Electrolysis

- ORP measure
- Pure chlorine gas
- pH measure & balance

### Large 4.3" LCD Touch Screen

- Modern UX & UI
- Multi-Language
- Detachable

### Multi-Device Control

- Pump
- Lighting
- Heating
- UV system
- Dosing
- Pool Cover

### Real-time control

- Electrolysis
- Measure
- Dosing
- Switch
- Intelligent control
- Setting





## Product features:

- Easy installation and maintenance
- User-friendly interface and operation
- Precise and reliable pool chemical control
- IoT APP control
- Intelligent system

### ROBUST TITANIUM CELL

#### *Transparent housing*

- Integrated Safety Features
- Self-Cleaning Function
- Real-Time Monitoring
- Durable Construction
- Easy Installation

### PROBE HOLDER


#### *4 probes*

- ORP
- pH
- Salinity
- Temperature



## Installation Diagram


### Devices schedule control

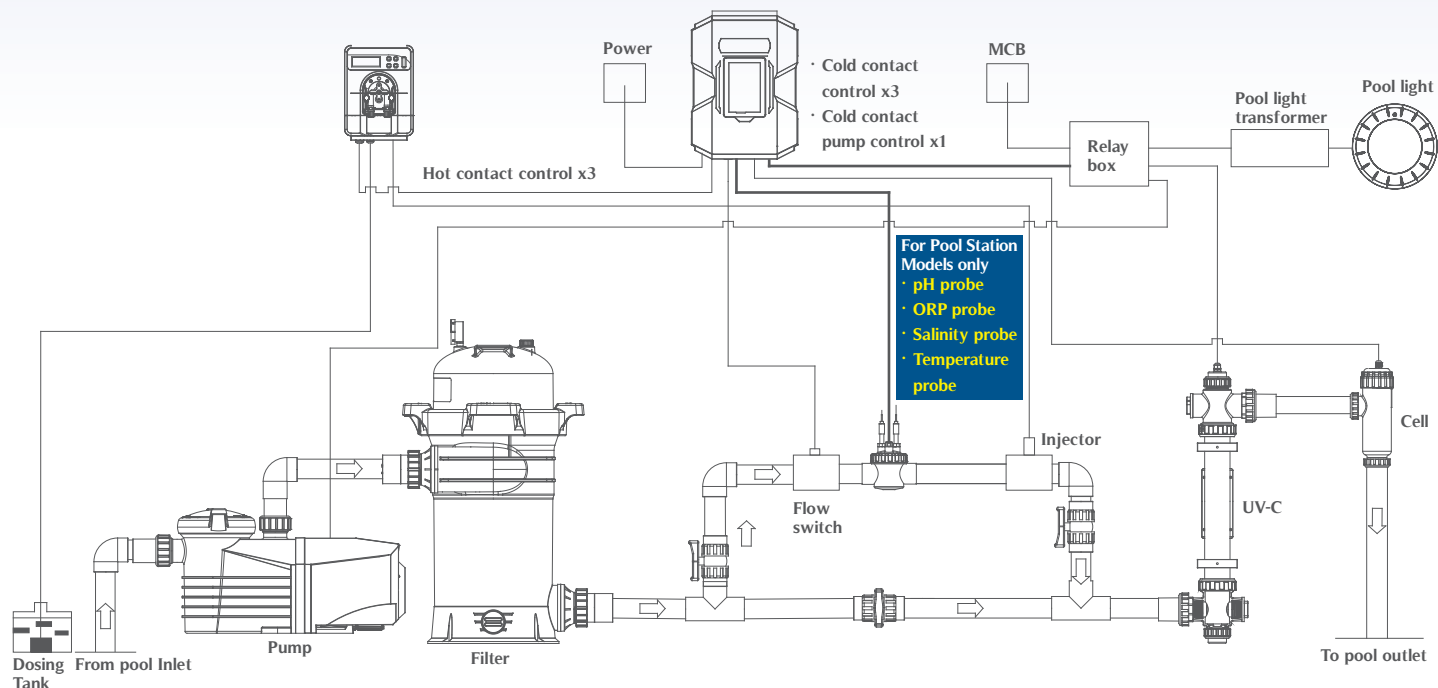

FUNCTION	SPECIFICATION
Display	4.3" LCD with Touch control
Cell type (chlorine production)	20 g/h , 30 g/h or 40 g/h
Measurement	pH, ORP, Salinity and Temperature
Devices schedule control	Hot contact x3 @50W: e.g. Dosing pump Cold contact x3: e.g. Lighting/ UV/ Heating Cold contact x1: Pump control
Pool cover detect	Detect connection x 1
Wi-Fi	- 802.11 b/g/n - 2.4 GHz - STA mode supported
Modbus	RS485
Input	220V to 240V AC, 2A max (EU version) 110V to 120V AC, 4A max (US version)
Salt level	3000-5000 ppm
IP rating	IPX4



## Product Information and Dimension:

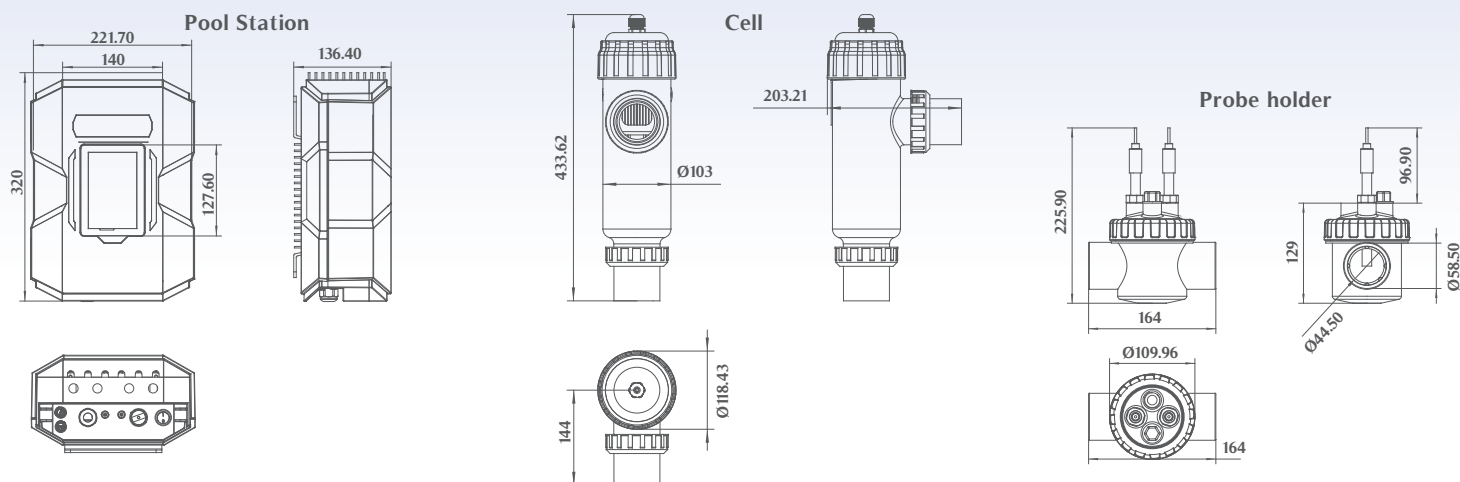

CyberSync Pool Station		Input Voltage/ Frequency (US Version)	Input Voltage/ Frequency (EU Version)	Cell Output (gram/h)	Concrete Pool (m³)	Max Consumption	Function
Code	Model						
9130601	CS-A20	110-120V 50/60 Hz	220-240V 50/60Hz	20	60	210W	
9130602	CS-A30	110-120V 50/60 Hz	220-240V 50/60 Hz	30	80	280W	
9130603	CS-A40	110-120V 50/60 Hz	220-240V 50/60 Hz	40	100	370W	Chlorinator, Measurement, Devices schedule control, Pool cover, Flow switch, IoT APP

## Probe and Accessories Specifications

Code	Product Name	Parameter	Photo
106090074	ORP probe	Pressure: 7 bar Material: epoxy Measuring range: -300 to 900 mV (with 3 m signal line) Electrode diameter: 12 mm	
106090073	pH probe	Pressure: 7 bar Material: epoxy Measuring range: pH 0-14 (with 3 m signal line) Electrode body diameter: 12 mm	
178818	Salinity probe	Pressure: 7 bar Material: epoxy Measuring range: 1000 to 35000 ppm (with 3 m signal line) Electrode body diameter: 12 mm	
178817	Temperature sensor	stainless steel with 3 m cable	
1090010392	ORP buffer solution	256 mV, 30 mL	
109007168	pH buffer solution pH 4 and pH 7	pH 4.0 and pH 7.0, 30 mL	
E130078	Probe holder	PVC transparent	
114145332	Flow switch	Normal open	
620065469	Holder	PVC	





#### HEAD OFFICE

40/2 Moo.14 KingKaew Rd, Rachatheva,  
Bangplee, Samutprakarn, 10540 Thailand  
Tel 0-2738-5088-98  
Fax 0-2738-5299  
Email [projects@poolspa.co.th](mailto:projects@poolspa.co.th)  
[sales@poolspa.co.th](mailto:sales@poolspa.co.th)

#### โชว์รูมและสำนักงานใหญ่

40/2 หมู่ 14 ถนนกิ่งแก้ว ตำบลราชาเทวะ  
อำเภอบางพลี จังหวัดสมุทรปราการ 10540  
โทร 0-2738-5088-99  
แฟกซ์ 0-2738-5299  
อีเมล [projects@poolspa.co.th](mailto:projects@poolspa.co.th)  
[sales@poolspa.co.th](mailto:sales@poolspa.co.th)

