



Founded in the 1970s, BARACUDA® offers complete pool care solutions trusted worldwide for quality, simplicity and ease of use for everyday pools.

Aquantis+™ Single Speed Pump



Strong in performance, simple in maintenance



CONSISTENT PERFORMANCE, DAY AFTER DAY

Equipped with a high-quality motor protected against overheating, this pump is engineered for long-term reliability. Premium, corrosion-resistant components ensure consistent performance.



REDUCED NOISE, IMPROVED COMFORT

Thanks to its refined shaft design, Aquantis+™ runs with minimal vibration and noise. Enjoy smoother operation and a more peaceful pool environment—ideal for residential settings where comfort matters.




FEWER CLEANINGS, SMOOTHER OPERATION

Aquantis+™ is designed for convenience, featuring a large-capacity pre-filter that reduces cleaning frequency. The twist-and-lock lid allows quick, tool-free access, making routine servicing faster and easier.

TECHNICAL DATA

Models		50M	75M	100M	100T	150M	150T	200M	200T
SKU Codes		77858	77859	77860	77861	77862	77863	77864	77865
Voltage	V	230	230	230	230/400	230	230/400	230	230/400
Frequency	Hz	50	50	50	50	50	50	50	50
Power supply	phases	1	1	1	3	1	3	1	3
Flow at Nominal Head	m³/h	7.0	13.0	16.5	17.0	19.5	20.0	22.5	23.0
Nominal Head	m.c.w.	8	10	10	10	10	10	10	10
Max. Working Pressure	bars	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Motor Rated Power	kW	0.37	0.55	0.75	0.75	1.10	1.10	1.50	1.50
Max. Absorbed Power	kW	0.54	0.84	1.10	1.10	1.45	1.45	1.75	1.75
Maximum Head	m.c.w.	9.0	13.5	17.0	17.0	20.5	20.5	25.0	25.0
Maximum Flow rate	m³/h	16.0	21.0	23.0	23.0	25.0	25.0	27.0	27.0
Max. Water Temperature	°C	35	35	35	35	35	35	35	35
Max. Ambient Temperature	°C	45	45	45	45	45	45	45	45
Threaded ports	inches	-	-	-	-	-	-	-	-
Pipe fittings	mm	50	50	50	50	50 or 63	50 or 63	63	63
	inches	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2" or 2"	1 1/2" or 2"	2"	2"
Prefilter Volume	liters	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
Product Size	A (mm)	255.0	255.0	255.0	255.0	255.0	255.0	255.0	255.0
	H (mm)	330.0	330.0	330.0	330.0	330.0	330.0	330.0	330.0
	L (mm)	595.0	595.0	595.0	595.0	625.0	625.0	625.0	625.0
Net weight	kg	9	11	12	16	18	18	18	18
Packaging volume	m³	0.062	0.062	0.062	0.062	0.062	0.062	0.062	0.062

Models: 50 - 200

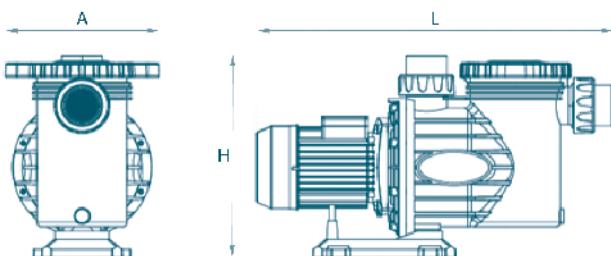

Performance Curves

