

PoolDose pH or ORP system



PoolDose delivers a user-friendly solution, combining a peristaltic dosing pump and single measurement with automatic proportional dosing to adjust chemical parameters for above-ground pools, indoor and outdoor pools.

PoolDose Single - pH

pH (0 – 14)

PoolDose Single - ORP

ORP (0 – 1,000 mV)

Flow rate	1.5 l/h
Pressure	1.5 bar
Pool size	Indoor 5–130 m ³ Outdoor 5–110 m ³

IP65 Enclosure

Dimensions	164 X 241 X 126 mm (L x H x D)
Material	ABS





Main Board

Alphanumeric display	16 characters x 2 lines
Power supply	220 Vac, 50/60Hz

Features

- PSS pipe in-line probe holder for easy installation of probe and chemical injection point (accessory not included)
- Easily connect device to the app by scanning a QR code
- Wi-Fi module enables pool management via app
- Galvanic electrical and measure insulation
- Three PVDF rollers and Santoprene tubing
- Internal relay enables chlorine generator management
- Water meter flow rate input totalises swimming pool water changes
- Multi-language menu
- Wizard probe calibration and degree of health
- No technical skill required
- Circulation pump checks “Power On” flow trigger
- Input level probe checks product levels
- Proportional dosing TWM (time width modulation) mode
- Input temperature probe range 0 - 55°C for measure compensation only
- Installation kit included

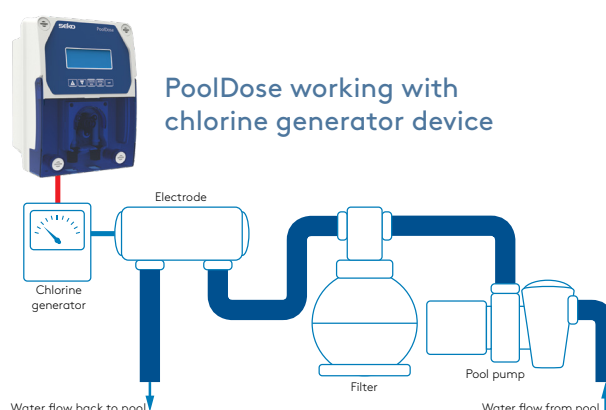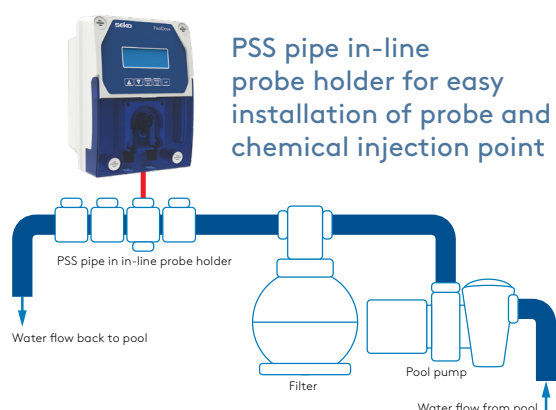

PoolDose Double

Offering the fullest range of measurements alongside user-friendly operation, PoolDose Double combines two peristaltic dosing pumps, multi-measurement capability and automatic proportional dosing to deliver the ideal solution for above-ground, indoor and outdoor pools.

PoolDose Double - pH-ORP

Parameters: pH (0 – 14) and ORP (0 – 1,000 mV)

PoolDose Double - pH-ORP-CL

Parameters: pH (0 – 14), ORP (0 – 1,000 mV) and free chlorine (0 – 5 ppm)

Flow rate	1.5 l/h
Pressure	1.5 bar
Pool size	Indoor 5–130 m ³ Outdoor 5–110 m ³

IP65 Enclosure

Dimensions	205 x 194 x 133 mm (L x H x D)
Material	ABS



Main Board

Alphanumeric display	16 characters x 2 lines
Power supply	220 Vac, 50/60Hz

Features

- PSS pipe in-line probe holder for easy installation of probe and chemical injection point (accessory not included)
- Easily connect device to the app by scanning a QR code
- Wi-Fi module enables pool management via app
- Galvanic electrical and measure insulation
- Three PVDF rollers and Santoprene tubing
- Internal relay enables chlorine generator management
- Water meter flow rate input totalises swimming pool water changes
- Amperometric probe includes high-grade insulation
- Probe holder with amperometric chlorine probe included in pH, ORP and CL versions
- Installation kit included
- Multi-language menu
- Wizard probe calibration and degree of health
- No technical skill required
- Circulation pump checks "Power On" flow trigger
- Input temperature probe range 0 - 55°C for measure compensation only
- Input level probe checks product levels
- pH and chlorine relay enables extra dosing
- Proportional dosing TWM (time width modulation) mode

