

PRODUCT CATALOG








电缆防水接头
Cable Gland

R&R
YUNHE ELECTRIC

凝神倾听
每一次的掌声与欢笑
但是，从不沉迷
荣誉
在云合人心中
只是漫漫征途中
前进的决心与动力

We drink in,
Every applause and mirth,
But, we indulge in these!
Honor,
In the minds of R&R People,
For the long journey,
Only is the determination and
power for advancing!

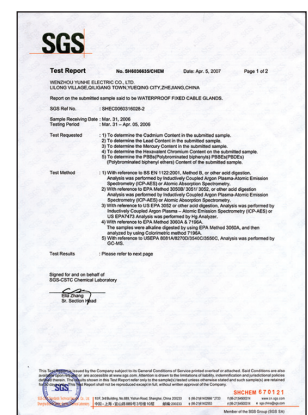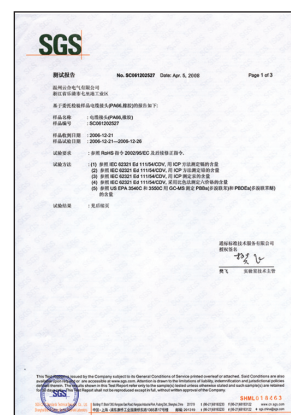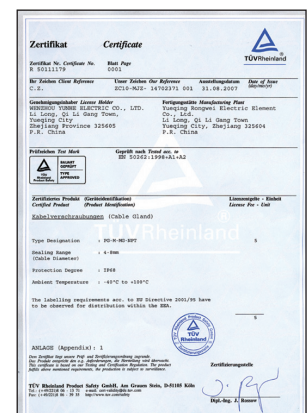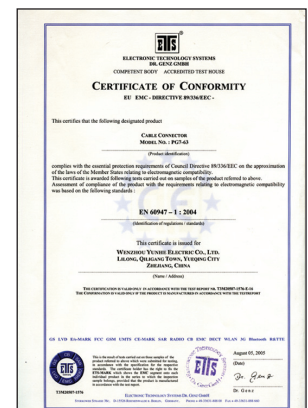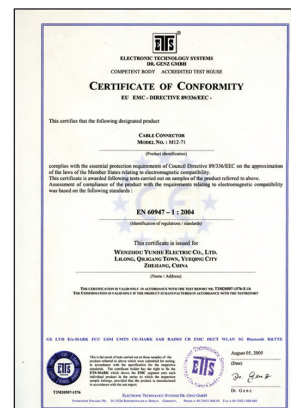

PRODUCTS 产品



- 1** 塑料固定电缆防水接头PG型
Plastic fixed cable gland PG type
- 2** 塑料固定电缆防水接头M型
Plastic fixed cable gland M type
- 3** 塑料固定电缆防水接头PG-L加长型
Plastic fixed cable gland PG-L type long thread
- 4** 塑料固定电缆防水接头M-L加长型
Plastic fixed cable gland M-L type long thread
- 5** 塑料固定电缆防水接头NPT型
Plastic fixed cable gland NPT type
- 6** 塑料固定电缆防水接头G型
Plastic fixed cable gland G type



- 16** 塑料固定电缆防水接头PGL型
Plastic fixed cable gland PGL type
- 17** 塑料固定电缆防水接头ML型
Plastic fixed cable gland ML type



- 7** 塑料固定电缆防水接头PG-P型
Plastic fixed cable gland PG-P type
- 8** 塑料固定电缆防水接头M-P型
Plastic fixed cable gland M-P type
- 9** 塑料固定电缆防水接头PG-LP加长型
Plastic fixed cable gland PG-LP type long thread
- 10** 塑料固定电缆防水接头M-LP加长型
Plastic fixed cable gland M-LP type long thread



- 18** 塑料固定电缆防水接头PG-A型
Plastic fixed cable gland PG-A type
- 19** 塑料固定电缆防水接头MG-A型
Plastic fixed cable gland MG-A type
- 20** 塑料固定电缆防水接头PG-B型
Plastic fixed cable gland PG-B type
- 21** 塑料固定电缆防水接头M-B型
Plastic fixed cable gland M-B type
- 22** 塑料固定电缆防水接头PG-ST/M-ST型
Plastic fixed cable gland PG-ST/M-ST type



- 11** 塑料固定电缆防水接头PG-M-R型
Plastic fixed cable gland PG-M-R type
- 12** 塑料固定电缆防水接头PG-M-LR加长型
Plastic fixed cable gland PG-M-LR type long thread
- 13** 塑料固定电缆防水接头NPT/G-R型
Plastic fixed cable gland NPT/G-R type



- 23** 塑料堵塞件PG-M-T型
Plastic threaded plug PG-M-T type



14 塑料固定电缆防水接头PG-S型
Plastic fixed cable gland PG-S type

15 塑料固定电缆防水接头M-S型
Plastic fixed cable gland M-S type



24 金属固定电缆防水接头PG-M型
Metallic fixed cable gland PG-M type

25 金属固定电缆防水接头M-M型
Metallic fixed cable gland M-M type

26 金属固定电缆防水接头PG-LM加长型
Metallic fixed cable gland PG-LM type long thread

27 金属固定电缆防水接头M-LM加长型
Metallic fixed cable gland M-LM type long thread



28 金属固定电缆防水接头NPT-M型
Metallic fixed cable gland NPT-M type

29 金属固定电缆防水接头G-M型
Metallic fixed cable gland G-M type

30 金属堵塞件PG/M-TM型
Metallic threaded plug PG/M-TM type

云合凭借丰富的专业生产经验和先进的工艺开发，
研制和生产的固定电缆防水接头系列
产品广泛应用于接线盒、配电柜、通讯设备、
仪器仪表、医疗器械、机床机械等多个领域

With abundant specialized production experience and advanced technologies, R&R develops, researches and produces fixed cable glands, the products have been widely applied to many fields such as junction box, distribution cabinet, communication equipment, instrument & meter, medical equipment, machine tool, etc.,




塑料固定电缆防水接头 PG 型

Plastic fixed cable gland PG type

△ CE SGS IP68

A 螺帽 Lock Nut
B 平垫 Washer
C 主体 Body
D 防水圈 Seal
E 迫紧螺帽 Sealing Nut



- 产品材质: A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。
- 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- 工作温度: 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。
- 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- 颜色种类: 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

- Material: Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- Thread spec.: Metric, PG, G, NPT.
- Working temperature: -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- Color: Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.


产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
PG7	PG7	3~6.5	12.5	9	18/16	100
PG7	PG7	2~5	12.5	9	18/16	100
PG9	PG9	4~8	15.2	9	22/19	100
PG9	PG9	2~6	15.2	9	22/19	100
PG11	PG11	5~10	18.6	9	24/22	100
PG11	PG11	3~7	18.6	9	24/22	100
PG13.5	PG13.5	6~11	20.4	10	27/24	100
PG13.5	PG13.5	5~9	20.4	10	27/24	100
PG16	PG16	10~13	22.5	10	30/27	100
PG16	PG16	7~12	22.5	10	30/27	100
PG19	PG19	12~15	24	10	30/28	100
PG19	PG19	10~12	24	10	30/28	100
PG21	PG21	13~18	28.3	12	35/33	100
PG21	PG21	9~16	28.3	12	35/33	100
PG25	PG25	16~21	30	12	37/35	50
PG25	PG25	13~18	30	12	37/35	50
PG29	PG29	18~25	37	12	45/42	50
PG29	PG29	13~20	37	12	45/42	50
PG36	PG36	22~32	47	15	58/52	20
PG36	PG36	20~26	47	15	58/52	20
PG42	PG42	32~38	54	18	62/58	20
PG42	PG42	25~31	54	18	62/58	20
PG48	PG48	37~44	59.3	18	70/64	20
PG48	PG48	29~35	59.3	18	70/64	20
PG63	PG63	42~50	71	30	83/77	10
PG63	PG63	32~40	71	30	83/77	10



2 塑料固定电缆防水接头 M 型

Plastic fixed cable gland M type

△ CE SGS IP68

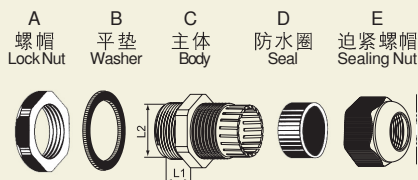

- 产品材质: A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。
- 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- 工作温度: 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。
- 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- 颜色种类: 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

- Material: Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- Thread spec.: Metric, PG, G, NPT.
- Working temperature: -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- Color: Black(RAL9005), light grey(RAL7035), silver(RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
M8	M8x1.25	2.5~4.5	8	8	13/12	100
M8	M8x1.25	1~2.5	8	8	13/12	100
M10	M10x1.5	3~6	10	8	15/13	100
M10	M10x1.5	1.5~3	10	8	15/13	100
M12	M12x1.5	3~6.5	12	9	18/16	100
M12	M12x1.5	2~5	12	9	18/16	100
M16	M16x1.5	4~8	16	9	22/19	100
M16	M16x1.5	2~6	16	9	22/19	100
M18	M18x1.5	5~10	18	9	24/22	100
M18	M18x1.5	3~7	18	9	24/22	100
M20	M20x1.5	6~11	20	10	27/24	100
M20	M20x1.5	5~9	20	10	27/24	100
M22	M22x1.5	10~13	22	10	30/27	100
M22	M22x1.5	7~12	22	10	30/27	100
M24	M24x1.5	12~15	24	10	30/28	100
M24	M24x1.5	10~12	24	10	30/28	100
M25	M25x1.5	12~15	25	11	31/28	100
M25	M25x1.5	10~12	25	11	31/28	100
M27	M27x1.5	13~18	27	12	35/33	100
M27	M27x1.5	9~16	27	12	35/33	100
M28	M28x1.5	13~18	28	12	35/33	100
M28	M28x1.5	9~16	28	12	35/33	100
M30	M30x1.5	16~21	30	12	37/35	50
M30	M30x1.5	13~18	30	12	37/35	50
M32	M32x1.5	16~21	32	12	38/35	50
M32	M32x1.5	13~18	32	12	38/35	50
M36	M36x1.5	18~25	36	12	45/42	50
M36	M36x1.5	13~20	36	12	45/42	50
M40	M40x1.5	22~32	40	15	52/52	20
M40	M40x1.5	20~26	40	15	52/52	20
M46	M46x1.5	22~32	46	15	58/52	20
M46	M46x1.5	20~26	46	15	58/52	20
M50	M50x1.5	32~38	50	18	62/58	20
M50	M50x1.5	25~31	50	18	62/58	20
M58	M58x1.5	37~44	58	18	70/64	20
M58	M58x1.5	29~35	58	18	70/64	20
M63	M63x1.5	37~44	63	18	72/64	20
M63	M63x1.5	29~35	63	18	72/64	20
M71	M71x1.5	42~50	71	30	83/77	10
M71	M71x1.5	32~40	71	30	83/77	10




5 塑料固定电缆防水接头 NPT 型

Plastic fixed cable gland NPT type

△ CE SGS IP68

A 螺帽 Lock Nut
B 平垫 Washer
C 主体 Body
D 防水圈 Seal
E 迫紧螺帽 Sealing Nut




- 产品材质: A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。
- 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- 工作温度: 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。
- 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- 颜色种类: 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

- Material: Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- Thread spec.: Metric, PG, G, NPT.
- Working temperature: -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- Color: Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
NPT3/8"	NPT3/8"	6~10	17.1	15	22	100
NPT3/8"	NPT3/8"	4~8	17.1	15	22	100
NPT1/2"	NPT1/2"	8~14	21.3	15	27	100
NPT1/2"	NPT1/2"	6~11	21.3	15	27	100
NPT3/4"	NPT3/4"	12~18	26.6	15	33	100
NPT3/4"	NPT3/4"	10~16	26.6	15	33	100
NPT1"	NPT1"	18~25	33.5	17	41	20
NPT1"	NPT1"	16~22	33.5	17	41	20
NPT1 1/4"	NPT1 1/4"	24~32	42	17	50	20
NPT1 1/4"	NPT1 1/4"	20~25	42	17	50	20
NPT1 1/2"	NPT1 1/2"	22~32	48	17	57	20
NPT1 1/2"	NPT1 1/2"	20~26	48	17	57	20






- 材料: 采用 UL 认可的尼龙 PA66
- O-密封件: 丁腈橡胶
- 工作温度: -40℃至 100℃
- 颜色种类: 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

- Material: Made of UL approved nylon PA66.
- O-sealing element: Made of nitrile butadiene rubber (NBR).
- Working temperature: -40℃to100℃.
- Color: Black(RAL9005), light grey (RAL7035), silver(RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	主体尺寸 Main body Dimensions L (mm)	盖帽尺寸 Cover Dimensions D (mm)
PG7-T	PG7	12.5	8.5	12.5	15
PG9-T	PG9	15.2	8.5	13	19
PG11-T	PG11	18.6	9	13	22
PG13.5-T	PG13.5	20.4	9	13	25
PG16-T	PG16	22.5	10.5	15	27
PG21-T	PG21	28.3	10.5	15.5	33
PG29-T	PG29	37	11.5	16	44
PG36-T	PG36	47	13.5	18	55
PG42-T	PG42	54	13.5	18.5	62
PG48-T	PG48	59.3	14.5	19.5	68

产品型号 Model	螺纹规格 Thread Size	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	主体尺寸 Main body Dimensions L (mm)	盖帽尺寸 Cover Dimensions D (mm)
M12-T	M12x1.5	12	8.5	12.5	15
M16-T	M16x1.5	16	8.5	13	19
M18-T	M18x1.5	18	9	13	22
M20-T	M20x1.5	20	9	13	25
M22-T	M22x1.5	22	10.5	15	27
M25-T	M25x1.5	25	10.5	15.5	29
M27-T	M27x1.5	27	10.5	15.5	33
M28-T	M28x1.5	28	10.5	15.5	33
M32-T	M32x1.5	32	10.5	16	38
M40-T	M40x1.5	40	11.5	18	46
M50-T	M50x1.5	50	13.5	18	56
M63-T	M63x1.5	63	14	19	68



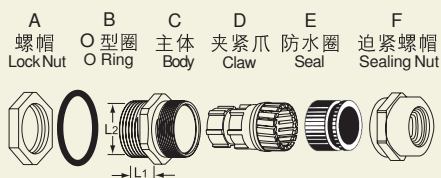

■ 产品材质: A.C.F 部位采用黄铜镀镍, D 部位采用 UL 认可的尼龙 PA66, B.E 部位采用丁腈橡胶。

■ 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ 工作温度: -40℃ 至 100℃, 瞬时耐热至 120℃。


■ 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ Material: Parts A, C, F are made of brass plated with nickel, part D is made of UL approved nylon PA66, parts B and E are made of nitrile butadiene rubber (NBR).

■ Thread spec.: Metric, PG, G, NPT.

■ Working temperature: -40℃ to 100℃, instantaneous heat resistance up to 120℃.


■ Characteristics: Special design of clamping die and rubber part, large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.



产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size (mm)
PG7-M	PG7	3~6.5	12.5	6	14
PG7-M	PG7	2~5	12.5	6	14
PG9-M	PG9	4~8	15.2	7	18
PG9-M	PG9	2~6	15.2	7	18
PG11-M	PG11	5~10	18.6	7	20
PG11-M	PG11	3~7	18.6	7	20
PG13.5-M	PG13.5	6~12	20.4	7.5	22
PG13.5-M	PG13.5	5~9	20.4	7.5	22
PG16-M	PG16	10~14	22.5	7.5	24
PG16-M	PG16	6~12	22.5	7.5	24
PG21-M	PG21	13~18	28.3	8	30
PG21-M	PG21	9~16	28.3	8	30
PG29-M	PG29	18~25	37	9	40
PG29-M	PG29	13~20	37	9	40
PG36-M	PG36	22~33	47	9	50
PG36-M	PG36	20~26	47	9	50
PG42-M	PG42	32~38	54	10	57
PG42-M	PG42	25~31	54	10	57
PG48-M	PG48	37~44	59.3	11	64
PG48-M	PG48	29~35	59.3	11	64

PG63 >>43-52



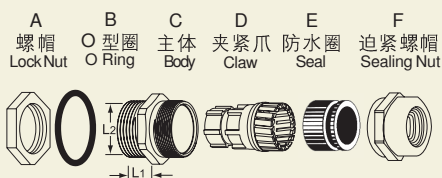

■ 产品材质: A.C.F 部位采用黄铜镀镍, D 部位采用 UL 认可的尼龙 PA66, B.E 部位采用丁腈橡胶。

■ 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。

■ 工作温度: -40℃ 至 100℃, 瞬时耐热至 120℃。



■ 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。

■ Material: Parts A, C, F are made of brass plated with nickel, part D is made of UL approved nylon PA66, parts B and E are made of nitrile butadiene rubber (NBR).

■ Thread spec.: Metric, PG, G, NPT.


■ Working temperature: -40℃ to 100℃, instantaneous heat resistance up to 120℃.

■ Characteristics: Special design of clamping die and rubber part, large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.




产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size (mm)
M12-M	M12x1.5	3~6.5	12	6	14
M14-M	M14x1.5	3~6.5	14	6	17
M16-M	M16x1.5	4~8	16	7	18
M18-M	M18x1.5	5~10	18	7	20
M20-M	M20x1.5	6~12	20	7.5	22
M22-M	M22x1.5	10~14	22	7.5	24
M24-M	M24x1.5	10~14	24	8	30
M25-M	M25x1.5	13~18	25	9	30
M27-M	M27x1.5(2)	13~18	27	9	30
M30-M	M30x1.5(2)	13~18	30	10	36
M32-M	M32x1.5(2)	18~25	32	10	36
M33-M	M33x1.5(2)	15~22	33	10	36
M36-M	M36x1.5(2)	18~25	36	10	42
M40-M	M40x1.5(2)	22~32	40	10	50
M42-M	M42x1.5(2)	22~30	42	10	50
M48-M	M48x1.5(2)	25~33	48	10	52
M50-M	M50x1.5(2)	32~38	50	10	57
M54-M	M54x1.5(2)	32~38	54	10	57
M60-M	M60x1.5(2)	37~44	60	11	64
M63-M	M63x1.5(2)	37~44	63	11	68
M64-M	M64x1.5(2)	37~44	64	11	68



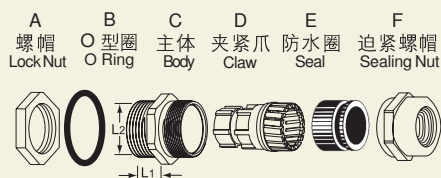

- 产品材质: A.C.F 部位采用黄铜镀镍, D 部位采用 UL 认可的尼龙 PA66, B.E 部位采用丁腈橡胶。
- 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- 工作温度: -40℃ 至 100℃, 瞬时耐热至 120℃。
- 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。


- Material: Parts A, C, F are made of brass plated with nickel, part D is made of UL approved nylon PA66, parts B and E are made of nitrile butadiene rubber (NBR).
- Thread spec.: Metric, PG, G, NPT.
- Working temperature: -40℃ to 100℃, instantaneous heat resistance up to 120℃.
- Characteristics: Special design of clamping die and rubber part, large range in clamping the cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.



产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size (mm)
NPT3/8" -M	NPT3/8"	5-10	17.1	15	18
NPT3/8" -M	NPT3/8"	2~6	17.1	15	18
NPT1/2" -M	NPT1/2"	10-14	21.3	13	22
NPT1/2" -M	NPT1/2"	5~9	21.3	13	22
NPT3/4" -M	NPT3/4"	13~18	26.6	15	30
NPT3/4" -M	NPT3/4"	9~16	26.6	15	30
NPT1" -M	NPT1"	18~25	33.5	16	40
NPT1" -M	NPT1"	13~20	33.5	16	40
NPT1 1/4" -M	NPT1 1/4"	22~33	42	18	50
NPT1 1/4" -M	NPT1 1/4"	18~25	42	18	50
NPT1 1/2" -M	NPT1 1/2"	32~38	48	15	57
NPT1 1/2" -M	NPT1 1/2"	20~26	48	15	57


NPT1/4" >>3-6.5

NPT 2" >>37-44



- 材料: 黄铜镀镍
- O-密封件: 丁腈橡胶
- 工作温度: -40℃至100℃

- Material: Made of brass plated with nickel.
- O-sealing element: Made of nitrile butadiene rubber (NBR).
- Working temperature: -40℃to100℃.

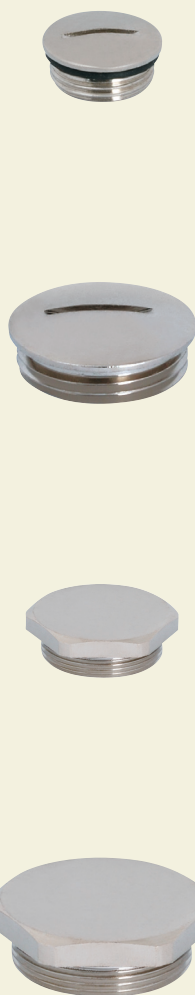

产品型号 Model	螺纹规格 Thread Size	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	主体尺寸 Main body Dimensions L (mm)	盖帽尺寸 Cover Dimensions D (mm)
PG7-TM	PG7	12.5	5	8	14
PG9-TM	PG9	15.2	6	9	17
PG11-TM	PG11	18.6	6	9	20
PG13.5-TM	PG13.5	20.4	6.5	9.5	22
PG16-TM	PG16	22.5	6.5	9.5	24
PG21-TM	PG21	28.3	7	11	30
PG29-TM	PG29	37	8	12	39
PG36-TM	PG36	47	9	15	50
PG42-TM	PG42	54	10	16	57
PG48-TM	PG48	59.3	10	16	64

产品型号 Model	螺纹规格 Thread Size	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	主体尺寸 Main body Dimensions L (mm)	盖帽尺寸 Cover Dimensions D (mm)
M12-TM	M12x1.5	12	5	8	14
M16-TM	M16x1.5	16	6	9	18
M18-TM	M18x1.5	18	6	9	20
M20-TM	M20x1.5	20	6.5	9.5	22
M22-TM	M22x1.5	22	6.5	9.5	24
M25-TM	M25x1.5	25	7	11	28
M32-TM	M32x1.5	32	8	12	35
M40-TM	M40x1.5	40	9	15	44
M50-TM	M50x1.5	50	10	16	54
M63-TM	M63x1.5	63	10	16	70

