

Multi Point unit

DHC ILEC

DATA PRODUCT

Model	:	DHC 6 ILEC (STE)	DHC 8 ILEC (STE)
Product Code	:	1111-238946	1111-238947
Dimension (HxWxD)	:	350 x 210 x 96 mm.	
Box Dimension (HxWxD)	:	120x460x222 mm.	
Weight of Product	:	2.20 kg.	2.30 kg.
Weight overall	:	3.00 kg.	3.10 kg.



Multi Point unit

DHC ILEC


PACKAGING BOX




Multi Point unit

DHC ILEC

PATTERN PACKAGING BOX

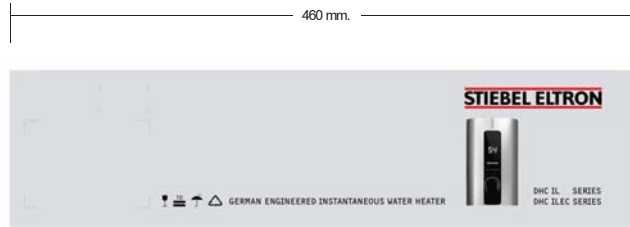

BACK VIEW



RIGHT VIEW




TOV VIEW



LEFT VIEW



FRONT VIEW



BACK VIEW

Multi Point unit

DHC ILEC



FEATURES

- Temperature control
- Touch control buttons
- 3 memory settings
- Microprocessor control system
- LCD display-ELCB (Earth Leak Circuit Breaker)
- Heat resistant PCB cover protection-Multi point multi function
- Rotary control knob for temperature setting
- Automatic cut-off for scalding prevention
- High pressure and heat resistant copper tank
- Water proof to IP 25

Multi Point unit

DHC ILEC

TECHNICAL DATA

Product Name	DHC 6 ILEC (STE)	DHC 8 ILEC (STE)
Product Code	1111-238946	1111-238947
Barcode Product		
Type	DHC 6 ILEC	DHC 8 ILEC
Design	Closed outlet	
Min. pressure to activate unit	0.2 bar / 0.02 MPa	
Max. inlet water pressure	10 bar / 1.0 MPa	
Water connection	G 1/2" (External Thread)	
Electrical connection	1/N/PE/AC 220...240 V.	
Dimension (H x W x D) (mm.)	350 x 210 x 96	
Weight (kg)	2.2	2.3
Recommended circuit breaker (A.)	32	40
Recommended cable size (Sqmm.)	4-6	6-8
Rated power (kW) Rated current (A)	kW - A	kW - A
	220 V	220 V
	230 V	230 V
	240 V	240 V
	6.0 - 27.3	8.0 - 36.4
	6.6 - 28.7	8.7 - 37.8
	7.1 - 29.6	9.5 - 39.6