Clamp Cylinder

Characteristic:


Front and rear caps are finished by aluminum alloy die—casting, processed with high precision. Three side are settled air port, easy for installation, The flow—limiting valve in front and back sides, movement speed is adjustable. Adjustable air cushion in the front and back sides, Interface of double—toggle is special designing for welder when weld the car body.

Specification:

Туре	40	50	63	80
Portsize	1/4"		3/8"	
Fluid	Air			
Operating pressure Range Mpa	0.05~1.5			
Operating speed mm/sec	50~500			
Ambient temperature ℃	5~60			
Cushion	Attach Two Sides			
Oil	Luicbration Needless(Oil Spray Luicbration)			
Mounting	Two Ears			



How to order:

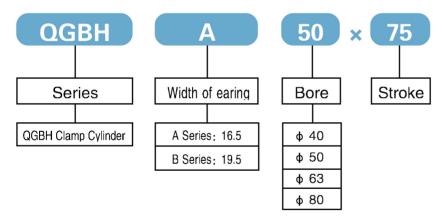

Inner structure drawing:

