

INSTANT-MATE



Instantaneous Water Boiler 電熱開水器系列

Instant-Mate instantaneous water boilers are designed with the principle "More Durable, More Prompt, More Concise and More Variety". The machine is made up of S/S exterior with insulation. Water can be rapidly heated up to 92°C as well as saving up to 30%-50% of power consumption.

捷寶牌開水器以「更耐用、更快捷、更省電、更易用和款式多樣化」為依歸。產品全為不銹鋼設計，美觀耐用，適合各種場合使用。水溫可快速升至92°C，並節省用電量高達30%-50%，為各大用家首選。

INSTANT-MATE




即熱式開水器 Instantaneous Water Boiler

捷寶牌即熱式開水器全由電子系統監控下運作，確保出水溫度達至92-97°C的無菌狀態，適合於各大場所使用，包括便利店、醫院、酒樓及餐館等。

INSTANT-MATE Instantaneous Water Boilers are fully controlled by electronic monitoring system, which is able to guarantee the temperature of water output is within the bacteria-free range (92-97°C). It is a perfect choice for convenient stores, hospitals, schools and restaurants etc.

Comparison Between Traditional Boiler and Instant-Mate Boiler 傳統熱水器及捷寶牌開水器比較

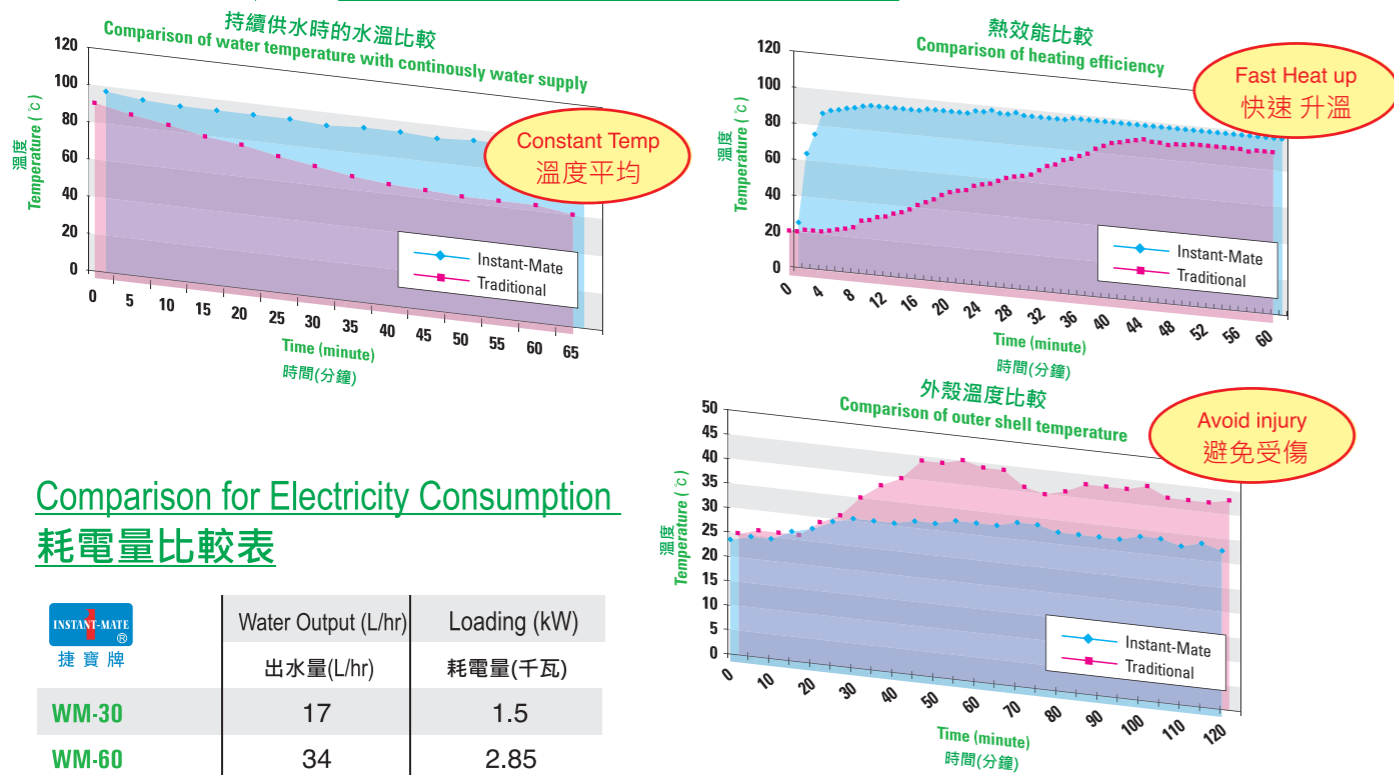

Comparison for Electricity Consumption 耗電量比較表

INSTANT-MATE 捷寶牌	Water Output (L/hr) 出水量(L/hr)	Loading (kW) 耗電量(千瓦)
WM-30	17	1.5
WM-60	34	2.85
WM-80	65	6
WM-100	166.5	9
WM-200	282.5	18

Traditional 傳統型號	Water Output (L/hr) 出水量 (L/hr)	Loading (kW) 耗電量(千瓦)
10 Gallon (加侖)	30	3
20 Gallon (加侖)	90	9
30 Gallon (加侖)	125	15
40 Gallon (加侖)	150	18

即熱式開水器配件 Accessories for Instantaneous Water Boiler

Model 型號	Dimension (mm) 尺寸(毫米)			Corresponding Model 對應型號
	W	D	H	
SM-60 ¹	341	374	665	WM60/80
SM-100 ¹	515	460	785	WM100/180/120
TW-10 ²	490	510	760	WM60/80
TW-100 ²	515	460	665	WM100/180/120

¹ Water Boiler Stand 開水器底座
² Towel warmer w/ Stand(220V/SPN)
毛巾熱櫃連底座 (220V/SPN)

SM-60 / SM-100

即熱式開水器 Instantaneous Water Boiler

即熱式開水器 Instantaneous Water Boiler



Model 型號	Dimension (mm) 尺寸(毫米)			Voltage 電壓	Loading (kW) 耗電量(千瓦)	Water Output (L) 出水量 (公升)
	W	D	H			
WM-12	212	312	430	220-240V/SPN	1	12
WM-30	300	282	470	220-240V/SPN	1.5	17
WM-35	212	366	471	220-240V/SPN	2	23

SPEC / 規格 P.108

即熱式開水器 Instantaneous Water Boiler



Model 型號	Dimension (mm) 尺寸(毫米)			Voltage 電壓	Loading (kW) 耗電量(千瓦)	Water Output (L) 出水量 (公升)
	W	D	H			
WM-60	340	340	650	220-240V/SPN	2.85	34
WM-80	340	340	650	380-415V/TPN	6	65
WM-60F	220	475	650	220-240V/SPN	2.85	31
WM-80F	220	475	650	380-415V/TPN	6	70

SPEC / 規格 P.108

即熱式開水器 Instantaneous Water Boiler



WM-100 / WM-180 / WM-200

Model 型號	Dimension (mm) 尺寸(毫米)			Voltage 電壓	Loading (kW) 耗電量(千瓦)	Water Output (L) 出水量 (公升)
	W	D	H			
WM-100	510	425	930	380-415V/TPN	9	102
WM-180	510	425	930	380-415V/TPN	15	172
WM-200	510	425	930	380-415V/TPN	18	206

SPEC / 規格 P.108

即熱式開水器 - 水吧式 Instantaneous Water Boiler - Bar Counter Version



WM-35UHC

WM-35UH

WM-35UHW



Tank (水膽)
WM-35UHC



Tank (水膽)
WM-35UH



Tank (水膽)
WM-35UHW

Hot Water Version 熱水型號

Model 型號	Tank Dimension (mm) 水膽尺寸(毫米)			Voltage 電壓	Loading (kW) 耗電量(千瓦)	Water Output (L) 出水量 (公升)
	W	D	H			
WM-35UH	212	235	490	220-240V/SPN	2.0	27

Hot / Cold Water Version 冷熱水型號

Model 型號	Tank Dimension (mm) 水膽尺寸(毫米)			Voltage 電壓	Loading (kW) 耗電量(千瓦)	Water Output (L) 出水量 (公升)
	W	D	H			
WM-35UHC	500	500	400	220-240V/SPN	2.2+0.5=2.7	29 ¹ / 20 ²

Faucet Dimension 龍頭尺寸: Ø48.5 x 420mm H¹ Drip tray size 滴水盆尺寸: 247 x 180mm
¹ Hot water 熱水 ² Cold water output 冷水

Hot+Amibent Water Version 熱水+過濾水

Model 型號	Tank Dimension (mm) 水膽尺寸(毫米)			Voltage 電壓	Loading (kW) 耗電量(千瓦)	Water Output (L) 出水量 (公升)
	W	D	H			
WM-35UHW	212	235+110	490	220/SPN	2.0	27

Faucet Dimension 龍頭尺寸: 50W x 250 X 270H mm Drip tray size 滴水盆尺寸: 247 x 180mm
過濾水: 配置美國EVERPURE直飲水系統

SPEC / 規格 P.108