

DR-1504P


DirectIP 1500 Series Full HD Recorder / NDAA Compliant



- Total incoming throughput 60Mbps
- Easy to install, set-up, and play with DirectIP cameras
- Up to 120ips 8MP real-time recording
- Built-in 4 channel PoE Switch
- Up to 120ips live display
- Supports one click network configuration through FEN service

SPECIFICATIONS

Video	
Video Inputs	4 IP Channels
Max. Incoming Throughput	60Mbps
Supported Camera	DirectIP
Video Outputs	1 HDMI, 1 VGA
Display Resolution	1920 x 1200, 1920 x 1080, 1680 x 1050, 1600 x 1200
Display Speed	Up to 120ips
Digital Zoom	x2 - x12
Recording	
Max. Throughput	20Mbps, 120ips@8MP
Recording Resolution	Up to 8MP (Depending on IP Camera)
Video Compression	H.265, H.264
Recording Mode	Time-lapse, Event, Pre-event, Panic
Trigger Event	Motion Detection, Trip-zone, Tampering, Video Loss, Etc.
Playback	
Performance	4ch Full HD Synchronous Playback
Search Mode	Time-lapse, Event Log
Digital Zoom	x2 - x12
Storage	
HDD	SATA x1
Network	
Client Connection	Fast Ethernet (Client) x1
Video In Connection	Fast Ethernet (IP Camera) x4
Transmission Speed	20Mbps
PSE Power	PoE (IEEE 802.3at Class 4) Supported 4 Ports, 30W
Event Notification	Email (MP4), Callback to Remote S/W, Push Notification (IDIS Mobile)
Interface	
USB	USB 2.0 x 2
User Interface	Mouse
General	
Operating System	Embedded Linux
Environmental	
Operating Temperature	0°C to 40°C (32°F - 104°F)
Operating Humidity	0% - 90%
Electrical	
Power Consumption	NVR: 48V, 0.85A, Max. 40.8W PSE : Max. 30W
Approval	KC, CE, FCC
Mechanical	
Unit Dimensions (W x H x D)	205mm x 44.5mm x 216.4mm (8.07" x 1.75" x 8.52")
Unit Weight	1.2kg (2.65 lb) (with 1 HDD)

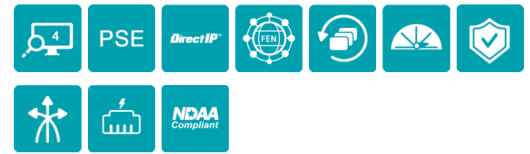

PRODUCT IMAGE

