

DR-2504P-A


DirectIP™ 2500 Series H.265 4K Recorder / NDAA Compliant



- Total incoming throughput 160Mbps
- Supports UHD display
- Built-in 4 channel PoE Switch
- Supports third party cameras (Axis, Panasonic, ONVIF™)
- Up to 120ips UHD real-time recording
- Up to 120ips live display
- Supports RAID 1
- Supports H.265 / H.264 codec
- Easy to install, set-up and play with DirectIP™ cameras
- Supports one click network configuration through FEN service

SPECIFICATIONS

VIDEO	
Video Inputs	4 IP channels
Max. Incoming Throughput	160Mbps
Supported Camera	DirectIP, AXIS, PANASONIC, ONVIF
Video Outputs	1 HDMI, 1 VGA
Display Resolution	HDMI : 3840x2160, 1920 x 1200 , 1920 x 1080, 1680 x 1050, 1600 x 1200 VGA : 1920 x 1200 , 1920 x 1080, 1680 x 1050, 1600 x 1200
Display Speed	Up to 120ips
Digital Zoom	x2 ~ x12
RECORDING	
Max. Throughput	70Mbps, 120ips@UHD
Recording Resolution	Up to 12MP (Depending on IP Camera)
Compression	H.265, H.264
Recording Mode	Time-Lapse, Event, Pre-Event, Panic
Trigger Events	Alarm in, Audio detection, Motion detection, Trip-zone, Tampering, Video Loss, Text-in, ANPR, Etc.
PLAYBACK	
Performance	4ch synchronous playback
Search Mode	Time-lapse, Event log, Text-in
Digital Zoom	x2 ~ x12
STORAGE	
HDD	SATA x2, eSATA x1, Raid 1 Supported
NETWORK	
Client Connection	Gigabit Ethernet(Client) x1
Video In Connection	Fast Ethernet(IP Camera) x4
Transmission Speed	50Mbps / 100Mbps(BRP Mode)
Camera Power	PoE(IEEE 802.3at class 4) supported 4 ports, 30W
Remote Data Export	IDIS Player, AVI, JPG
Event Notification	Email (attach clip (.cbf).MP4), Callback to Remote S/W, Push notification (IDIS Mobile)
Two-way Audio	Yes
Client Viewer	IDIS Center, IDIS Mobile, IDIS Web, IDIS Solution Suite
INTERFACE	
Audio In / Out	Local(NVR) : - / 1RCA 1HDMI, IP Camera : 4 / 4 (Depending on IP Camera)
Alarm In / Out	Local(NVR) : 4 / 1, IP Camera : 4 / 4 (Depending on IP Camera)
Serial Interface	RS232 (Terminal Block)
USB	USB 2.0 x 1, USB 3.0 x 1
User Interface	Mouse, IR Remote Control, Network Remote Keyboard
GENERAL	
Operating System	Embedded Linux
UNIT Dimensions (W x H x D)	300mm x 62mm x 231 mm (11.8" x 2.4" x 9.1")
Unit Weight	2.2kg (4.9lb) (with 1 HDD)
Working Temperature	0°C to 40°C (32°F ~ 104°F)
Operating Humidity	0% ~ 90%
Power Consumption	NVR: 12V=, 2.2A, 26.4W PSE: 48V=, 0.64A, 30.72W MAX
Approvals	FCC, CE, KC

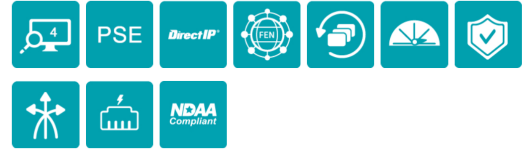

PRODUCT IMAGE



DIMENSIONS

