

DC-3303X

- Easy installation with DirectIP NVR
- 3MP (2048 x 1536) resolution
- Optional lens (C/CS mount)
- micro SD/SDHC/SDXC, Smart Failover
- Two-way audio
- Alarm in / out
- PoE (IEEE 802.3af Class 3), 12V DC
- Day and night (ICR)
- True wide dynamic range (WDR)
- Digital image stabilization (DIS)
- Supports ONVIF




SPECIFICATIONS

VIDEO		
Image Sensor	1/2.8" CMOS	
Max. Resolution	2048 x 1536	
Scanning Mode	Progressive Scan	
Lens Type	Optional (C/CS Mount)	
Iris Control	P-Iris / DC Auto Iris / Manual Iris	
Min. Illumination	Color : 0.0206 Lux @ F1.2 BW : 0.0007 Lux @ F1.2	
Dynamic Range	120 dB (True WDR)	
Electronic Shutter Speed	Auto / Manual (1/30 ~ 1/10000), Anti-Flicker, Slow Shutter (1~1/5, 1/7.5, 1/15)	
Day and Night	IR Cut Filter with Auto Switch	
Image Setting	Configurable Exposure, White Balance, Sharpness	
Digital Noise Reduction	Configurable 2DNR / 3DNR	
Backlight Compensation	-	
Image Stabilizer	Yes (DIS)	
De-fog	On / Off	
Privacy Masking	8 Zones	
Intelligent Video	Video Motion Detection, Active Tampering Alarm, Trip Zone	
Video Out	1 RCA	
NETWORK		
	DirectIP Mode	Compatibility Mode
Video Compression	H.265, H.264 (MP), M-JPEG	
Intelligent Codec	Supported	
Bitrate Control	H.265 - VBR H.264 - VBR	
Audio Compression	G.726, G.711	
Two-way Audio	Yes	
IP Camera Protocol	DirectIP	IDIS ONVIF Profile S
Max. Frame Rate	30ips : 2048 x 1536	30ips : 2048 x 1536
Supported Resolution	2048 x 1536, 1600 x 1200, 1280 x 960, 800 x 600, 480 x 360, 320 x 240	2048 x 1536, 1600 x 1200, 1280 x 960, 800 x 600, 480 x 360, 320 x 240
Multi-video Streaming	Quadruple Streaming	Quadruple Streaming
Network Protocols	DirectIP Protocol	RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP, RTSP/TCP, HTTP, HTTPS, FTP, SNMP, SMTP, FEN, mDNS, uPNP
Security	SSL Encryption	Multi-user Authority, IEEE 802.1x, IP Filtering, HTTPS, SSL Encryption
Remote Access Client	DirectIP NVR Connection	IDIS Web, IDIS Mobile, IDIS Solution Suite
Ethernet	RJ45 (10/100 BASE-T)	
Recording Session Buffer	Yes (Up to 60MB)	
Edge Storage	micro SD / SDHC / SDXC, Smart Failover	
ALARM AND EVENT		
Trigger Event	Motion Detection, Alarm in, Audio detection, Tampering, Trip Zone	
Event Notification	Remote S/W, Email (with Image)	
Audio In / Out	Line-in 1ea + Internal Mic 1ea / Line-out 1ea	
Alarm In / Out	Input 1ea / Output 1ea	
ENVIRONMENTAL		
Vandal Proof Casing	-	
Outdoor Ready	-	
Operating Temperature	-10°C ~ +50°C (+14°F ~ +122°F) *Starting Up at Above 0°C (32°F)	
Operating Humidity	0% ~ 90%	
ELECTRICAL		
Power Source	12VDC, PoE (IEEE 802.3af Class 3)	
Power Consumption	6W	
Approvals	FCC, CE, KC, UL	
MECHANICAL		
Dimensions (W x H x D)	75.6mm x 61mm x 129.3mm (2.98" x 2.4" x 5.09")	
Weight	0.4kg (0.89lb)	

DIMENSIONS

(Unit - mm)

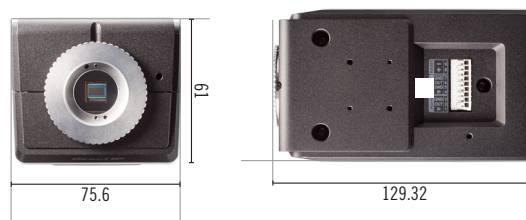

ACCESSORIES (OPTIONAL)



ACCESSORIES CONFIGURATION TREE

