




EMC
EN: 61326

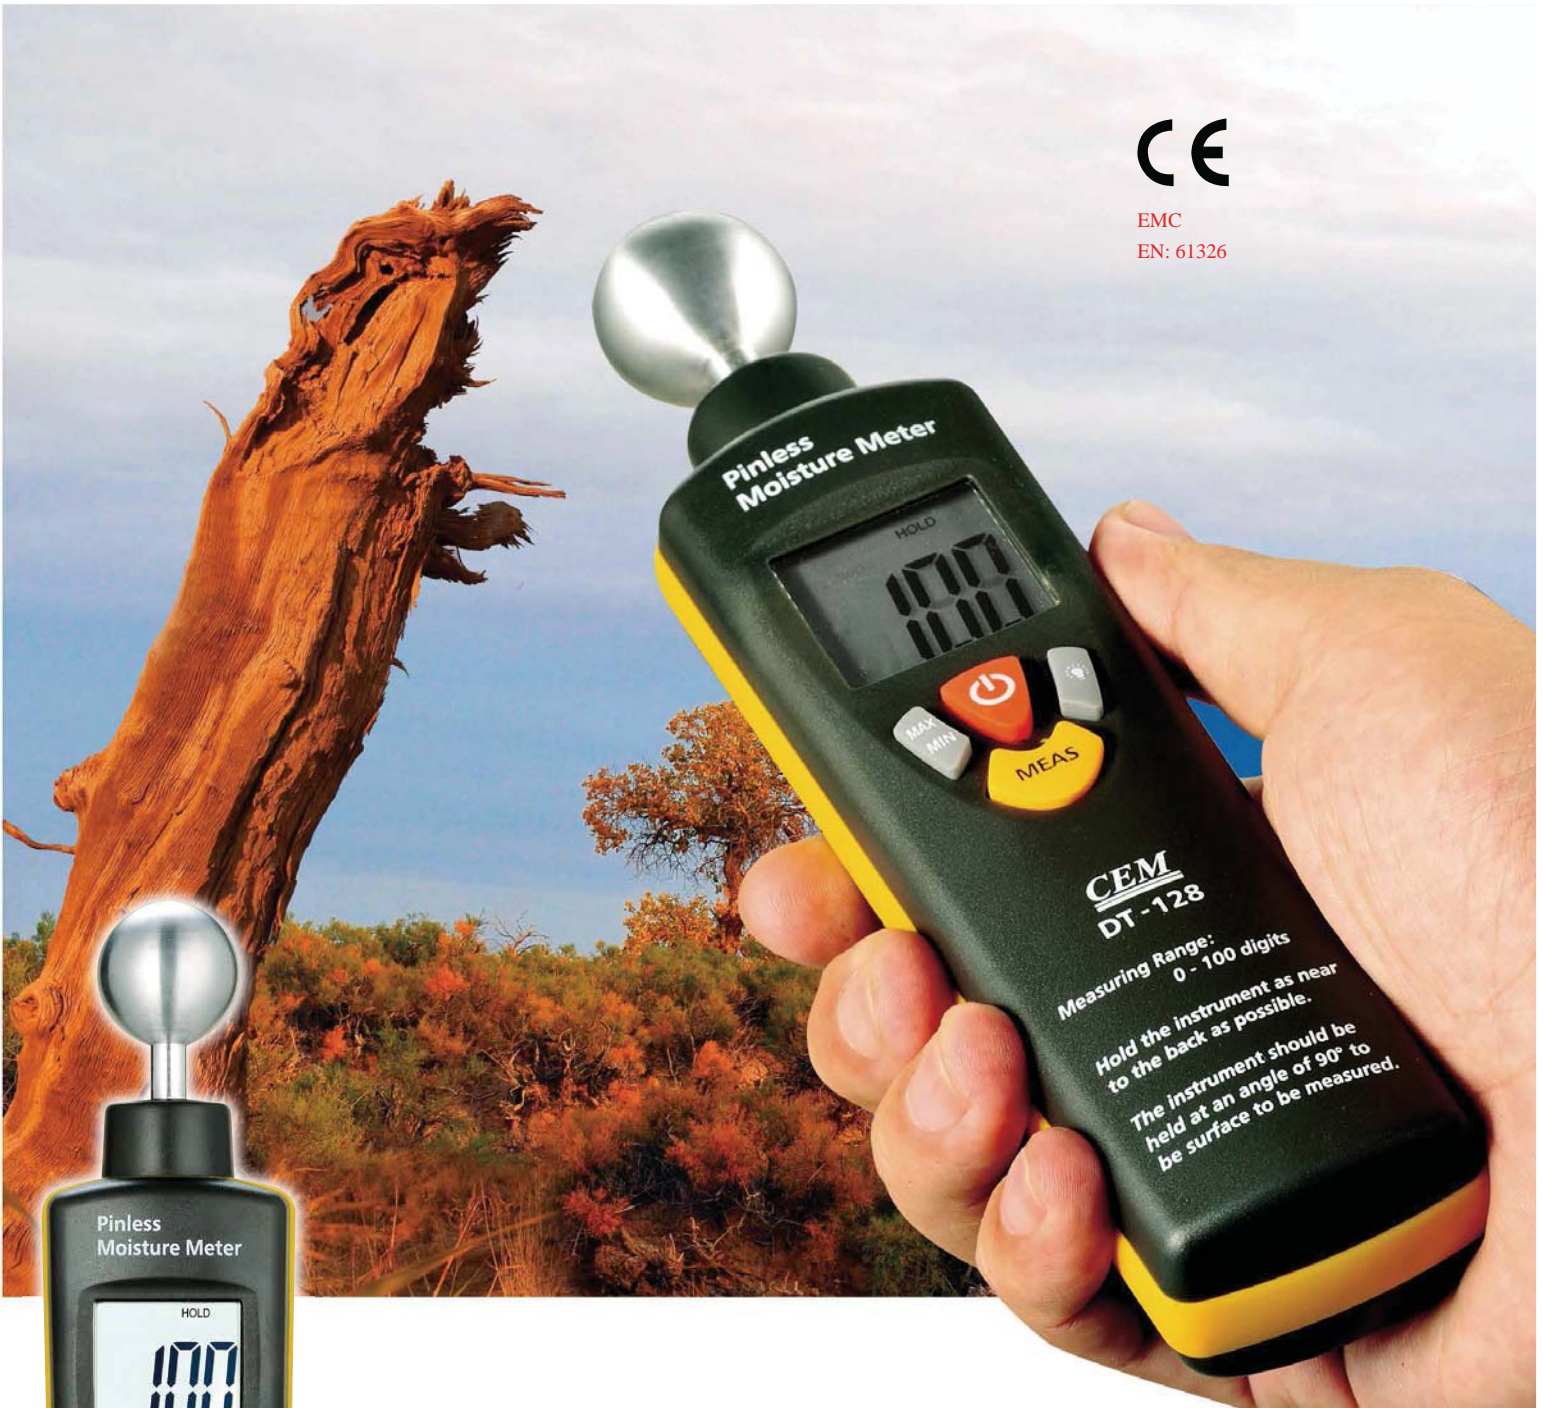


Features	
Quickly indicate the moisture content of materials	
Depth of penetration about 20-40mm.	
Low battery indication	
MAX/MIN Function	
HOLD Function	
Auto Power Off	
White Backlit LCD Display	


Specifications	
Sensor Type	metal spheroid
Measuring Range	0 to 100 digit
Max Resolution	1
Battery	9V battery
Dimensions	189 x 47 x 35mm
Weight	178g

Accessories:
9V battery and gift box

Table of Comparison Air Relative Humidity Structural Moisture

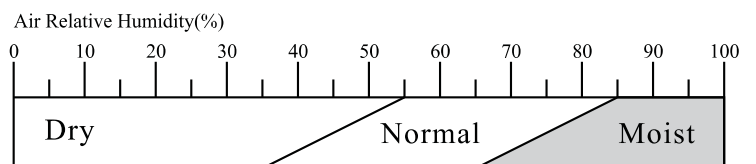

LCD Readout - COMPACT B



LCD Readout - COMPACT B

Gypsum+anhydrite based constr.mat./flooring - Wt./CM-%	0.3	0.5	1.4	2.0	2.5	2.7	%
Cement based constr.mat. and flooring in CM-%	1.5	2.1	3.0	3.5	4.0		CM-%
Cement based constr.mat. and flooring in weight-%	2.7	3.6	4.5	5.5	6.0		Wt-%

CM% = percentage value by carbide method