


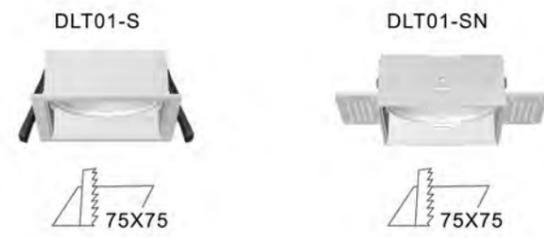



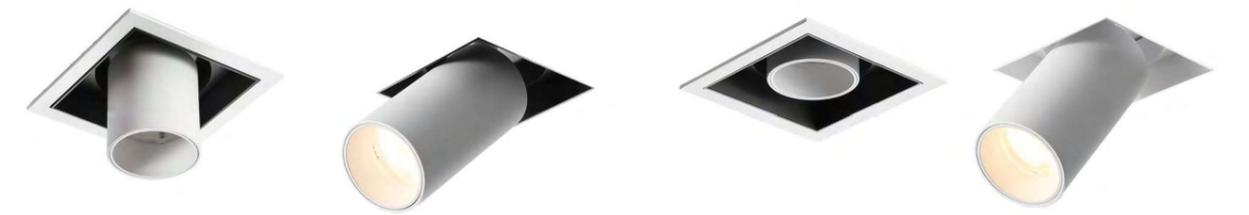


ETERNITY


Multi-configuration spotlight series; Easy for installation and stock;
It provides with power from 6W to 18W with the same cutout size;
Suitable for different applications;

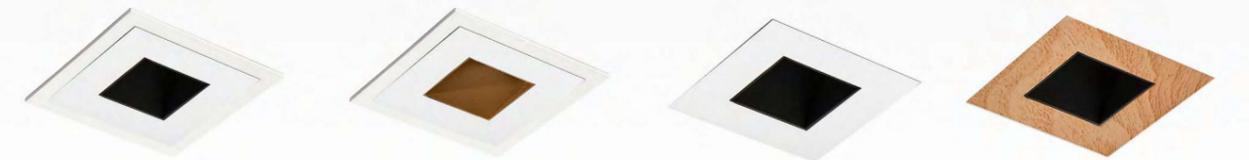

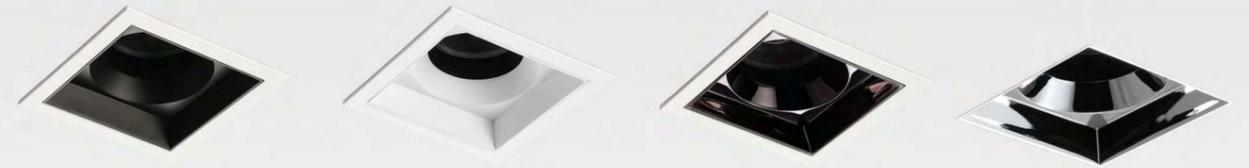

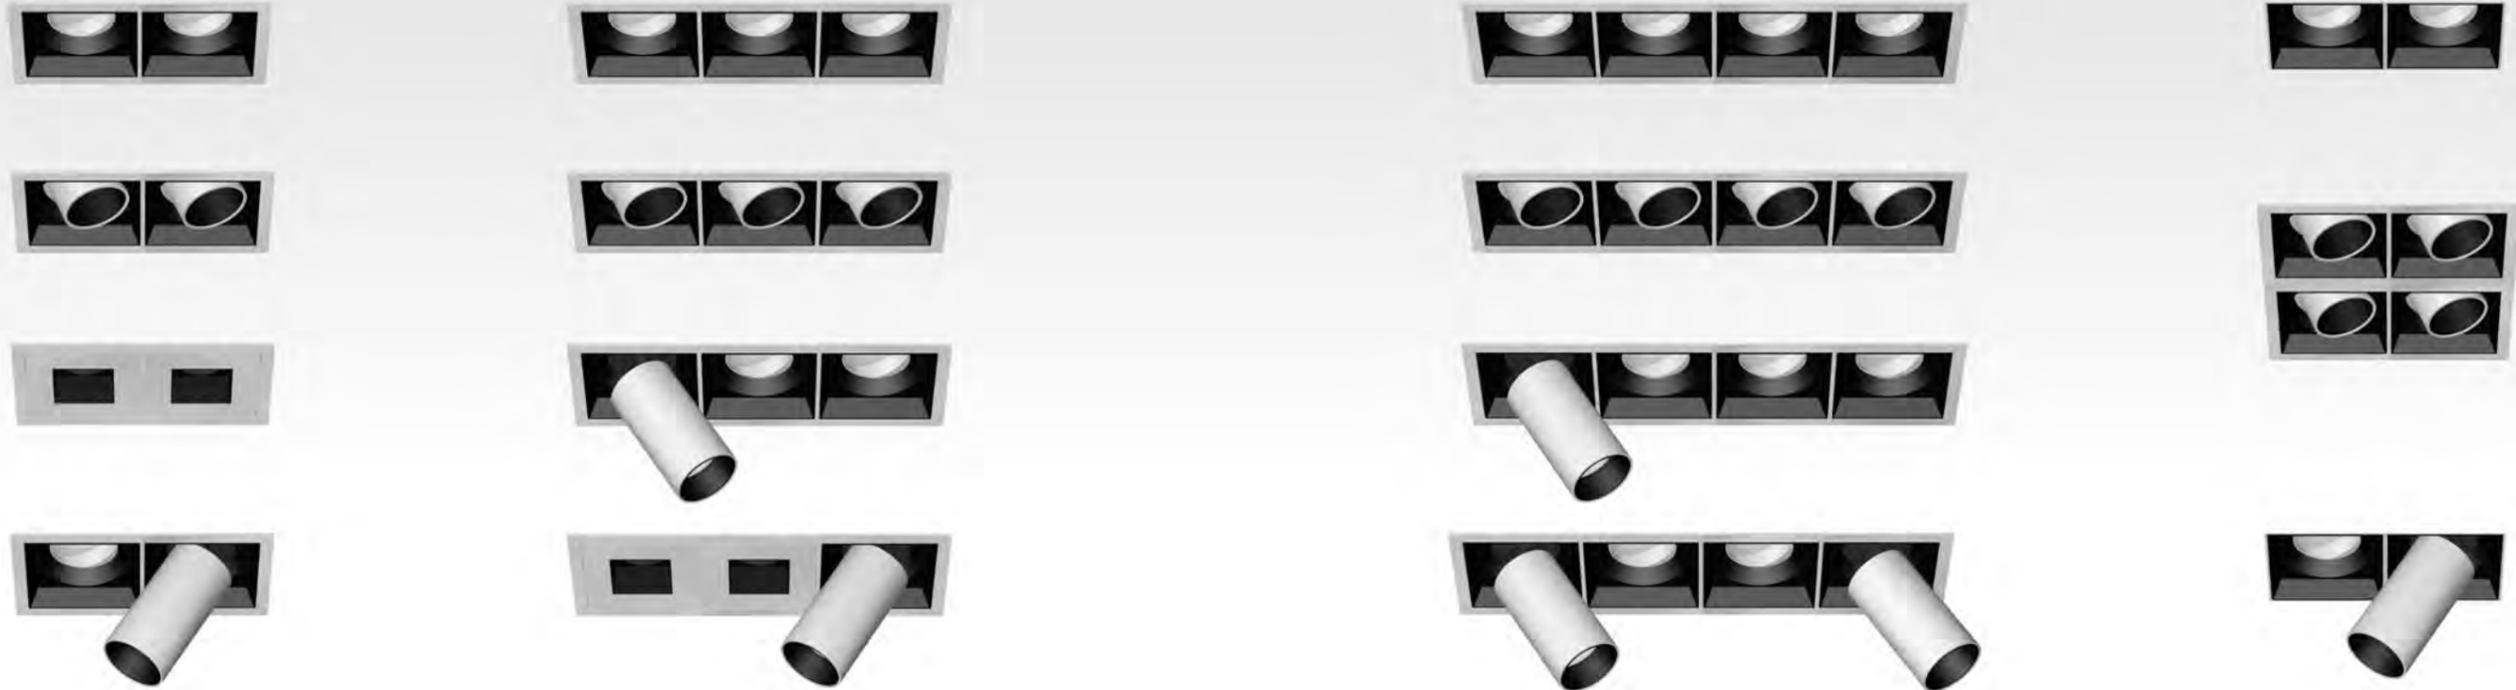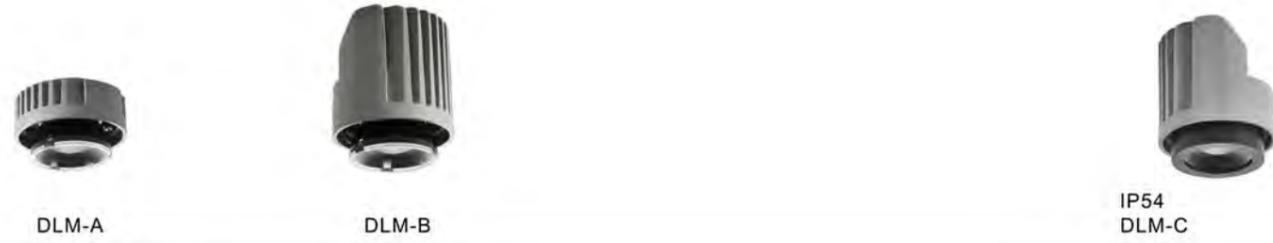




-  SCR Dimming
-  0-10V Dimming
-  DALI Dimming
-  Bluetooth Dimming
-  Tuya Dimming
-  High-power LED SDCM<3
-  CRI ≥ 90
-  Anti-Glare



Code No.:DL201-A

Power	MAX 12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

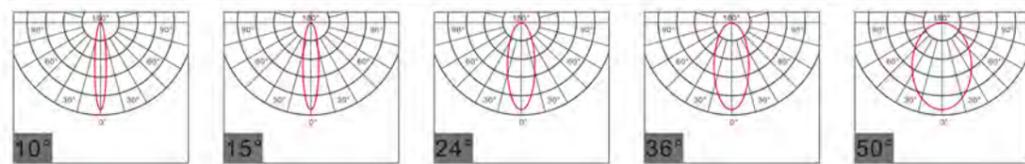

Code No.:DL201N-A

Power	MAX 12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

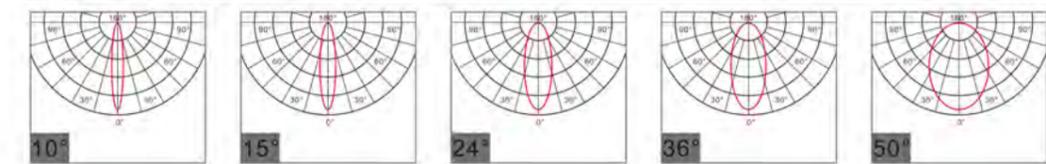

Code No.:DL201-B

Power	MAX 18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

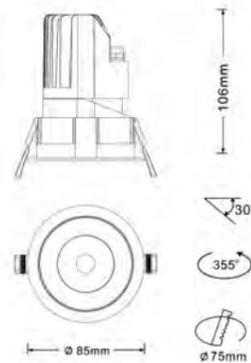

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

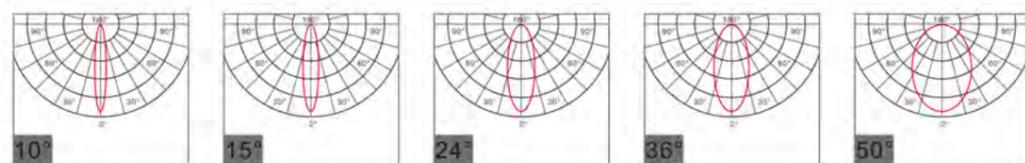

Code No.:DL201N-B

Power	MAX 18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

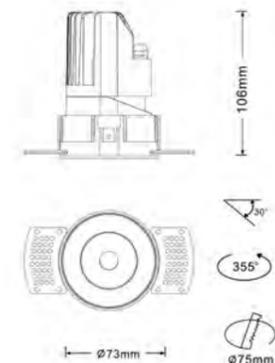

White Black


Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

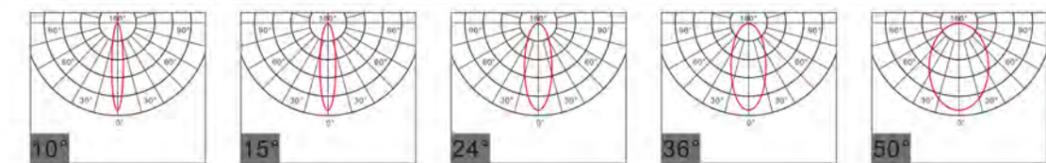

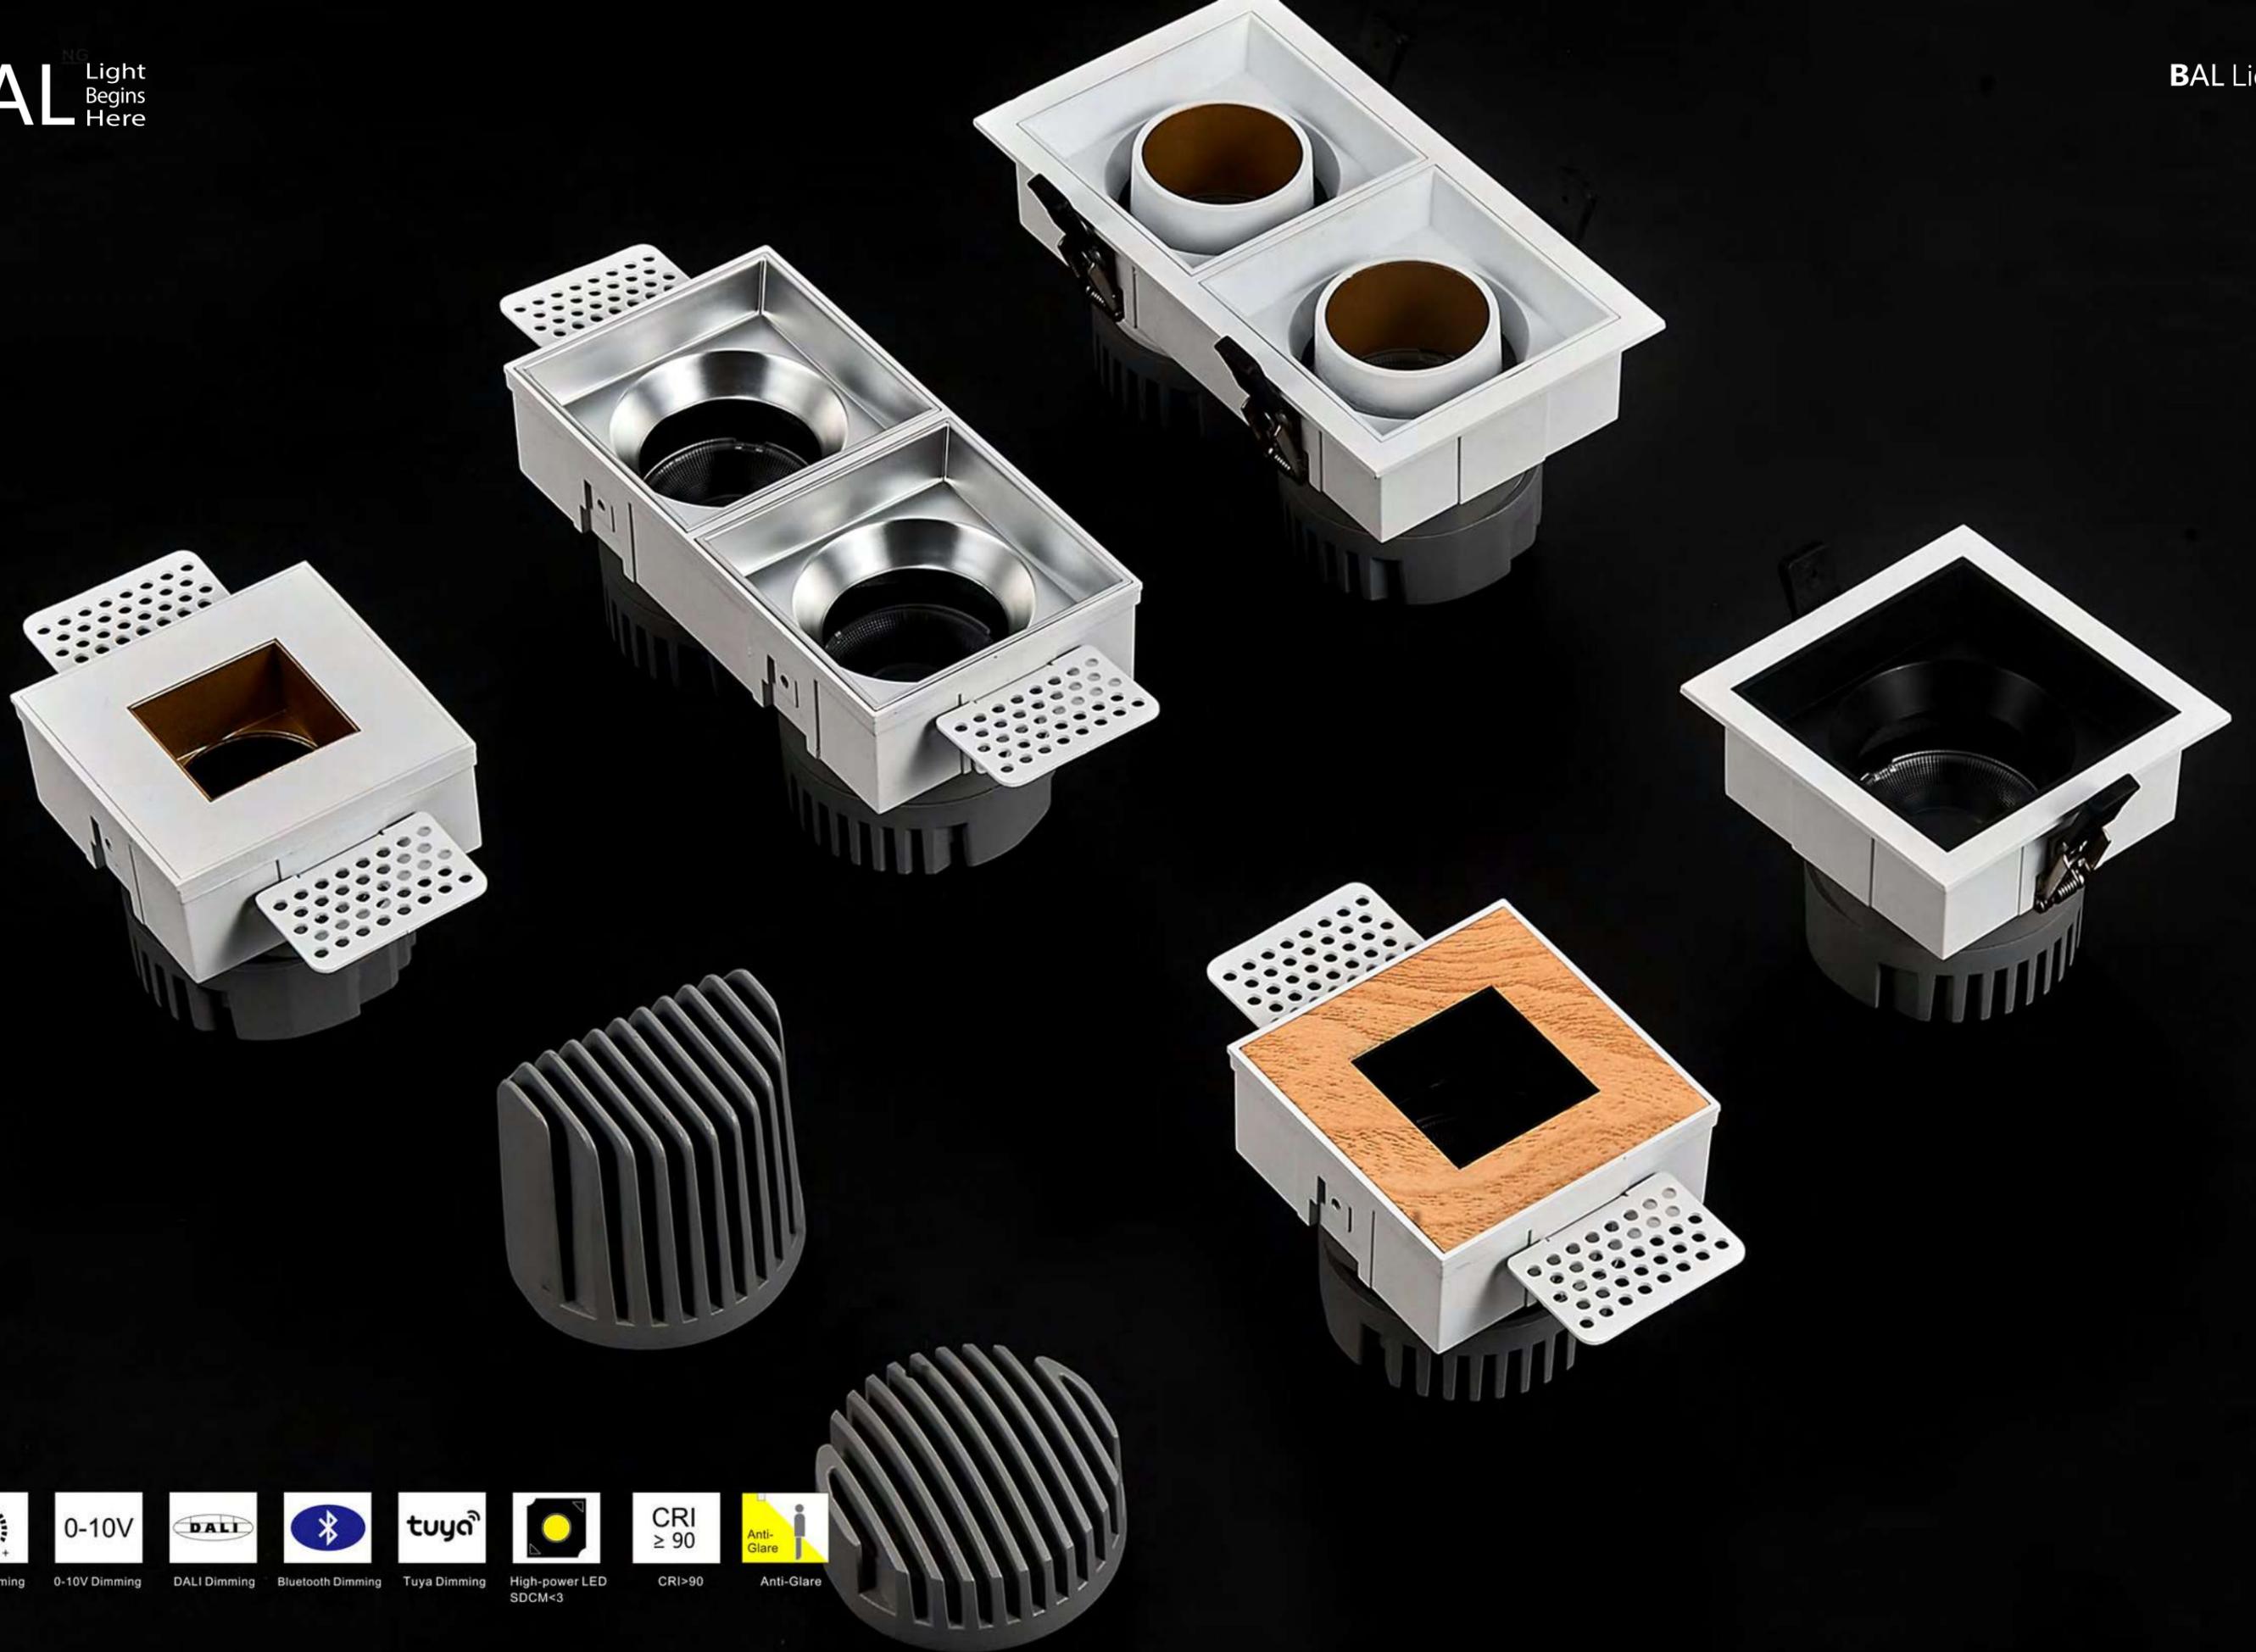


-  SCR Dimming
-  0-10V Dimming
-  DALI Dimming
-  Bluetooth Dimming
-  tuya Dimming
-  High-power LED SDCM<3
-  CRI ≥ 90
-  Anti-Glare




Code No.:DL201S-A

Power	MAX 12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

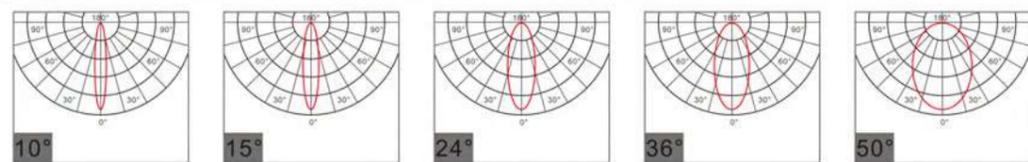


Code No.:DL201S-B

Power	MAX 18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

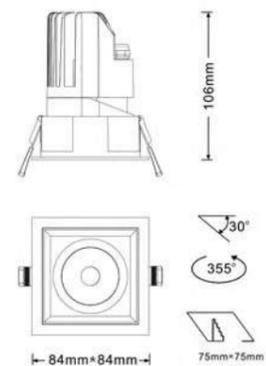


White Black

Reflector



2700K / 3000K / 3500K / 4000K / 5000K


Angle

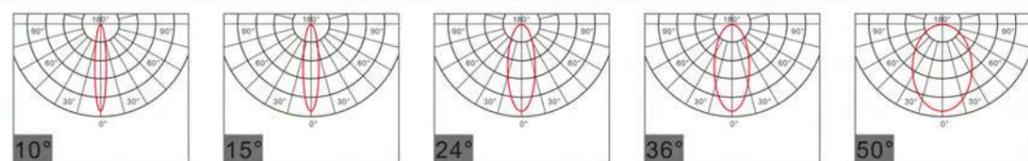




Code No.:DL221-A

Power	MAX 2*12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



75mm



156mm*84mm



145mm*75mm

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

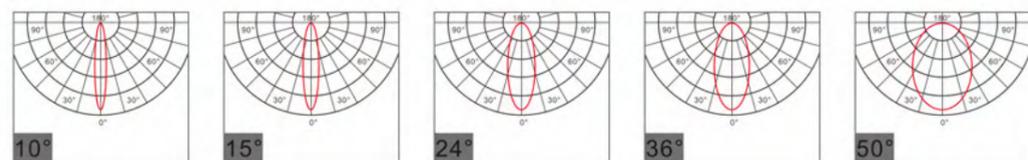


Code No.:DL221-B

Power	MAX 2*18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



106mm



156mm*84mm



145mm*75mm

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

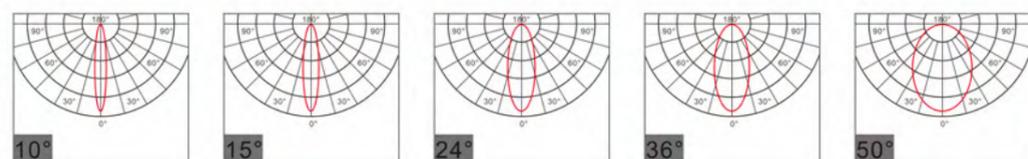



Code No.:DL231-A

Power	MAX 3*12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

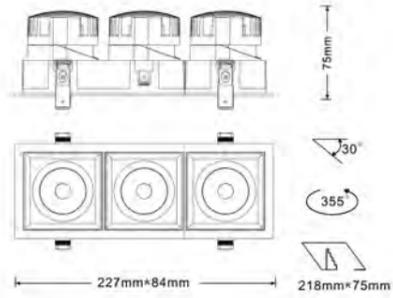

White Black




Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

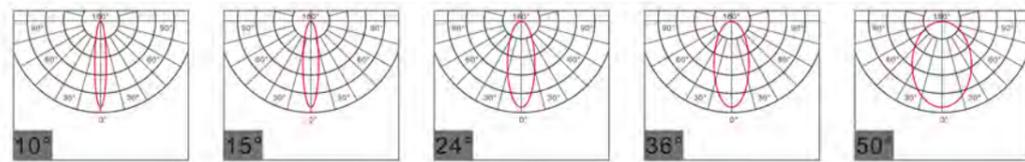

Code No.:DL241-A

Power	MAX 4*12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

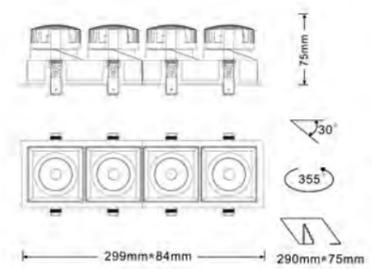

White Black




Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

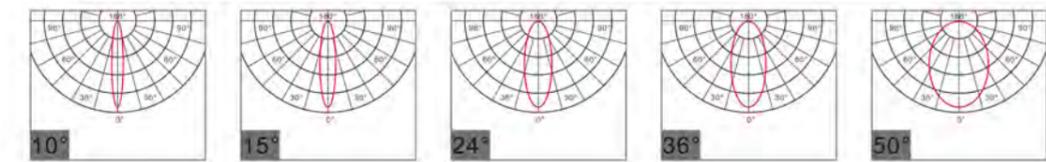

Code No.:DL231-B

Power	MAX 3*18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

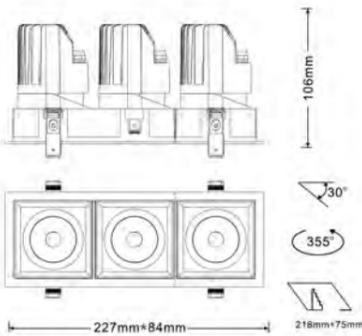

White Black




Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

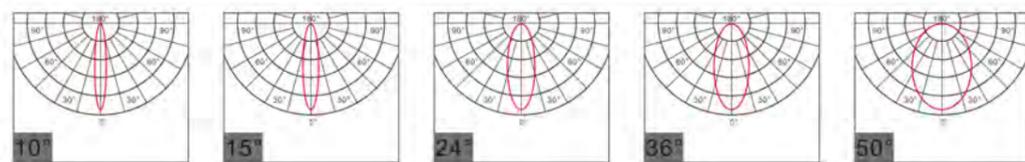

Code No.:DL241-B

Power	MAX 4*18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

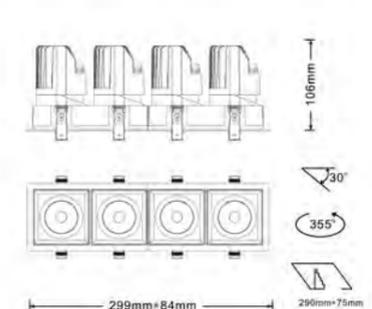

White Black




Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K


Angle

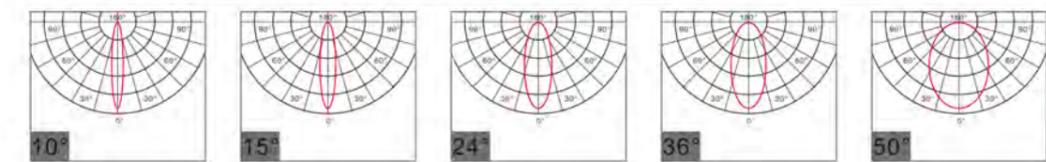




Code No.:DL241S-A

Power	MAX 4*12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



75mm



30°

355°

145mm*145mm

156mm*156mm

White Black



Honey Comb Spread Lens Solite Lens

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

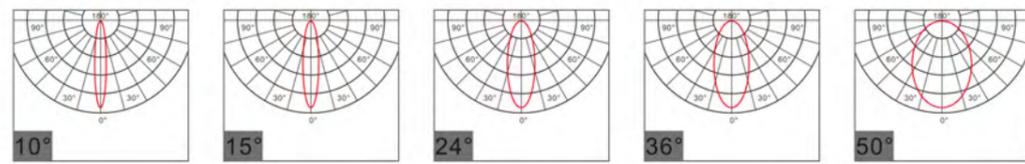


Code No.:DL241S-B

Power	MAX 4*18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



106mm



30°

355°

145mm*145mm

156mm*156mm

White Black



Honey Comb Spread Lens Solite Lens

Reflector





Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

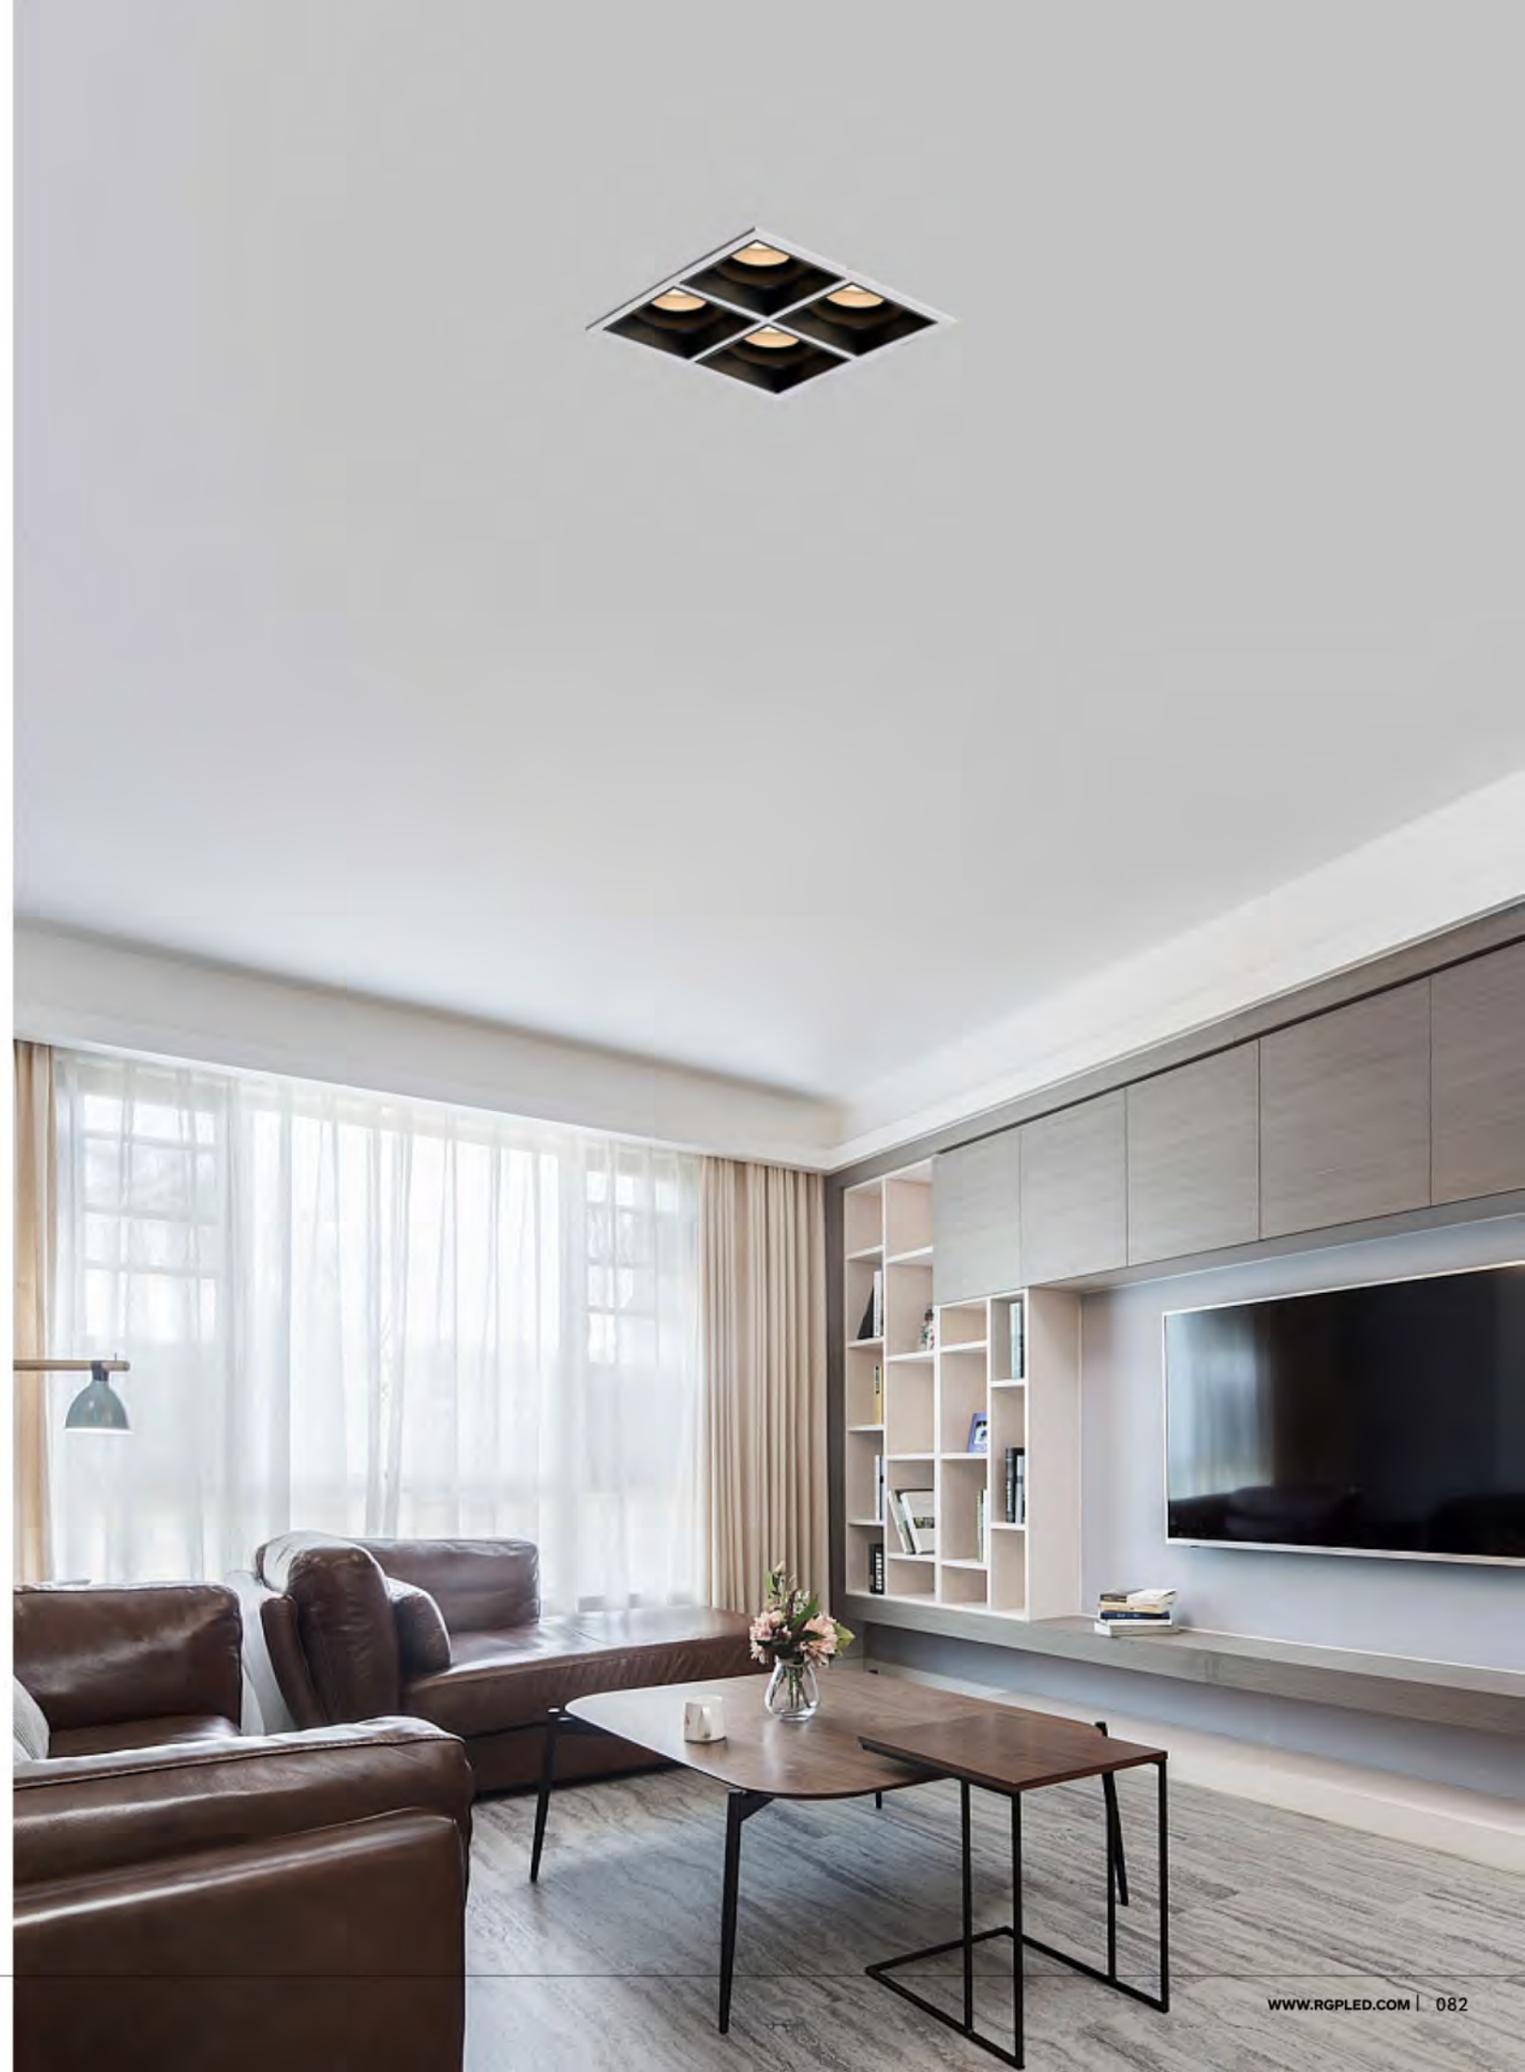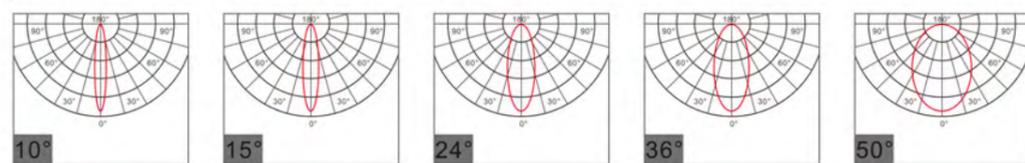



Code No.:DL201SN-A

Power	MAX 12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black



Reflector




Angle

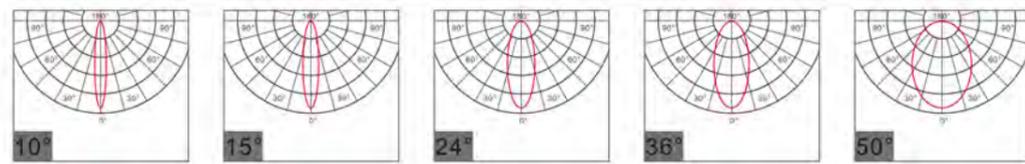

Code No.:DL201SN-B


Power	MAX 18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

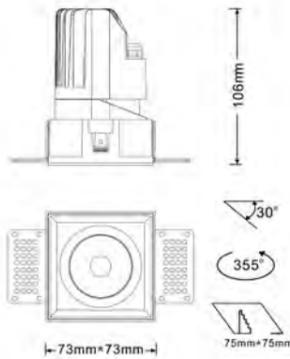


White Black



Reflector




Angle

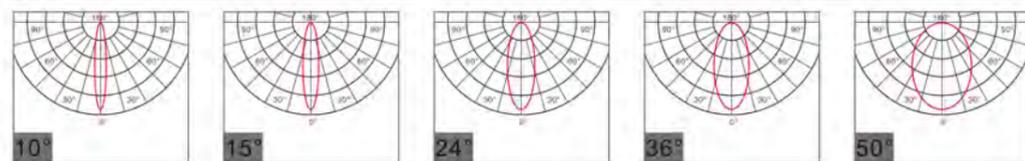

Code No.:DL221N-A


Power	MAX 2*12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black



Reflector




Angle

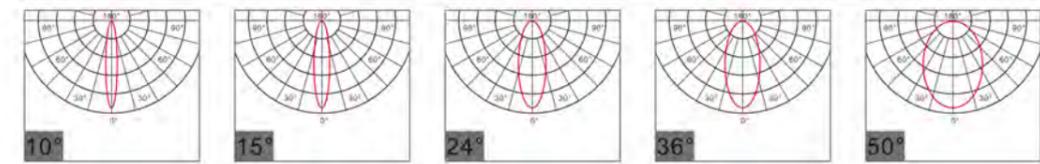

Code No.:DL221N-B



Power	MAX 2*18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20
Installation	Embedded




White Black



Reflector




Angle

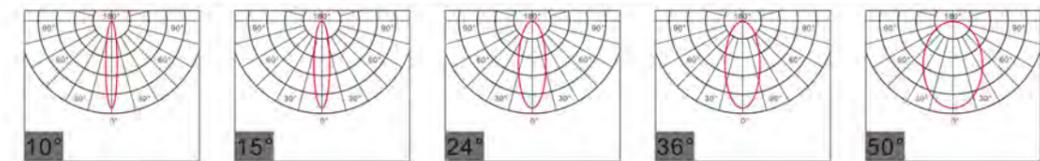




Code No.:DL241SN-A

Power	MAX 4*12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



75mm



143mm*143mm

30°

355°

145mm*145mm

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

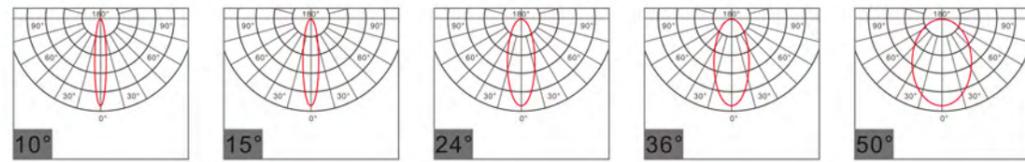


Code No.:DL241SN-B

Power	MAX 4*18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



106mm



143mm*143mm

30°

355°

145mm*145mm

White Black

Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

