




SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



Tuya Dimming



High-power LED
SDCM<3



CRI ≥ 90




Anti-Glare



Code No.:DL302-A

Power	MAX 12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

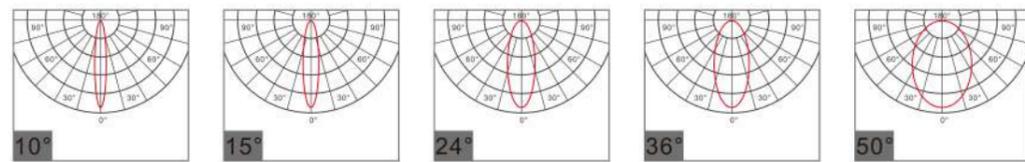

Code No.:DL302-B

Power	MAX 18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

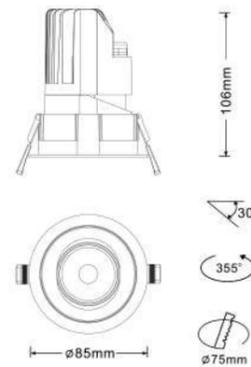

White Black



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

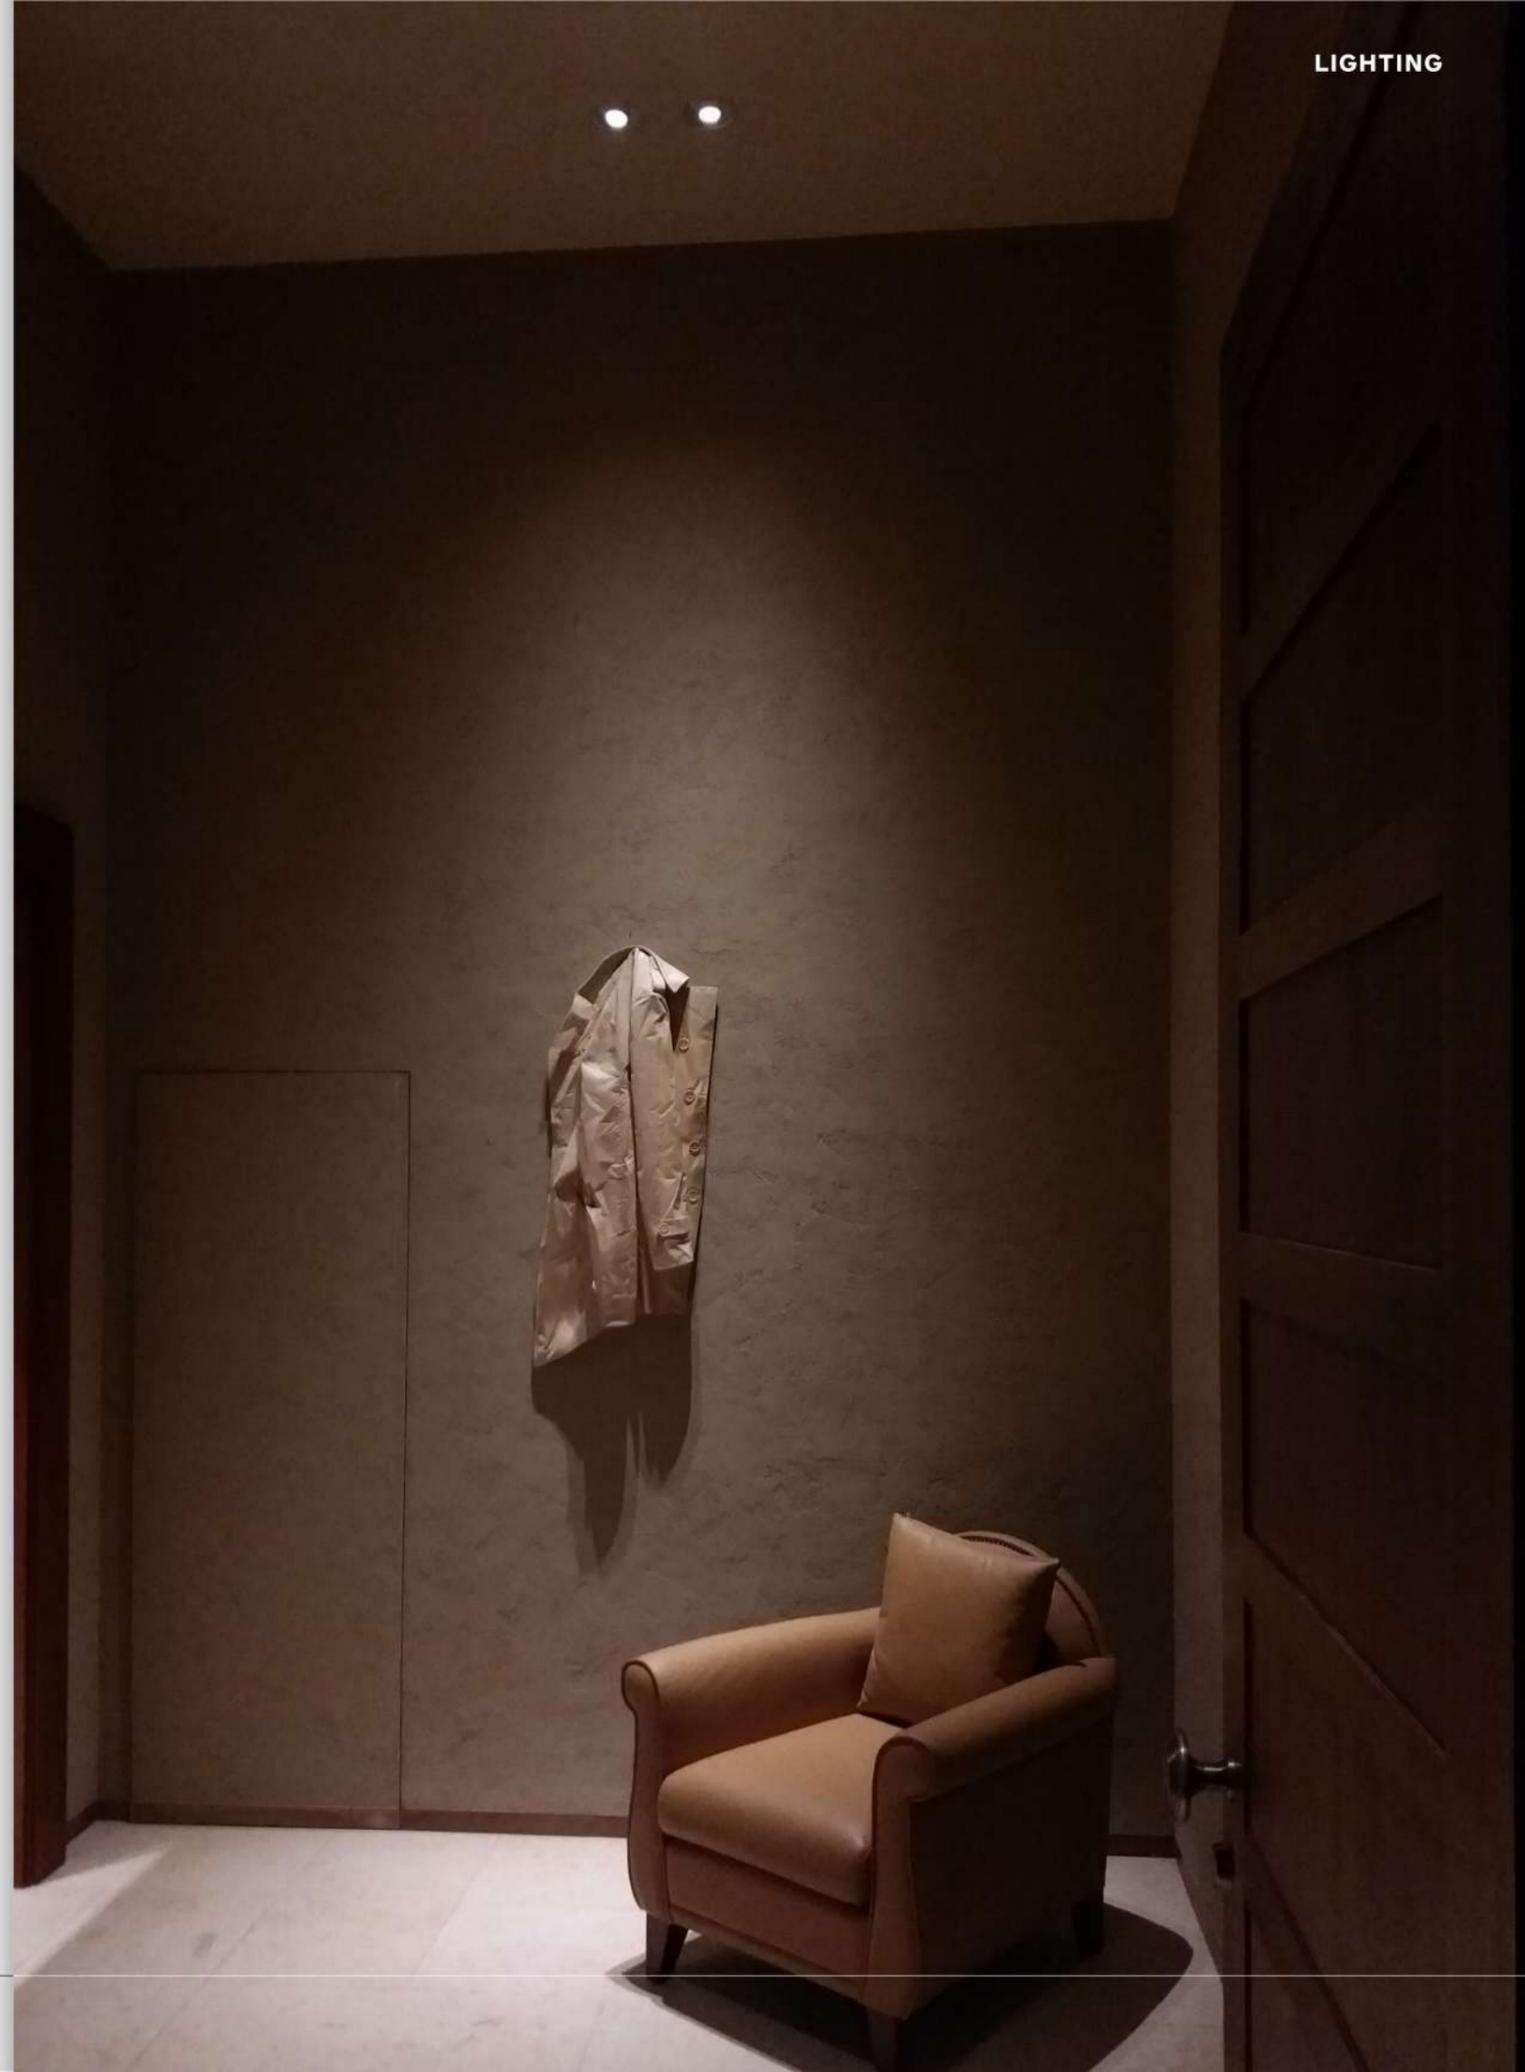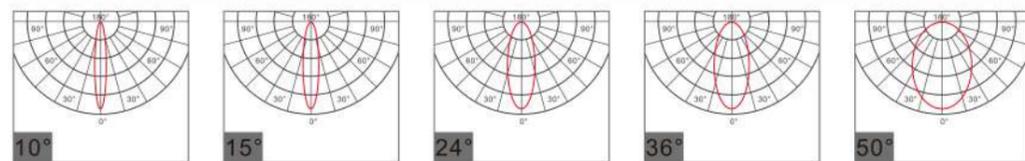



Code No.:DL302N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

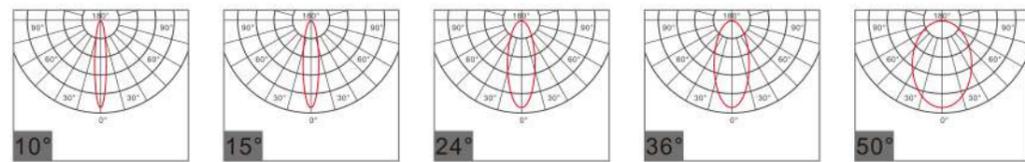

Code No.:DL302N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

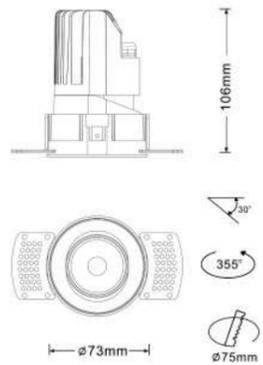

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

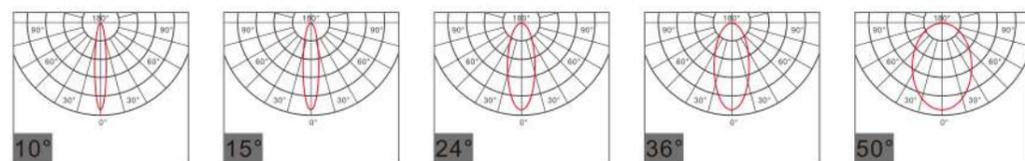

Code No.:DL302S-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

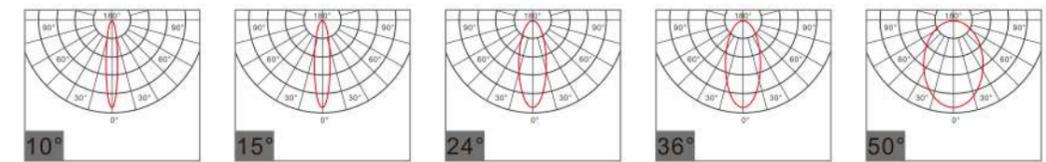

Code No.:DL302S-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

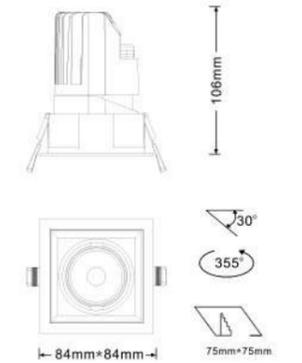

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

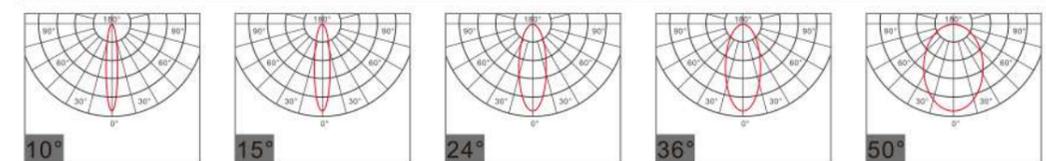




Code No.:DL322-A

Power	MAX 2*12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

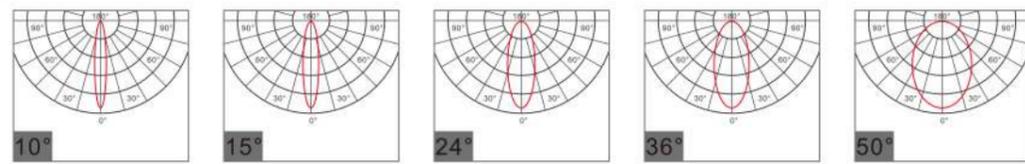


Code No.:DL322-B

Power	MAX 2*18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded





Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

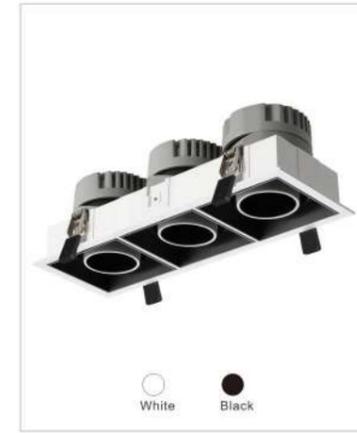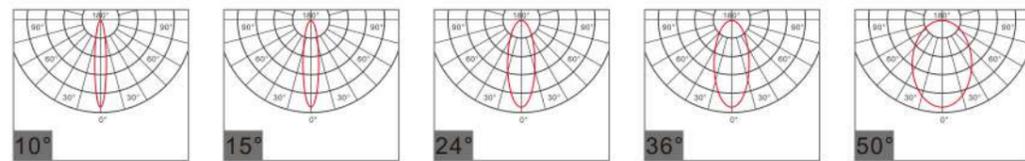


Code No.:DL332-A

Power	MAX 3*12W
Voltage	AC 220-240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded


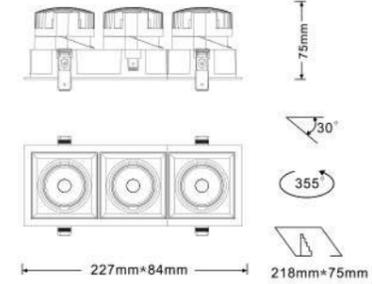


Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

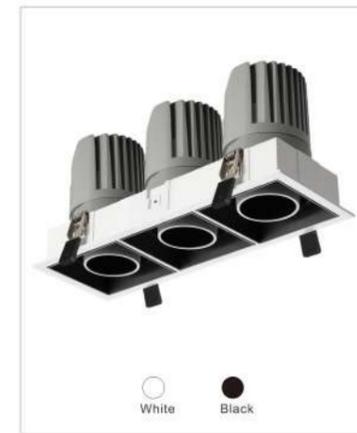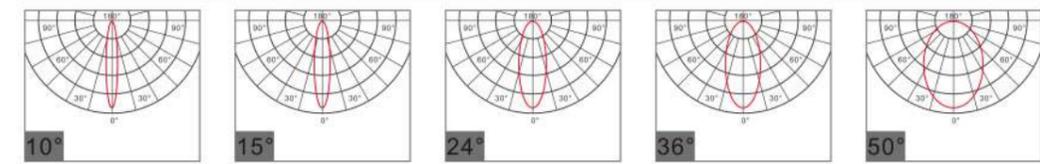


Code No.:DL332-B

Power	MAX 3*18W
Voltage	AC 220-240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

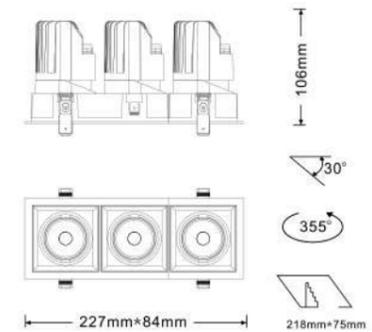



Reflector



2700K / 3000K / 3500K / 4000K / 5000K


Angle

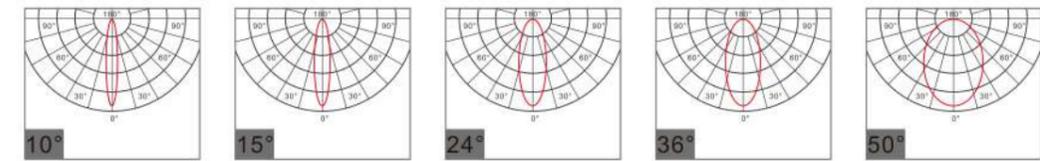

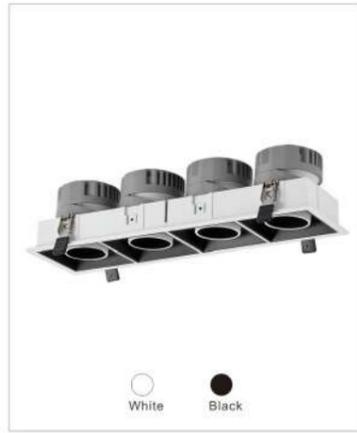

Code No.:DL342-A

Power	MAX 4*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

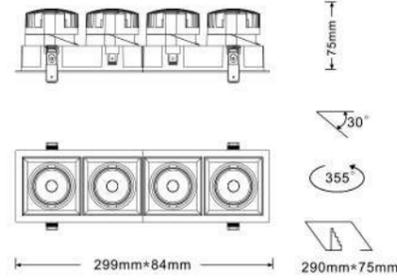


White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

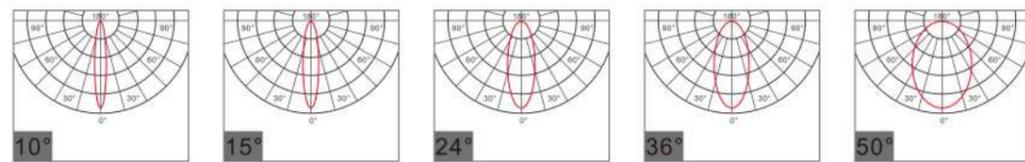

Code No.:DL342-B

Power	MAX 4*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

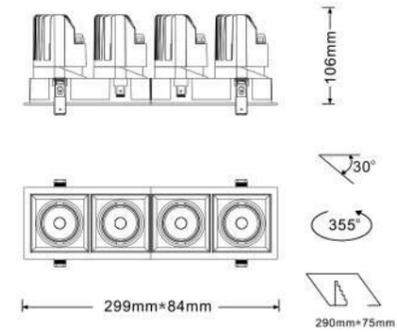


White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

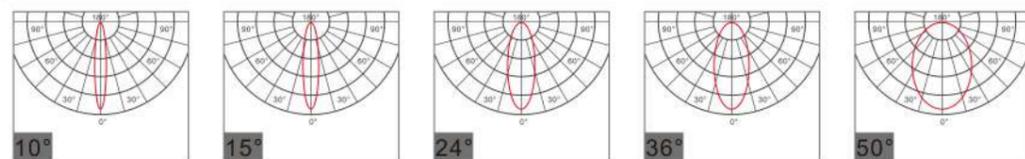

Code No.:DL342S-A

Power	MAX 4*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

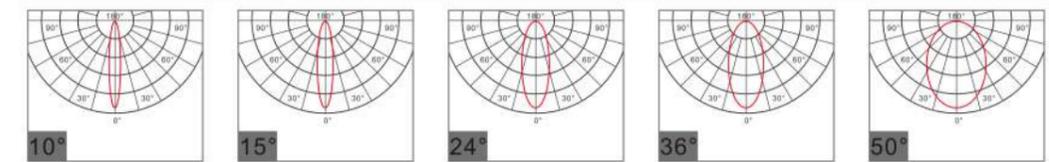

Code No.:DL342S-B

Power	MAX 4*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

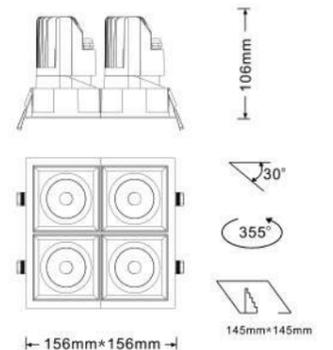


White Black

Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K


Angle

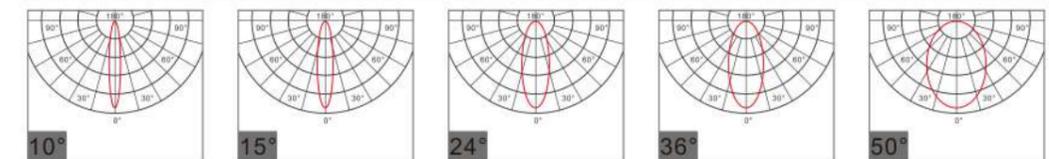



Code No.:DL302SN-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

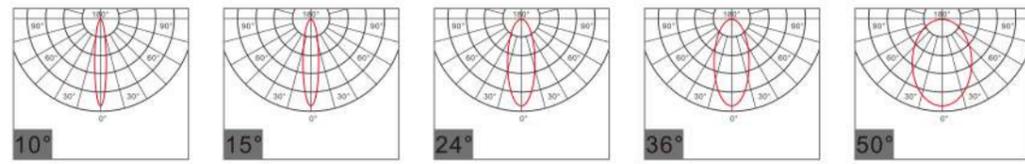


Code No.:DL322N-A

Power	MAX 2*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black

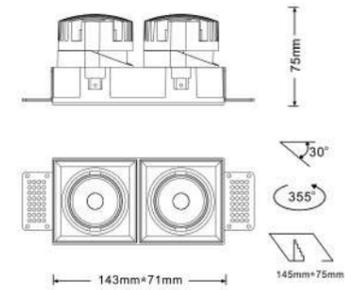


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

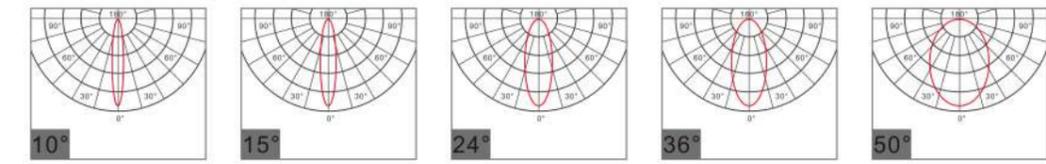


Code No.:DL302SN-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



White Black

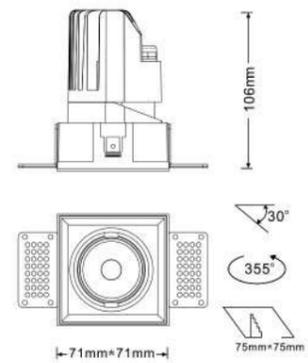


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

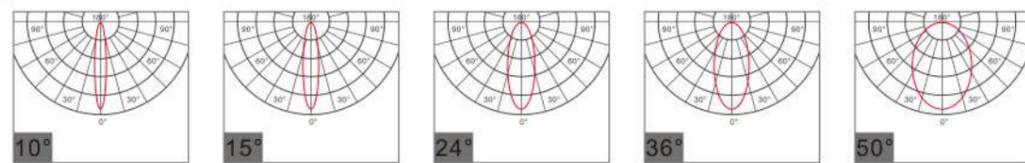


Code No.:DL322N-B

Power	MAX 2*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



White Black

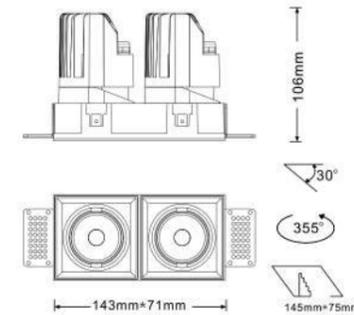


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K


Angle

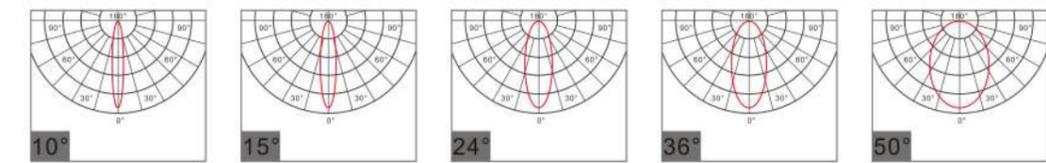




Code No.:DL342SN-A

Power	MAX 4*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




Reflector





2700K / 3000K / 3500K / 4000K / 5000K

Angle

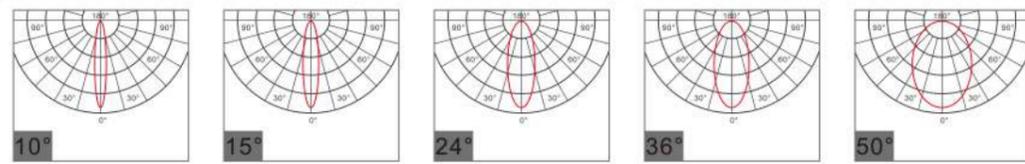

Code No.:DL342SN-B

Power	MAX 4*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

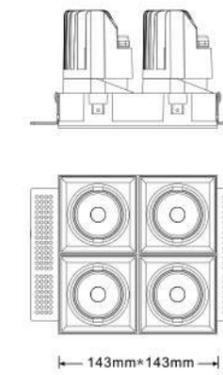


Reflector





2700K / 3000K / 3500K / 4000K / 5000K

Angle

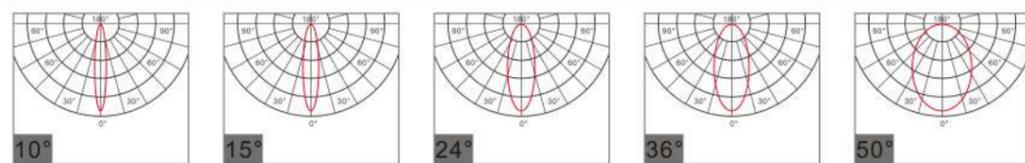

BAL Light Begins Here

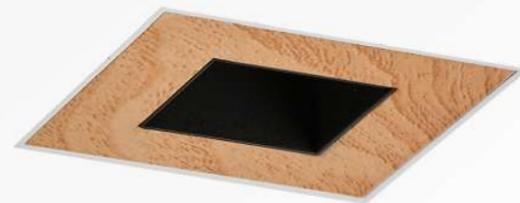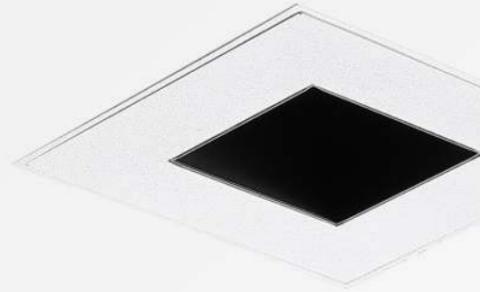

SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



Tuya Dimming



High-power LED
SDCM<3



CRI > 90



Anti-Glare


LIGHTING






Code No.:DL205-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

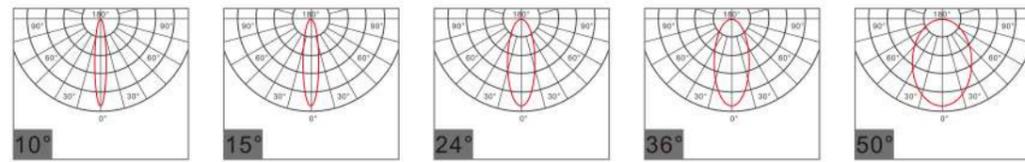



Code No.:DL205-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

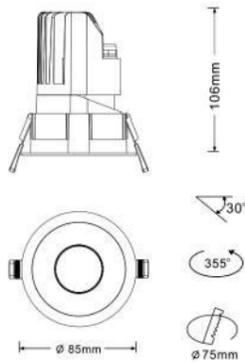


White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

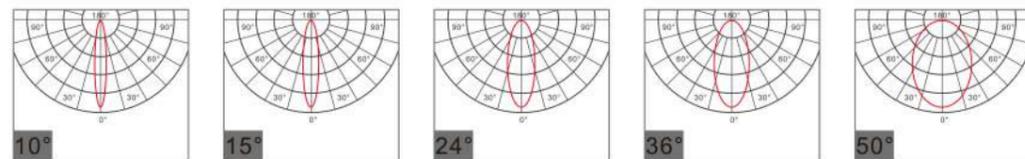

Code No.:DL205N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

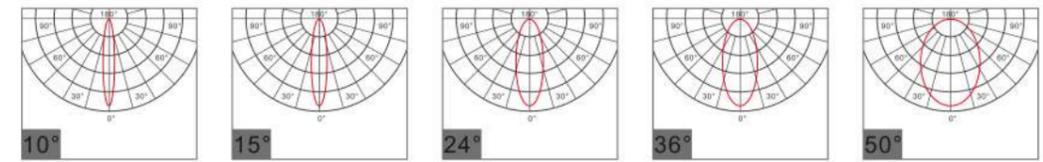

Code No.:DL205N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

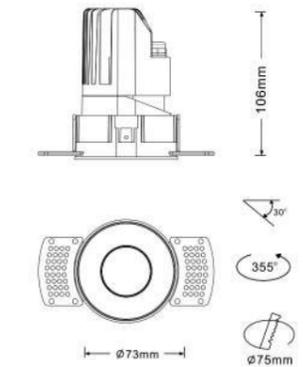


White Black

Reflector



2700K / 3000K / 3500K / 4000K / 5000K


Angle

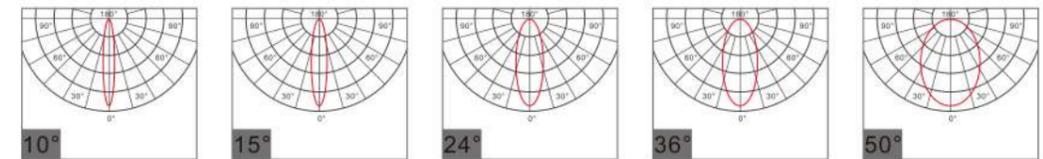




Code No.:DL206-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector




Angle

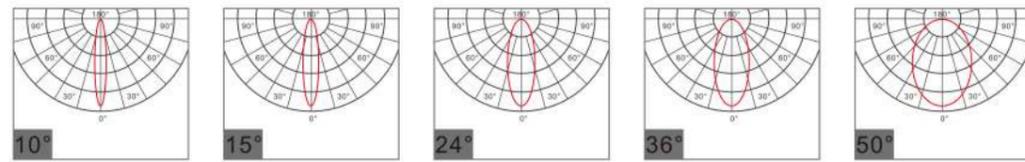


Code No.:DL206-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded




White Black

Reflector




Angle

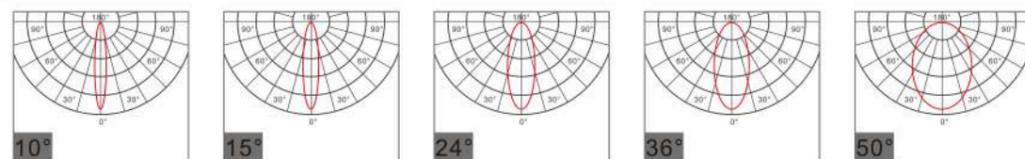


Code No.:DL206N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector




Angle

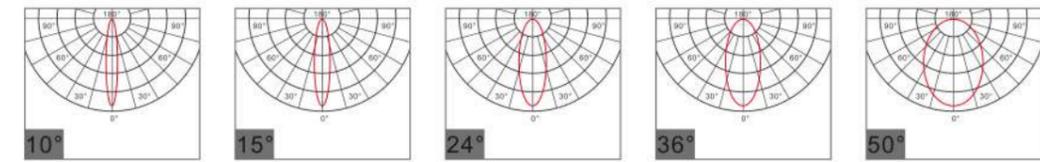

Code No.:DL206N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded




White Black

Reflector




Angle

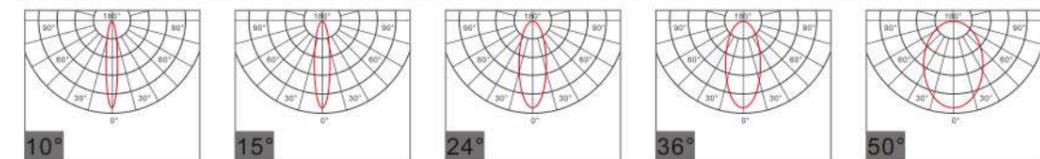



Code No.:DL204-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	polarized
Lumen	605LM
CRI	90/98
IP	20
Installation	Embedded



White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL204N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	polarized
Lumen	605LM
CRI	90/98
IP	20
Installation	Embedded



White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL204-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	polarized
Lumen	902LM
CRI	90/98
IP	20/54
Installation	Embedded

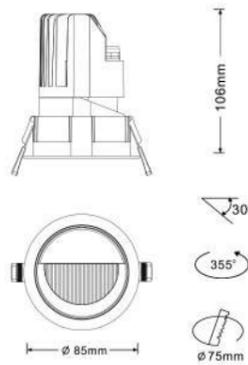

White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL204N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	polarized
Lumen	902LM
CRI	90/98
IP	20/54
Installation	Embedded

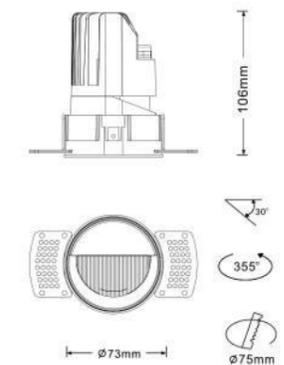

White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K



White Black

Code No.:DL207S-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux
2700K / 3000K / 3500K / 4000K / 5000K


Angle

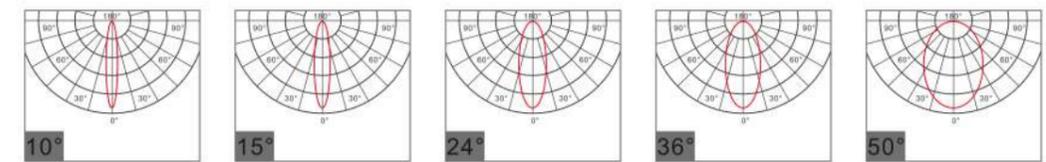

White Black

Code No.:DL207S-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

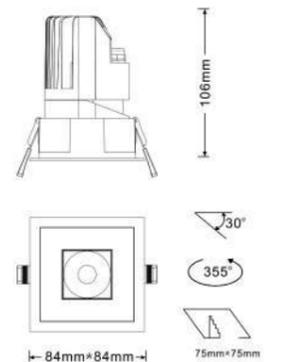


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux
2700K / 3000K / 3500K / 4000K / 5000K


Angle

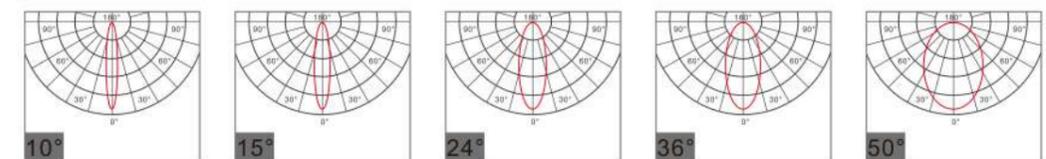



Code No.:DL207SN-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

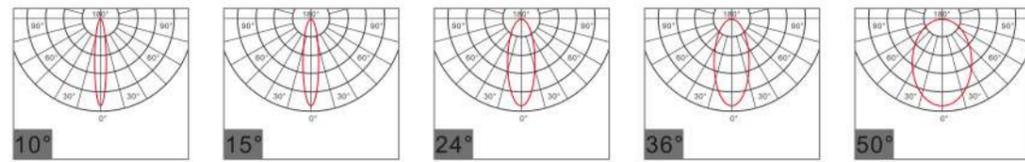


Code No.:DL207SN-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

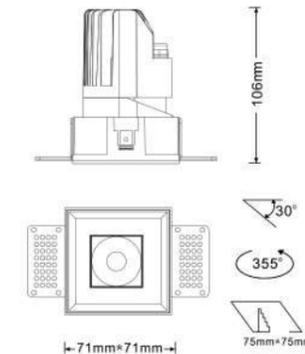


White Black

Reflector



2700K / 3000K / 3500K / 4000K / 5000K

Angle

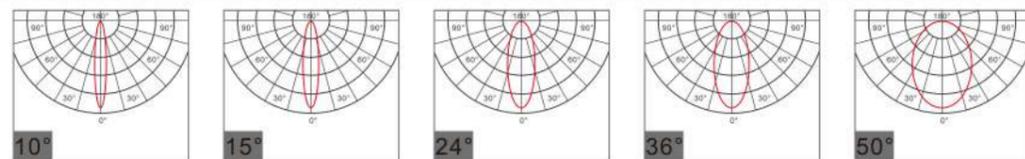

Code No.:DL227-A

Power	MAX 2*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector



2700K / 3000K / 3500K / 4000K / 5000K

Angle

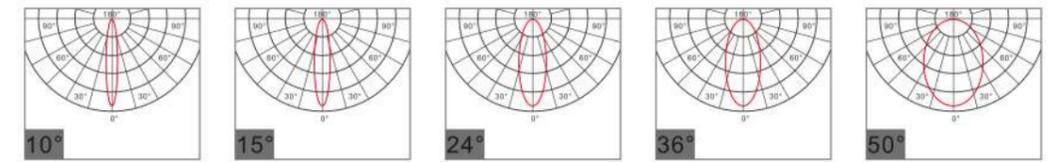

Code No.:DL227-B

Power	MAX 2*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded




White Black

Reflector



2700K / 3000K / 3500K / 4000K / 5000K


Angle

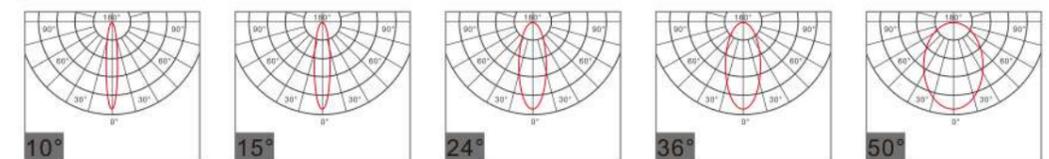



Code No.:DL227N-A

Power	MAX 2*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

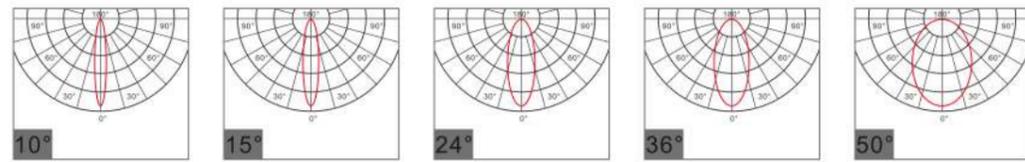


Code No.:DL227N-B

Power	MAX 2*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded





White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

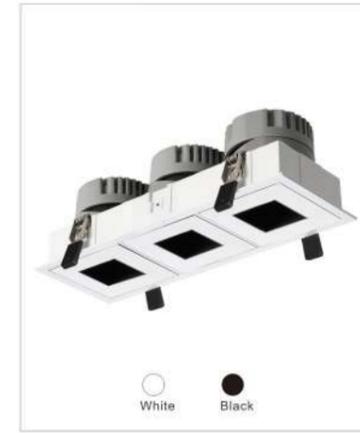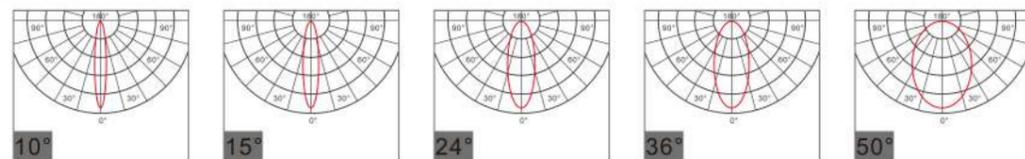

Code No.:DL237-A

Power	MAX 3*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

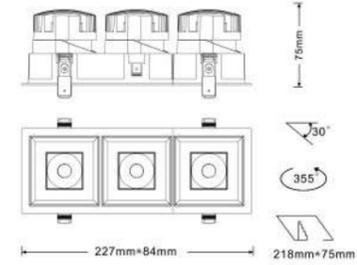


White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

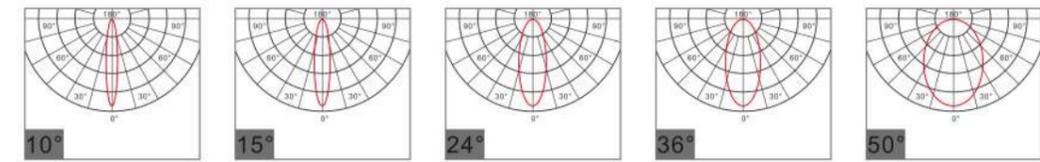

Code No.:DL237-B

Power	MAX 3*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

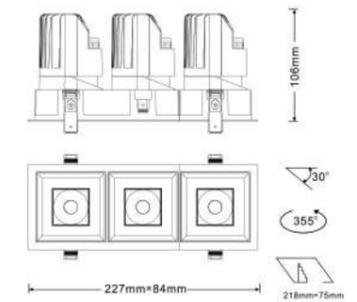

White Black

Reflector



2700K / 3000K / 3500K / 4000K / 5000K

Angle

