




-  SCR Dimming
-  0-10V Dimming
-  DALI Dimming
-  Bluetooth Dimming
-  tuya Dimming
-  High-power LED SDCM<3
-  CRI > 90
-  Anti-Glare



Code No.:DL403


Power	MAX 10W					
Voltage	AC 220~240V					
Current	3W 700mA			10W 250mA		
Angle	3°	7°	15°	24°	36°	60°
Lumen	342LM	379LM	803LM	838LM	850LM	591LM
CRI	90/98					
IP	20					
Installation	Embedded					

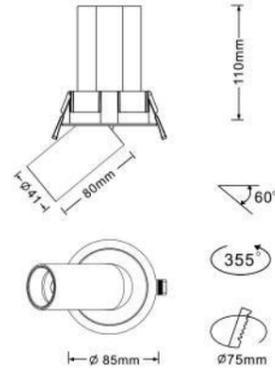

Reflector




Angle

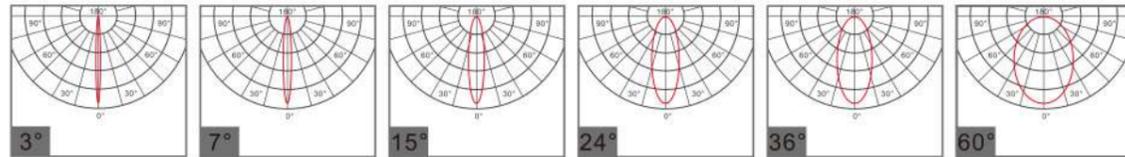


Code No.:DL403N


Power	MAX 10W					
Voltage	AC 220~240V					
Current	3W 700mA			10W 250mA		
Angle	3°	7°	15°	24°	36°	60°
Lumen	342LM	379LM	803LM	838LM	850LM	591LM
CRI	90/98					
IP	20					
Installation	Embedded					

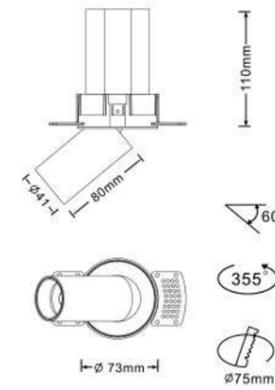

Reflector




Angle

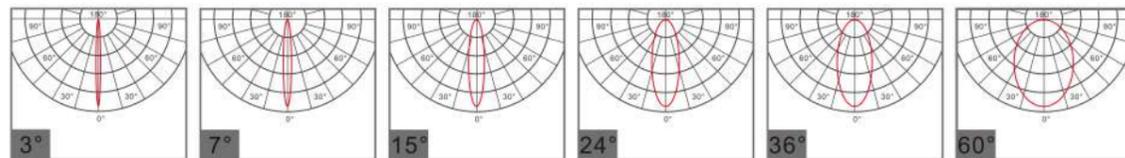




Code No.:DL403S

Power	MAX 10W	
Voltage	AC 220~240V	
Current	3W 700mA	10W 250mA
Angle	3° 7° 15° 24° 36° 60°	
Lumen	342LM 379LM 803LM 838LM 850LM 591LM	
CRI	90/98	
IP	20	
Installation	Embedded	

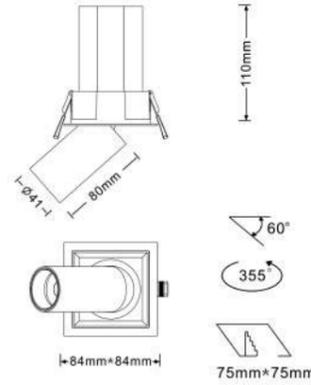


Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

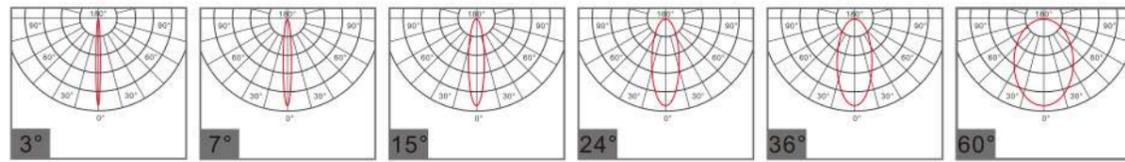

Code No.:DL403SN

Power	MAX 10W	
Voltage	AC 220~240V	
Current	3W 700mA	10W 250mA
Angle	3° 7° 15° 24° 36° 60°	
Lumen	342LM 379LM 803LM 838LM 850LM 591LM	
CRI	90/98	
IP	20	
Installation	Embedded	

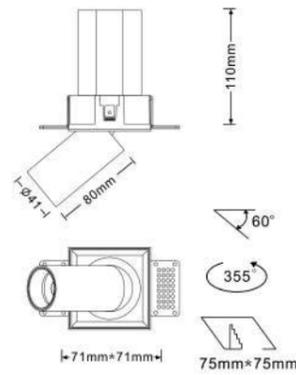


Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

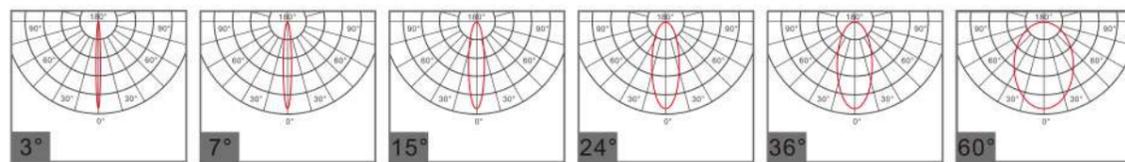

Code No.:DL423

Power	MAX 2*10W	
Voltage	AC 220~240V	
Current	3W 700mA	10W 250mA
Angle	3° 7° 15° 24° 36° 60°	
Lumen	342LM 379LM 803LM 838LM 850LM 591LM	
CRI	90/98	
IP	20	
Installation	Embedded	

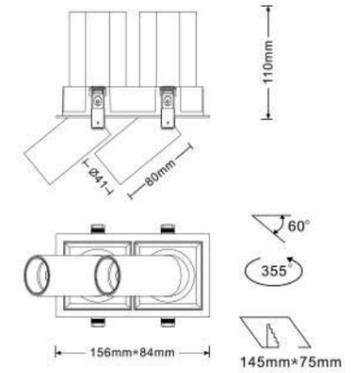


Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

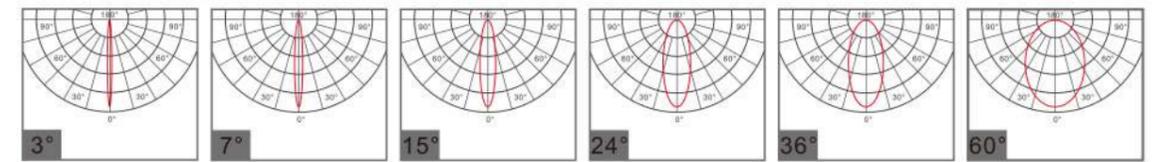

Code No.:DL423N

Power	MAX 2*10W	
Voltage	AC 220~240V	
Current	3W 700mA	10W 250mA
Angle	3° 7° 15° 24° 36° 60°	
Lumen	342LM 379LM 803LM 838LM 850LM 591LM	
CRI	90/98	
IP	20	
Installation	Embedded	

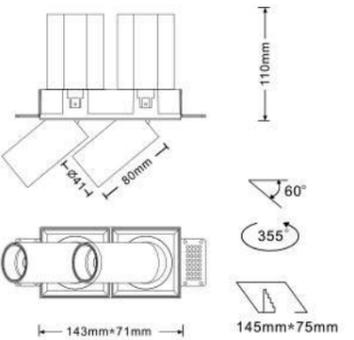


Reflector



2700K / 3000K / 3500K / 4000K / 5000K


Angle

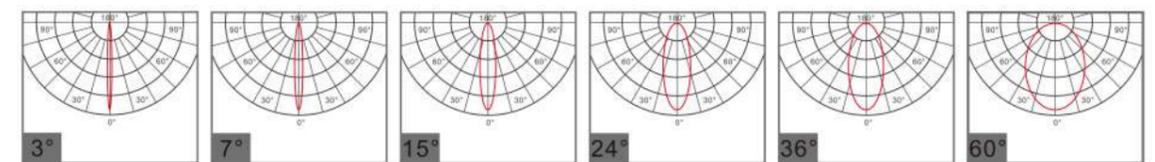




Code No.:DL433



Power	MAX 3*10W
Voltage	AC 220~240V
Current	3W 700mA / 10W 250mA
Angle	3° 7° 15° 24° 36° 60°
Lumen	342LM 379LM 803LM 838LM 850LM 591LM
CRI	90/98
IP	20
Installation	Embedded

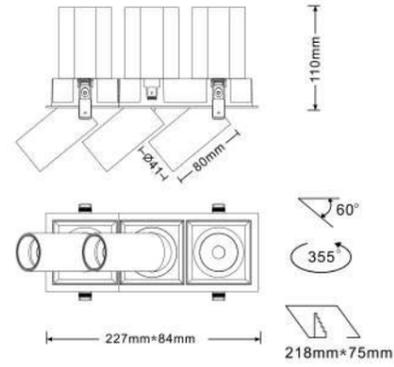

Reflector




Angle

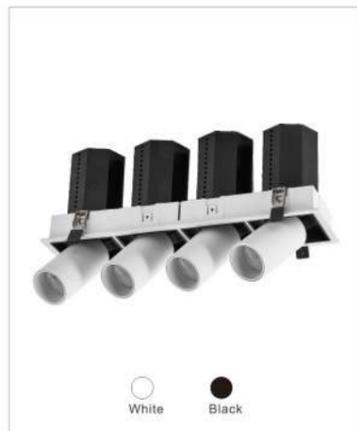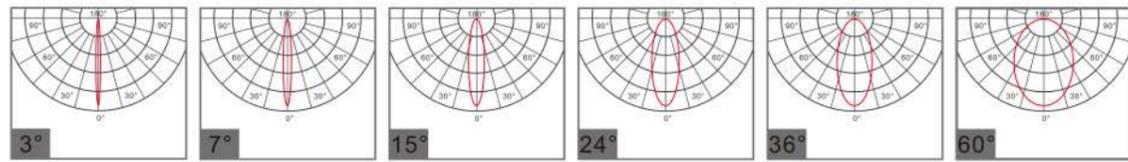


Code No.:DL443


Power	MAX 4*10W
Voltage	AC 220~240V
Current	3W 700mA / 10W 250mA
Angle	3° 7° 15° 24° 36° 60°
Lumen	342LM 379LM 803LM 838LM 850LM 591LM
CRI	90/98
IP	20
Installation	Embedded

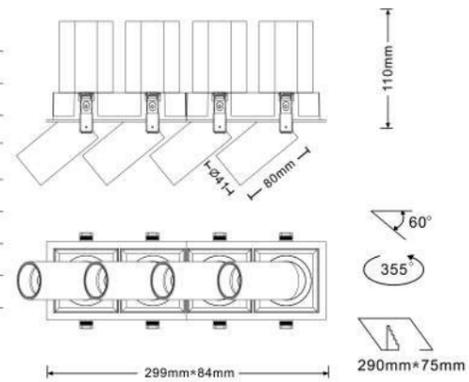

Reflector




Angle

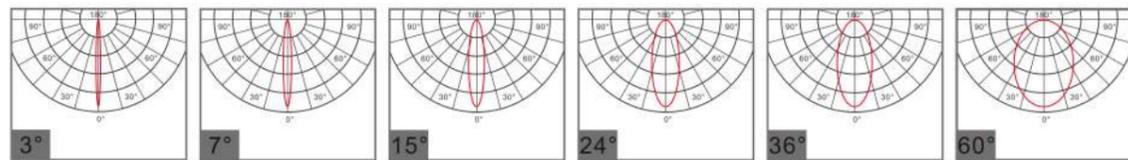

Code No.:DL443S


Power	MAX 4*10W
Voltage	AC 220~240V
Current	3W 700mA / 10W 250mA
Angle	3° 7° 15° 24° 36° 60°
Lumen	342LM 379LM 803LM 838LM 850LM 591LM
CRI	90/98
IP	20
Installation	Embedded

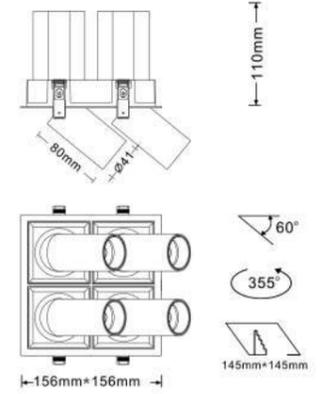

Reflector




Angle


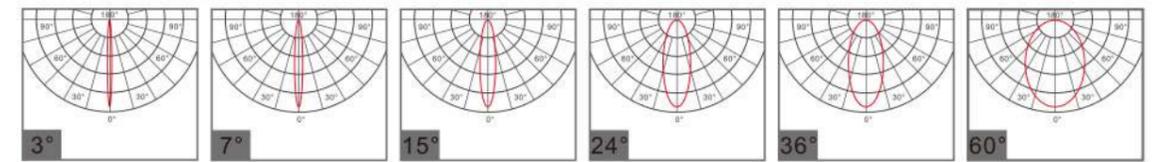


Code No.:DL443SN


Power	MAX 4*10W
Voltage	AC 220~240V
Current	3W 700mA / 10W 250mA
Angle	3° 7° 15° 24° 36° 60°
Lumen	342LM 379LM 803LM 838LM 850LM 591LM
CRI	90/98
IP	20
Installation	Embedded

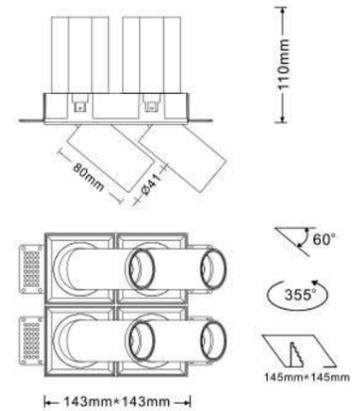

Reflector



Angle

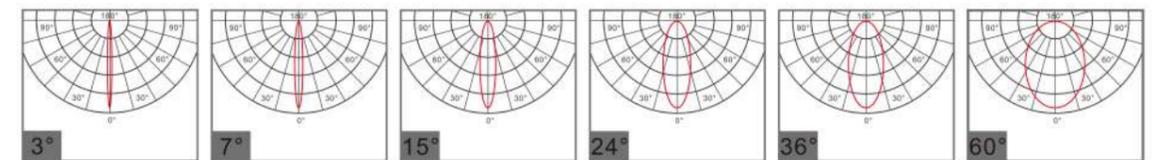

SHUANGPIN



THREE PINS



THREE PINS




FOUR PINS




Code No.:DL228


Power	MAX 2*10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	678LM 694LM 715LM 740LM
CRI	90/98
IP	20
Installation	Embedded

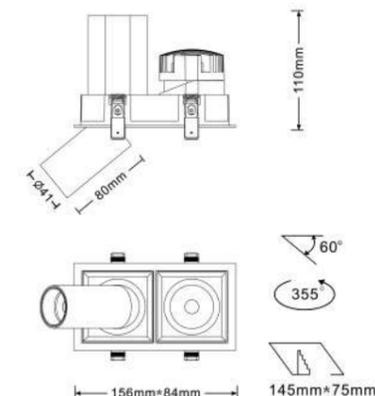

Reflector




Angle

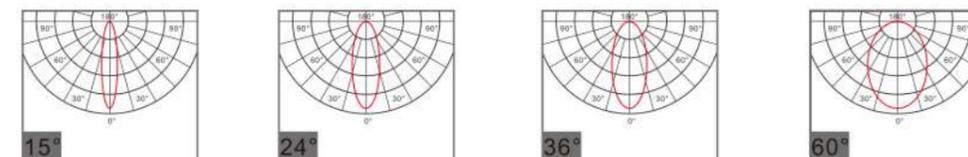


Code No.:DL228N


Power	MAX 2*10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	678LM 694LM 715LM 740LM
CRI	90/98
IP	20
Installation	Embedded

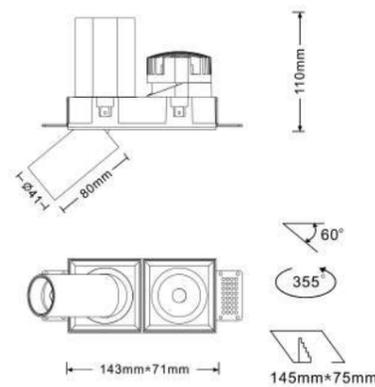

Reflector




Angle

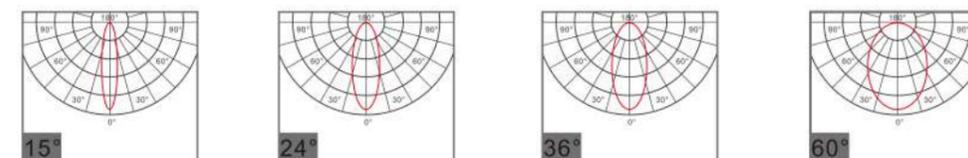



Code No.:DL238

Power	MAX 3*10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	678LM 694LM 715LM 740LM
CRI	90/98
IP	20
Installation	Embedded

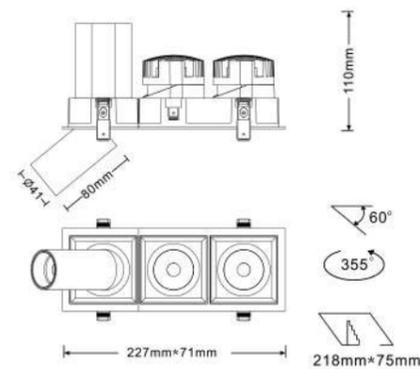

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

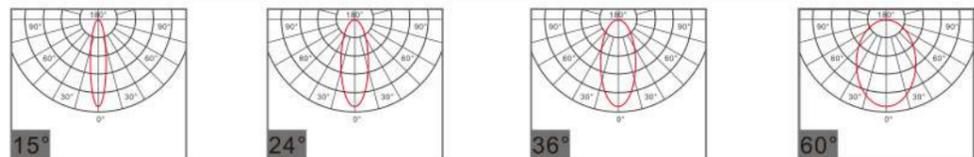

Code No.:DL238D

Power	MAX 3*10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	678LM 694LM 715LM 740LM
CRI	90/98
IP	20
Installation	Embedded

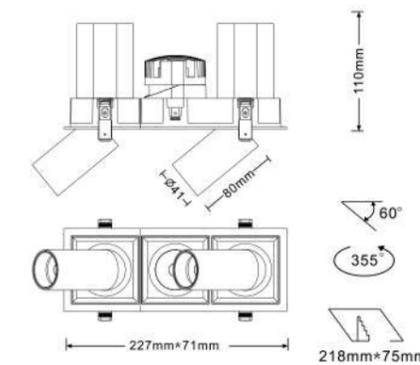

White Black



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

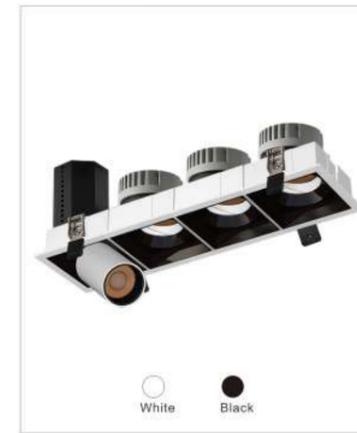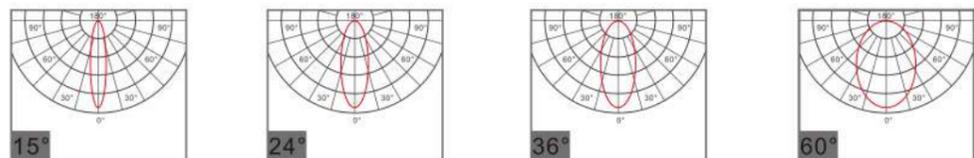

Code No.:DL248

Power	MAX 4*10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	678LM 694LM 715LM 740LM
CRI	90/98
IP	20
Installation	Embedded

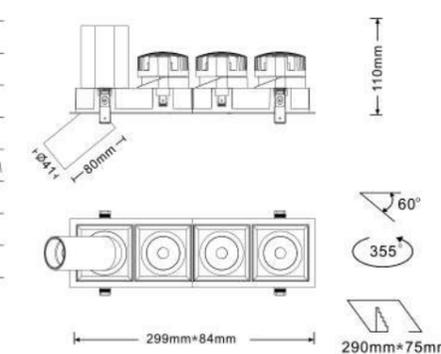

White Black



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

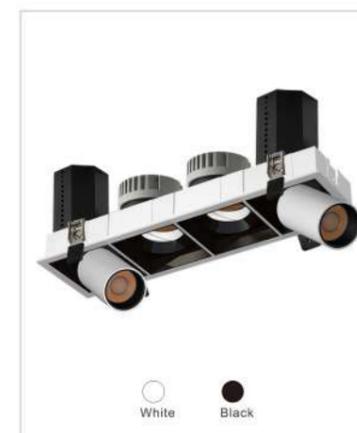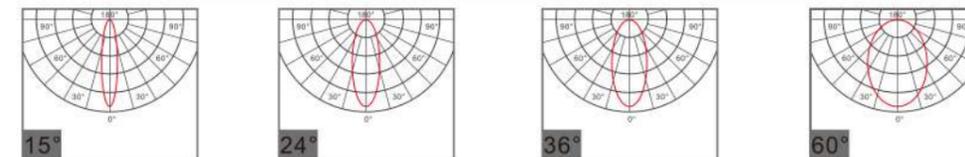

Code No.:DL248D

Power	MAX 4*10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	678LM 694LM 715LM 740LM
CRI	90/98
IP	20
Installation	Embedded

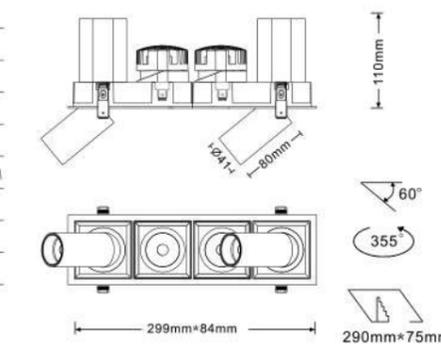

White Black


Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

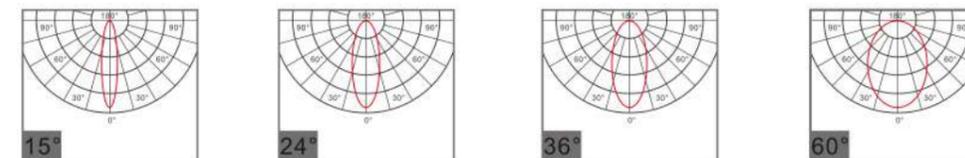

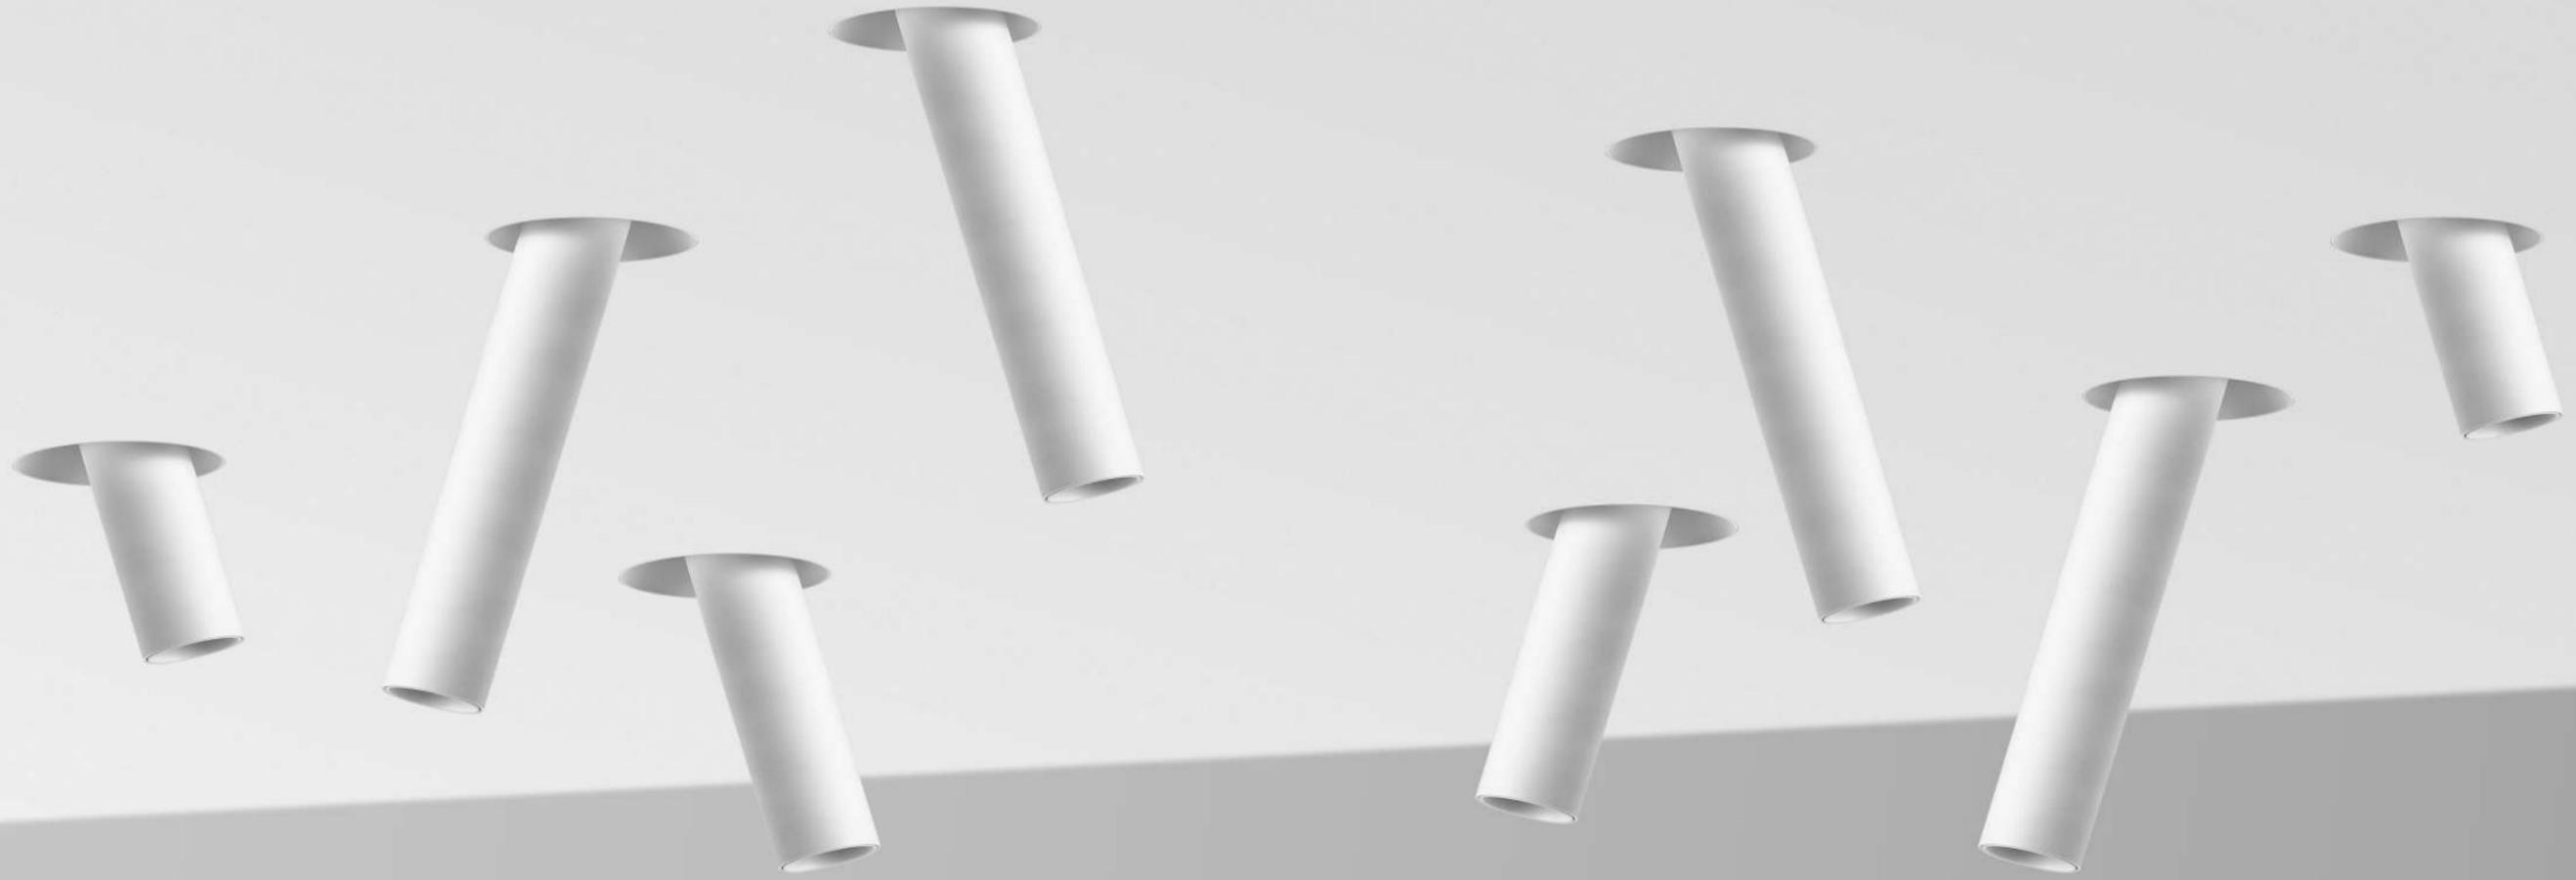

SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



Tuya Dimming



High-power LED  
SDCM<3



CRI >= 90




Anti-Glare



Code No.:DL203

Power	MAX 10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	803LM 838LM 850LM 591LM
CRI	90/98
IP	20
Installation	Embedded




Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

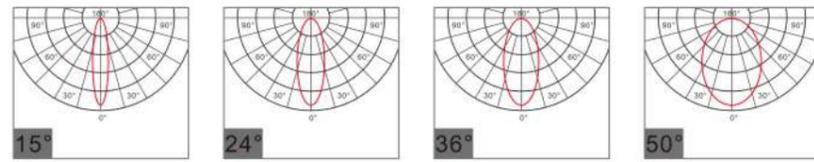


Code No.:DL203N

Power	MAX 10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	803LM 838LM 850LM 591LM
CRI	90/98
IP	20
Installation	Embedded




Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

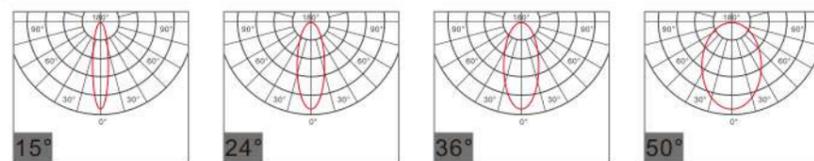

Code No.:DL203S

Power	MAX 10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	803LM 838LM 850LM 591LM
CRI	90/98
IP	20
Installation	Embedded

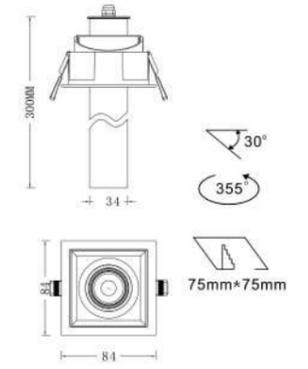


Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

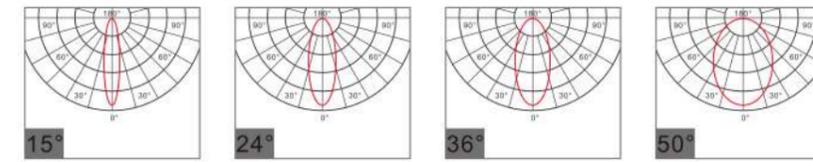


Code No.:DL203SN

Power	MAX 10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	803LM 838LM 850LM 591LM
CRI	90/98
IP	20
Installation	Embedded

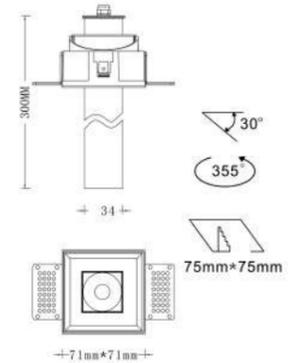

Reflector



2700K / 3000K / 3500K / 4000K / 5000K

Angle

