



Fixed

Non adjustable angle

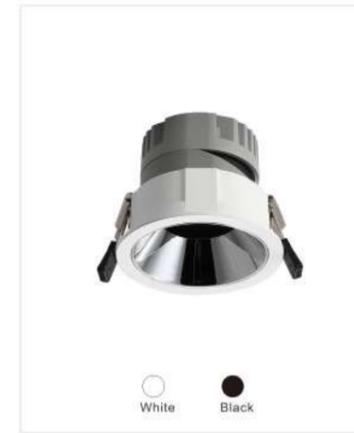

Code No.:DL101-A


Power	MAX 12W				
Voltage	AC 220~240V				
Current	300mA				
Angle	10°	15°	24°	36°	50°
Lumen	789LM	964LM	1006LM	1021LM	710LM
CRI	90/98				
IP	20				
Installation	Embedded				

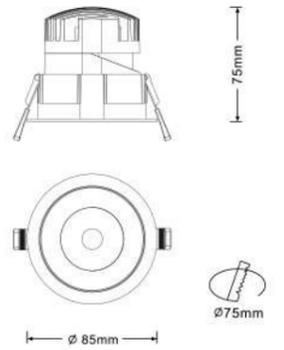

Reflector




Angle

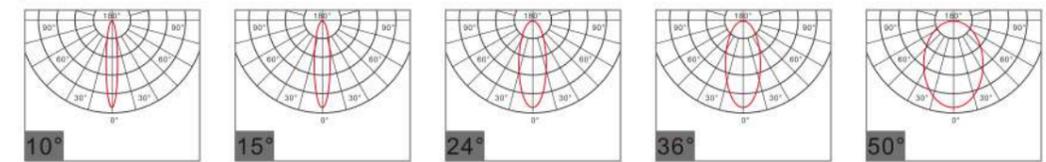

Code No.:DL101-B


Power	MAX 18W				
Voltage	AC 220~240V				
Current	450mA				
Angle	10°	15°	24°	36°	50°
Lumen	1183LM	1446LM	1509LM	1531LM	1065LM
CRI	90/98				
IP	20/54				
Installation	Embedded				

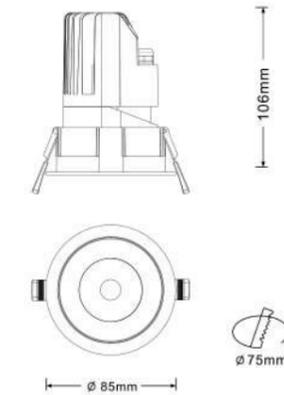

Reflector



Angle

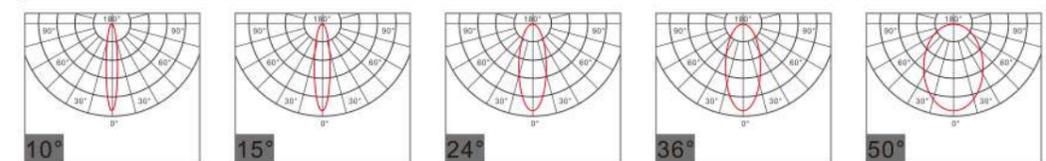


-
-
-
-
-
-
-
-



Code No.:DL101N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

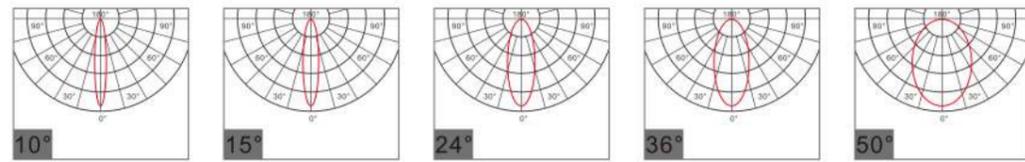


Code No.:DL101N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

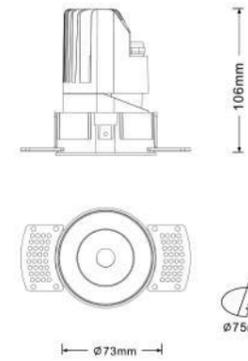



White Black

Reflector



2700K / 3000K / 3500K / 4000K / 5000K

Angle

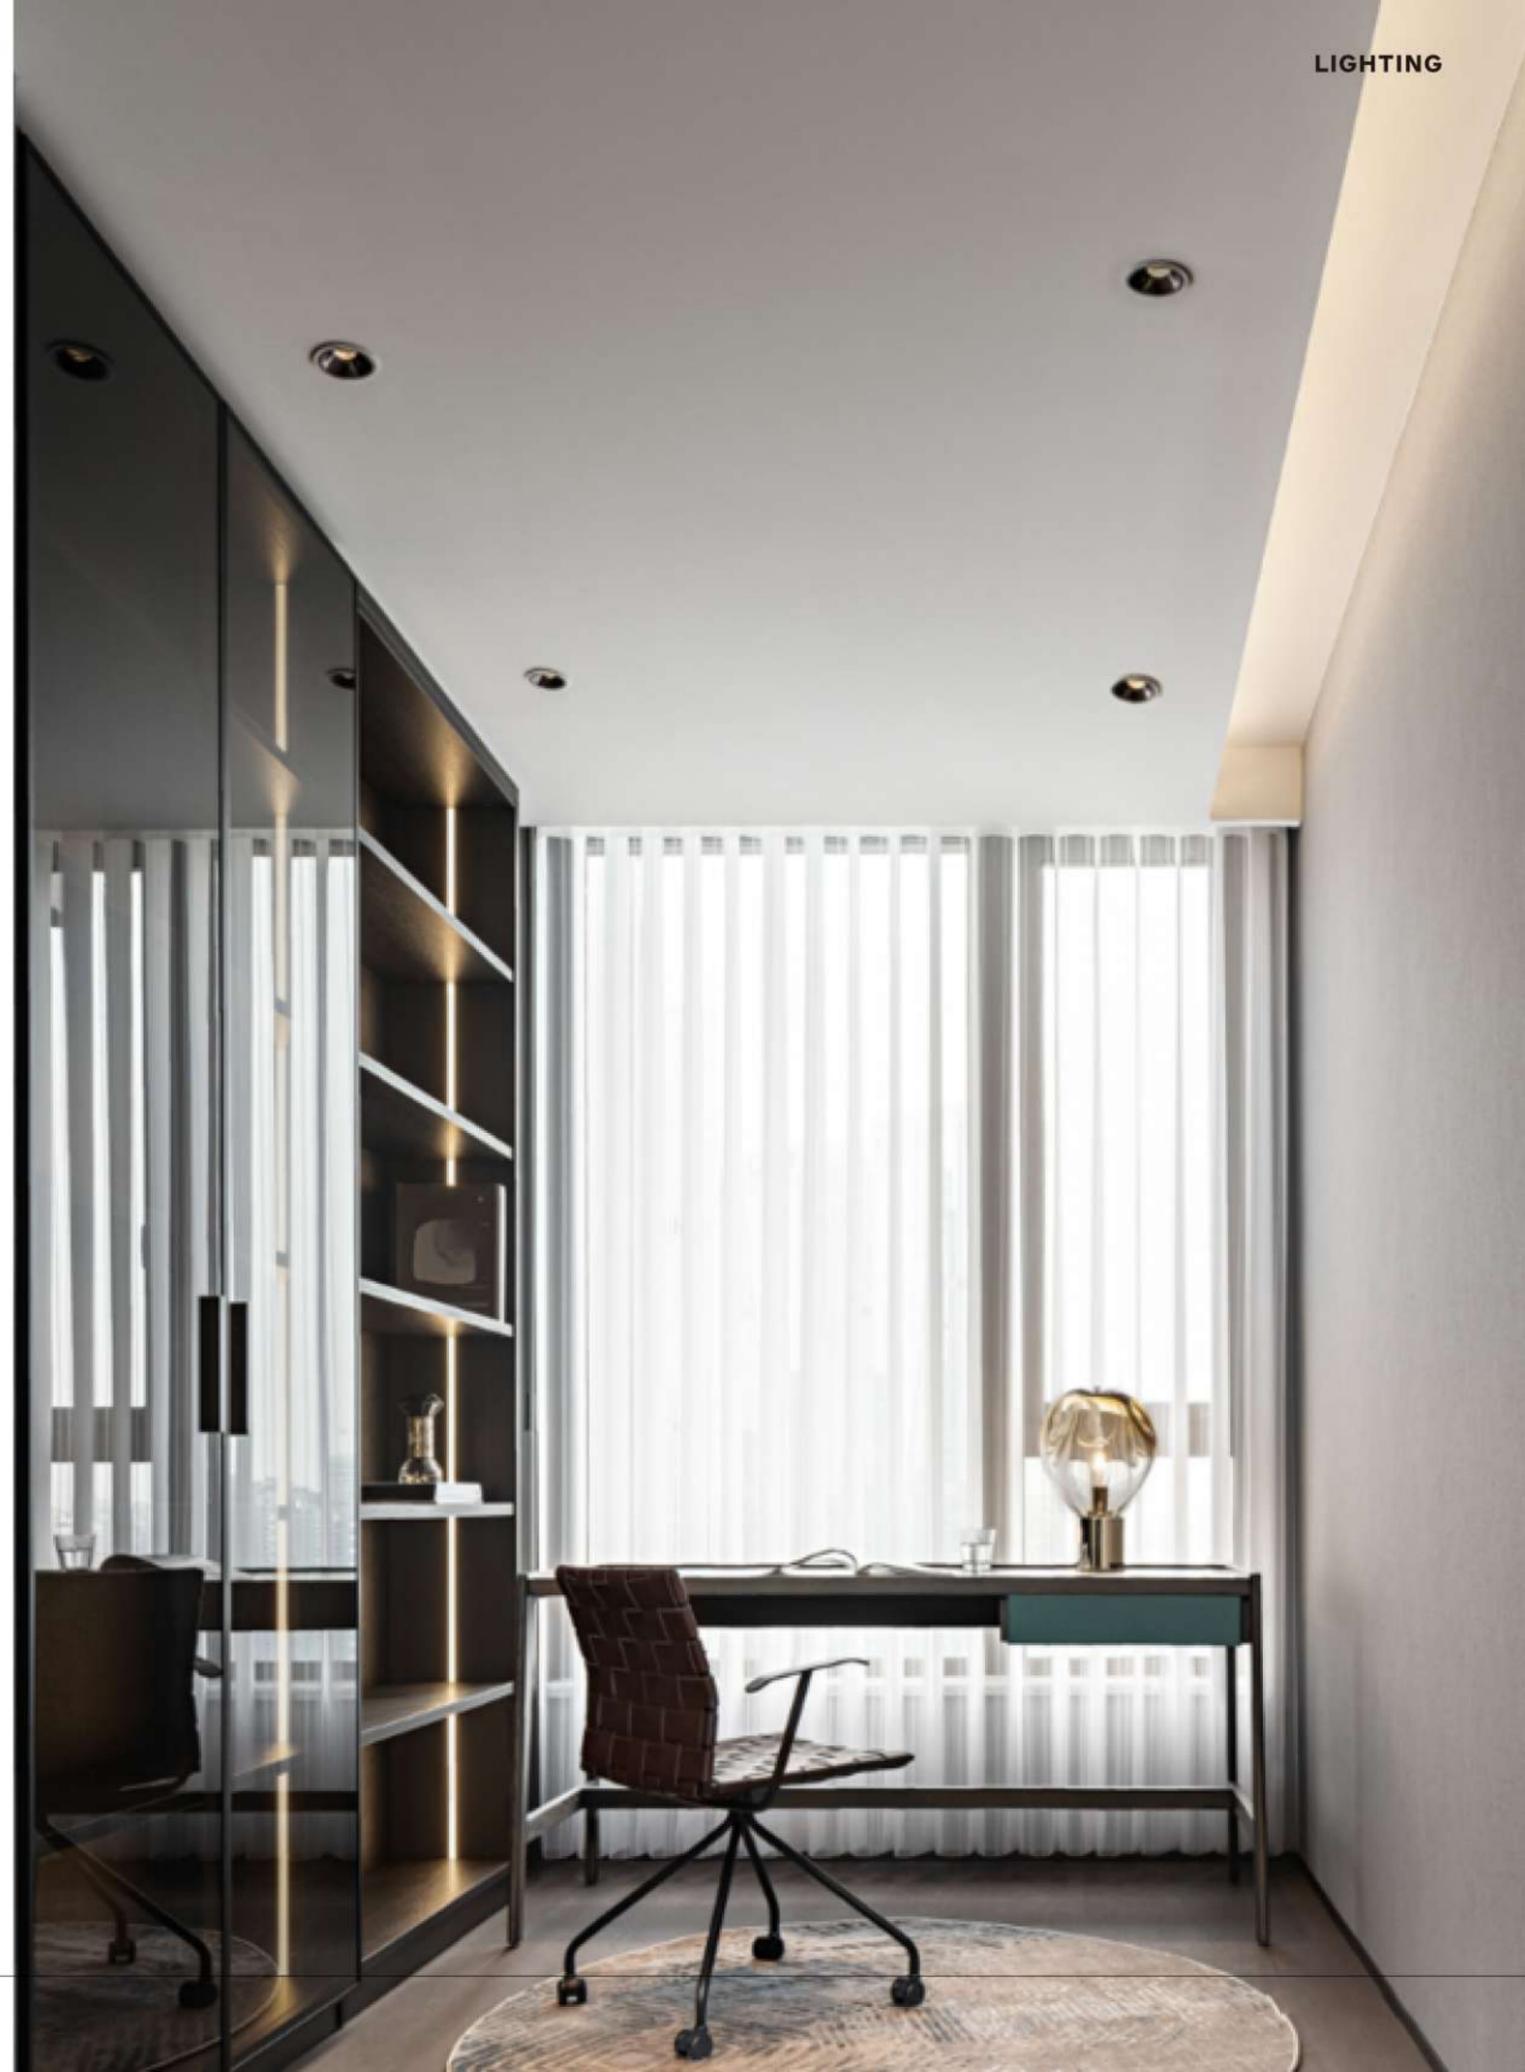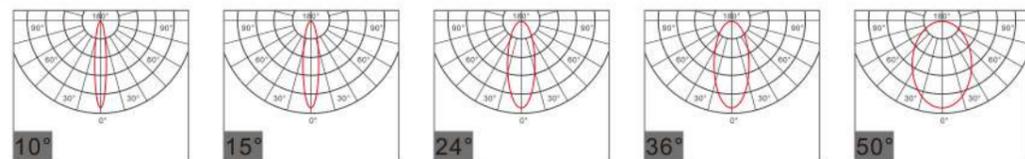




Code No.:DL101S-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



75mm



75mm*75mm

84mm*84mm

White Black




Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

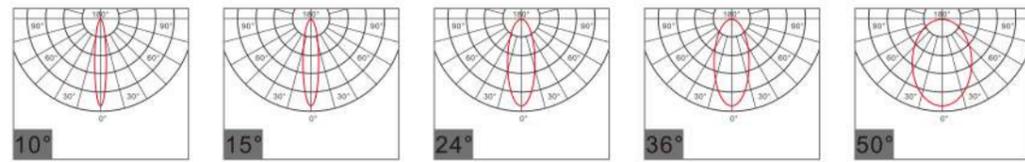


Code No.:DL101S-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



106mm



75mm*75mm

84mm*84mm

White Black




Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

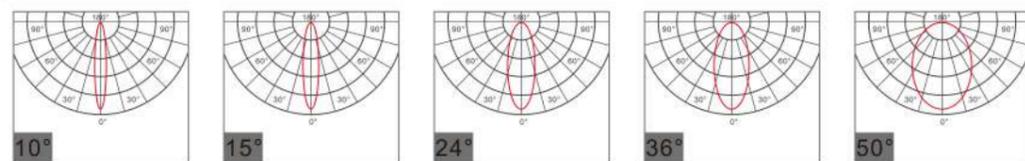


Code No.:DL101SN-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



75mm



75mm*75mm

73mm*73mm

White Black




Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

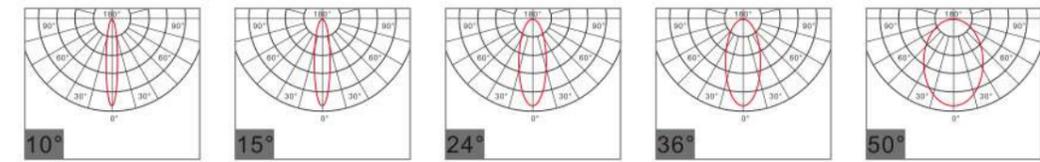


Code No.:DL101SN-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



106mm



75mm*75mm

73mm*73mm

White Black



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

