

SIMES

GENERAL CATALOGUE 2023 - 2024



1973-2023

Since 50 years protagonist in outdoor lighting

Simes is a company in continuous evolution and constantly engaged with the aim of creating emotion, with the light.

In 2023 SIMES celebrates an important birthday with the satisfaction of having drawn a path marked by many conquests and with the determination to achieve new goals.

Since over fifty years Simes has maintained a constant intuition in intercepting the needs and the wishes of the designers, the commitment to produce beautiful and reliable objects, the desire to make the spaces pleasantly accessible and to add to the architectures a fourth dimension, aware that the light can transform the face of our cities.

The concept of quality remains an absolute priority and over time has assumed countless facets. The quality is intended not only as 100% Made in Italy, but especially as a strategic asset in each company department: in the workplace, in the services offered to the customer, in the design and aesthetics choices, in the experience offered to guests and visitors.

Simes has always been a hub for lighting designers, architects and landscapers. From these workshops were born the most innovative ideas that have marked these years of intense activity.

The company's goal constantly remains to design light with passion, investing in continuous resources and energies to generate beauty, spreading the culture of light and putting at the service of lighting designers solutions more and more refined and clever.

Aware that the achievement of excellence is the result of decisions that we take day by day, Simes intends to continue selecting the suppliers with the utmost care, producing luminaires starting from the best and innovative technologies, the attention to details and the constant focus on the development of new solutions.

These 50 years have shown that the result of these choices is a constant growth and a quality destined to last over time. Every single innovation opens up the road to the next one and the experience becomes fundamental to lay the foundations of new interesting scenarios in the outdoor lighting industry.

Towards innovation

The company's vision, constantly reinterpreted and fuelled by continuous progress in the technological field, has generated unprecedented solutions, which pose the architecture to make light the true protagonist of architecture.

MATERIAL EXPRESSION

Wood and Concrete collections were distinguished by their use of materials and expressive languages that investigates the relationship between light and materials. The dialogue between the aluminium, in its most natural colors and warm shades, and amber of illuminated wood, become a good combination for a perfect integration between lighting fixture, landscape and natural elements. Cement is a rigorous material but poetic, who knows how to age, transform and take on the colours of the surrounding environment.



STRUCTURAL LIGHT

Ghost family managed to translate into a product the concept of "structural light", the total integration between the building material and the luminaires. Ghost is a subtraction instead of an addition: no visible luminaires are added to the architecture, on the contrary, a void is created to be filled with light.



SOLIDS AND VOIDS

The development of the so-called "solids and voids", has created a wide range of products designed as void volumes: visually very light objects, without borders that can be passed from one side to the other creating continuity in the environments. The lighting fitting is an extremely thin element that emits light so impalpable, almost magical.



MICROLIGHTING

Microlighting collection has pushed to the extreme the concept of miniaturization by reducing the product dimensions and optimizing visual comfort. Tiny objects that disappear into the architecture focusing attention on the luminous light effect. A design and aesthetic refinement made even more complex by the need to ensure an IP protection for the outdoor environments, that has managed to find expression in a wide variety of products collection designed in every detail.

Ongoing research

Simes' research is now focused towards some fundamental themes. The solutions that enrich the product portfolio of new elegant collections, useful, logical and always aligned to the lighting designers needs.

LIGHT QUALITY AND VISUAL COMFORT

The light efficiency is important but it cannot be the only parameter to define the quality of light. More important parameters are today the color render index, the visual comfort, precise and adjustable light beams and the management of the light. There are numerous families inside this catalogue developed with rear-mounted and comfortable optics, associating to the light source a system of shutters that can define the beam and avoid the possibility of glare.



FLEXIBILITY

Flexibility in the use of light, shape and directionality of the beam, the possibility of changing on site atmospheres and situations is one of the main themes of research. A flexibility increasingly desired because able to add freedom in the definition of spaces. Products such as Flower Zoom, Pivot and Between allow you to modify the opening and the the light beam direction in real time adapting the light beam to the project with a gesture.



DECORATIVE MINIMAL

The need to extend the living space of the house to the outside and to furnish the living outdoor with the same care and refinement used in the interior, is a consolidated trend. Even in this case SIMES wants to represent this identity unequivocally, presenting new solutions with a decorative soul keeping a clean and formal elegance that distinguishes all collections, even the most technical.



MATERIAL AND COLOURS

Many families are enriched with new colors accompanying the current evolution of the lighting going towards the use of dark colors like black and anthracite, but also natural colors such as green and burnished bronze to look for a perfect mimesis in the landscape. Research on materials continues through the introduction of the elegant solid bronze inserts of Bell family, a new material combination that tells the desire to propose new refined details.

New goals

IP System®, marks another important step in the innovation path traced by the company. It is the result of long and constant research, IP System® is the first outdoor linear lighting system that enriches the design of outdoor environments with new expressive light potential.



IP65 PLUG-IN LINEAR LIGHTING SYSTEM

IP System® opens the way for the first generation of outdoor linear lighting systems. It's composed of a light rod that, besides being a stand-alone lighting fixture for diffuse lighting, it can also host and power at any point one or more additional plug-in lights IP65.

IP System®, with its innovative plug-in installation system IP65, provides an high degree of protection on all elements of the system and provides a flexible illumination of any space that requires effects of diffuse linear light combined with accent lighting effects. Its elegance and aesthetic simplicity makes it also suitable for any indoor environment.



Training room

Designers

Stig Myler Holscher Design



Holscher Design is one of the most valued and prize-winning design agencies in Scandinavia with more than 25 years of expertise: a team of innovating people with a solid architectural background with a mission to help customers improve the quality of lives of people. Over the years the assignments of the agency have extended from large scale architecture to the design of products. When confronted with very complex demands, the solutions suggested aim at simplifying the complexity by balancing form and function in an even aesthetical manner. The agency has been founded by Knud Holscher, one of the most influential designers in Scandinavia. His work has had a strong impact on the international design community. Many of his projects have become world famous classics for which the agency has been awarded over the years with several prizes.



Stage Round spot


Matteo Thun



Matteo Thun, architect and designer, was born in Bolzano in 1952. He studied at the Salzburg Academy with Oskar Kokoschka and at the University of Florence. After meeting Ettore Sottsass, he became co-founder of the ‘Memphis’ group in Milan and was a partner at Sottsass Associati from 1980 to 1984. He was a professor of design at the University of Applied Arts in Vienna (Hochschule für Angewandte Kunst, Wien) from 1983 to 2000. In 1984 he opened his own studio in Milan and became the Art Director of Swatch from 1990 to 1993. An encounter with Luca Colombo and Antonio Rodriguez led to the establishment of Matteo Thun & Partners in 2001, which was later organized into the companies MTL, MTD-R and MTD-R China. These different creative entities develop projects in the fields of architecture, interior design and product design. The companies employ around sixty professionals, including architects, designers and graphic designers.



Look Wood



Cool Wood



Skill Wood

Marc Sadler



Marc Sadler was born in Austria with French origin and is now resident in Italy. One of the first graduates in “esthétique industrielle” at ENSAD Paris with a thesis on plastic materials, he pioneered the use of experimentation with different materials. The contamination between technologies become a distinctive aspect of his business. Citizen of the world (he lived and worked for many years in Europe, North America and Asia) and eclectic designer, he is now a consultant for furniture and lighting companies, as well as for large and small appliances, sports and other more technical fields. Four-time winner of the ADI Golden Compass (1994, 2001, 2008 and 2014), his career has been rewarded internationally for many times over the years.



Ghost for cast concrete



Ghost for cladding



Ghost for insulation panels and for construction materials with plaster finish

Klaus Begasse



Klaus Begasse was born in Wiesbaden, Germany. Architectural diploma at the University of Stuttgart, Klaus Begasse founded the interdisciplinary bureau for architecture, product design and media design. Product designer, Begasse won different international awards as: Red Dot Award, iF Design Award, Good Design Award - Chicago Athenaeum, Swiss Design Award and German Design Award. For SIMES Begasse created products which are the expression of the newest LED technology and highest functionality. They are slim, flexible, visionary, multifunctional, sculptural, efficient, miniaturized and optimized. All luminaires together are intelligently designed tools inspired by fundamental values that consider well illuminated sceneries.



Keen



Twist



Movit



Outline



Minishape



Smooth

Alphabetic index

Page Family

100	5CENTO
162	APPEAL
138	APPLY
506	AVENUE
54	BELL
264	BETWEEN
114	BLINKER
494	BOULEVARD
50	BRICK OF LIGHT
128	BRIQUE
408	CATCH
404	CEILING
468	CIGARETTE
358	COMPACT COMFORT
24	CONCRETE
336	CONTINUOUS LINE
82	CONTINUOUS ROD
166	COOL
16	COOL WOOD
172	COOL SQUARE
458	CUBIKS
72	FEELING
226	FLOWER
318	FOCUS
32	GHOST FOR CAST CONCRETE
40	GHOST FOR CONSTRUCTION MATERIALS
430	IKONIC
88	IP SYSTEM
270	KEEN
178	KUBE
218	LIFT
414	LOBBY
190	LOFT
314	LOFT SPOT
144	LOOK
16	LOOK WOOD
120	MARKER
342	MINILINEAR
342	MINIROUND
454	MOAI
280	MOVIT

Page Family

348	NANOLED
348	NANOLED FRAME
294	OUTLINE
326	OVER-ALL
482	PARK
134	PETIT
256	PIVOT
152	PLAN
358	PLANO COMFORT
156	POCKET
514	POOL
476	POSTER
442	REEF
388	RING COMFORT
214	SHAPE
332	SHELL
104	SKILL
16	SKILL WOOD
202	SLOT
472	SLOT POLE
196	SMOOTH
66	SPILLO
300	STAGE RECTANGULAR
426	STAGE ROUND DOWNLIGHT
242	STAGE ROUND SPOT
124	STEP
308	STREAMLINE
396	SUIT
78	TILTABLE ROD
462	TOMORROW
436	TONIGHT
60	TRÈS JOLIE
184	TRIM
288	TWIST
120	WALKER
208	ZEN
366	ZIP COMFORT
420	ZIP DOWNLIGHT COMFORT
534	<i>Numerical index</i>
522	<i>Remote power supply</i>
532	<i>Technical guide datas</i>

Step light (surface mounted)

16 Skill Wood	24 Concrete	100 5cento	134 Minipetit	104 Skill

INDEX

50 Brick of Light

Wall mounted

16 Look Wood	16 Cool Wood	24 Concrete	66 Spillo	72 Feeling	60 Très Jolie	54 Bell

INDEX

Step light (wall recessed)

32 Ghost 40 Ghost cladding 44 Ghost ins. panel	124 Step	120 Marker / Walker	114 Blinker	128 Brique	348 Nanoled Stainless steel	332 Shell

134 Petit	144 Look	152 Plan	162 Appeal	156 Pocket	138 Apply	166 Cool

Linear effects

78 Tiltable Rod	82 Continuous Rod Minimal	82 Continuous Rod Comfort

Linear systems

88 IP System®

172 Cool Square	184 Trim	208 Zen	190 Loft Square	190 Loft Round	196 Smooth	202 Slot

Wall effects Blade of light



242 Stage Blade of Light
270 Keen Blade of Light

INDEX



214 Shape
348 Nanoled Frame



218 Lift

Radial Inground (not walkover)



332 Shell


Onground (not walkover)



24 Concrete Up-light
326 Over-all


INDEX

Spotlights

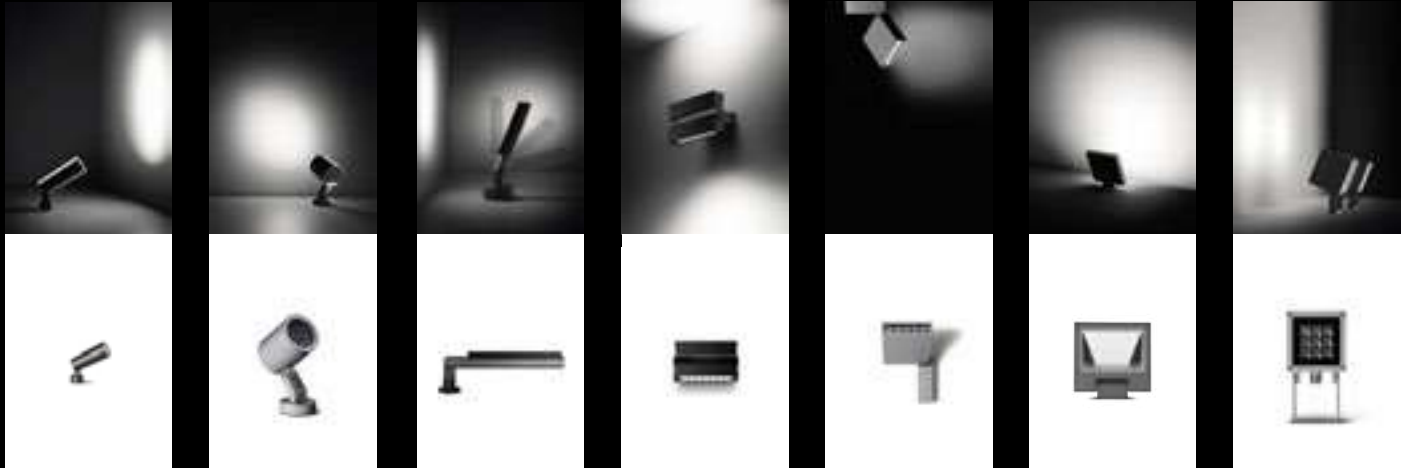

226 Flower / Flower ZOOM
242 Stage Round
256 Pivot
264 Between
270 Keen
280 Movit
314 Loft Spot

Inground walkover

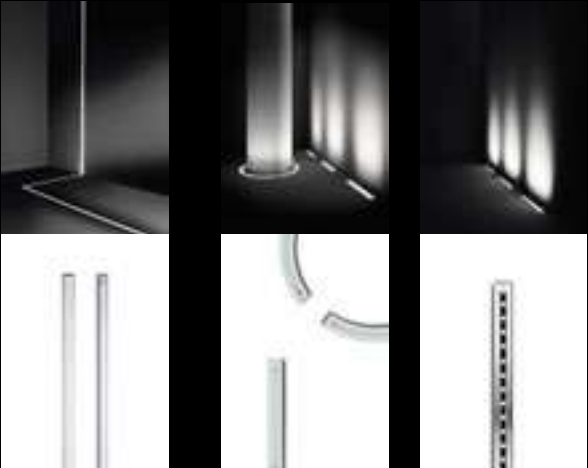

336 Continuous Line
342 Minilinear / Miniround
342 Minilinear Stainless steel



348 Nanoled Stainless steel
366 Zip Comfort
358 Plano and Compact Comfort

Inground driveover



388 Ring Comfort

Onground driveover




396 Suit




288 Twist
294 Outline
308 Streamline
300 Stage
318 Focus

Ceiling (surface mounted)

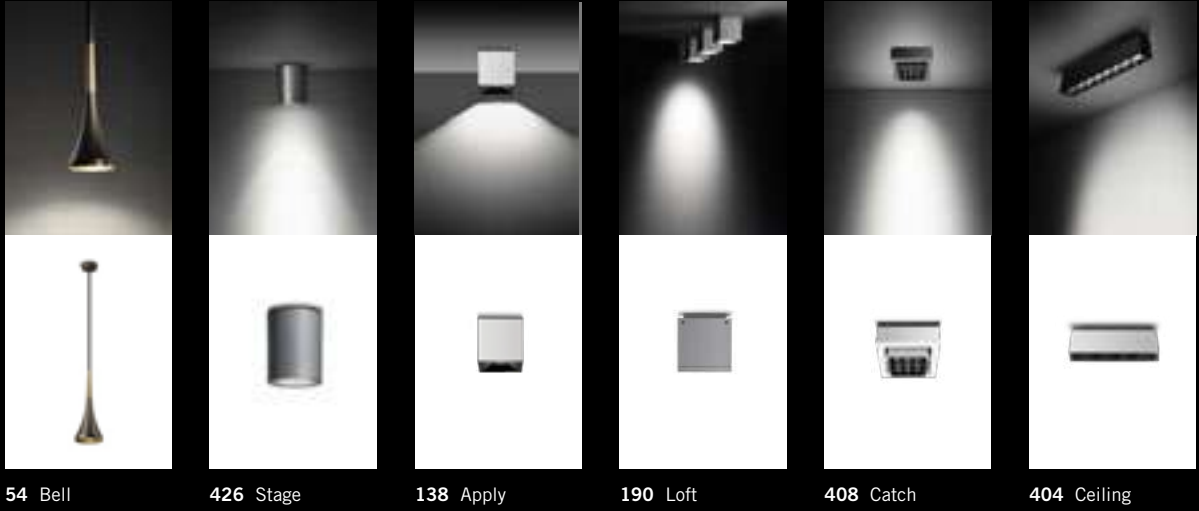

Ceiling (recessed mounted)

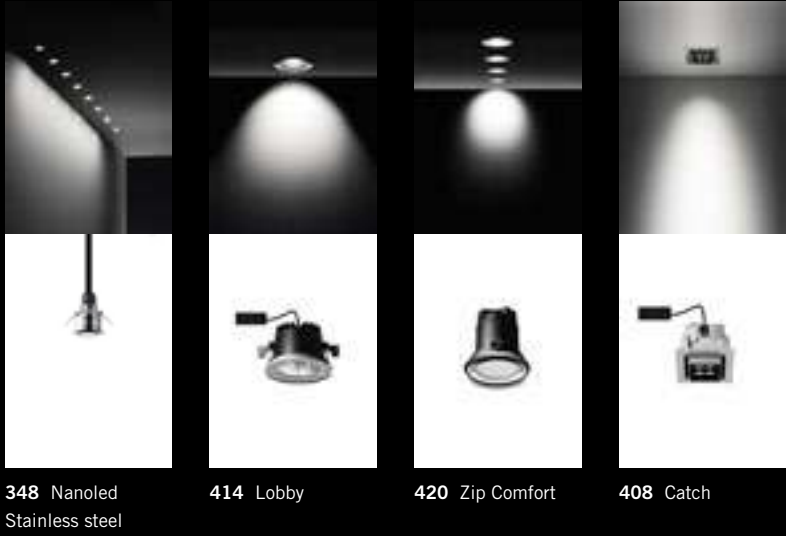


Ground stake



INDEX

Garden bollard

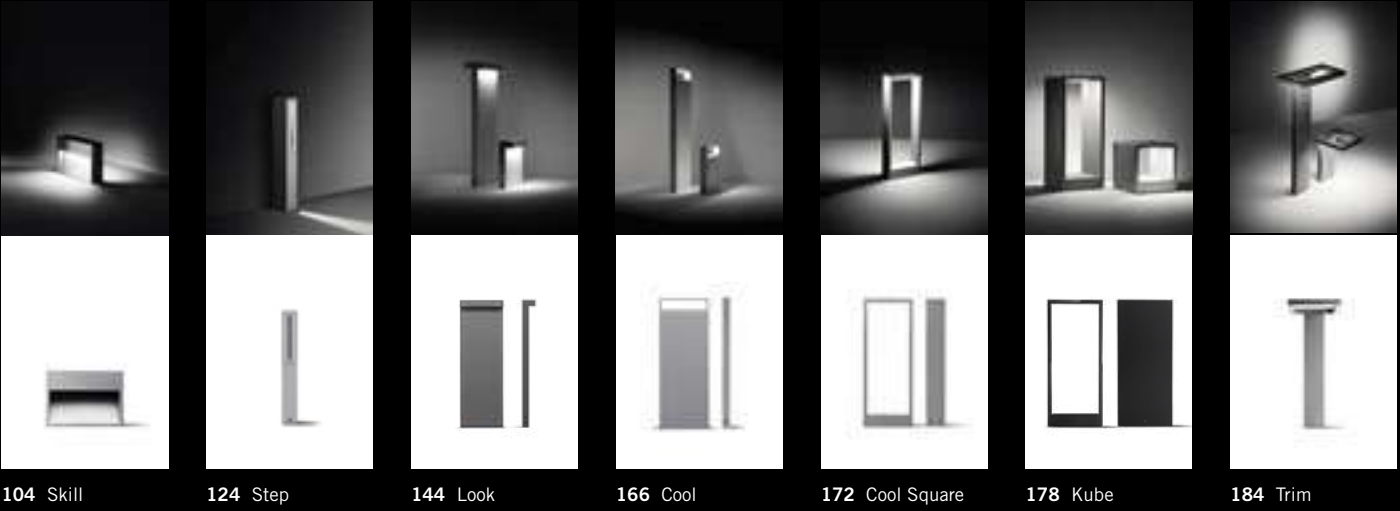

INDEX

Garden bollard “material expression”



Bollard



Urban lighting

						
						
462 Tomorrow	472 Slot Pole	476 Poster	468 Cigarette	482 Park	494 Boulevard	506 Avenue

INDEX

Rechargeable table lamp

	
	
50 Brick of Light	60 Très Jolie

Floor-standing



72 Feeling

INDEX

Spotlight pole mounted

						
						
226 Flower	270 Keen	256 Pivot	242 Stage Round	280 Movit	288 Twist	318 Focus

Underwater

	
	
514 Pool	514 Pool Spot

	
	
294 Outline	300 Stage

Drivers


522 Power supply

When light blends together with an essential and innovative design, a unique sense of elegance arises with a strong emotional impact. Simple shapes and geometries characterize the range "Tailored made" by Matteo Thun, from the creative collaboration between SIMES and the prestigious Italian architect and designer. A perfect balance between sustainable and diverse material expressions: the range was developed using a combination of wood teak that conveys a warm effect and the minimalist lines of aluminium, new finishes specifically dedicated to improve the quality of the lighting performance. Natural elegance and lighting poetry that dress with charm the environments with an unmistakable style.

This luminaire has been manufactured with hand crafted procedures, therefore small imperfections, subsidence of the wood surface, actual cracks and future, colour ripples and variations over time, are deliberately present and they are a feature of the wood, proving the hand-made manufacturing procedure.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Oiled TEAK wood finish 8mm thick. Toughened glass diffuser. Stainless steel A4 screws. Luminaire suitable for single grommet. Silicone gaskets. Double powder paint.

MINISKILL
Luminaire supplied with 1,0m neoprene H05RN-F cable.

SKILL
Luminaire with double cable entry and grommet.

LOOK APPLIQUE AND COOL APPLIQUE
Luminaire supplied with 1,0m neoprene H05RN-F cable.

LOOK BOLLARD AND COOL BOLLARD
Pre-wired luminaire with neoprene H05RN-F cable and connector.

PATENTED

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⊕ SKILL 230V
CLASS II □ LOOK, COOL
CLASS III ⬡ MINISKILL 24V

MECHANICAL RESISTANCE
IK 06 LOOK, COOL
IK 08 SKILL


LOOK, COOL

COLOURS AND FINISHING

.01 White + Teak wood

.20 Burnished Bronze + Teak wood


Design M. Thun





www.simes.it/wood

MINILOOK WOOD Applique


SIMES




L.9201W Single emission
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable




L.9202W Double emission
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable





MINILOOK WOOD Bollard



L.9211W Minilook bollard H 580 mm
LED MODULE **3000K** CRI90 1050lm 8,9W
(on request 2700K CRI90 997lm)
(on request 4000K CRI80 1400lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable



L.9206W Minilook bollard H 220 mm
LED MODULE **3000K** CRI90 1050lm 8,9W
(on request 2700K CRI90 997lm)
(on request 4000K CRI80 1400lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable




S.7249
FLANGE FOR MINILOOK BOLLARD
Flange to be anchored in concrete
for L.9206W e L.9211W.




Private villa, Monza, Italy - Arch. Michele Perini

MINICOOL WOOD Applique


SIMES




L.9231W Applique
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable




MINICOOL WOOD Bollard



L.9241W Bollard H 580mm
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable




L.9236W Bollard H 220mm
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable



S.7249
FLANGE FOR MINICOOL BOLLARD
Flange to be anchored in concrete
for L.9236W e L.9241W.




Miniskill vertical




L.9230W
LED MODULE **3000K** CRI90 775lm 4W
(on request 2700K CRI90 653lm)
(on request 4000K CRI80 891lm)
24Vdc PWM
Require constant voltage 24Vdc
remote power supply (page 522-523)

Skill square



L.9260W
LED MODULE **3000K** CRI90 1050lm 8,9W
(on request 2700K CRI90 997lm)
(on request 4000K CRI80 1218lm)
220V-240Vac 50/60Hz
Phase-cut dimmer
Version with DALI 2 / PUSH power supply
available on request with surcharge.

Skill rectangular



L.9240W
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





Concrete is the leading architectural material of the last century because it redefined the standards of architectural design through the work of the late "Maestros". Rigorous and poetic, solid and raw, concrete is an essential element for the exterior. It is a material that ages, transforms and evolves absorbing the surrounding colors, blending, integrating and interacting with the architecture in terms of form and function. The contrast between the untouchable lighting effects and the pure strength of the solid concrete structures, designed in simple forms, create a strong emotional impact. The concrete takes on the more structural part whilst the aluminium a more functional leaving the emotional role to the lighting effect.

TECHNICAL DESCRIPTION
Concrete covering with added synthetic fibres with high mechanical strength. Die-cast aluminium housing with high corrosion resistance. Toughened glass diffuser. Stainless steel A4 screws. Silicone gaskets.

MINI APPLIQUE
Luminaire supplied with 1,0m neoprene H05RN-F cable

APPLIQUE
Luminaire with one single cable entry and grommet.

WALL RECESSED
Luminaire supplied with 3,0m neoprene H05RN-F cable

UP-LIGHT
Luminaire supplied with 5,0m neoprene H05RN-F cable. Supplied with ground fixing base.

BOLLARD
Pre-wired luminaire with neoprene H05RN-F cable and connector in the bollard.

REGISTERED DESIGN


PROTECTION CLASS
IP65 APPLIQUE, WALL RECESSED, BOLLARD
IP65 / IP67 UP-LIGHT


ISOLATION CLASS
CLASS I ⊕ APPLIQUE
CLASS II ⊞ MINI APPLIQUE, BOLLARD
CLASS III ⬢ UP-LIGHT, WALL RECESSED

MECHANICAL RESISTANCE
IK 06 APPLIQUE
IK 08 UP-LIGHT
IK 10 WALL RECESSED, BOLLARD


FINISHING

.35 Concrete






C.8160W.35 Spot beam with lenses
LED MODULE **3000K** CRI90 2184lm 18,8W
(on request 2700K CRI90 2016lm)
(on request 4000K CRI80 2688lm)
1050mA Vf 18,6V max



C.8161W.35 Flood beam with lenses
LED MODULE **3000K** CRI90 2184lm 18,8W
(on request 2700K CRI90 2016lm)
(on request 4000K CRI80 2688lm)
1050mA Vf 18,6V max


Requires constant current Vout 120Vdc max
remote power supply (page 524-525)
Beam lenses available on request with no surcharge: 65°




S.3524
STAKE in polypropylene.
Colour: black (code 09)
Length 270 mm




Mini Applique single emission




C.8015W.35
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




Mini Applique double emission



C.8016W.35
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




Applique single emission




C.8005W.35
LED MODULE **3000K** CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Phase-cut dimmer

Version with DALI 2 / PUSH power supply
available on request with surcharge.




Applique double emission





C.8006W.35
LED MODULE **3000K** CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Phase-cut dimmer


Version with DALI 2 / PUSH power supply
available on request with surcharge.



CONCRETE Wall recessed




C.8055W.35
LED MODULE **3000K** CRI80 1218lm 8,9W
(on request 2700K CRI80 1157lm)
(on request 4000K CRI80 1494lm)
24Vdc PWM
Require constant voltage 24Vdc
remote power supply (page 522-523)





Accessory
C.8054
BASE FOR SURFACE APPLICATION
Fixing base for surface applications

SIMES




CONCRETE Bollard

H 250mm





C.8100W.35 **Single emission**
LED MODULE **3000K** CRI90 1260lm 10,7W
(on request 2700K CRI90 1388lm)
(on request 4000K CRI80 1610lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




C.8101W.35 **Double emission**
LED MODULE **3000K** CRI90 2520lm 21,4W
(on request 2700K CRI90 2190lm)
(on request 4000K CRI80 3220lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

H 450mm



C.8105W.35 **Single emission**
LED MODULE **3000K** CRI90 1260lm 10,7W
(on request 2700K CRI90 1388lm)
(on request 4000K CRI80 1610lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



C.8106W.35 **Double emission**
LED MODULE **3000K** CRI90 2520lm 21,4W
(on request 2700K CRI90 2190lm)
(on request 4000K CRI80 3220lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Accessory
S.6359
FLANGE FOR CONCRETE BOLLARD
Flange to be anchored in concrete.




Ghost for cast concrete is a luminous void. The luminaire is only installed when the concrete surrounding the housing is completely dried, filling the void with light.

"The light blade comes from the concrete. When it's off, it disappears. No artifice, just a void in the concrete with brutal and magic inspiration: actually a technical prodigy, directly cast into the concrete, the product of a sophisticated and invisible genius to fuse architecture and light in a natural way."

Marc Sadler

This luminaire is manufactured on site during the concrete casting of the wall with hand crafted procedures; therefore, small imperfections caused by the low accuracy of the casting, subsidence of the concrete surface, actual and future cracks, colour ripples and variations over time, will be deliberately present and they are a feature of the concrete, proving the hand-made manufacturing procedure.

Design M.Sadler

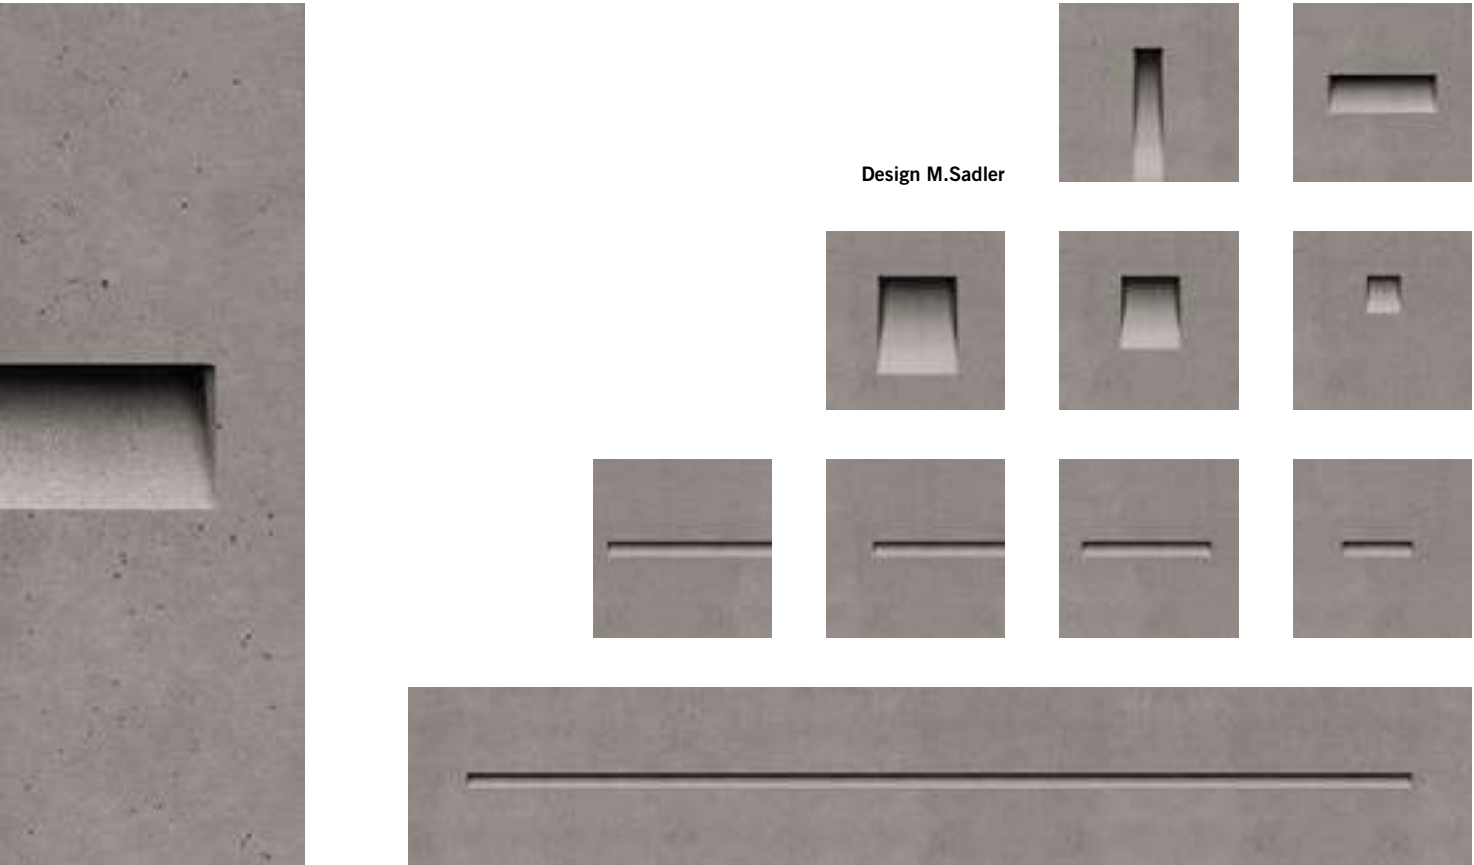

TECHNICAL DESCRIPTION

Ghost is a lighting void that is obtained from a housing anchored to the retaining panels before pouring the concrete. Ghost is composed of two elements: the housing and the lighting element.

The recessed housing is in polypropylene (in aluminium for Linear versions) and it consists of two complementary parts:

- A jig, which forms the housing, and is extracted together with the retaining panel after completing the casting and removing the anchor screws;
- The housing that remains embedded inside the casting and houses the lighting element.

(The housing is supplied with bolts, locking system and stickers to be applied on the outside of the retaining panels so to secure a perfect alignment for multiple installations of each housing when pouring the concrete). The cavity will have the finish obtained directly from the concrete cast.

The lighting element in aluminium is secured to the recessed casing with screws and remains completely hidden within the void.

PATENTED
REGISTERED DESIGN

GHOST HORIZONTAL, MINIGHOST and GHOST SQUARE
Requires a remote constant voltage driver. Luminaire supplied with 0,3m neoprene H05RN-F cable and connector in the recessed box. CLASS III ⚡

GHOST VERTICAL
Luminaire supplied with 6,0m neoprene H05RN-F cable. CLASS I ⚡

MICROGHOST SQUARE
Requires a remote constant voltage driver. Luminaire supplied with 3,0m neoprene H05RN-F cable. CLASS III ⚡

GHOST LINEAR
Luminaire supplied with 6,0m neoprene H05RN-F cable. CLASS II ⚡

PROTECTION CLASS
IP65

MECHANICAL RESISTANCE
IK 10

FINISHING
Cast cement
Suitable for reinforced concrete




www.simes.it/ghost-concrete

Ghost Horizontal



C.8020W
2 housings in polypropylene
with locking system
+
Lighting element with
LED MODULE **3000K** CRI80 1218lm 8,9W
(on request 2700K CRI80 1157lm)
(on request 4000K CRI80 1299lm)
24Vdc PWM


Requires constant voltage 24Vdc remote power supply
(page 522-523)



Ghost Vertical



C.8024W
2 housings in polypropylene
with locking system
+
Lighting element with
LED MODULE **3000K** CRI80 992lm 5,9W
(on request 2700K CRI80 940lm)
(on request 4000K CRI80 986lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Microghost Square




C.8030W

2 housings in polypropylene
with locking system

Lighting element with
LED MODULE **3000K** CRI80 244lm 1,8W
(on request 2700K CRI80 232lm)
(on request 4000K CRI80 260lm)
24Vdc PWM

Requires constant voltage 24Vdc remote power supply
(page 522-523)



Minighost Square




C.8027W

2 housings in polypropylene
with locking system

Lighting element with
LED MODULE **3000K** CRI80 609lm 4,5W
(on request 2700K CRI80 578lm)
(on request 4000K CRI80 650lm)
24Vdc PWM

Requires constant voltage 24Vdc remote power supply
(page 522-523)



Ghost Square




C.8025W

2 housings in polypropylene
with locking system


Lighting element with
LED MODULE **3000K** CRI80 1775lm 13W
(on request 2700K CRI80 1686lm)
(on request 4000K CRI80 1893lm)
24Vdc PWM

Requires constant voltage 24Vdc remote power supply
(page 522-523)






C.8034W
2 housings in aluminium with locking system
+
Lighting element with
LED MODULE **3000K** CRI80 574lm 2,5W
(on request 2700K CRI80 483lm)
(on request 4000K CRI80 660lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



C.8033
Accessory template for drilling *




C.8036W
2 housings in aluminium with locking system
+
Lighting element with
LED MODULE **3000K** CRI80 1148lm 5W
(on request 2700K CRI80 965lm)
(on request 4000K CRI80 1320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



C.8035
Accessory template for drilling *




C.8038W
2 housings in aluminium with locking system
+
Lighting element with
LED MODULE **3000K** CRI80 2295lm 9,9W
(on request 2700K CRI80 1931lm)
(on request 4000K CRI80 2639lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

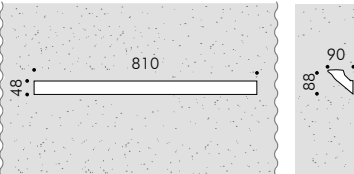

C.8037
Accessory template for drilling *



C.8040W
2 housings in aluminium with locking system
+
Lighting element with
LED MODULE **3000K** CRI80 4590lm 19,8W
(on request 2700K CRI80 3862lm)
(on request 4000K CRI80 5278lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

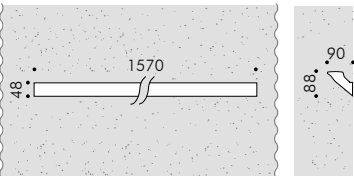

C.8039
Accessory template for drilling *

* The template for drilling facilitates the alignment of the recessed profile of Ghost Continuous Line.
You require only one template for each size which can be reused.



Seaplan Lagoon, Alameda, California - Arch. Mary Wong Donn Logan © ph. Billy Hustace



For Cladding

Ghost for cladding or plasterboard comes with an anodised aluminium recessed housing that can be finished in many different materials such as plasterboard, mosaic, ceramic tiles or stone finish. The fixtures aperture has also been developed with a slanted front panel accessory in anodised aluminium that can be removed to take different types of material finish, especially when the use of different materials may prove difficult when applying on the slanted aperture. Ghost has been developed so that it can be completely covered with the same material finish as the wall to totally integrate the fixture into the architecture and create discreet lighting effects.

TECHNICAL DESCRIPTION
Ghost for cladding can be installed in plasterboard panels for indoors, exterior fibre cement siding panels, breeze blocks or other construction materials that require a surface finish. A fixture that has been developed to be totally integrated into the architecture. The slanted front aperture can either be in anodised aluminium or it can be finished with the same material finish as the wall. The front lip of the recessed housing and the aluminium sides of the front aperture will remain visible.

For application in humid ambients like swimming pools, spa, wellness center it's necessary to use the version in 24V.

**PATENTED
REGISTERED DESIGN**

MICROGHOST SQUARE
Requires a remote constant voltage driver. Luminaire supplied with 3,0m neoprene H05RN-F cable. CLASS III ⚡

GHOST LINEAR
Luminaire supplied with 6,0m neoprene H05RN-F cable. CLASS II ⚡

PROTECTION CLASS
IP65

MECHANICAL RESISTANCE
IK 10



Microghost L 72mm



C.8330W
Housings in aluminium
+
Lighting element with
LED MODULE **3000K** CRI80 191lm 0,8W
(on request 2700K CRI80 161lm)
(on request 4000K CRI80 219lm)
24Vdc PWM


Requires a remote constant voltage driver
(page 522-523)

Ghost L 240mm



C.8334W
Housings in aluminium
+
Lighting element with
LED MODULE **3000K** CRI80 574lm 2,5W
(on request 2700K CRI80 483lm)
(on request 4000K CRI80 660lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Ghost L 430mm



C.8336W
Housings in aluminium
+
Lighting element with
LED MODULE **3000K** CRI80 1148lm 5W
(on request 2700K CRI80 965lm)
(on request 4000K CRI80 1320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Ghost L 810mm




C.8338W
Housings in aluminium
+
Lighting element with
LED MODULE **3000K** CRI80 2295lm 9,9W
(on request 2700K CRI80 1931lm)
(on request 4000K CRI80 2639lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Ghost L 1570mm



C.8340W
Housings in aluminium
+
Lighting element with
LED MODULE **3000K** CRI80 4590lm 19,8W
(on request 2700K CRI80 3862lm)
(on request 4000K CRI80 5278lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

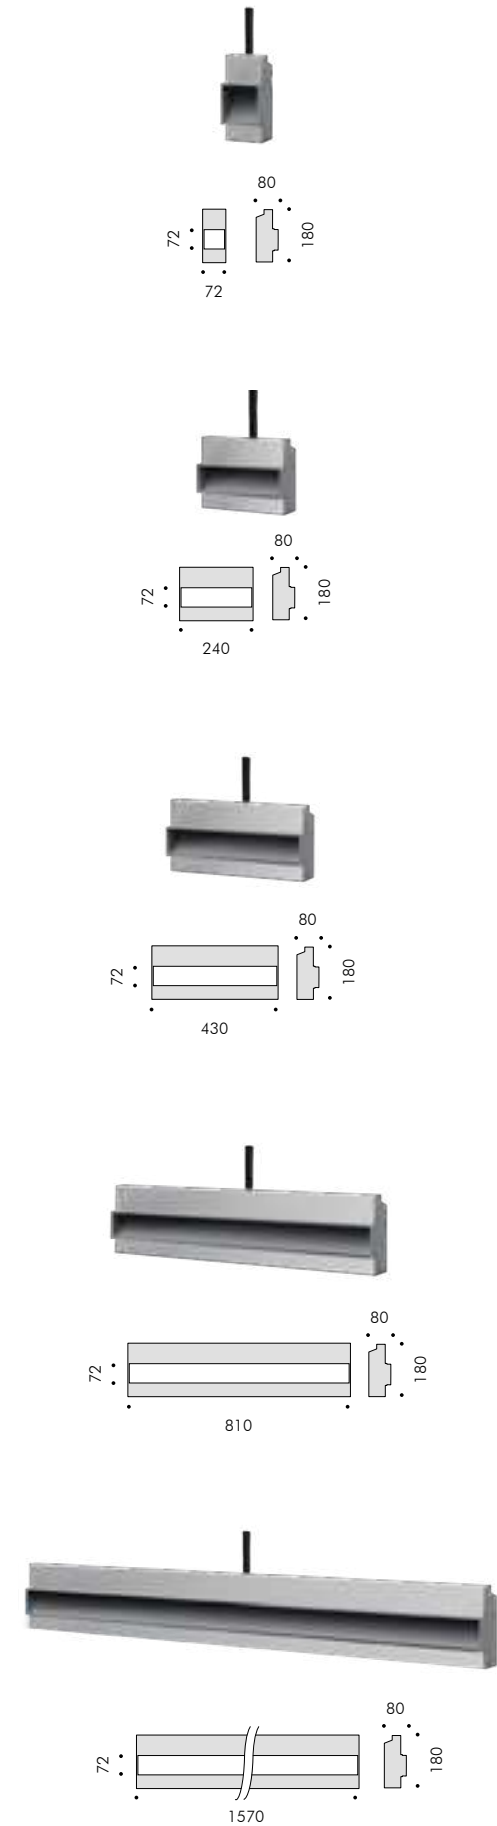

Kings College New Science Gallery, London, Great Britain © LTS Architects, Zumbobel UK, ph. Peter Landers



For Insulation panels



For Construction materials with plaster finish

GHOST FOR INSULATION PANELS is a wall mounted signal lighting fixture. The lighting fitting is provided already integrated in the insulation panel and has to be installed together with the other insulating panels of polystyrene. In this way the light is completely integrated in the insulated "shell" of the architecture without jeopardizing the thermal insulation and therefore maintaining the energy efficiency rating of the building.

GHOST FOR CONSTRUCTION MATERIALS is a further development of the Ghost range that allows to create lit voids into walls built from any material that require a plaster finish. The special recessed housing protrudes by 15mm so to consider the various layers of plaster in view of a perfect final flush finish. The inner slide of Ghost is already prepared for painting and then completely integrated within the architecture.

TECHNICAL DESCRIPTION

GHOST FOR INSULATION PANEL
Ghost for insulation panel can be installed inside the exterior insulating panel, maintaining the degree of insulation of the house, since produced with the same type of insulating polystyrene. Attention should be paid only to the positioning of the corrugated tube for mains electrical connection.

GHOST FOR CONSTRUCTION MATERIALS WITH PLASTER FINISH
Ghost can be easily applied in walls made of building materials in work to be plastered, like brick (bricks perforated) or concrete conglomerates. It is a product designed to be totally integrated with the architecture, of which will inherit the finishes. The recess is pre-finished and ready for painting.

PATENTED
REGISTERED DESIGN

MICROGHOST SQUARE
Requires a remote constant voltage driver. Luminaire supplied with 3,0m in neoprene H05RN-F cable. CLASS III

GHOST HORIZONTAL
Requires a remote constant voltage driver. Luminaire supplied with 0,3m in neoprene H05RN-F cable and connector in the recessed box. CLASS III

PROTECTION CLASS
IP65

MECHANICAL RESISTANCE
IK 06




Microghost Square



C.8130W
AE D35 polystyrene block
with housings in polypropylene
+
Lighting element with
LED MODULE **3000K** CRI80 244lm 1,8W
(on request 2700K CRI80 231lm)
(on request 4000K CRI80 260lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)




Ghost Horizontal



C.8120W
AE D35 polystyrene block
with housings in polypropylene
+
Lighting element with
LED MODULE **3000K** CRI80 1218lm 8,9W
(on request 2700K CRI80 1157lm)
(on request 4000K CRI80 1299lm)
24Vdc PWM

Requires constant voltage 24Vdc remote
power supply (page 522-523)



Private villa, Italy - Arch. Duilio Damilano Italy © ph. Mario Bertani / Simes S.p.A.

Microghost Square



C.8230W
AE D35 polystyrene block
with housings in polypropylene
+
Lighting element with
LED MODULE **3000K** CRI80 244lm 1,8W
(on request 2700K CRI80 231lm)
(on request 4000K CRI80 260lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)

Ghost Horizontal




C.8220W
AE D35 polystyrene block
with housings in polypropylene
+
Lighting element with
LED MODULE **3000K** CRI80 1218lm 8,9W
(on request 2700K CRI80 1157lm)
(on request 4000K CRI80 1299lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)



Design P. Rizzatto

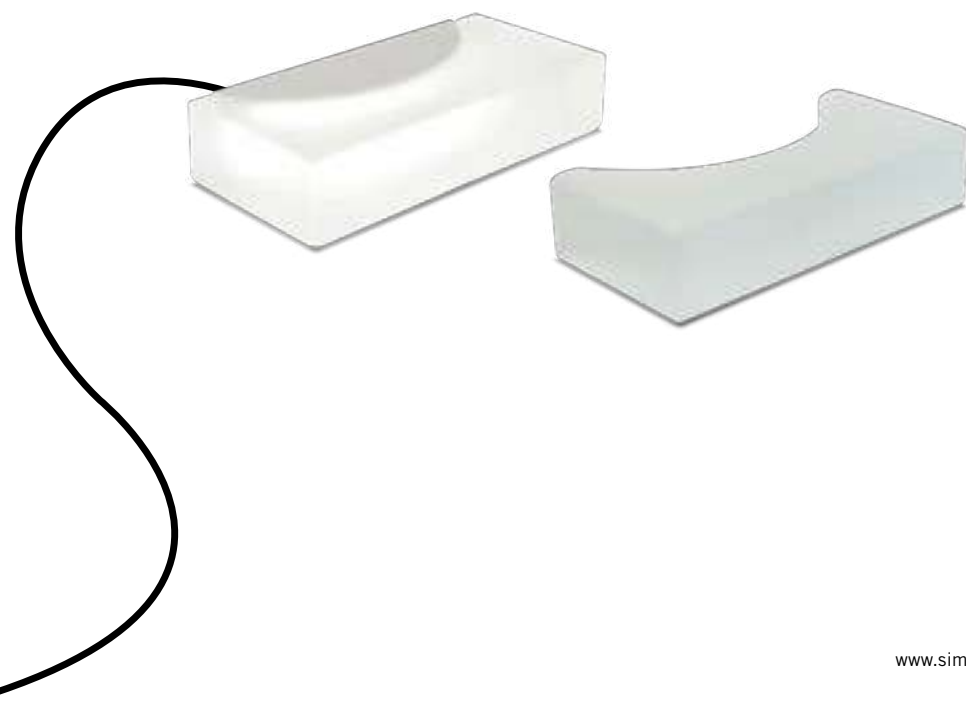

www.simes.it/brick-of-light

Brick of Light camouflages itself with the brick texture not only by taking on the form and the dimensions of the brick, but also by adopting the same modes of handling, assembly and installation thanks to its characteristics of resistance and manageability. The restrained and basic archetype form allows a perfect integration in brick walls. It is endlessly declinable and talks together with the rhythm of the surfaces and appropriate lighting needs. Designed for integration with exposed brick surfaces such as:

*exterior and interior
flush with walls, recessed or protruding
on a flat masonry or curvilinear wall
concave or convex
at the center or at an edge
isolated or arranged
at intervals or in a continuous line
free or according to a plan*

Its compact geometry and its adaptability with the masonry itself, along with the solid glass, make it performant in terms of maintenance, perishability over time and resistance against vandalism.

TECHNICAL DESCRIPTION

Die-cast aluminium housing with high corrosion resistance. Diffuser made of acid-etched pressed glass. Brick of Light has been developed with reference to the standard Italian brick. Double powder paint.

24V DC REMOTE POWER SUPPLY FOR WALL RECESSED

Luminaire supplied with 5,0m neoprene H05RN-F cable for installation in exposed brick walls or other construction materials in place.

WITH RECHARGEABLE BATTERY FOR STAND ALONE

At maximum power luminaire operates 10 hours. The Lithium polymers Battery is recharged via a micro USB plug. Brick of Light is a portable decorative luminaire for exterior use. Lateral ON-OFF and three step (30% - 60% - 100%) dimming switch. Supplied with Micro USB cable and power supply 230V.

PATENTED
REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS III

MECHANICAL RESISTANCE
IK 08

COMPRESSION RESISTANCE
Full brick 60N/mm²
BRICK of LIGHT 100N/mm²

FINISHING: Acid-etched glass

ALUMINIUM BASE COLOUR

.01 White


This luminaire has been manufactured with handcrafted procedures, therefore small imperfections, subsidence of the glass surface, actual cracks and future, colour ripples and variations over time, are deliberately present and they are a feature of the glass, proving the hand-made manufacturing procedure.




BRICK OF LIGHT

SIMES


Stand alone version with rechargeable battery





B.9005W
LED MODULE **3000K** CRI80 180lm 1,1W
(on request 2700K CRI80 171lm)
(on request 4000K CRI80 192lm)
Dimmable (3 steps 30%-60%-100%)
Luminaire operating on rechargeable lithium polymers fed battery.
Independent charge approx. 10 hours



24V DC Recessed version for remote power supply





B.9000W
LED MODULE **3000K** CRI80 360lm 2,2W
(on request 2700K CRI80 288lm)
(on request 4000K CRI80 384lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply (page 522-523)

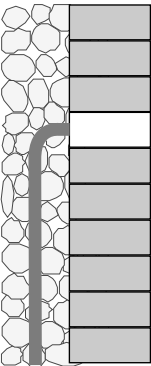



The luminaire has been designed to be integrated and recessed in the wall like a true construction material.

Recessed full glass version

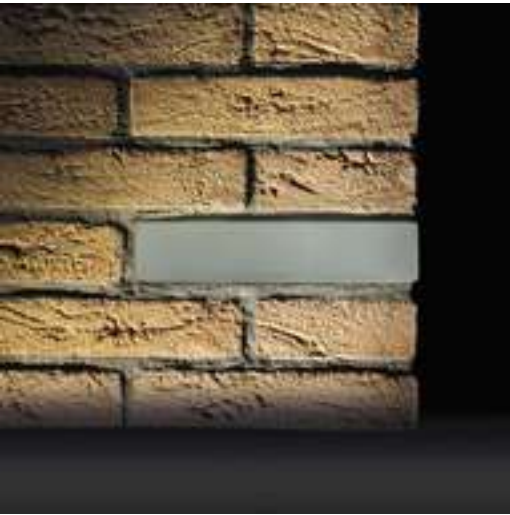

B.9009
Decorative wall element

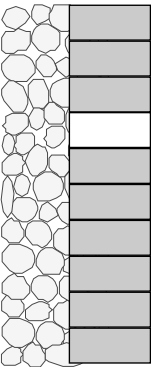

The luminaire has been designed to be integrated and recessed in the wall like a true construction material.



BELL Wall mounted, ceiling and bollard



SIMES

BELL

The elegance of the Bell family is told by an harmonious merge of colours and materials. The product differentiates itself for the shape of the aluminum body enriched by solid bronze inserts characterizing the whole family in a distinctive way. The cone reflector that embraces the inner part of the fitting warms the light beam and the neck slims the silhouette. These decorative elements in solid bronze are treated with a transparent protective layer that maintains the color and ensures quality and durability.

TECHNICAL DESCRIPTION
Die-cast aluminium, extruded aluminium structure (bollard version) with high corrosion resistance. Satin bronze neck and cone reflector. Stainless steel A4 screws. Toughened glass diffuser 4mm thick. Pre-wired luminaire with neoprene H05RN-F cable and connector. Silicone gaskets. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⚡



MECHANICAL RESISTANCE
IK 06

COLOURS AND FINISHING

- .01** White (cone reflector and neck in solid satin bronze)
- .20** Burnished Bronze (cone reflector and neck in solid satin bronze)





Applique



S.8000W
LED MODULE **3000K** CRI90 1250lm 8,9W
(on request 2700K CRI90 1150lm)
(on request 4000K CRI80 1552lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Supplied with cable 1,5m



Bollard H 700 mm

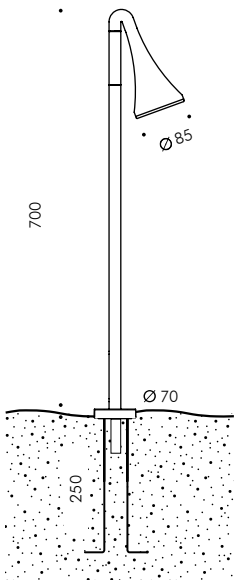

S.8005W
LED MODULE **3000K** CRI90 1250lm 8,9W
(on request 2700K CRI90 1150lm)
(on request 4000K CRI80 1552lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Supplied with cable 4,0m

Flange to be fixed in concrete included

Bollard H 900 mm

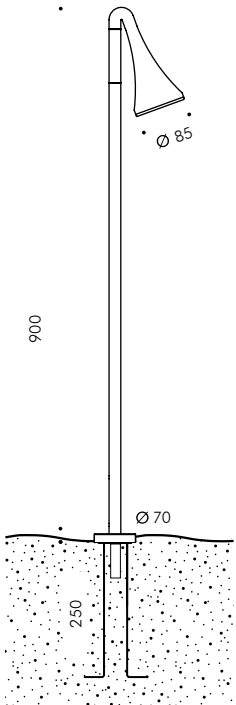


S.8006W
LED MODULE **3000K** CRI90 1250lm 8,9W
(on request 2700K CRI90 1150lm)
(on request 4000K CRI80 1552lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Supplied with cable 4,0m

Flange to be fixed in concrete included





Private villa, Sale Marasino, Brescia, Italy - © ph. Mario Bertani / Simes S.p.A.

Applique





S.8020W
LED MODULE **3000K** CRI90 2500lm 17,7W
(on request 2700K CRI90 2300lm)
(on request 4000K CRI80 3105lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Supplied with cable 1,5m

Ceiling

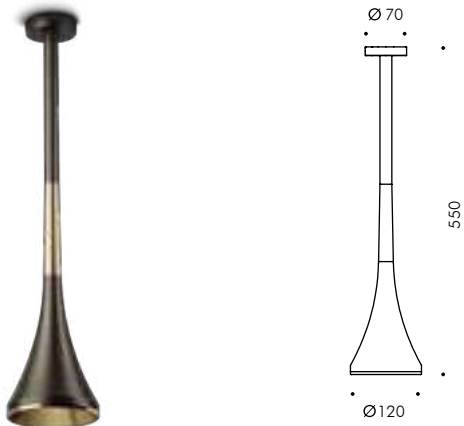

S.8035W
LED MODULE **3000K** CRI90 2500lm 17,7W
(on request 2700K CRI90 2300lm)
(on request 4000K CRI80 3105lm)
220V-240Vac 50/60Hz
Phase-cut dimmer
Supplied with cable 1,5m

Suspension

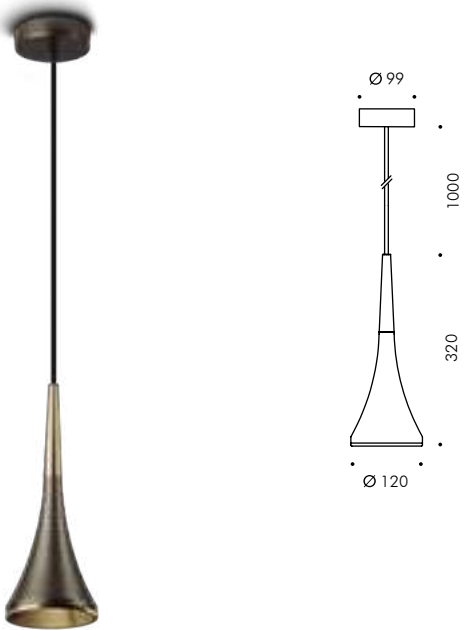

S.8030W
LED MODULE **3000K** CRI90 2500lm 17,7W
(on request 2700K CRI90 2300lm)
(on request 4000K CRI80 3105lm)
220V-240Vac 50/60Hz
Phase-cut dimmer
Supplied with cable 4,0m



Private villa, Sale Marasino, Brescia, Italy - © ph. Mario Bertani / Simes S.p.A.



TRÈS JOLIE

Très Jolie is a complete range that includes a small bollard version, a wall applique and a free standing lamp, available in two different versions: 230V or free standing with rechargeable battery. With its simple but elegant design, Très Jolie has been developed to illuminate outdoor spaces, enhancing and blending into the surrounding architecture and landscape. Superior visual comfort has been obtained through its simplistic forms: its special tapered stem catches the light and embellishes the object, creating soft bright shade. The free standing table version is a cordless solution that offers the light also where there is no direct power supply. It also provides a tunable white solution from 3000K to a warmer 2200K.

TECHNICAL DESCRIPTION
Die-cast and extruded (bollard) aluminium housing with high corrosion resistance. Micro etched prismatic glass diffuser. Stainless A4 steel screws. Silicone gaskets. Double powder paint.

APPLIQUE
Luminaire supplied with 5,0m neoprene H05RN-F cable.

BOLLARD
Luminaire supplied with 4,0m neoprene H05RN-F cable.

RECHARGEABLE TABLE LAMP
Luminaire operating on Lithium polymers fed Battery via a micro USB plug with a maximum power (battery version) of 8 hours to be used as a portable decorative luminaire for the exterior. Lighting and dimming (0%-100%) with the simple touch of the upper part of the head. Supplied with Micro USB cable and power supply 230V.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II 230V
CLASS III FREE STANDING

MECHANICAL RESISTANCE
IK 07

COLOURS APPLIQUE AND BOLLARD



- .01 White
- .09 Black
- .24 Anthracite Grey

COLOURS RECHARGEABLE TABLE LAMP

- .01 White
- .24 Anthracite Grey





Wall mounted



S.2500W
LED MODULE **3000K** CRI90 1146lm 8,1W
(on request 2700K CRI90 1054lm)
(on request 4000K CRI80 1423lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Short bollard with ground stake

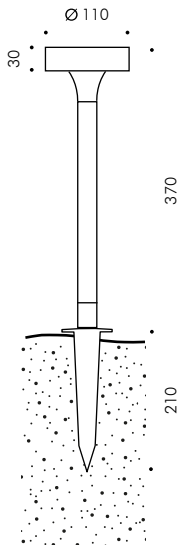

S.2510W
LED MODULE **3000K** CRI90 1146lm 8,1W
(on request 2700K CRI90 1054lm)
(on request 4000K CRI80 1423lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Stake in polypropylene included

Tall bollard with flange

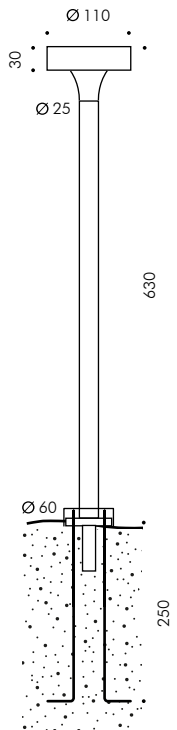



S.2506W
LED MODULE **3000K** CRI90 1146lm 8,1W
(on request 2700K CRI90 1054lm)
(on request 4000K CRI80 1423lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Flange to be fixed in concrete included



Private villa, Italy - Arch. Varischi e Geom. Berlandis © ph. Mario Bertani

Rechargeable table lamp
with magnetic base



S.2515W
LED MODULE DIM TO WARM 3000K-2200K
CRI90 330-272lm 2,5W
Dimming light (0%-100%)
Luminaire operating on rechargeable
lithium polymers fed battery.
Independent charge approx. 8 hours



Supplied with Micro USB cable
and power supply 230V.



S.2519
STAKE for RECHARGEABLE TABLE LAMP
in polypropylene for ground positioning.





www.simes.it/spillo

Spillo was developed as a user friendly and quick solution to the never ending need to direct the light in a specific direction. The luminaire can be rotated on its axis giving different effects: direct, indirect and also wall washer. Available in different versions, single, double or tilted applique, Spillo can be wall or ceiling mounted and installed at one's discretion through its fixation base that also enables to adjust its positioning at different angles. In the bollard version, its adjustable flexibility allows you to choose the area or the object to illuminate. With its minimalistic design and without visible screws, Spillo does not alter the architectural balance but, on the contrary, it disappears in it while enhancing it through light.

TECHNICAL DESCRIPTION
Die-cast aluminium housing, extruded aluminium structure with high corrosion resistance. Toughened glass diffuser 4mm thick. Stainless steel A4 screws. Silicone gaskets. Double powder paint. It requires constant voltage 24V remote power supply.

APPLIQUE
Luminaire supplied with 5,0m neoprene H05RN-F cable.

BOLLARD
Luminaire supplied with 4,0m neoprene H05RN-F cable.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS III

MECHANICAL RESISTANCE
IK 07

COLOURS APPLIQUE

.01 White

.20 Burnished Bronze

.24 Anthracite Grey



COLOURS BOLLARD

.20 Burnished Bronze

.24 Anthracite Grey





Spillo double applique

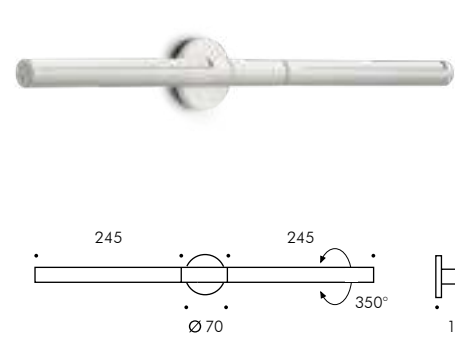

S.1706W
2 x LED MODULE **3000K** CRI90 1120lm 8,4W
(on request 2700K CRI90 1064lm)
(on request 4000K CRI80 1352lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523)

Spillo bollard

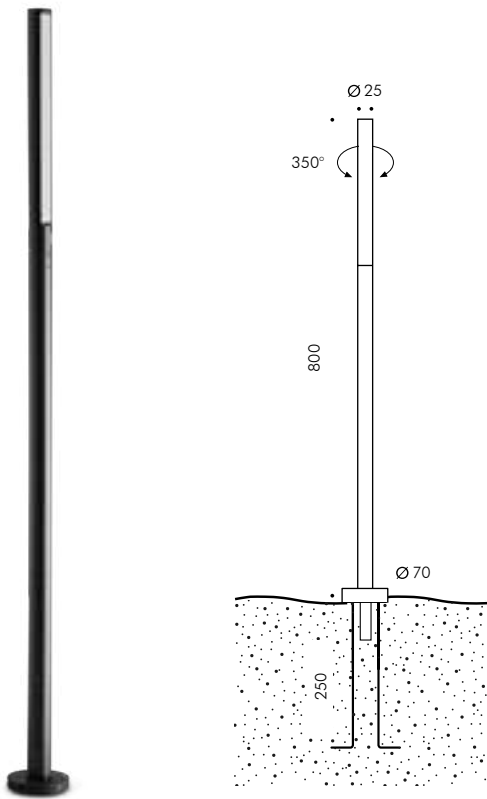


S.1710W
LED MODULE **3000K** CRI90 1120lm 8,4W
(on request 2700K CRI90 1064lm)
(on request 4000K CRI80 1352lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523)
Flange to be fixed in concrete included





Private villa, Italy - Arch. Duilio Damiano © ph. Mario Bertani / Simes S.p.A.

Spillo applique





S.1705W
LED MODULE **3000K** CRI90 1120lm 8,4W
(on request 2700K CRI90 1064lm)
(on request 4000K CRI80 1352lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523)

Spillo tilted applique

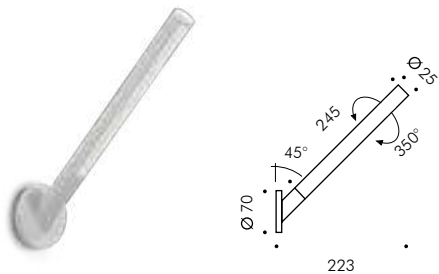

S.1700W
LED MODULE **3000K** CRI90 1120lm 8,4W
(on request 2700K CRI90 1064lm)
(on request 4000K CRI80 1352lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523)

Spillo bollard 90°

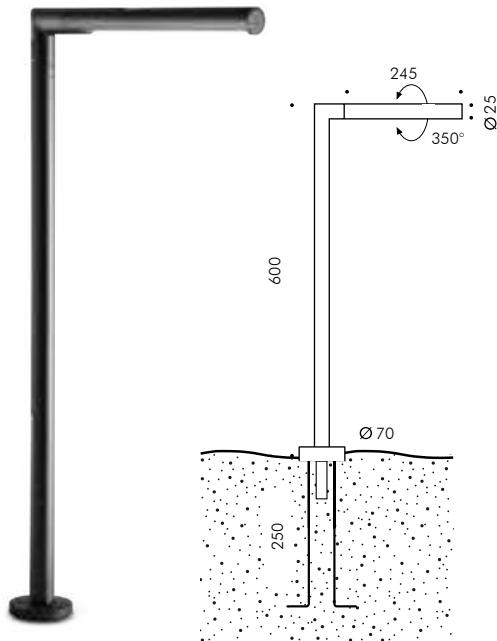

S.1711W
LED MODULE **3000K** CRI90 1120lm 8,4W
(on request 2700K CRI90 1064lm)
(on request 4000K CRI80 1352lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523)
Flange to be fixed in concrete included



Private villa, Italy - Arch. Duilio Damilano © ph. Mario Bertani

FEELING Wall mounted, floor standing and garden stake

SIMES



www.simes.it/feeling

FEELING

Feeling enhances the lighting of outdoor spaces such as terraces and gardens, making them cosy and comfortable as if they were indoor spaces. A decorative lighting family for outdoors with a minimalist design for an elegant and charming ambient light. Feeling is available as floor standing, garden stake and wall or ceiling applique. In the applique version, its thin stem can perform two different rotations: the first one, around its own axis, allows to direct the light beam, creating direct, indirect or lateral light effects; the second rotation, around the fixing joint, moves the lighting from a vertical position to a diagonal or horizontal position.

TECHNICAL DESCRIPTION
Die-cast aluminium housing, extruded aluminium structure with high corrosion resistance. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

APPLIQUE
Luminaire supplied with 5,0m neoprene H05RN-F cable.

GARDEN STAKE
Luminaire supplied with 0,4m of bipolar flat cable and fast connector.

FLOOR STANDING
Luminaire supplied with 3,0m neoprene H05RN-F cable, with Schuko plug and push button.

REGISTERED DESIGN.

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⊕ FLOOR STANDING
CLASS III ⚡ APPLIQUE, GARDEN STAKE

MECHANICAL RESISTANCE
IK 06

APPLIQUE AND FLOOR STANDING ROD COLOURS

.01 White (pivot / base black)


.09 Black (pivot / base black)


GARDEN STAKE ROD COLOURS

.01 White (base black)


.09 Black (base black)



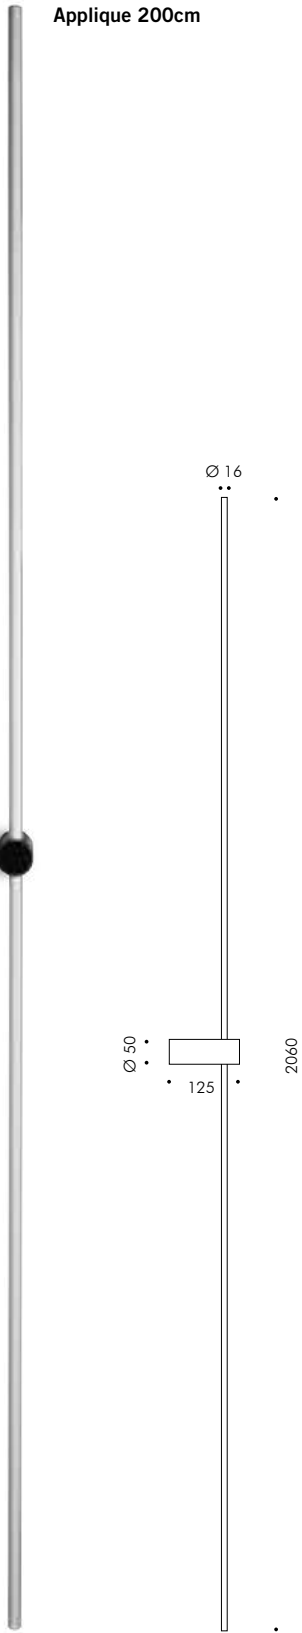





S.2281W Applique 200cm
LED MODULE **3000K** CRI90 440lm 14,4W
(on request 2700K CRI90 418lm)
(on request 4000K CRI80 506lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523)
Supplied with cable 5,0m




S.2280W Applique 120cm
LED MODULE **3000K** CRI90 308lm 8,6W
(on request 2700K CRI90 292lm)
(on request 4000K CRI80 354lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523)
Supplied with cable 5,0m

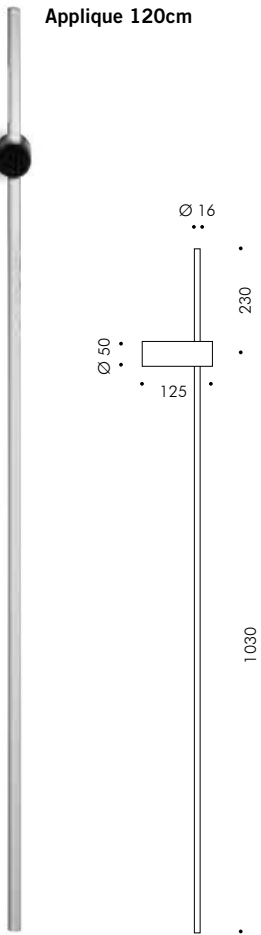

Private villa, Palazzolo sull'Oglio, Brescia, Italy - Arch. Giuliano Venturelli © ph. Mario Bertani / Simes S.p.A.

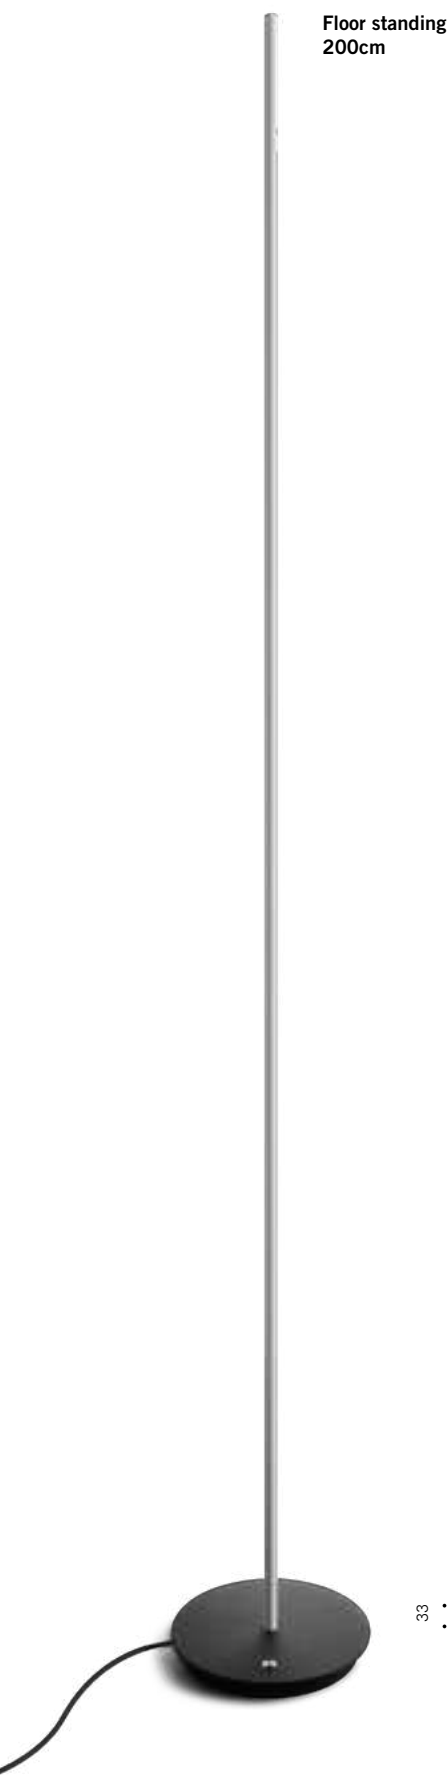


Floor standing
200cm



S.2286W Floor standing 200cm
LED MODULE **3000K** CRI90 440lm 14,4W
(on request 2700K CRI90 418lm)
(on request 4000K CRI80 506lm)
220V-240Vac 50/60Hz
Push button dimmable


Supplied with cable 3,0m and Shuko plug




S.2285W Garden stake 100cm
LED MODULE **3000K** CRI90 220lm 7,2W
(on request 2700K CRI90 209lm)
(on request 4000K CRI80 253lm)
24Vdc PWM

Requires constant voltage 24Vdc remote power supply
(page 522-523)

Supplied with cable 0,4m of bipolar flat cable
and fast connector.

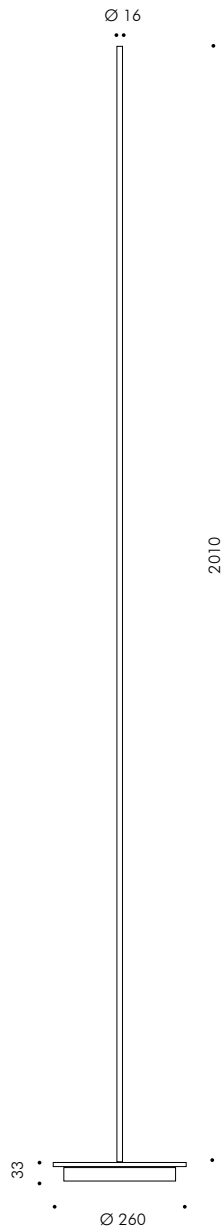


Garden stake
100cm

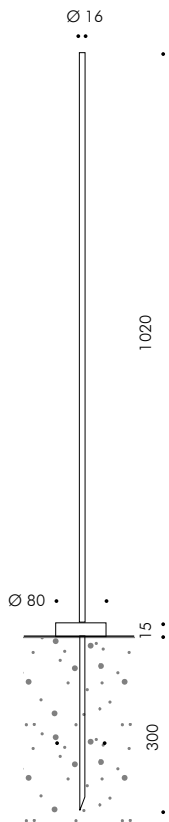

Private villa, Corte Franca Italy - Arch. Massimo Castagna © Simes S.p.A.

TILTABLE ROD Linear effect (surface mounted)

SIMES

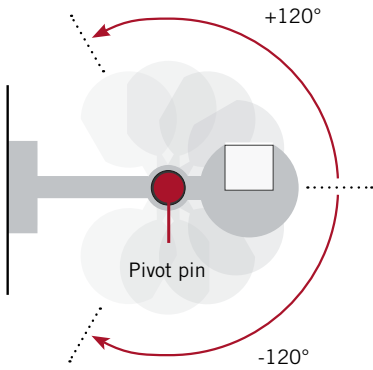

www.simes.it/tiltable-rod

TILTABLE ROD

Slim and linear design, possibility of rotation and tunable light: Tilttable Rod adapts in real time to the context to be illuminated. Perfect for facade lighting or to illuminate architectural elements, ceilings and vaults, Tilttable Rod can be used as wall washer light effect or to design lines of direct light. The body can rotate of 240° around its axis to direct the beam even when installed. The potentiality of Tilttable Rod is also expressed through the quality of the LED source: an IP65 opal silicone diffusing strip available in 3000K, Tunable White 2700K-4000K or RGBW version.

TECHNICAL DESCRIPTION
Fixing base in extruded aluminium housing with high corrosion resistance. Luminaire supplied with 5,0m PVC cable. Continuous light source made of opal silicone. Aluminium caps for the extruded parts. Double powder paint or Anodized Aluminium.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS III ⚡

MECHANICAL RESISTANCE
IK 08


COLOUR AND FINISHING

.01	White
.13	Anodized Aluminium





3000K




S.2250W	1,0m length	737lm 9,6W
S.2260W	2,0m length	1474lm 19,2W

LED MODULE **3000K** CRI90
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)



TUNABLE WHITE
(2700-4000K)




S.2250T	1,0m length	715lm 12W
S.2260T	2,0m length	1430lm 24W

LED MODULE **TUNABLE WHITE 2700K-4000K** CRI80
24Vdc PWM

Requires constant voltage remote power supply
for TUNABLE WHITE and DMX or DALI controllers
(pag. 526-527)




RGBW
(W 2700K)



S.2251	1,0m length	215lm 14,4W
S.2261	2,0m length	430lm 28,8W

LED MODULE **RGBW (W=2700K)**
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers
(pag. 528-529)

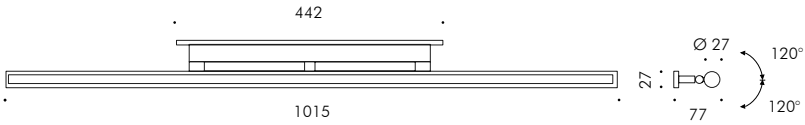

"C-mine" exhibition center, Genk, Belgium @ Ph. Pieter Kers

CONTINUOUS ROD Linear effect



S I M E S

CONTINUOUS ROD

Continuous Rod is a linear luminaire made of a performing IP65 rated LED Strip and a thin aluminium profile in which it is embedded. Continuous Rod is available in two different versions: Minimal surface mounted, with the silicon strip Rod flush with the profile, Comfort surface mounted with the strip silicon Rod recessed in the profile. A straight connector allows a continuous installation of Continuous Rod Minimal to create uniform light lines at the desired length. The angular accessories can create angles at 90° for single flat surfaces or for two perpendicular flat surfaces. The light intensity can be modulated with 24V remote dimmable power supplies.

TECHNICAL DESCRIPTION
Fixing base in extruded aluminium housing with high corrosion resistance. Luminaire supplied with 5,0m PVC cable. Continuous light source made of opal silicone. Transparent silicone end caps for LED circuit and aluminium caps for the extruded parts. Double powder paint.

MINIMAL
In Continuous Rod Minimal, the corrugated tube for the supply must be installed at the beginning of the luminaire.

COMFORT
In Continuous Rod Comfort, the extruded profile allows the placement of the plastic through wiring duct (22mm x 10mm max) and the passage of the cable inside. Moreover, the supply cable of the luminaire next to it may also be fitted.

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS III ⚡

MECHANICAL RESISTANCE
IK 08

COLOURS

.01	White
.14	Aluminium Grey



www.simes.it/continuous-rod



3000K

S.2310W	1,0m length	737lm 9,6W
S.2311W	2,0m length	1474lm 19,2W
S.2312W	3,0m length	2211lm 28,8W

LED MODULE 3000K CRI90
24Vdc PWM

Requires constant voltage 24Vdc remote power supply
(page 522-523)



TUNABLE WHITE
(2700-4000K)

S.2310T	1,0m length	715lm 12W
S.2311T	2,0m length	1430lm 24W
S.2312T	3,0m length	2145lm 36W

LED MODULE TUNABLE WHITE 2700K-4000K CRI80
24Vdc PWM

Requires constant voltage remote power supply
for TUNABLE WHITE and DMX or DALI controllers (pag. 526-527)




RGBW
(W 2700K)

S.2316	1,0m length	215lm 14,4W
S.2317	2,0m length	430lm 28,8W
S.2318	3,0m length	645lm 43,2W

LED MODULE RGBW (W=2700K)
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers (pag. 528-529)



The standard luminaires listed in the catalogue can create surface lighting lines of 1m, 2m or 3m.



All surface mounted versions may be connected to create luminous angles at 90° in relation to a single installation plan (wall or ceiling) with the specific accessories.



S.2307
Corner coupler accessory for single flat surfaces
NOT INCLUDED



Luminous angles at 90° on two perpendicular surfaces (ceiling/wall or wall/wall) can be achieved as well. Also in this case specific accessories are needed.



S.2308
Corner coupler accessory for perpendicular surfaces
NOT INCLUDED



Private villa, Monza, Italy - Arch. Michele Perlini



3000K

S.2360W	1,0m length	737lm 9,6W
S.2361W	2,0m length	1474lm 19,2W
S.2362W	3,0m length	2211lm 28,8W

LED MODULE 3000K CRI90
24Vdc PWM

Requires constant voltage 24Vdc remote power supply
(page 522-523)



TUNABLE WHITE
(2700-4000K)

S.2360T	1,0m length	715lm 12W
S.2361T	2,0m length	1430lm 24W
S.2362T	3,0m length	2145lm 36W

LED MODULE TUNABLE WHITE 2700K-4000K CRI80
24Vdc PWM

Requires constant voltage remote power supply
for TUNABLE WHITE and DMX or DALI controllers (pag. 526-527)




RGBW
(W 2700K)

S.2366	1,0m length	215lm 14,4W
S.2367	2,0m length	430lm 28,8W
S.2368	3,0m length	645lm 43,2W

LED MODULE RGBW (W=2700K)
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers (pag. 528-529)



Using the standard luminaires listed in the catalogue surface luminous lines of 1m, 2m or 3m can be achieved with direct light perpendicular to the installation surface. The recessed installed light source ensures an excellent visual comfort.




The standard luminaires may be lined up between themselves in a continuous mode by removing the end caps.



Continuous Rod Comfort surface version can be installed with the light parallel to the installation surface as to obtain grazing light effects of standard lengths (1m, 2m or 3m).




The standard luminaires may be lined up even if they are installed with light parallel to the mounting surface. Grazing light effects of the desired length can be achieved by removing the end caps.



Scatolificio del Garda, Pastrengo, Verona, Italy - Arch: studio nico sandri - © ph. Mario Bertani

Surface

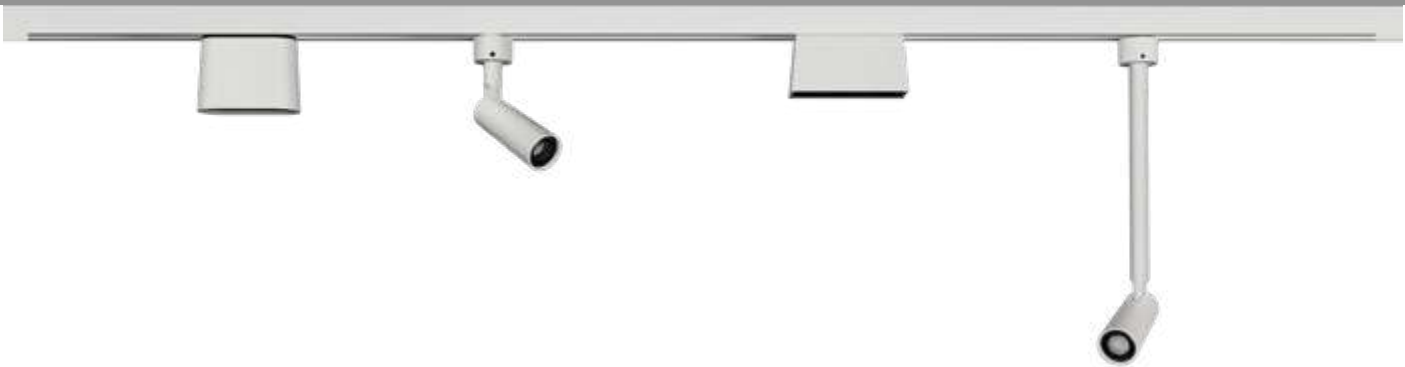

Recessed



IP System is the first innovative dual power light system for outdoor environment IP54. It is an IP rated system composed by a silicone rod (general lighting) and a number of additional luminaires (spot light for accent lighting, downlights and pendant for wider beam effects). The additional luminaires are connected to the rod through an innovative plug-in electrical and mechanical connection, which guarantees a high protection level on all products. IP System can be used in any environment, from typical outdoor application (gazebos and pergolas) to indoor humid ambients (wellness, spa and wineries). Its elegant design both in surface mounted version or recessed, leads IP System to be perfectly used also in normal indoor application even where the IP rating is not required. IP System has two 24V independent electrical circuits: one dedicated to supply the silicone rod and the other one dedicated to supply all the additional plug-in luminaires. It requires two remote dimmable drivers to manage the light.

TECHNICAL DESCRIPTION
Luminaire supplied with 5,0m silicone 4-poles cable for two independent electrical circuits: one to supply the light rod and the other specifically dedicated to supply the plug-in fixtures. Continuous light source made of co-extruded opal silicone. AISI 301 painted end caps. Double powder paint. It requires constant voltage 24Vdc remote power supply.

HIGHLIGHTER SURFACE
Fixing base in black anodized extruded aluminium housing with high corrosion resistance 1, 2, 3 or 4m length and side covers in painted aluminium.

HIGHLIGHTER RECESSED
Fixing base in black anodized extruded aluminium housing with high corrosion resistance 1, 2, 3 or 4m length and side covers in painted aluminium. Supplied with aluminium recessed box for plaster board.

ADDITIONAL PLUG-IN FIXTURE
FLOWER plug-in (adjustable projector)
TRENDY plug-in (fixed downlight)
CEILING plug-in (fixed downlight)
FINGER plug-in (suspension)

Die-cast aluminium housing. Clear toughened glass 4 mm thick. Comfort optic: clear lenses with the retracted position of the LED. Stainless steel screws. Fast clip-on fixation system and pins for the electrical connection. Silicone gaskets. Plug-in fixtures protected against the reverse polarity. Constant voltage 24Vdc from the electrical connection to the HIGHLIGHTER lighting profile.

**PATENTED
REGISTERED DESIGN
REGISTERED TRADEMARK**

PROTECTION CLASS
Lighting system IP System: IP54
PLUG-IN fixtures: IP65

The lighting rod HIGHLIGHTER without plug-in products installed guarantees an IP65 protection rating.

The lighting rod HIGHLIGHTER with plug-in fixtures installed and never removed guarantees an IP65 protection rating.

The lighting rod HIGHLIGHTER, after installation, removal and repositioning of plug-in fixtures, guarantees an IP54 protection rating.

ISOLATION CLASS
CLASS III

MECHANICAL RESISTANCE
IK08 HIGHLIGHTER
IK07 PLUG-IN FIXTURES

Remote power supply 24Vdc not included.

The overall consumption of the plug-in fixtures on each HIGHLIGHTER Rod (regardless of its length 1, 2, 3 or 4m) must not exceed 60W.

The HIGHLIGHTER Rod can be shortened every 5cm on request with a surcharge (this process must be carried out exclusively by Simes).


COLORS HIGHLIGHTER SURFACE AND PLUG-IN

.01 White

.09 Black

COLOR HIGHLIGHTER RECESSED

.09 Black

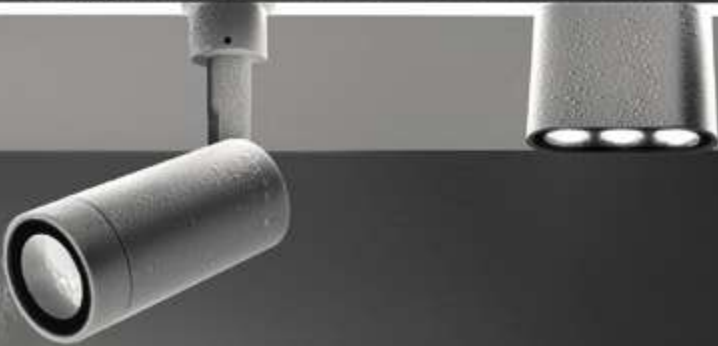




SURFACE VERSION

IP System has been developed to assure a special electrical IP rated connection that allows the installation of plug-in products anywhere in the system and their possible repositioning. (This operation shall be managed by a trained and qualified staff). The mechanical and electrical connection of all plug-in products to the light rod is via a double installation connection:

1. The two metal clips hook the black anodised aluminium profile externally and mechanically ensure the product plug-in to the light rod;
2. The pins, necessary for the 24V electrical connection, pierce the silicone strip housed in the profile and intercept a dedicated electrical line independent from the electrical line of the rod.

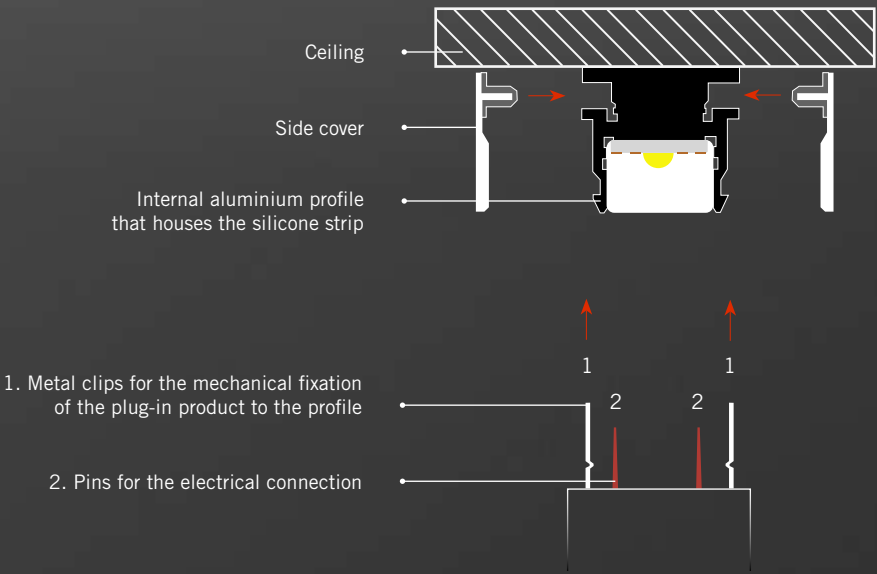


RECESSED VERSION

IP System is also available as recessed version for plasterboard. The recessed profile is supplied with its recessing box designed to host the plasterpanel and the profile which will be directly clipped to it and securely fixed with two screws.


The installation and the electrical connection of all the plug-in products to the profile, works as per the IP System surface mounted version and by using a template who steer the pins to pierce correctly the silicone rod and get in connection with the dedicated electrical lines.

To remove the plug-in products, it is necessary to unscrew the security screws and remove the profile from the recessing box by using a proper supplied tool. After that you proceed to remove the plug-in products as per the IP System surface version procedure.

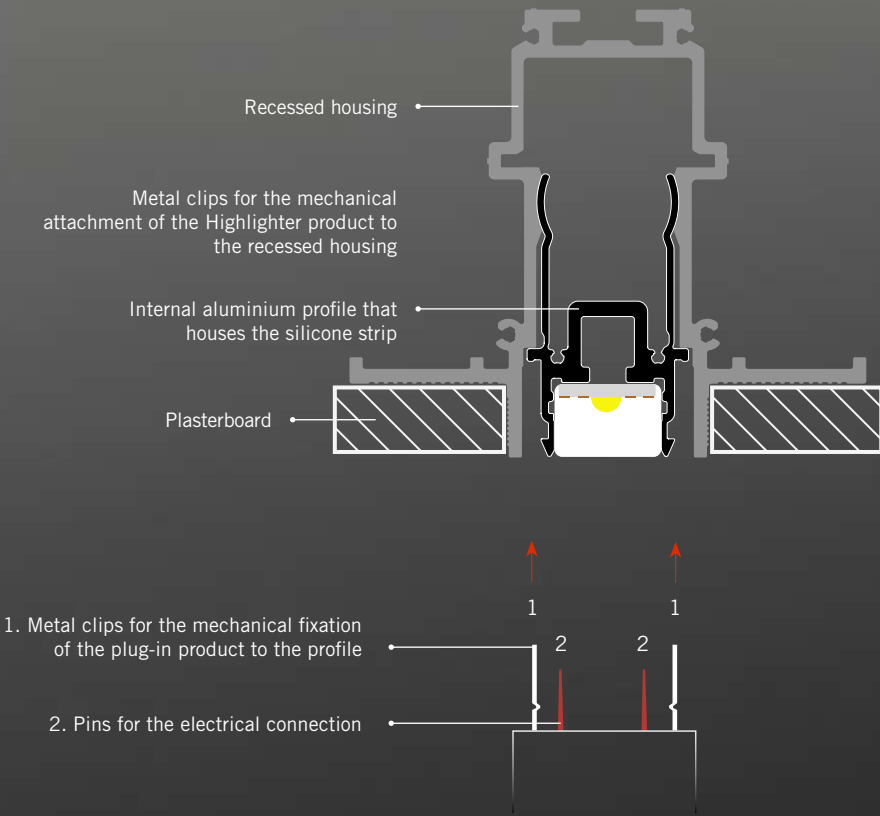

HIGHLIGHTER Surface


HIGHLIGHTER 1m / 2m / 3m / 4m
Luminous rod



- S.9001W 1,0m length
- S.9002W 2,0m length
- S.9003W 3,0m length
- S.9004W 4,0m length

LED MODULE 3000K CRI90 850lm/1m 15W/1m
(on request 2700K CRI90 800lm/1m)
(on request 4000K CRI90 893lm/1m)
24Vdc PWM

Requires constant voltage 24Vdc remote power supply
(page 522-523)




Accessories

JUNTIONS FOR HIGHLIGHTER SURFACE
In painted steel





Corner junction
S.9090



Linear junction
S.9091

HIGHLIGHTER Recessed (for plasterboard)



HIGHLIGHTER 1m / 2m / 3m / 4m
Luminous rod

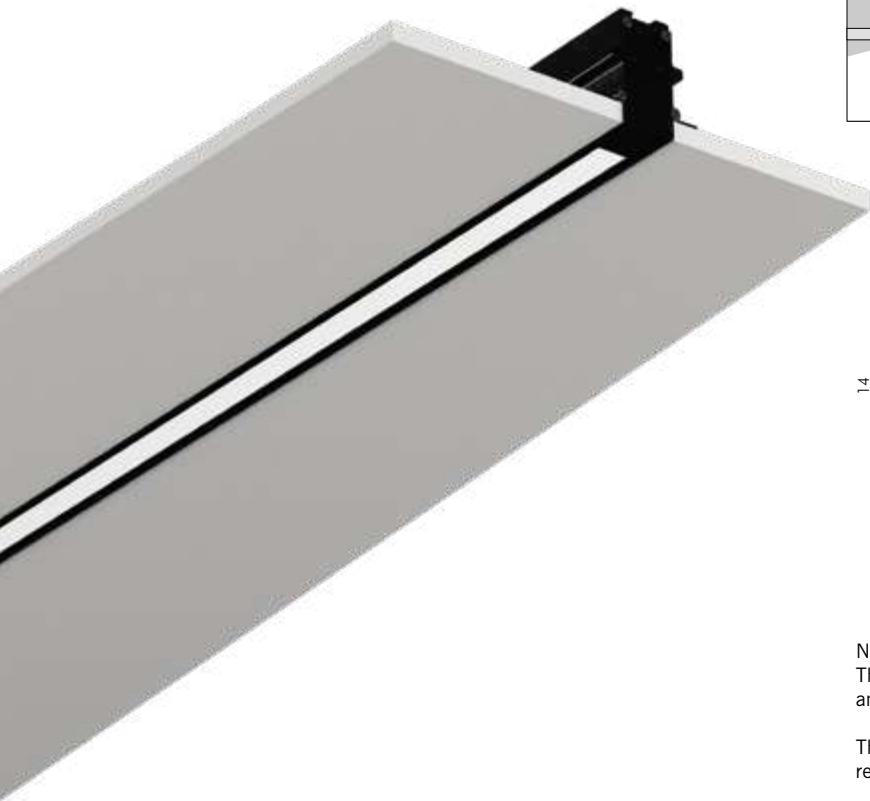

- S.9005W 1,0m length
- S.9006W 2,0m length
- S.9007W 3,0m length
- S.9008W 4,0m length

LED MODULE 3000K CRI90 850lm/1m 15W/1m
(on request 2700K CRI90 800lm/1m)
(on request 4000K CRI90 893lm/1m)
24Vdc PWM

Requires constant voltage 24Vdc remote power supply
(page 522-523)





N.B.
The lighting rod HIGHLIGHTER without plug-in products installed guarantees an IP65 protection rating.

The lighting rod HIGHLIGHTER with plug-in fixtures installed and never removed guarantees an IP65 protection rating.

The lighting rod HIGHLIGHTER, after installation, removal and repositioning of plug-in fixtures, guarantees an IP54 protection rating.





CEILING 2 LED plug-in
Fixed IP65 Downlight



S.9045W Wide Flood beam with reflectors
LED MODULE **3000K** CRI90 520lm 4,2W
(on request 2700K CRI90 480lm)
(on request 4000K CRI80 640lm)
Rated input power 5W 24Vdc PWM

24Vdc electrical connection from the HIGHLIGHTER lighting profile.

CEILING 4 LED plug-in
Fixed IP65 Downlight

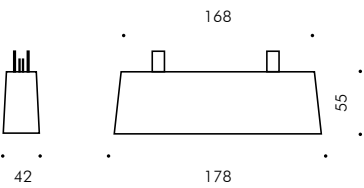



S.9050W Wide Flood beam with reflectors
LED MODULE **3000K** CRI90 1040lm 8,4W
(on request 2700K CRI90 960lm)
(on request 4000K CRI80 1280lm)
Rated input power 10W 24Vdc PWM

24Vdc electrical connection from the HIGHLIGHTER lighting profile.




FLOWER Plug-in

FLOWER 35 plug-in
Adjustable IP65 plug-in micro-projector with fixed optic





S.9010W Spot beam with lens
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
Rated input power 6,5W 24Vdc PWM




S.9011W Flood beam with lens
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
Rated input power 6,5W 24Vdc PWM

24Vdc electrical connection from the HIGHLIGHTER lighting profile.

FLOWER WITH ARM 35 plug-in
Adjustable IP65 plug-in micro-projector with fixed optic

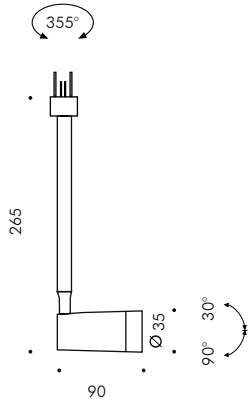



S.9015W Spot beam with lens
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
Rated input power 6,5W 24Vdc PWM



S.9016W Flood beam with lens
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
Rated input power 6,5W 24Vdc PWM

24Vdc electrical connection from the HIGHLIGHTER lighting profile.

FLOWER ZOOM 60 plug-in
Adjustable IP65 plug-in projector with adjustable optic



S.9020W From Medium to Flood beam with lens
LED MODULE **3000K** CRI90 852lm 8,6W
(on request 2700K CRI90 807lm)
(on request 4000K CRI80 1056lm)
Rated input power 9,5W 24Vdc PWM



24Vdc electrical connection from the HIGHLIGHTER lighting profile.




TRENDY Plug-in

SIMES

TRENDY plug-in
Fixed IP65 Downlight



S.9030W Spot beam with lenses
LED MODULE **3000K** CRI90 580lm 4,2W
(on request 2700K CRI90 536lm)
(on request 4000K CRI80 714lm)
Rated input power 5W 24Vdc PWM





S.9031W Flood beam with lenses
LED MODULE **3000K** CRI90 580lm 4,2W
(on request 2700K CRI90 536lm)
(on request 4000K CRI80 714lm)
Rated input power 5W 24Vdc PWM


24Vdc electrical connection from the HIGHLIGHTER lighting profile.

FINGER Plug-in

FINGER plug-in
Suspension IP65



S.9035W Flood beam with lens
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
Rated input power 6,5W 24Vdc PWM
Supplied with 1,0m adjustable cable



S.9036W Wide flood beam with lens
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
Rated input power 6,5W 24Vdc PWM
Supplied with 1,0m adjustable cable

24Vdc electrical connection from the HIGHLIGHTER lighting profile.



5CENTO Step light (surface mounted)

SIMES

5CENTO

5cento is a highly versatile step light, with limited dimensions and a slim design that can be installed in plasterboard or brickwork. It can be fixed to the traditional electrical junction box and house the driver directly in it, or it can be installed surface mounted. With only 22mm of protrusion, 5cento has been developed without visible screws that are totally concealed by a magnetic plate that fits perfectly onto the body of the luminaire. Available in different dimensions, 5cento has been conceived with a modular installation system, so that the larger version can be installed on the smaller electrical junction boxes. 5cento is particularly suitable for residential applications and represents a very user friendly installation system on all the various european standard electrical box.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Toughened glass diffuser. Not visible stainless steel A4 screws. Luminaire supplied with 0,5m bipolar flat cable. Silicone gaskets. Double powder paint.

Require constant voltage 24Vdc remote power supply.



REGISTERED DESIGN

- PROTECTION CLASS**
IP65
- ISOLATION CLASS**
CLASS III ⚡
- MECHANICAL RESISTANCE**
IK 07
- COLOUR:**
- .01 White
 - .14 Aluminium Grey
 - .24 Anthracite Grey




www.simes.it/5cento

Square





S.2200W
LED MODULE **3000K** CRI90 263lm 1,9W
(on request 2700K CRI90 242lm)
(on request 4000K CRI80 327lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)




Can be mounted onto the recessed junction box
Italian, French, English and German versions for plasterboard or masonry

Rectangular





S.2210W
LED MODULE **3000K** CRI90 438lm 3,1W
(on request 2700K CRI90 403lm)
(on request 4000K CRI80 544lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)




Can be mounted onto the rectangular recessed junction box
Italian, French, English and German versions for plasterboard or masonry

**The electrical junction box can house
the driver accessory S.2407 to drive the fixture.**

Rectangular long



S.2220W
LED MODULE **3000K** CRI90 700lm 5W
(on request 2700K CRI90 644lm)
(on request 4000K CRI80 896lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)



Can be mounted onto the rectangular recessed junction box
Italian, French, English and German versions for plasterboard or masonry


**The electrical junction box can house
the driver accessory S.2407 to drive the fixture.**



Private villa, Vicenza, Italy - Yakisugi design © DD Store

SKILL Bollard and step light (surface mounted)

S I M E S

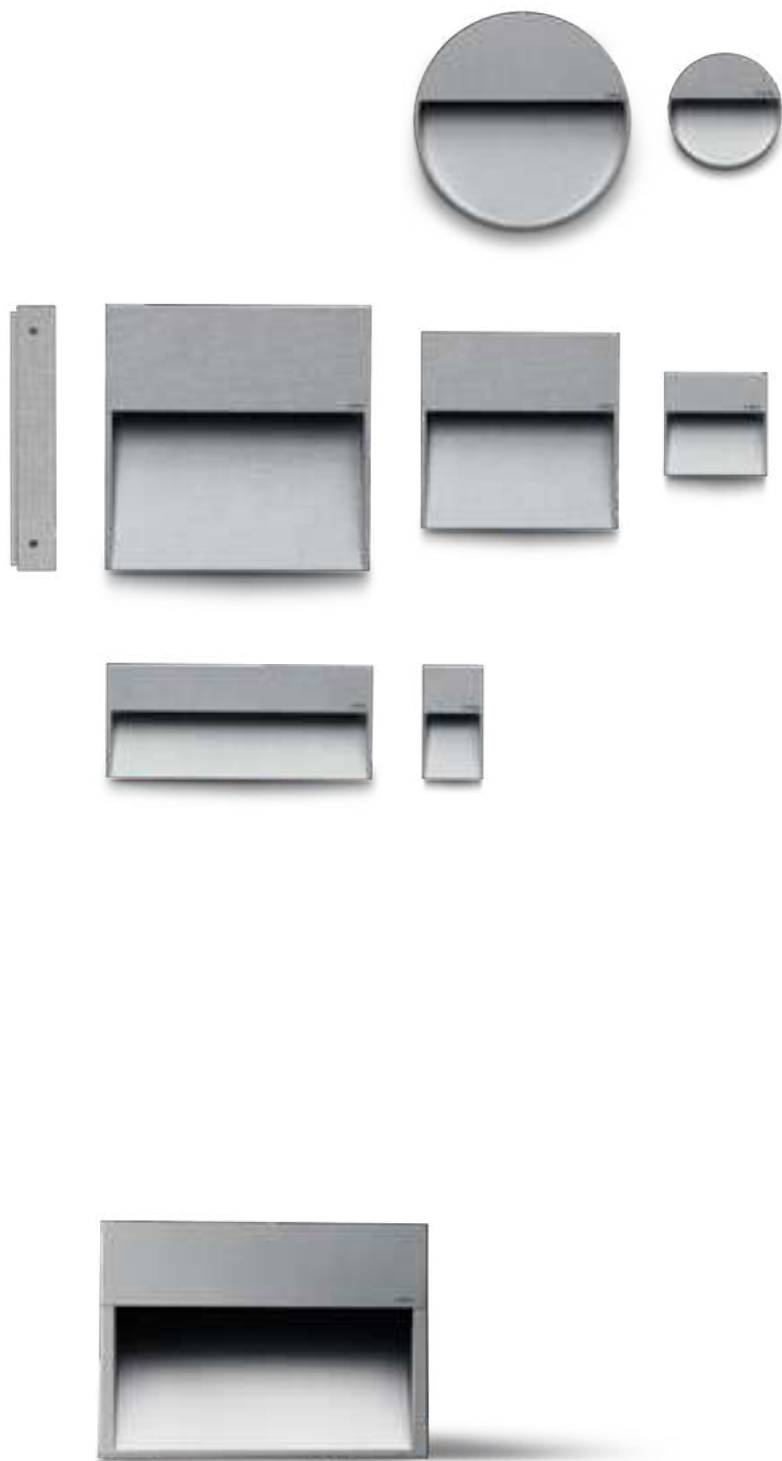

SKILL

Skill represents a new concept of outdoor lighting fitting; a recessed/not-recessed luminaire for wall mounting. It concentrates all the advantages of a recessed fitting, but without requiring a recessed box in the wall. Due to this easy and user friendly method of installation, Skill is a unique LED luminaire, assuring high lighting performance and total absence of glare. The most modern electronic technology is contained in the thickness of only 3 cm and provides an excellent quality of light while saving energy. Skill is available as round, square and rectangular versions. Skill becomes a wall recessed fitting totally flush with the wall by using a special recessed box and the fixing kit.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Toughened glass diffuser. Stainless steel A4 screws. Luminaire with double grommets. Silicone gaskets. Double powder paint.

MINISKILL
Luminaire supplied with 1,0m neoprene H05RN-F cable.

SKILL AND SKILL 270
Luminaire with double cable entry and grommet.

SKILL BOLLARD
Luminaire supplied neoprene H05RN-F cable and connector.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⊕ SKILL
CLASS II ⊞ SKILL BOLLARD
CLASS III ⊕ MINISKILL

MECHANICAL RESISTANCE
IK 06 SKILL BOLLARD
IK 07 MINISKILL VERTICAL
IK 08




COLOURS SKILL

- .01 White
- .14 Aluminium Grey
- .24 Anthracite Grey

COLOURS SKILL BOLLARD


- .14 Aluminium Grey
- .24 Anthracite Grey



MINISKILL Surface wall mounting


SIMES

Miniskill round 115mm




S.6270W
LED MODULE **3000K** CRI90 551lm 4,7W
(on request 2700K CRI90 507lm)
(on request 4000K CRI80 735lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)

Miniskill square 105mm



S.6250W
LED MODULE **3000K** CRI90 551lm 4,7W
(on request 2700K CRI90 507lm)
(on request 4000K CRI80 735lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)


Miniskill vertical 60mm




S.6230W
LED MODULE **3000K** CRI90 775lm 4W
(on request 2700K CRI90 652lm)
(on request 4000K CRI80 891lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)

MINISKILL Flush recessed wall mounting


Miniskill becomes a wall recessed fitting totally flush with the wall by using the recessing box and the fixing kit.



S.6278
RECESSED BOX + FIXING KIT
for MINISKILL ROUND
(suitable for fair faced concrete applications)
(extractor tools included)



S.6256
RECESSED BOX + FIXING KIT
for MINISKILL SQUARE
(suitable for fair faced concrete applications)
(extractor tools included)



S.6239
RECESSED BOX + FIXING KIT
for MINISKILL VERTICAL
(suitable for fair faced concrete applications)
(extractor tools included)



Private Villa, Sulzano, Brescia, Italy © ph. Mario Bertani / Simes S.p.A.

SKILL Surface wall mounting



SIMES

SKILL Flush recessed wall mounting

SIMES

Skill becomes a wall recessed fitting totally flush with the wall by using the recessing box and the fixing kit.



Skill round 220mm



S.6280W
LED MODULE **3000K** CRI90 1050lm 8,9W
(on request 2700K CRI90 997lm)
(on request 4000K CRI80 1400lm)
220V-240Vac 50/60Hz
Phase-cut dimmer

Version with DALI 2 / PUSH power supply
available on request with surcharge.



Skill square 200mm



S.6260W
LED MODULE **3000K** CRI90 1050lm 8,9W
(on request 2700K CRI90 997lm)
(on request 4000K CRI80 1400lm)
220V-240Vac 50/60Hz
Phase-cut dimmer



Version with DALI 2 / PUSH power supply
available on request with surcharge.

Skill square 270mm





S.6255W
LED MODULE **3000K** CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2800lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




Skill rectangular 270mm





S.6240W
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





S.6288
RECESSED BOX + FIXING KIT
for SKILL ROUND
(suitable for fair faced concrete applications)
(extractor tools included)



S.6268
RECESSED BOX + FIXING KIT
for SKILL SQUARE
(suitable for fair faced concrete applications)
(extractor tools included)




S.6257
RECESSED BOX + FIXING KIT
for SKILL SQUARE 270mm
(suitable for fair faced concrete applications)
(extractor tools included)





S.6247
RECESSED BOX + FIXING KIT
for SKILL RECTANGULAR
(suitable for fair faced concrete applications)
(extractor tools included)






S.6350W **Single emission**
LED MODULE **3000K** CRI90 1680lm 13,7W
(on request 2700K CRI90 1596lm)
(on request 4000K CRI80 1820lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.6360W **Double emission**
LED MODULE **3000K** CRI90 3360lm 27,5W
(on request 2700K CRI90 3192lm)
(on request 4000K CRI80 3640lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




Accessory



S.6359
FLANGE FOR SKILL BOLLARD
Flange to be anchored in concrete.



Private Villa, Isseo lake, Italy © ph. Simes S.p.A

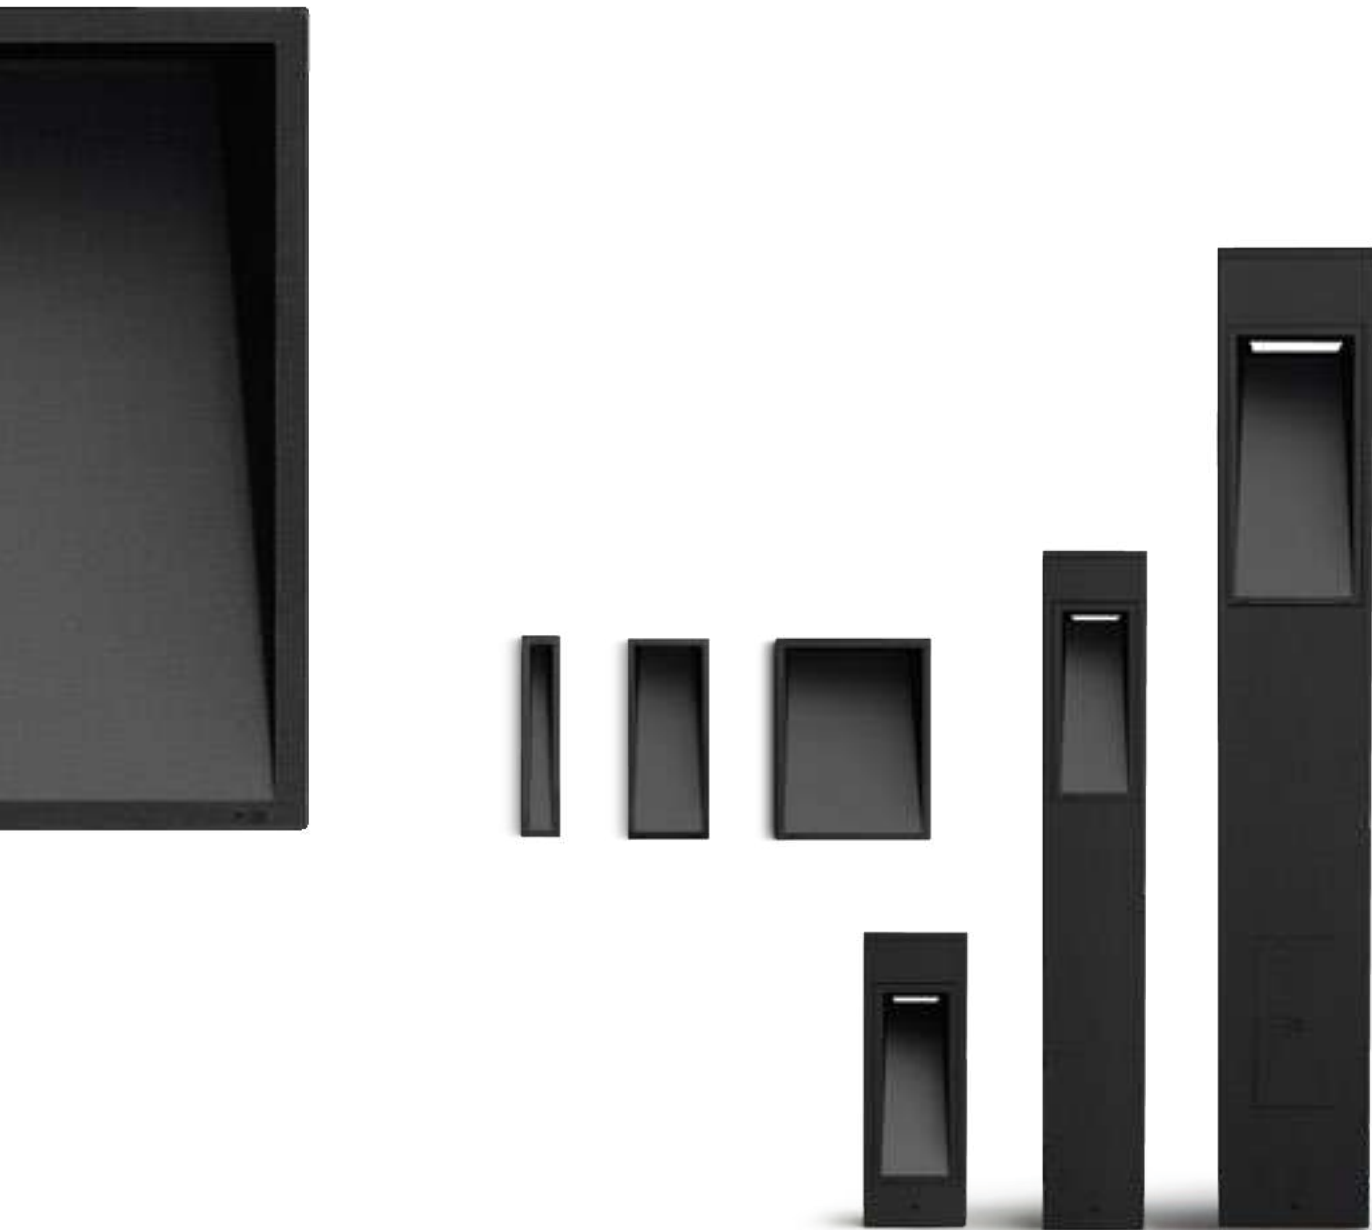

www.simes.it/blink

A clean and minimal design characterizes this elegant wall recessed created for discretely and comfortably illuminate outdoor areas, staircases, walkways. The perfect coplanarity of the luminaire with the wall and its light beams, homogeneous and glare-free, offer great visual comfort and create evocative atmospheres.

TECHNICAL DESCRIPTION
Die-cast aluminium housing, extruded aluminium structure (bollard version) with high corrosion resistance. Stainless steel A4 screws. Acid-etched glass diffuser. Silicone gaskets. Double powder paint.

WALL RECESSED
Spring lock system for a total absence of visible screws. Luminaire with one single cable entry and grommet.

BOLLARD
Luminaire supplied with neoprene H05RN-F cable.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⊕
CLASS II ⊞ MEGABLINKER BOLLARD



MECHANICAL RESISTANCE
IK 06

COLOURS

.09	Black
.14	Aluminium Grey



Microblinker





S.6060W
LED MODULE **3000K** CRI90 193lm 1,5W
(on request 2700K CRI90 178lm)
(on request 4000K CRI80 238lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included



S.6063
RECESSING BOX
for MICROBLINKER
70 x 300mm
Depth 105mm

Blinker


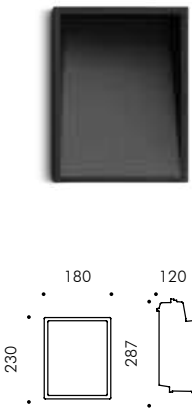


S.6080W
LED MODULE **3000K** CRI90 2854lm 20,8W
(on request 2700K CRI90 2713lm)
(on request 4000K CRI80 3498lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Recessing box not included



S.6083
RECESSING BOX
for BLINKER
190 x 300mm
Depth 130mm

Miniblinker

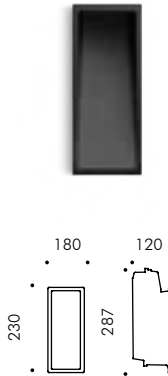


S.6070W
LED MODULE **3000K** CRI90 1828lm 13,6W
(on request 2700K CRI90 1738lm)
(on request 4000K CRI80 2241lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Recessing box not included




S.6073
RECESSING BOX
for MINIBLINKER
110 x 300mm
Depth 130mm


Miniblinker bollard H 350mm




S.6050W
LED MODULE **3000K** CRI90 1828lm 13,6W
(on request 2700K CRI90 1738lm)
(on request 4000K CRI80 2241lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



Miniblinker bollard H 800mm





S.6090W
LED MODULE **3000K** CRI90 1828lm 13,6W
(on request 2700K CRI90 1738lm)
(on request 4000K CRI80 2241lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.6309
FLANGE FOR MINIBLINKER BOLLARD
Ø 120mm flange to be anchored in concrete

Megablinker




S.6020W
LED MODULE **3000K** CRI90 4314lm 30W
(on request 2700K CRI90 4101lm)
(on request 4000K CRI80 5288lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Recessing box not included




S.6023
RECESSING BOX
for MEGABLINKER
187 x 433mm
Depth 170mm

Megablinker bollard H 1150mm



S.6040W
LED MODULE **3000K** CRI90 4314lm 30W
(on request 2700K CRI90 4101lm)
(on request 4000K CRI80 5288lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

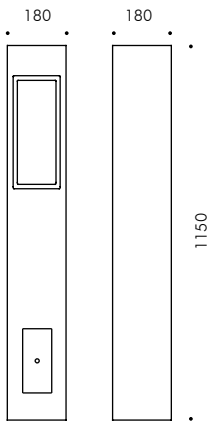

S.5310
FLANGE FOR MEGABLINKER BOLLARD
Ø 180mm flange to be anchored in concrete



The Blue Planet Building Foundation, Kastrup, Denmark - Arch. 3XN © ph. Tom Jersø

MARKER / WALKER Step light (wall recessed)

SIMES



www.simes.it/marker-walker

MARKER / WALKER

MARKER
Marker is a product to be recessed in the steps and stair risers. It is distinguished by the complete absence of glare, given by an optical system engineered to maximize the orientation of the light downwards. Even where the lighting fixture is installed at a height higher than the point of view, visual comfort and safety are totally guaranteed.

WALKER
Neat lines, essential shapes, high performances: Walker is a wall recessed luminaire developed to enlighten floors with a wide and well-directed light avoiding glare effects. The front frame, with no visible screws, is fixed through a spring locking system that preserves the elegant aesthetic.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Toughened glass diffuser. Stainless steel A4 screws. Luminaire with double cable entry and cable glands. Silicone gaskets. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⚡

MECHANICAL RESISTANCE
IK 10



COLOUR MARKER

.14 Aluminium Grey

COLOUR WALKER



.09 Black

.14 Aluminium Grey



MARKER

SIMES





S.6325W
LED MODULE **3000K** CRI90 873lm 5,3W
(on request 2700K CRI90 829lm)
(on request 4000K CRI80 1072lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Recessing box not included
Reinforced fixing system with screws



S.6329
RECESSING BOX for MARKER
305 x 79mm
Depth 86mm

WALKER




S.6320W
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-240Vac 50/60Hz
Phase-cut dimmer

Version with DALI 2 power supply available on request
with surcharge
Recessing box not included
Spring lock system for a total absence of visible screws



S.6329
RECESSING BOX for WALKER
305 x 79mm
Depth 86mm



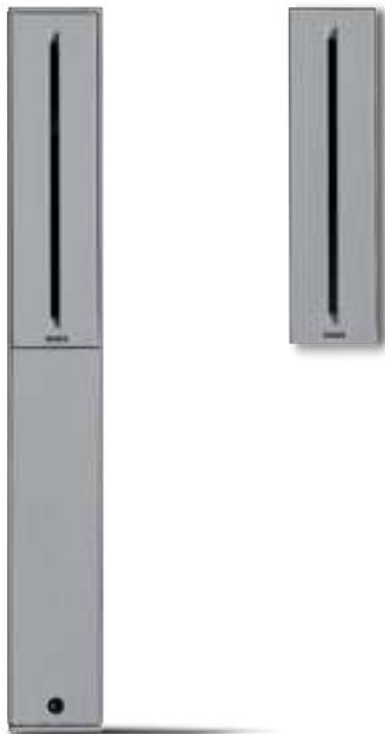

Steplight with a sharp and minimal design to be installed directly through a clip-on system to guarantee the total absence of visible screws. Step, equipped with a performant LED source, creates a marked blade of light on steps and walkways.

TECHNICAL DESCRIPTION
Die-cast aluminium housing and extruded aluminium structure (bollard version) with high corrosion resistance. Stainless steel A4 screws. Clear toughened glass diffuser. Silicone gaskets. Double powder paint.

WALL RECESSED
Luminaire with one single cable entry and grommet.

BOLLARD
Luminaire supplied with neoprene H05RN-F cable

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⚡

MECHANICAL RESISTANCE
IK 06


COLOURS WALL RECESSED

.01 White

.14 Aluminium Grey


COLOUR BOLLARD

.14 Aluminium Grey




www.simes.it/step


Step wall recessed



S.4655W
LED MODULE **3000K** CRI90 140lm 2,1W
(on request 2700K CRI90 133lm)
(on request 4000K CRI80 173lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included




S.4653
RECESSING BOX
for STEP WALL RECESSED
80 x 210mm
Depth 85mm




S.4660
MASK FOR PLASTER BOARD WALLS
for STEP WALL RECESSED
Hole 204x46mm

Step bollard H 450mm



S.4665W
LED MODULE **3000K** CRI90 140lm 2,1W
(on request 2700K CRI90 133lm)
(on request 4000K CRI80 173lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.4663
FLANGE for STEP BOLLARD
77 x 58mm flange to be anchored in concrete



Private House, Torri del Benaco, Verona, Italy - Finotti Architects © Ph. Mario Bertani

BRIQUE / DIAPASON Step light (wall recessed)

SIMES

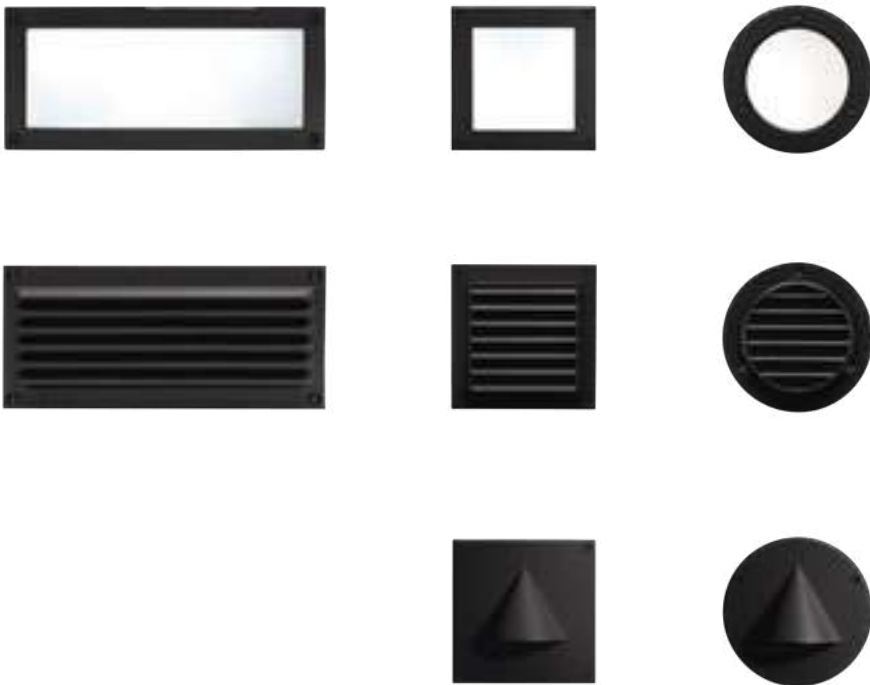

Brique and Diapason are wall recessed luminaires available in rectangular, square and round shape, each available in several variants, with front ring, with 45° grille or with visor. Classic design and low power consumption make Brique and Diapason an energy efficient lighting solution from Simes.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Opal toughened glass diffuser. Stainless steel A4 screws. Silicon gaskets. Double powder paint.

MINIDIAPASON / MINIBRIQUE
Luminaire with one single cable entry and grommet.

BRIQUE
Luminaire with double cable entry and grommet.

PROTECTION CLASS
IP54 MINIDIAPASON / MINIBRIQUE
IP65 BRIQUE

ISOLATION CLASS
CLASS I

MECHANICAL RESISTANCE
IK 07 MINIDIAPASON / MINIBRIQUE
IK 06 BRIQUE

- COLOURS**
- .09 Black
 - .14 Aluminium Grey





BRIQUE Round

SIMES

BRIQUE Square

SIMES

Minibrique round with ring





S.4533W
LED MODULE **3000K** CRI90 120lm 1,0W
(on request 2700K CRI90 114lm)
(on request 4000K CRI80 149lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included



S.4612
RECESSING BOX for MINIBRIQUE ROUND
Ø 98mm
Width 95mm

Minibrique square with ring





S.4543W
LED MODULE **3000K** CRI90 120lm 1,0W
(on request 2700K CRI90 114lm)
(on request 4000K CRI80 149lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included



S.4613
RECESSING BOX for MINIBRIQUE SQUARE
98 x 98mm
Width 95mm

Minibrique round with grille





S.4560W
LED MODULE **3000K** CRI90 120lm 1,0W
(on request 2700K CRI90 114lm)
(on request 4000K CRI80 149lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included



S.4612
RECESSING BOX for MINIBRIQUE ROUND
Ø 98mm
Width 95mm

Minibrique square with grille



S.4561W
LED MODULE **3000K** CRI90 120lm 1,0W
(on request 2700K CRI90 114lm)
(on request 4000K CRI80 149lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included





S.4613
RECESSING BOX for MINIBRIQUE SQUARE
98 x 98mm
Width 95mm

DIAPASON Round

DIAPASON Square

Minidiapason round





S.4563W
LED MODULE **3000K** CRI90 120lm 1,0W
(on request 2700K CRI90 114lm)
(on request 4000K CRI80 149lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included



S.4612
RECESSING BOX for MINIDIAPASON ROUND
Ø 98mm
Width 95mm

Minidiapason square





S.4573W
LED MODULE **3000K** CRI90 120lm 1,0W
(on request 2700K CRI90 114lm)
(on request 4000K CRI80 149lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included



S.4613
RECESSING BOX for MINIDIAPASON SQUARE
98 x 98mm
Width 95mm

Brique rectangular with ring





S.4511W
LED MODULE **3000K** CRI90 967lm 7,3W
(on request 2700K CRI90 893lm)
(on request 4000K CRI80 1368lm)
220V-240V AC 50/60Hz
Phase-cut dimmer
Recessing box not included

Version with DALI 2 power supply
available on request with surcharge



S.4503
RECESSING BOX for BRIQUE
220 x 92mm / Width 95mm

Brique rectangular with grille



S.4502W
LED MODULE **3000K** CRI90 967lm 7,3W
(on request 2700K CRI90 893lm)
(on request 4000K CRI80 1368lm)
220V-240V AC 50/60Hz
Phase-cut dimmer
Recessing box not included

Version with DALI 2 power supply
available on request with surcharge.



S.4503
RECESSING BOX for BRIQUE
220 x 92mm / Width 95mm





Petit as wall applique bigger version or as step light smaller one, suggests a creative use of light. Petit applique, conceived for the higher part of the wall, draws a vertical sharp light effect without glaring. In the steplight version instead, the optical system has been conceived to direct the light towards the walkway and enhances the space. Both versions have reduced dimensions and maintain the same design language within the project. Petit is an IP rated outdoor luminaire that can be used also in humid indoor ambiances, as Wellness and Spa.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Toughened glass diffuser. Stainless steel A4 screws. Luminaire supplied with 5,0m neoprene H05RN-F cable. Silicone gaskets. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65
ISOLATION CLASS
CLASS III ⚡ STEP LIGHT
CLASS I ⚡ APPLIQUE
MECHANICAL RESISTANCE
IK 07


- COLOURS**
- .01 White
 - .14 Aluminium Grey
 - .24 Anthracite Grey




www.simes.it/petit

PETIT Applique


SIMES




S.1810W
LED MODULE **3000K** CRI90 1342lm 12,5W
(on request 2700K CRI90 1246lm)
(on request 4000K CRI80 1658lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



MINIPETIT Surface step light



S.1801W
LED MODULE **3000K** CRI90 257lm 2,8W
(on request 2700K CRI90 244lm)
(on request 4000K CRI80 314lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)



Private villa, Italy - Arch. Varischi e Geom. Berlandis © ph. Mario Berlani

Apply is a family composed of wall applique, ceiling and bollard, characterized by small size and maximized performance. Apply ceiling is available in square version while Apply wall applique is available in square and rectangular version, both mono or double emission. Apply bollard is able to orient the head of 20° towards the walkway. The entire family is characterized by the total absence of visible screws and the rearward position of the light source guarantee's maximum visual comfort and a clear and sharp lighting effect.

TECHNICAL DESCRIPTION
Die-cast aluminium housing, extruded aluminium structure with high corrosion resistance. Nylon black shutter. Toughened transparent glass diffuser. Stainless steel A4 screws. Luminaire supplied with 5,0m neoprene H05RN-F cable. Silicone gaskets. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⊕ APPLY SQUARE
CLASS II ⊞ APPLY RECTANGULAR

MECHANICAL RESISTANCE
IK 06 APPLY BOLLARD
IK 07 APPLY WALL EFFECT and CEILING

COLOURS APPLIQUE / CEILING



- .01 White (black optic)
- .09 Black (black optic)
- .20 Burnished Bronze (black optic)

COLOURS BOLLARD


- .09 Black (black optic)
- .20 Burnished Bronze (black optic)




APPLY Square ceiling





S.2558W **Single emission 120°**
LED MODULE **3000K** CRI90 987lm 8,6W
(on request 2700K CRI90 916lm)
(on request 4000K CRI80 1219lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




APPLY Square applique



S.2555W **Single emission 120°**
LED MODULE **3000K** CRI90 987lm 8,6W
(on request 2700K CRI90 916lm)
(on request 4000K CRI80 1219lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.2557W **Duoble emission 120°**
2 x LED MODULE **3000K** CRI90 987lm 8,6W
(on request 2700K CRI90 916lm)
(on request 4000K CRI80 1219lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





SIMES







S.2550W **Single emission 90°**
LED MODULE **3000K** CRI90 455lm 4,0W
(on request 2700K CRI90 431lm)
(on request 4000K CRI80 564lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.2552W **Double emission 2x90°**
2 x LED MODULE **3000K** CRI90 455lm 4,0W
(on request 2700K CRI90 431lm)
(on request 4000K CRI80 564lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



APPLY Rectangular bollard version with adjustable optic



S.2560W **Single emission 90°**
LED MODULE **3000K** CRI90 455lm 4,0W
(on request 2700K CRI90 431lm)
(on request 4000K CRI80 564lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

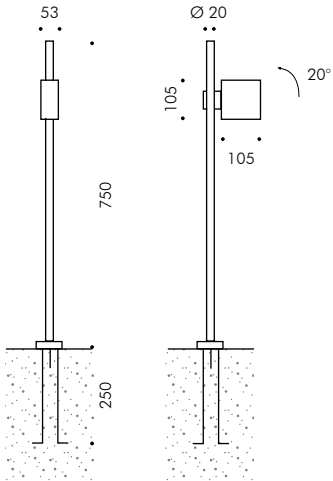

Look is an elegant geometric luminaire in aluminum and glass, minimal and compact. A small overhang that can be installed on the wall or on its bollard. Look family is available as wall appliques and bollards of many different sizes. Mini Look bollard is in 24V with remote power supply, to contain as much as possible its dimensions, while all the other versions, are available with integrated power supply. Look Applique versions are offered mono or bi-emission, while Look Bollard is offered with single or double side lighting.

TECHNICAL DESCRIPTION
Die-cast aluminium housing, extruded aluminium structure (bollard version) with high corrosion resistance. Toughened glass diffuser. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

MINILOOK L 220mm
Luminaire supplied with 1,0m neoprene H05RN-F cable.

LOOK L 290mm APPLIQUE
Luminaire with one single cable entry and grommet.

BOLLARD
Luminaire supplied with neoprene H05RN-F cable and connector.

REGISTERED DESIGN

PROTECTION CLASS
IP65



ISOLATION CLASS
CLASS I ⊕ LOOK 290mm (Applique)
CLASS II □
CLASS III ⚡ MICROLOOK

MECHANICAL RESISTANCE
IK 04 LOOK APPLIQUE 290mm
IK 06 MINILOOK 220mm,
LOOK BOLLARD 290mm



COLOURS

- .01 White
- .14 Aluminium Grey
- .20 Burnished Bronze
- .24 Anthracite Grey


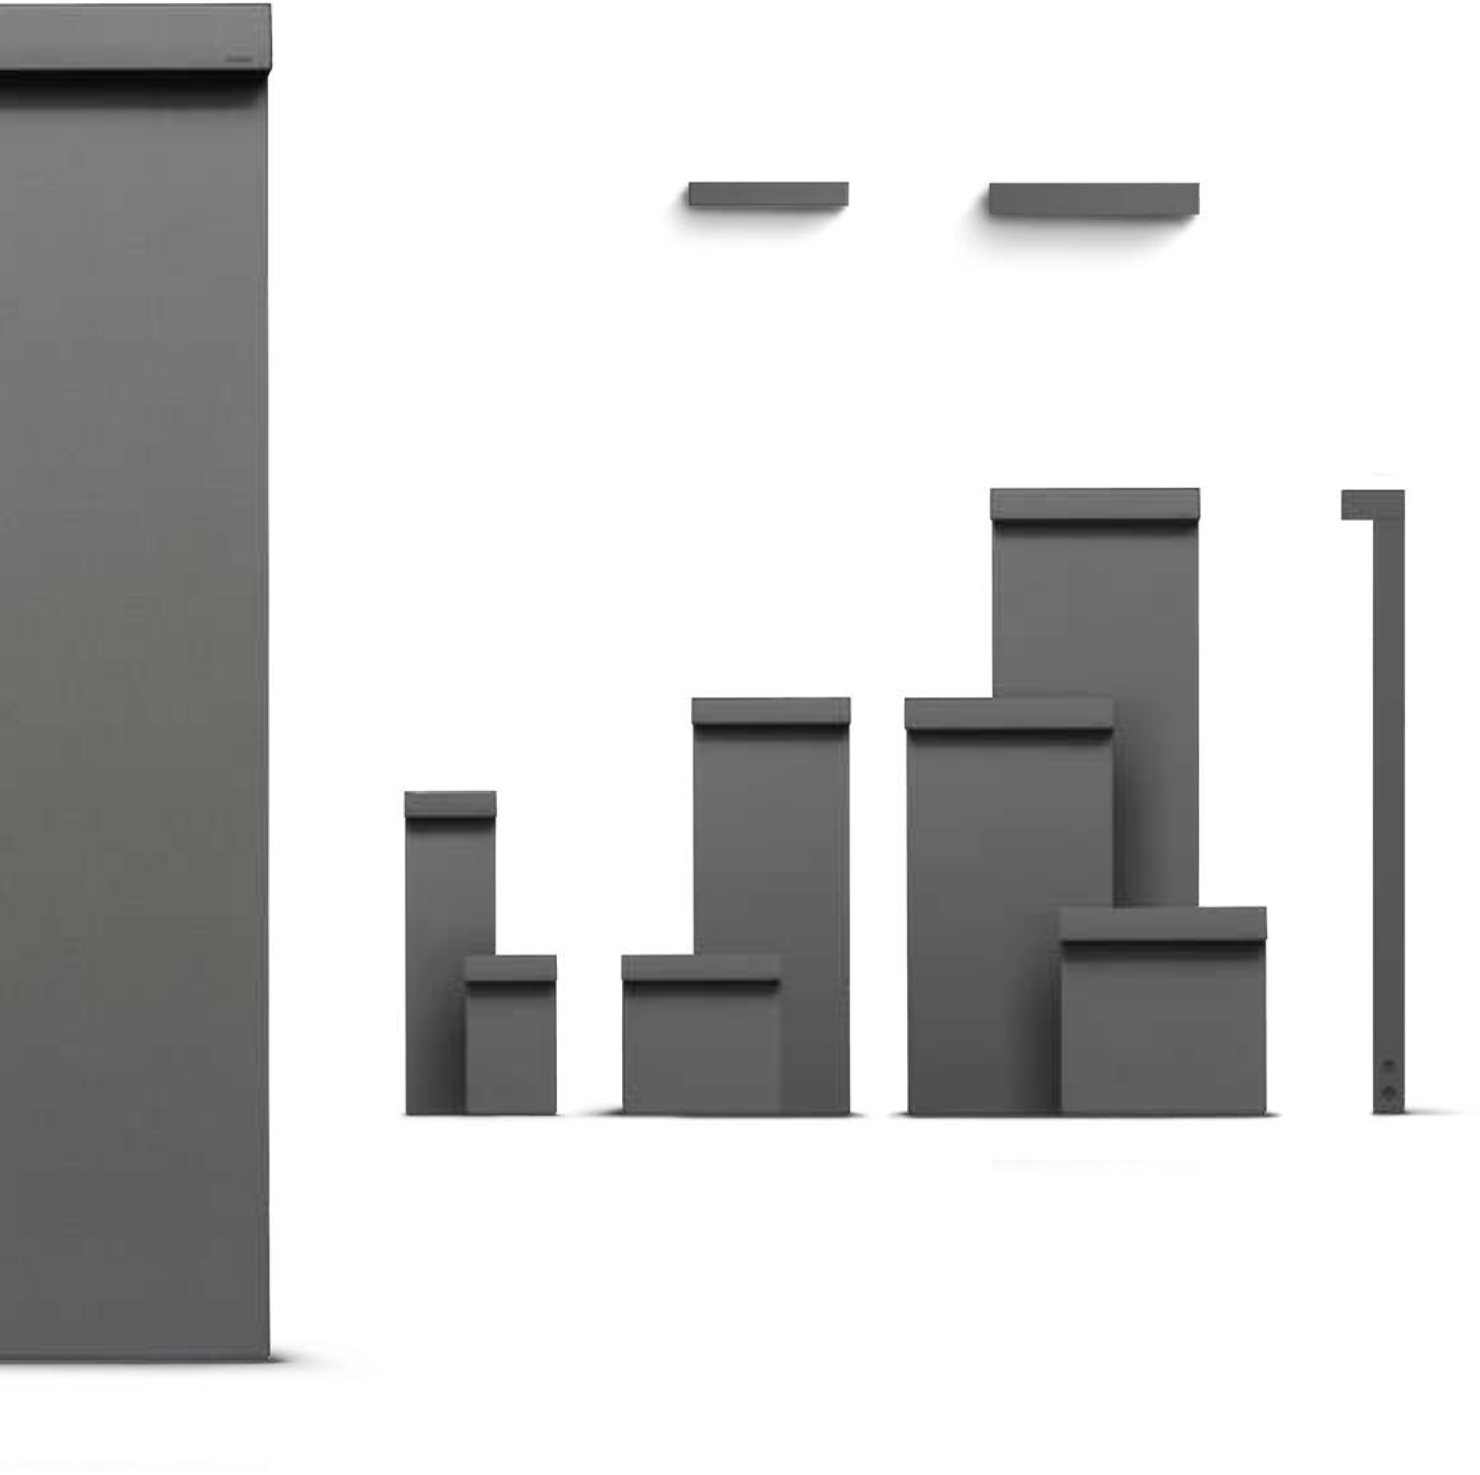


www.simes.it/look





MINILOOK Applique 220mm


SIMES

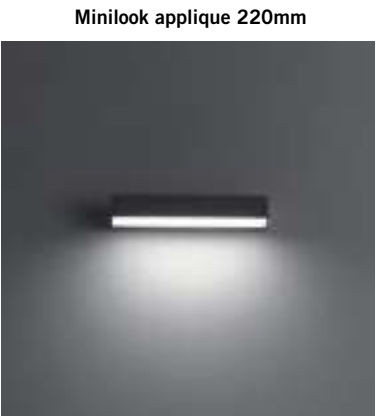


S.7201W **Single emission**
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.7202W **Double emission**
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable






LOOK Applique 290mm




S.7250W **Single emission**
LED MODULE **3000K** CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Phase-cut dimmer

Version with DALI 2 / PUSH power supply available on request with surcharge.

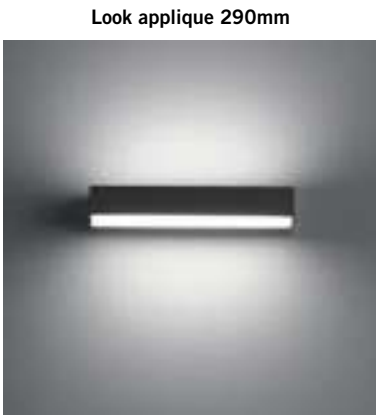

S.7252W **Double emission**
LED MODULE **3000K** CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Phase-cut dimmer



Version with DALI 2 / PUSH power supply available on request with surcharge.



MICROLOOK Bollard 125mm



SIMES

Microlook bollard H 220mm

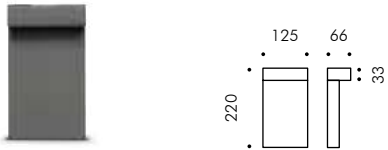

S.7216W Single emission
LED MODULE **3000K** CRI90 457lm 3,3W
(on request 2700K CRI90 434lm)
(on request 4000K CRI80 560lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)

Microlook bollard H 450mm

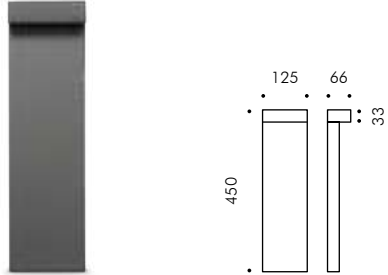

S.7217W Single emission
LED MODULE **3000K** CRI90 457lm 3,3W
(on request 2700K CRI90 434lm)
(on request 4000K CRI80 560lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)



Accessory




S.7219
FLANGE FOR MICROLOOK BOLLARD 125mm
Flange to be anchored in concrete
for S.7216W and S.7217W.

MINILOOK Bollard 220mm

Minilook bollard H 220mm


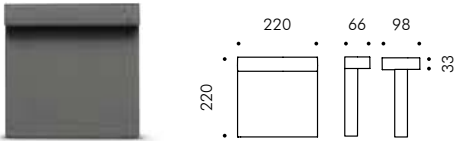


S.7206W Single emission
LED MODULE **3000K** CRI90 1050lm 8,9W
(on request 2700K CRI90 997lm)
(on request 4000K CRI80 1400lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.7215W Double emission
2 x LED MODULE **3000K** CRI90 1050lm 8,9W
(on request 2700K CRI90 997lm)
(on request 4000K CRI80 1400lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Minilook bollard H 580mm

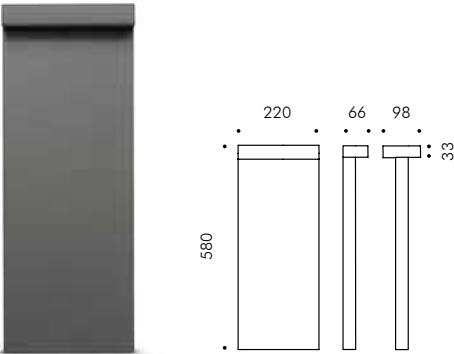

S.7211W Single emission
LED MODULE **3000K** CRI90 1050lm 8,9W
(on request 2700K CRI90 997lm)
(on request 4000K CRI80 1400lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.7220W Double emission
2 x LED MODULE **3000K** CRI90 1050lm 8,9W
(on request 2700K CRI90 997lm)
(on request 4000K CRI80 1400lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Accessory

S.7249
FLANGE FOR MINILOOK BOLLARD 220mm
Flange to be anchored in concrete
for S.7206W, S.7215W, S.7211W and S.7220W.





Uniquum Advocaten, Kortrijk, Belgium - Klaré architecten © Annick Verminnen


LOOK Bollard 290mm

SIMES

Look bollard H 290mm


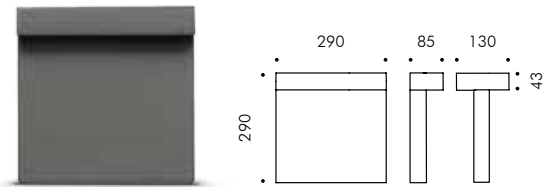


S.7260W Single emission
LED MODULE **3000K**
CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.7265W Double emission
2 x LED MODULE **3000K**
CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Look bollard H 580mm


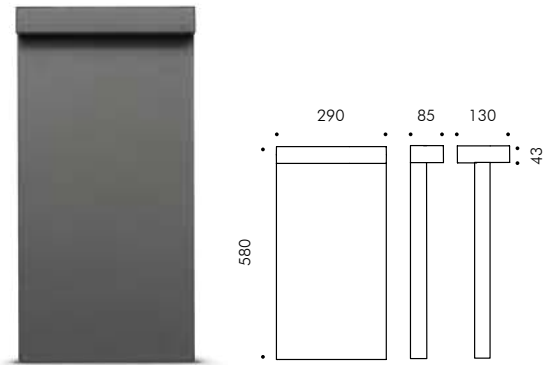


S.7261W Single emission
LED MODULE **3000K**
CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.7266W Double emission
2 x LED MODULE **3000K**
CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Look bollard H 870mm

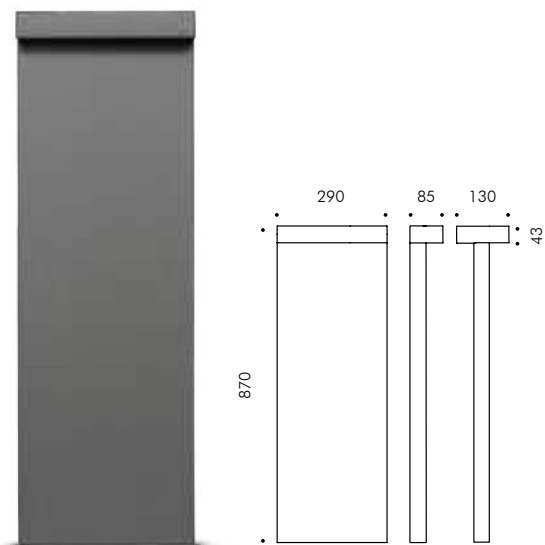

S.7262W Single emission
LED MODULE **3000K**
CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.7267W Double emission
2 x LED MODULE **3000K**
CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



Accessory
S.7269
FLANGE FOR LOOK BOLLARD 290mm
Flange to be anchored in concrete
for S.7260W, S.7265W, S.7261W,
S.7266W, S.7262W and S.7267W.



Filmar Headquarter, Zocco di Erbusco, Brescia, Italy - Arch. Giuliano Venturelli © Ph. Mario Bertani

PLAN Wall mounted

SIMES

PLAN

Characterized by simple but rigorous design and a soft and diffused beam, Plan is LED wall mounted luminaire in single or double emission. Its protruding frosted glass creates a pleasant and elegant luminous sign.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Toughened acid-etched decorative glass diffuser. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

MINIPLAN HORIZONTAL
Luminaire supplied with 1,0m neoprene H05RN-F cable.

PLAN HORIZONTAL
Luminaire with one single cable entry and grommet.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⊕ PLAN HORIZONTAL
CLASS II ⊞ MINIPLAN HORIZONTAL

MECHANICAL RESISTANCE
IK 06




COLOURS



- .01 White
- .14 Aluminium Grey




MINIPLAN Horizontal




S.3883W Single emission
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm
(on request 4000K CRI80 1751lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.3884W Double emission
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm
(on request 4000K CRI80 1751lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





PLAN Horizontal




S.3893W Single emission
LED MODULE **3000K** CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Phase-cut dimmer

Version with DALI 2 / PUSH power supply
available on request with surcharge.



S.3894W Double emission
LED MODULE **3000K** CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Phase-cut dimmer

Version with DALI 2 / PUSH power supply
available on request with surcharge.



SIMES



Pocket is a slim wall applique in single and double emission that designs striking lighting effects on the wall surface. The fixture is installed through a clip-on system and a special base anchored to the wall, leading to a user friendly installation. The complete range is characterized by clean and rounded shapes with no visible screws, enhancing its elegant but sober design. Pocket is available in two square and two rectangular versions.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Toughened glass diffuser. Stainless steel A4 screws. Luminaire supplied with 5,0m neoprene H05RN-F cable. Electronic power supply included. Silicone gaskets. Double powder paint.

REGISTERED DESIGN


PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II □ POCKET LONG
CLASS I ⊕

MECHANICAL RESISTANCE
IK 06

COLOURS

- .01 White
- .14 Aluminium Grey
- .24 Anthracite Grey




www.simes.it/pocket

POCKET Square


SIMES

POCKET Rectangular



SIMES



S.1850W Single emission
LED MODULE **3000K** CRI90 625lm 4,5W
(on request 2700K CRI90 575lm)
(on request 4000K CRI80 725lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.1851W Double emission
2 x LED MODULE **3000K** CRI90 625lm 4,5W
(on request 2700K CRI90 575lm)
(on request 4000K CRI80 725lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.1870W Single emission
LED MODULE **3000K** CRI90 1760lm 12,5W
(on request 2700K CRI90 1619lm)
(on request 4000K CRI80 2042lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply
available on request with surcharge.




S.1871W Double emission
2 x LED MODULE **3000K** CRI90 1760lm 12,5W
(on request 2700K CRI90 1619lm)
(on request 4000K CRI80 2042lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply
available on request with surcharge.




POCKET Square



POCKET Long




S.1860W Single emission
LED MODULE **3000K** CRI90 1250lm 8,8W
(on request 2700K CRI90 1150lm)
(on request 4000K CRI80 1450lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.1861W Double emission
2 x LED MODULE **3000K** CRI90 1250lm 8,8W
(on request 2700K CRI90 1150lm)
(on request 4000K CRI80 1450lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.1880W Single emission
LED MODULE **3000K** CRI90 2916lm 20,6W
(on request 2700K CRI90 2683lm)
(on request 4000K CRI80 3383lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.1881W Double emission
2 x LED MODULE **3000K** CRI90 2916lm 20,6W
(on request 2700K CRI90 2683lm)
(on request 4000K CRI80 3383lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





APPEAL Wall mounted

SIMES

APPEAL

Appeal is an outdoor wall luminaire with indirect light all around the body. A special clip-on system allow to fix the front cover in a central or offset position, thus choosing the preferred light distribution. The LED source is shielded by an anti-uv polycarbonate diffuser. The total absence of glare and visual comfort is guaranteed by the front cover that characterizes its minimal aesthetic.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Stainless steel A4 screws. Clear polycarbonate UV stop diffuser. Luminaire supplied with 2,0m neoprene H05RN-F cable. Silicone gaskets. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP54

ISOLATION CLASS
CLASS II ☐

MECHANICAL RESISTANCE
IK 08


COLOURS

- .01


White
- .14

Aluminium Grey







S.6400W
LED MODULE **3000K** CRI90 1786lm 10,9W
(on request 2700K CRI90 1696lm)
(on request 4000K CRI80 1910lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




Symmetrical fixing




The pin is fixed in a central position to the cover. The light is evenly distributed on all sides.

Asymmetrical fixing 1



The pin is fixed in a offset position with the shorter part facing upwards. The light is more distributed upwards.

Asymmetrical fixing 2



The pin is fixed in a offset position with the shorter part facing down. The light is distributed more downward.



Private Villa, Isco Lake, Italy © ph. Simes S.p.A.

Cool is a simple void volume that diffuses indirect light through a very thin circuit placed in adherence to the glass that protects it. Designed in different versions and sizes, wall or bollard, the Cool family offers a new way to illuminate the exterior, drawing real "solid and voids of light".

TECHNICAL DESCRIPTION
Die-cast aluminium housing, extruded aluminium structure (bollard version) with high corrosion resistance. Toughened glass diffuser. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

MINICOOL L 220mm
Luminaire supplied with 1,0m neoprene H05RN-F cable.

MINICOOL L 220mm BOLLARD
Luminaire supplied with neoprene H05RN-F cable and connector.

COOL L 290mm APPLIQUE
Luminaire with one single cable entry and grommet.

COOL L 290mm BOLLARD
Luminaire supplied with neoprene H05RN-F cable and connector.

PROTECTION CLASS
IP54

ISOLATION CLASS
CLASS II ☐ MINICOOL L 220 mm
CLASS I ⊕ COOL L 290 mm

MECHANICAL RESISTANCE
IK 06

COLOURS

- .01 White
- .09 Black
- .14 Aluminium Grey

REGISTERED DESIGN




www.simes.it/cool




MINICOOL 220mm

SIMES


Minicool Applique 220mm




S.7231W
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable




Minicool Bollard H 220mm




S.7236W
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable



Minicool Bollard H 580mm



S.7241W
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable



Accessory




S.7249
FLANGE FOR MINICOOL BOLLARD
flange to be anchored in concrete
for S.7236W and S.7241W




COOL 290mm

SIMES

Cool Applique 290mm




S.7270W
LED MODULE **3000K** CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Phase-cut dimmer




Version with DALI 2 / PUSH power supply
available on request with surcharge.

Cool Bollard H 290mm




S.7245W
LED MODULE **3000K** CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Phase-cut dimmer




Version with DALI 2 / PUSH power supply
available on request with surcharge.

Cool Bollard H 580mm



S.7246W
LED MODULE **3000K** CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2801lm)
220V-240Vac 50/60Hz
Phase-cut dimmer



Version with DALI 2 / PUSH power supply
available on request with surcharge.



Accessory
S.7269
FLANGE FOR COOL BOLLARD
Flange to be anchored in concrete
for S.7245W and S.7246W



Private villa, Forte dei Marmi, Lucca, Italy - Arch. Carlo Ceresoli © ph. Mauro Pini



Cool Square, like the Rectangular version, is expressed with a perfectly diffused indirect light through a void volume. Its extruded shapes give a feeling of solidity and open the door to many applications. The family is available in three sizes as wall and bollard, all with integrated power supply.

TECHNICAL DESCRIPTION
Die-cast aluminium housing, extruded aluminium structure (bollard version) with high corrosion resistance. Toughened glass diffuser. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

MICROCOOL SQUARE APPLIQUE
Luminaire supplied with 1,5m neoprene H05RN-F cable.

MINICOOL AND COOL SQUARE APPLIQUE
Luminaire with one single cable entry and grommet.

BOLLARDS
Luminaire supplied with neoprene H05RN-F cable and connector.

REGISTERED DESIGN

PROTECTION CLASS
IP54

ISOLATION CLASS
CLASS I

MECHANICAL RESISTANCE
IK 06



COLOURS

.01 White

.09 Black

.14 Aluminium Grey




www.simes.it/cool-square

MICROCOOL SQUARE 95mm


SIMES

Microcool Square applique



S.7282W
LED MODULE **3000K** CRI90 630lm 5,3W
(on request 2700K CRI90 598lm)
(on request 4000K CRI80 839lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable

Microcool Square bollard H 290mm




S.7287W
LED MODULE **3000K** CRI90 630lm 5,3W
(on request 2700K CRI90 598lm)
(on request 4000K CRI80 839lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable



S.7284
FLANGE FOR MICROCOOL SQUARE BOLLARD
Flange to be anchored in concrete for S.7287W



MINICOOL SQUARE 150mm

Minicool Square applique



S.7281W
LED MODULE **3000K** CRI90 1260lm 10,7W
(on request 2700K CRI90 1197lm)
(on request 4000K CRI80 1680lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable

Minicool Square bollard H 450mm

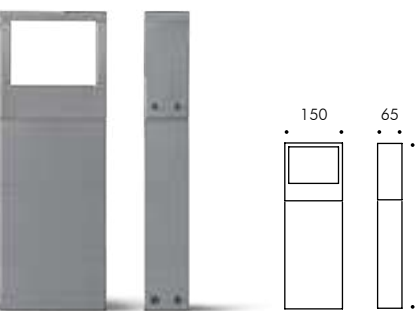

S.7286W
LED MODULE **3000K** CRI90 1260lm 10,7W
(on request 2700K CRI90 1197lm)
(on request 4000K CRI80 1680lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable




S.7288
FLANGE FOR MINICOOL SQUARE BOLLARD
Flange to be anchored in concrete for S.7286W

MAINA Headquarter Arch. Gianni Amaudo, Fossano, Cuneo, Italy © Ph. Mario Bertani

COOL SQUARE 220mm



SIMES

Cool Square applique





S.7280W
LED MODULE **3000K** CRI90 2625lm 22,3W
(on request 2700K CRI90 2493lm)
(on request 4000K CRI80 3501lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Cool Square bollard H 580mm

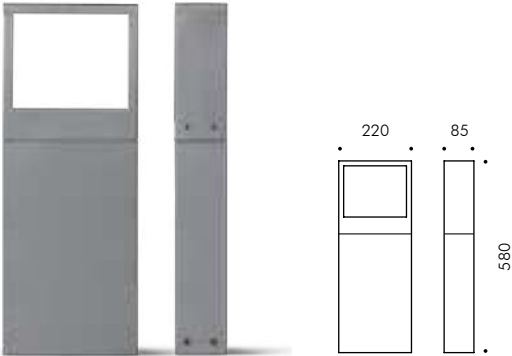



S.7285W
LED MODULE **3000K** CRI90 2625lm 22,3W
(on request 2700K CRI90 2493lm)
(on request 4000K CRI80 3501lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Cool Square long H 580mm

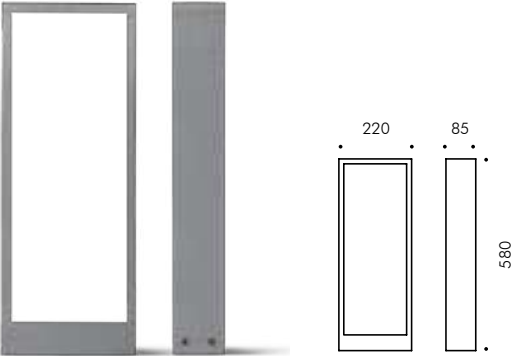

S.7290W
LED MODULE **3000K** CRI90 2625lm 22,3W
(on request 2700K CRI90 2493lm)
(on request 4000K CRI80 3501lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Cool Square long bollard H 1160mm

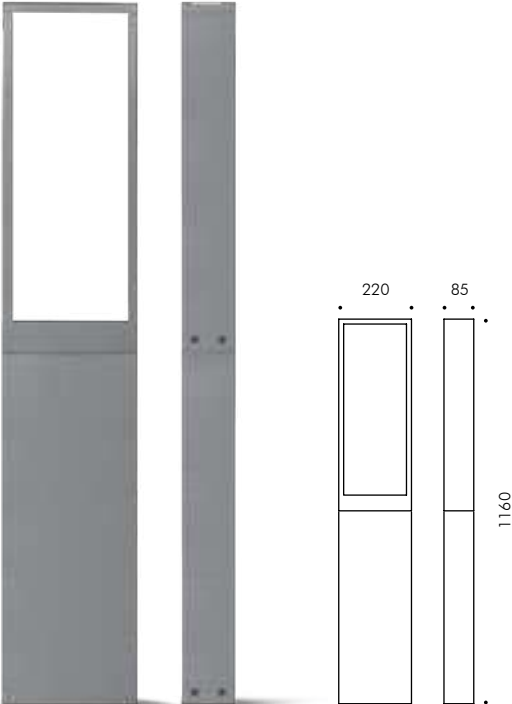

S.7295W
LED MODULE **3000K** CRI90 2625lm 22,3W
(on request 2700K CRI90 2493lm)
(on request 4000K CRI80 3501lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


Accessory



S.7289
FLANGE FOR COOL SQUARE BOLLARD
Flange to be anchored in concrete
for S.7285W, S.7290W and S.7295W



Private House, Torri del Benaco, Verona, Italy - Finotti Architects © Ph. Mario Bertani

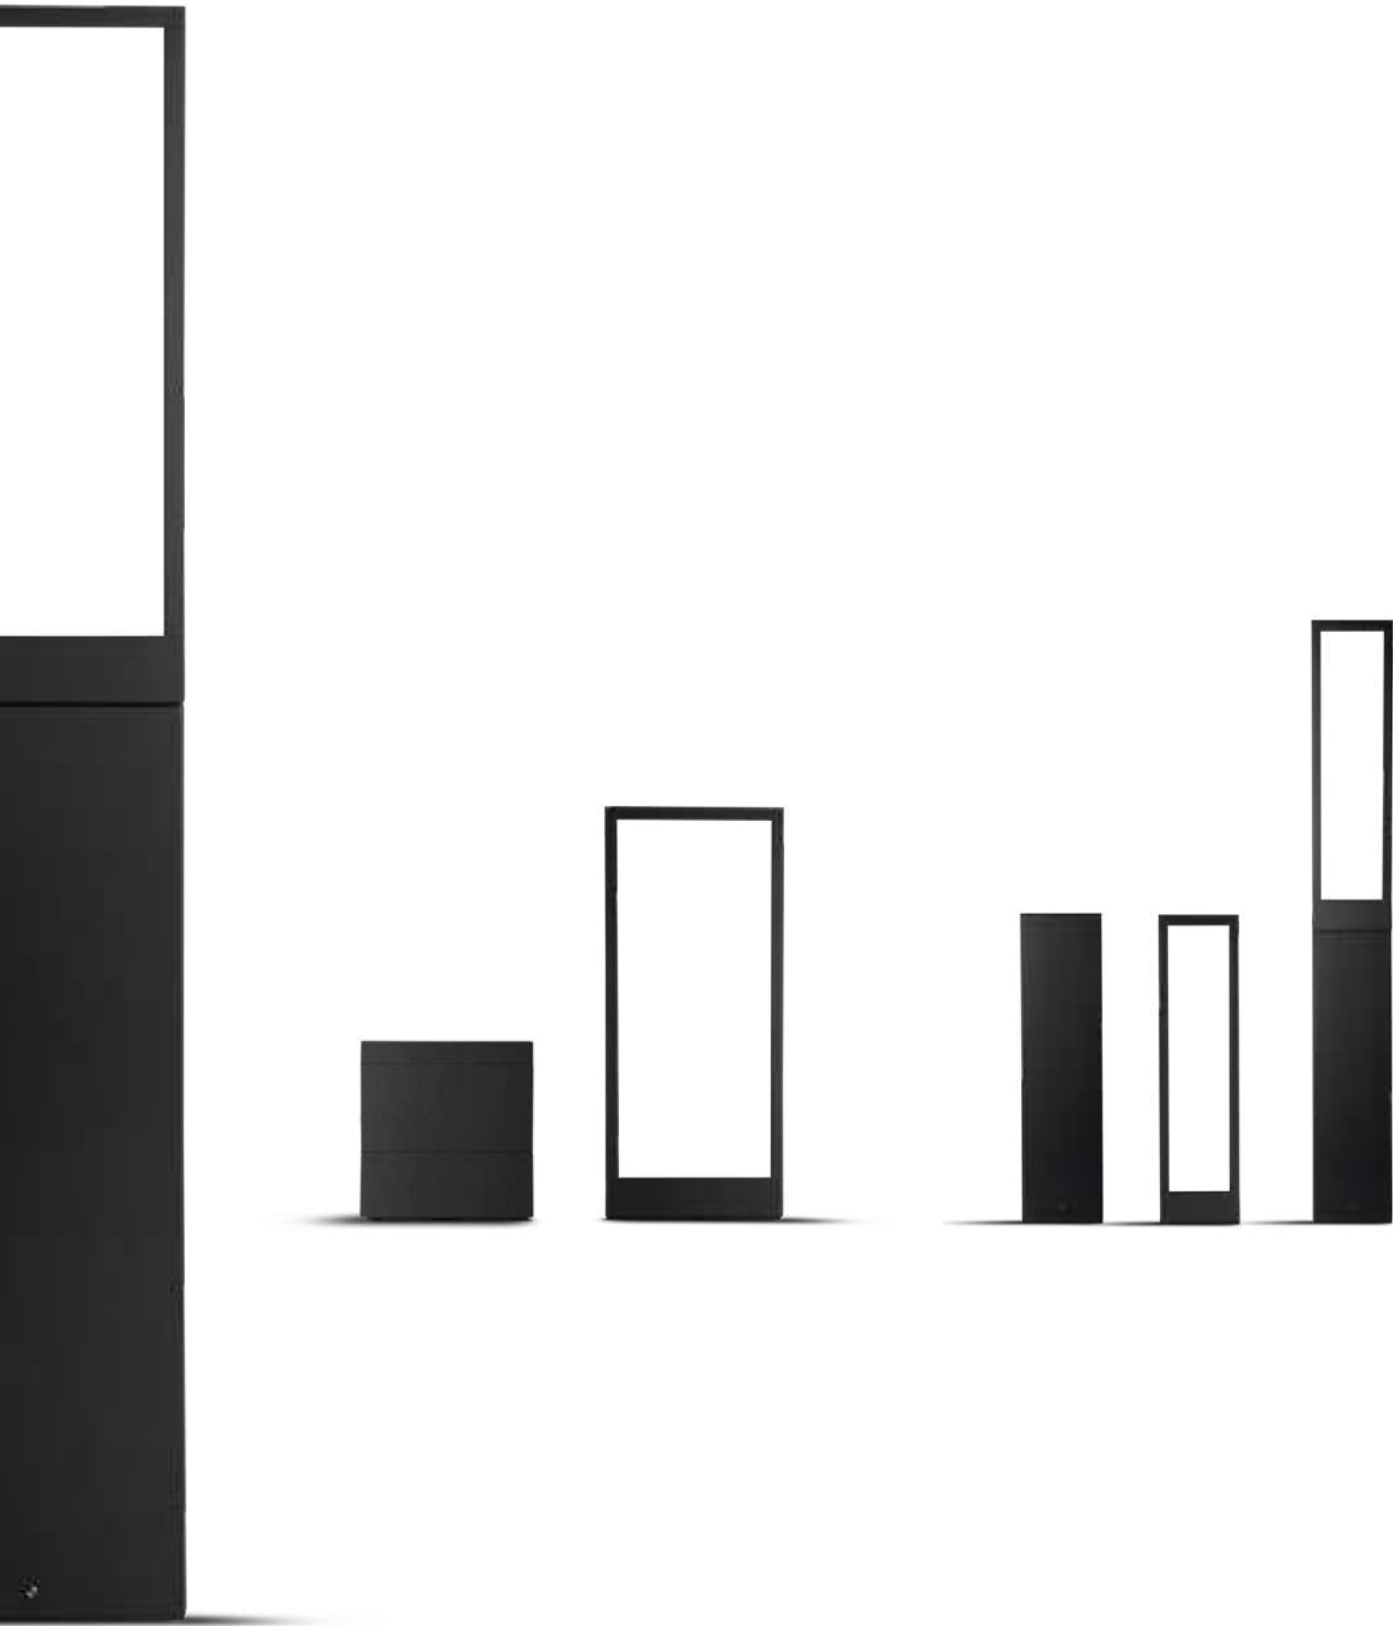

www.simes.it/kube

Kube maintains the technical characteristics of the Cool family and proposes them in solid and cubic sizes. Characterized by the beauty of a void volume filled with light that pours indirectly on the wall or on the ground, Kube ensures excellent light diffusion and great visual comfort. The shapes are expressed in applique and bollard, all available with integrated driver.

TECHNICAL DESCRIPTION
Die-cast aluminium, extruded aluminium structure (bollard version) with high corrosion resistance. Toughened glass diffuser 4mm thick. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

MICROKUBE, MICROKUBE LONG
Luminaire with one single cable entry and grommet.

KUBE, KUBE LONG
Luminaire with double cable entry and grommet.

MICROKUBE LONG BOLLARD, KUBE LONG BOLLARD
Luminaire supplied with neoprene H05RN-F cable and connector.

REGISTERED DESIGN

PROTECTION CLASS
IP54

ISOLATION CLASS
CLASS I ☺

MECHANICAL RESISTANCE
IK 06

COLOURS

.01 White

.09 Black


.14 Aluminium Grey



MICROKUBE 120mm

SIMES

Microkuba





S.6300W
LED MODULE **3000K** CRI90 1103lm 9,3W
(on request 2700K CRI90 970lm)
(on request 4000K CRI80 1470lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





S.1014
STAKE FOR MICROKUBE
in polypropylene

Microkuba long H 450mm

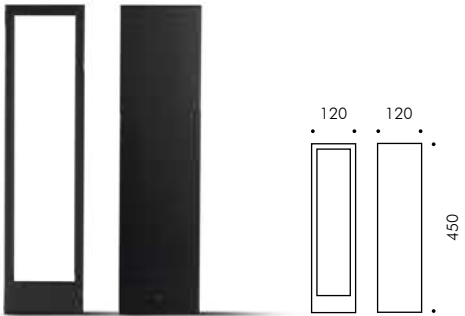

S.6306W
LED MODULE **3000K** CRI90 1103lm 9,3W
(on request 2700K CRI90 970lm)
(on request 4000K CRI80 1470lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Microkuba long bollard H 900mm

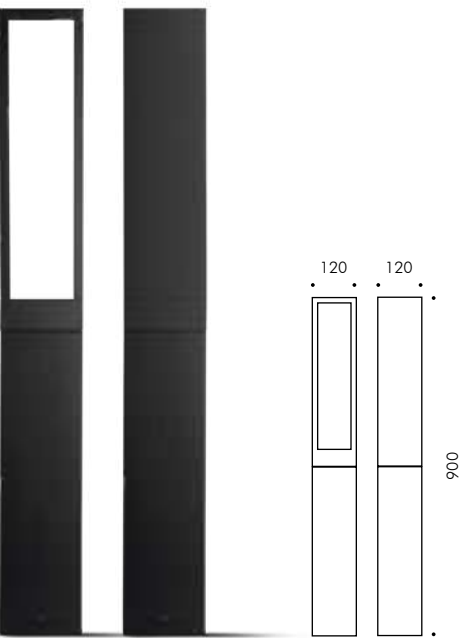

S.6307W
LED MODULE **3000K** CRI90 1103lm 9,3W
(on request 2700K CRI90 970lm)
(on request 4000K CRI80 1470lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Accessory




S.6309
FLANGE FOR MICROKUBE
Ø 120 mm flange to be buried in concrete
for S.6306W and S.6307W.

Private Villa, Els Gorgs, Spain - Landscape project: Paula Mendonça © Ph. Miquel Tres


KUBE 240mm

SIMES


Kube




S.6340W
LED MODULE **3000K** CRI90 5250lm 44,5W
(on request 2700K CRI90 3686lm)
(on request 4000K CRI80 6090lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




Kube long H 580mm




S.6346W
LED MODULE **3000K** CRI90 5250lm 44,5W
(on request 2700K CRI90 3686lm)
(on request 4000K CRI80 6090lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



Kube long bollard H 1350mm



S.6347W
LED MODULE **3000K** CRI90 5250lm 44,5W
(on request 2700K CRI90 3686lm)
(on request 4000K CRI80 6090lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

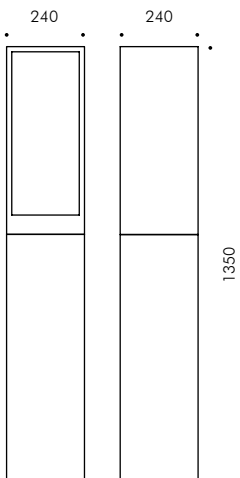

Accessory



S.3554
STAKE FOR KUBE S.6340W
in polypropylene



S.5350
FLANGE FOR KUBE S.6340W - S.6346W
- **S.6347W**
Flange Ø 240mm to be anchored in concrete



Private villa, Corte Franca Italy - Ad Architettura - Arch. Massimo Castagna © Simes S.p.A.

Trim is a family of wall appliques and bollards, with rectangular and square shapes, characterized by essential lines that contemplate the "solids and voids of light". Trim is a lighting fixture suitable for classical or modern context, able to give atmosphere and charm to the surrounding environment. Created by the combination of aluminium and glass, Trim is an extremely versatile lighting solution.

TECHNICAL DESCRIPTION
Die-cast aluminium housing, extruded aluminium structure (bollard version) with high corrosion resistance. Toughened glass diffuser 4mm thick. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

APPLIQUE
Luminaire supplied with 5,0m neoprene H05RN-F cable.

BOLLARD
Luminaire supplied with 4,0m neoprene H05RN-F cable.

REGISTERED DESIGN

PROTECTION CLASS
IP54

ISOLATION CLASS
CLASS III

MECHANICAL RESISTANCE
IK 06 TRIM HORIZONTAL, BOLLARDS
IK 09

COLOURS

.01 White

.14 Aluminium Grey





TRIM Square

SIMES

TRIM Rectangular



SIMES

Trim Square 170





S.3152W
LED MODULE **3000K** CRI90 1056lm 7,9W
(on request 2700K CRI90 1003lm)
(on request 4000K CRI80 1315lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523).

Trim Square 170 bollard





S.3153W
LED MODULE **3000K** CRI90 1056lm 7,9W
(on request 2700K CRI90 1003lm)
(on request 4000K CRI80 1315lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523).

Trim Square 240



S.3157W
LED MODULE **3000K** CRI90 2112lm 15,8W
(on request 2700K CRI90 2006lm)
(on request 4000K CRI80 2630lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523).

Trim Square 240 bollard


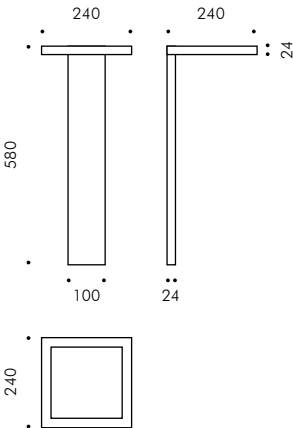


S.3158W
LED MODULE **3000K** CRI90 2112lm 15,8W
(on request 2700K CRI90 2006lm)
(on request 4000K CRI80 2630lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523).





Accessory
S.3159
FLANGE FOR TRIM BOLLARD
Flange to be anchored in concrete
for S.3153W, S.3158W and S.3177W.

Trim Horizontal





S.3175W
LED MODULE **3000K** CRI90 2112lm 15,8W
(on request 2700K CRI90 2006lm)
(on request 4000K CRI80 2630lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523).

Trim Rectangular



S.3176W
LED MODULE **3000K** CRI90 2112lm 15,8W
(on request 2700K CRI90 2006lm)
(on request 4000K CRI80 2630lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523).

Trim Rectangular bollard

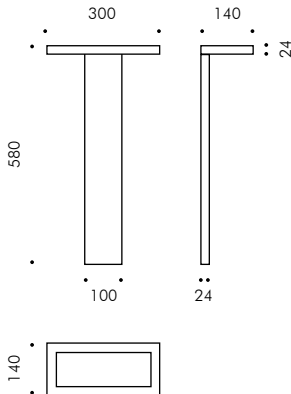

S.3177W
LED MODULE **3000K** CRI90 2112lm 15,8W
(on request 2700K CRI90 2006lm)
(on request 4000K CRI80 2630lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523).




Accessory
S.3159
FLANGE FOR TRIM BOLLARD
Flange to be anchored in concrete
for S.3153W, S.3158W and S.3177W.



LOFT Wall and ceiling mounted

SIMES

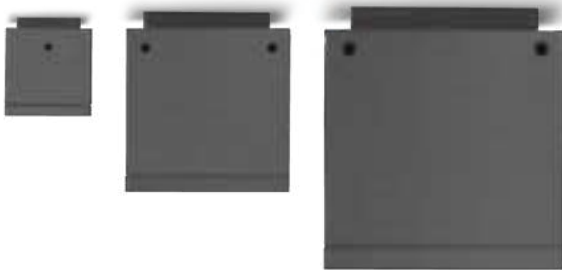

LOFT

Loft is a wide range of square and round single-emission wall product. The square version is also available as ceiling mounted. Those are all offered in three sizes and are equipped with comfort and tilting optics that make them suitable for the most varied contexts, from private to public, from classic to modern.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Stainless steel A4 screws. Clear toughened glass diffuser. Silicone gaskets. Double powder paint.

MICROLOFT
Luminaire supplied with 5,0m neoprene H05RN-F cable.

MINILOFT AND LOFT
Luminaire with one single cable entry and grommet.


REGISTERED DESIGN

PROTECTION CLASS
IP65



ISOLATION CLASS
CLASS I

MECHANICAL RESISTANCE
IK 06

- COLOURS**
- .01 White
 - .14 Aluminium Grey
 - .24 Anthracite Grey





Microloft Square



S.6615W Flood beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm, 4000K CRI80 320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position

Beam lenses available on request with no surcharge:
9°, 22°, 63°, 10°x44°



Microloft Square



S.6625W Ellyptical beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position

Beam lenses available on request with no surcharge:
9°, 22°, 38°, 63°



Miniloft Square




S.6646W Flood beam with lenses
LED MODULE **3000K** CRI90 774lm 6,2W
(on request 2700K CRI90 714lm, 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic

Beam lenses available on request with no surcharge:
12°, 63°, 10°x44°

Miniloft Square





S.6655W Spot beam with lenses
LED MODULE **3000K** CRI90 774lm 6,2W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic



S.6618W Flood beam with lenses
LED MODULE **3000K** CRI90 774lm 6,2W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic

Beam lenses available on request with no surcharge:
63°, 10°x44°



Loft Square

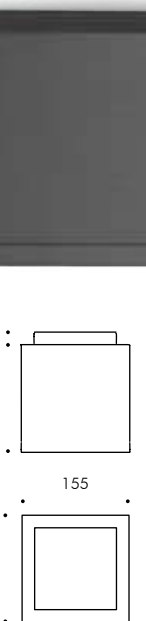


S.6675W Flood beam with lenses
LED MODULE **3000K** CRI90 2340lm 19,5W
(on request 2700K CRI90 2160lm, 4000K CRI80 2880lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic

Beam lenses available on request with no surcharge:
12°, 63° and 10°x44°

Loft Square

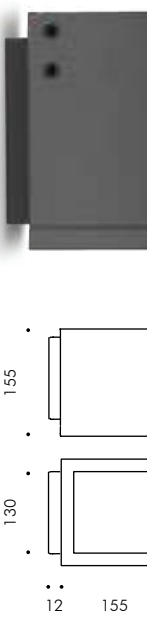



S.6695W Spot beam with lenses
LED MODULE **3000K** CRI90 2340lm 19,5W
(on request 2700K CRI90 2160lm)
(on request 4000K CRI80 2880lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic



S.6678W Flood beam with lenses
LED MODULE **3000K** CRI90 2340lm 19,5W
(on request 2700K CRI90 2160lm)
(on request 4000K CRI80 2880lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic

Beam lenses available on request with no surcharge:
63°, 10°x44°



Microloft Round




S.6622W Ellyptical beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position

Beam lenses available on request with no surcharge:
9°, 22°, 38°, 63°

Miniloft Round





S.6658W Spot beam with lenses
LED MODULE **3000K** CRI90 774lm 6,2W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic




S.6628W Flood beam with lenses
LED MODULE **3000K** CRI90 774lm 6,2W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic

Beam lenses available on request with no surcharge:
63°, 10°x44°

Loft Round



S.6689W Spot beam with lenses
LED MODULE **3000K** CRI90 2340lm 19,5W
(on request 2700K CRI90 2160lm)
(on request 4000K CRI80 2880lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic



S.6680W Flood beam with lenses
LED MODULE **3000K** CRI90 2340lm 19,5W
(on request 2700K CRI90 2160lm)
(on request 4000K CRI80 2880lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic

Beam lenses available on request with no surcharge:
63°, 10°x44°



Palace music hall, Thessaloniki, Greece © Gravani Lighting

SMOOTH Wall mounted and pole mounted

S I M E S



Design K.Begasse



www.simes.it/smooth

SMOOTH

Smooth is a family composed by applique and pole version, the expression of an extreme technical and aesthetic synthesis. The proportions, the absence of edges and visible screws, the smooth and continuous surface that welcomes without interruption its technological heart, are the result of careful formal research. The excellent performance in functional and accent lighting are guaranteed by the latest generation LEDs, combined with specific reflectors.

TECHNICAL DESCRIPTION
Die-cast and extruded aluminium housing with high corrosion resistance. Stainless steel A4 screws. Toughened glass diffuser 4mm thick. Silicone gaskets. Double powder paint.

MINISMOOTH AND SMOOTH
Luminaire supplied with neoprene H05RN-F cable and connector.

MEGASMOOTH
Luminaire with one single cable entry and grommet.

**PATENTED
REGISTERED DESIGN**

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II 

MECHANICAL RESISTANCE
IK 06



COLOURS

 .09 Black

 .14 Aluminium Grey



Minismooth




S.2900W Single Flood beam with reflector
LED MODULE **3000K** CRI90 619lm 4,4W
(on request 2700K CRI90 588lm)
(on request 4000K CRI80 675lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

S.2905W Double Flood beam with reflector
2x LED MODULE **3000K** CRI90 619lm 4,4W
(on request 2700K CRI90 588lm)
(on request 4000K CRI80 675lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Fixed LED position
Version with DALI 2 / PUSH power supply
available on request with surcharge.

Smooth

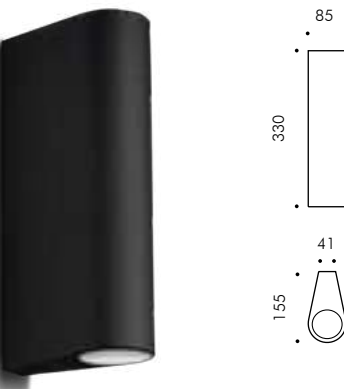


S.2910W Single Flood beam with reflector
LED MODULE **3000K** CRI90 1563lm 11,4W
(on request 2700K CRI90 1467lm)
(on request 4000K CRI80 1830lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

S.2915W Double Flood beam with reflector
2x LED MODULE **3000K** CRI90 1563lm 11,4W
(on request 2700K CRI90 1467lm)
(on request 4000K CRI80 1830lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Fixed LED position
Version with DALI 2 / PUSH power supply
available on request with surcharge.

Megasmooth

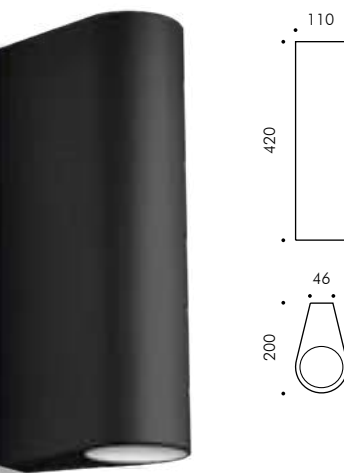

S.2920W Single Wide Flood beam with reflector
LED MODULE **3000K** CRI90 3133lm 23,6W
(on request 2700K CRI90 3052lm)
(on request 4000K CRI80 3748lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable


S.2925W Double Wide Flood beam with reflector
2x LED MODULE **3000K** CRI90 3133lm 23,6W
(on request 2700K CRI90 3052lm)
(on request 4000K CRI80 3748lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Fixed LED position
Version with DALI 2 / PUSH power supply
available on request with surcharge.

Smooth pole mounted





Megasmooth pole mounted



S.2930W Asymmetrical beam with reflector
LED MODULE **3000K** CRI80 2353lm 15,6W
(on request 2700K CRI80 2230lm)
(on request 4000K CRI80 2382lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Fixed LED position
Version with DALI 2 / PUSH power supply
available on request with surcharge.



Pole not included



S.2940W Asymmetrical beam with reflector
LED MODULE **3000K** CRI80 3702lm 24,3W
(on request 2700K CRI80 3547lm)
(on request 4000K CRI80 3832lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Fixed LED position
Version with DALI 2 / PUSH power supply
available on request with surcharge.

Pole not included

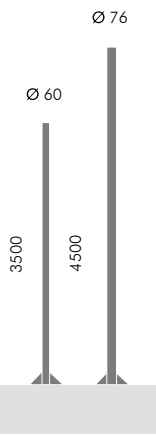

Poles with base

S.2843
Ø 60mm CYLINDRICAL POLE WITH BASE
Pole total height 3500mm

S.2845
Ø 76mm CYLINDRICAL POLE WITH BASE
Pole total height 4500mm
Provided with inspection door
and cable connector

Accessory

S.2849
PLANTED ROOT FOR S.2843 and S.2845
h=470mm and bolts in galvanized steel
with M16 threads.





SLOT Ceiling and wall mounted

SIMES

SLOT



Slot is an iconic family of Simes composed of cylinders for ceiling or wall, offered in three different sizes, with a great mechanical resistance and tiltable optics designed on the COB source. The aluminium double inner reflectors assure high comfort lighting with reduced glare, maintaining high performances. The wall version is available both with single or double emission. This last one with two independent adjustable reflectors and lighting management.

TECHNICAL DESCRIPTION
Die-cast and extruded aluminium housing with high corrosion resistance. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

MICROSLOT
Luminaire with one single cable entry and grommet. Toughened glass diffuser 6mm.

MINISLOT
Luminaire supplied with neoprene H05RN-F cable and connector. Toughened glass diffuser 8mm.

SLOT
Luminaire supplied with neoprene H05RN-F cable and connector. Toughened glass diffuser 8mm.

PROTECTION CLASS
IP65


ISOLATION CLASS
CLASS I

MECHANICAL RESISTANCE
IK 06

COLOURS

.14 Aluminium Grey

.24 Anthracite Grey



www.simes.it/slot





SLOT Wall mounted

SIMES


SLOT Ceiling

SIMES

Microslot





S.3814W Single Flood beam with reflector
LED MODULE **3000K** CRI90 657lm 6,6W
(on request 2700K CRI90 627lm)
(on request 4000K CRI80 837lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic




S.3815W Double Flood beam with reflector
2 x LED MODULE **3000K** CRI90 657lm 6,6W
(on request 2700K CRI90 627lm)
(on request 4000K CRI80 837lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic

Minislot





S.3824W Single Medium beam with reflector
LED MODULE **3000K** CRI90 2034lm 15,5W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic




S.3825W Double Medium beam with reflector
2 x LED MODULE **3000K** CRI90 2034lm 15,5W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic

Slot





S.3834W Single Flood beam with reflector
LED MODULE **3000K** CRI90 3636lm 28W
(on request 2700K CRI90 3456lm)
(on request 4000K CRI80 4456lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic





S.3835W Double Flood beam with reflector
2 x LED MODULE **3000K** CRI90 3636lm 28W
(on request 2700K CRI90 3456lm)
(on request 4000K CRI80 4456lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic

Microslot





S.3817W Flood beam with reflector
LED MODULE **3000K** CRI90 657lm 6,6W
(on request 2700K CRI90 627lm)
(on request 4000K CRI80 837lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic

Minislot



S.3827W Flood beam with reflector
LED MODULE **3000K** CRI90 2034lm 15,5W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic

Slot



S.3837W Flood beam with reflector
LED MODULE **3000K** CRI90 3636lm 28W
(on request 2700K CRI90 3456lm)
(on request 4000K CRI80 4456lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic



Elegant and minimal luminaire, Zen is engineered to assure significant energy savings and excellent visual comfort. The moulded, etched and painted glass diffuser ensures excellent diffused and uniform light distribution on the glass itself and on the surrounding ambient. IP65 degree protection and the possibility of integrating protective grids, lead Zen to be suitable for any architectural environment.

TECHNICAL DESCRIPTION
Die cast aluminium housing with high corrosion resistance. Fixing base with heat dissipation system. Acid-etched glass diffuser 5mm thick, white painted internally. Stainless steel A4 screws. Luminaire with double cable entry and grommet (Luminaire suitable for double grommets). Silicone gaskets. Zen Round 320 and Square 300 supplied with emergency inverter and battery to supply 1 hour emergency lighting in the case of a mains failure. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65


ISOLATION CLASS
CLASS I ⚡

MECHANICAL RESISTANCE
IK 06



COLOURS

- .01 White
- .09 Black
- .14 Aluminium Grey



ZEN Round

SIMES

ZEN Square

SIMES

Round



S.6950W
LED MODULE **3000K** CRI90 1125lm 9,5W
(on request 2700K CRI90 1068lm)
(on request 4000K CRI80 1437lm)
220V-240Vac 50/60Hz
Phase-cut dimmer


Round 320mm



S.6980W
LED MODULE **3000K** CRI90 2400lm 20,4W
(on request 2700K CRI90 2280lm)
(on request 4000K CRI80 3201lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


S.6981W
Emergency version
Complies with CEI EN 60598-2-22
LED MODULE **3000K** CRI90 2400lm 20,4W
(on request 2700K CRI90 2280lm)
(on request 4000K CRI80 3201lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Square

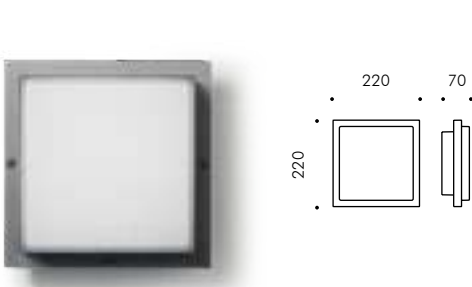

S.6960W
LED MODULE **3000K** CRI90 1125lm 9,5W
(on request 2700K CRI90 1068lm)
(on request 4000K CRI80 1437lm)
220V-240Vac 50/60Hz
Phase-cut dimmer


Square 300mm

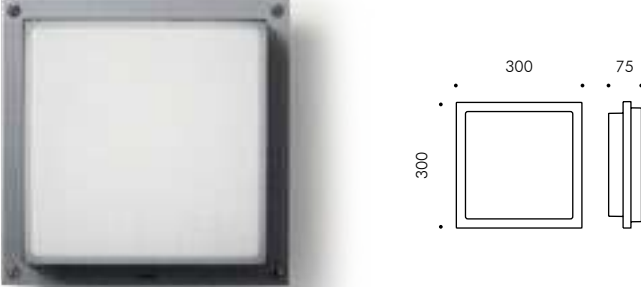

S.6990W
LED MODULE **3000K** CRI90 2400lm 20,4W
(on request 2700K CRI90 2280lm)
(on request 4000K CRI80 3201lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

S.6991W
Emergency version
Complies with CEI EN 60598-2-22
LED MODULE **3000K** CRI90 2400lm 20,4W
(on request 2700K CRI90 2280lm)
(on request 4000K CRI80 3201lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Round with grille

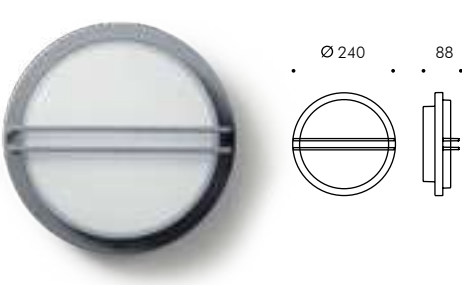

S.6955W
LED MODULE **3000K** CRI90 1125lm 9,5W
(on request 2700K CRI90 1068lm)
(on request 4000K CRI80 1437lm)
220V-240Vac 50/60Hz
Phase-cut dimmer


Round 320mm with grille



S.6985W
LED MODULE **3000K** CRI90 2400lm 20,4W
(on request 2700K CRI90 2280lm)
(on request 4000K CRI80 3201lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


S.6986W
Emergency version
Complies with CEI EN 60598-2-22
LED MODULE **3000K** CRI90 2400lm 20,4W
(on request 2700K CRI90 2280lm)
(on request 4000K CRI80 3201lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Square with grille

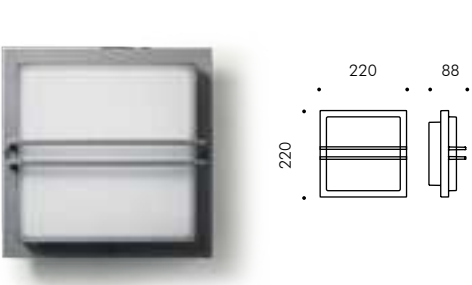

S.6965W
LED MODULE **3000K** CRI90 1125lm 9,5W
(on request 2700K CRI90 1068lm)
(on request 4000K CRI80 1437lm)
220V-240Vac 50/60Hz
Phase-cut dimmer

Square 300mm with grille

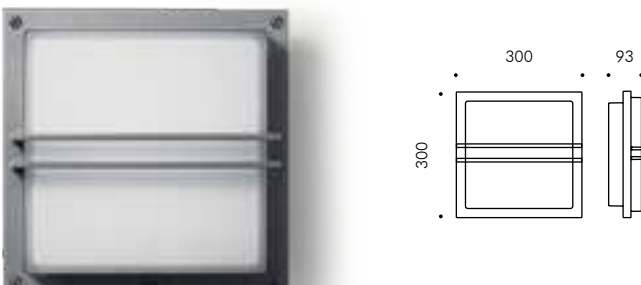

S.6995W
LED MODULE **3000K** CRI90 2400lm 20,4W
(on request 2700K CRI90 2280lm)
(on request 4000K CRI80 3201lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

S.6996W
Emergency version
Complies with CEI EN 60598-2-22
LED MODULE **3000K** CRI90 2400lm 20,4W
(on request 2700K CRI90 2280lm)
(on request 4000K CRI80 3201lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Shape creates uniform light on the window frames, producing charming light effects on residential, public, historical and artistic façades. Miniaturized, versatile and high performing: those are the characteristics of this luminaire which is able to illuminate even wide openings with a minimum energy consumption and its high functionality level. The light fitting uses only one LED and its inclination can be easily adjusted to adapt to different tilted window sills for a proper lighting distribution.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Protective Cover with clip locking system. No visible screws. Clear polycarbonate diffuser. Luminaire supplied with 1,5m neoprene H05RN-F cable for connection with remote (recessed) connection box. Silicone gaskets. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⚡ SHAPE
CLASS III ⚡ MINISHAPE

MECHANICAL RESISTANCE
IK 10




COLOURS

- .01 White
- .14 Aluminium Grey

Design K.Begasse




www.simes.it/shape

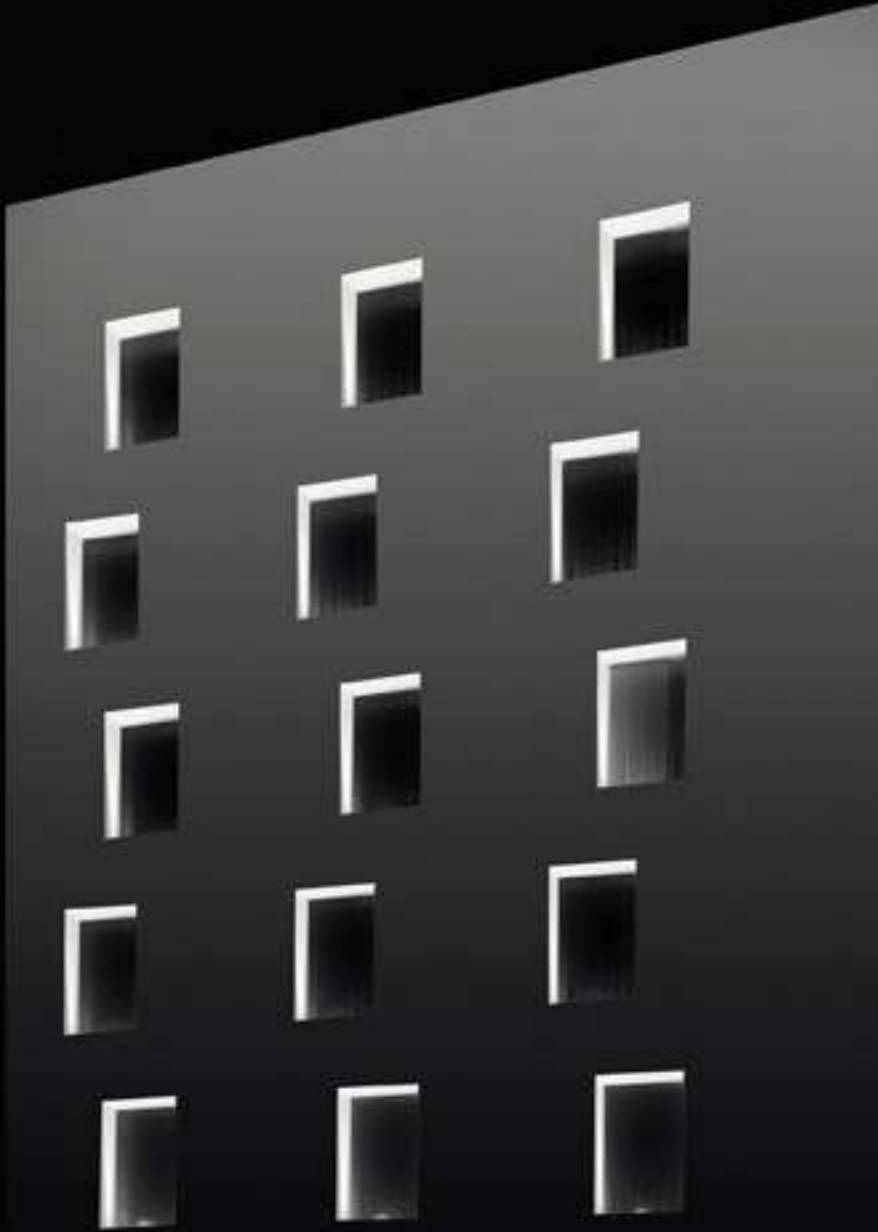


SHAPE

Mini-Shape




S.6425W Blade of Light beam with lens
LED MODULE **3000K** CRI80 411lm 3,3W
(on request 2700K CRI80 377lm)
(on request 4000K CRI80 473lm)
1200mA Vf 3,2V max
With radial lens 170°x6°


Requires constant current Vout 120Vdc max
remote power supply (page 524-525)



Shape



S.6420W Blade of Light beam with lens
LED MODULE **3000K** CRI80 411lm 3,3W
(on request 2700K CRI80 377lm)
(on request 4000K CRI80 473lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
With radial lens 170°x6°



Canonica del Vicario, Palazzago, Bergamo, Italy © ph. Paolo Stroppa

Lift is a family of square wall applique proposed in two sizes that creates bright accents on the wall thanks to special lenses. Its minimalist design integrates perfectly into the environments in which it is located. The different effects marked with light can enhance any facade making the light effect the protagonist.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Reflector in polymers covered with pure aluminium. Clear toughened glass. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

MINILIFT
Luminaire through wiring cable entry and grommet.

LIFT
Luminaire with double cable entry and cable grommets.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⊕ LIFT
CLASS II ⊞ MINILIFT

MECHANICAL RESISTANCE
IK 06 MINILIFT, LIFT


COLOURS

.09 Black


.14 Aluminium Grey




1 wide beam




S.5077W
LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




2 narrow beams




S.5047W
2 x LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





1 narrow beam




S.5067W
LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





4 narrow beams




S.5087W
4 x LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




2 wide beams




S.5027W
2 x LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




4 wide beams




S.5097W
4 x LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



1 wide beam + 1 narrow beam




S.5037W
2 x LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable






1 wide beam




S.5070W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply
available on request with surcharge.




1 narrow beam




S.5075W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply
available on request with surcharge.




2 wide beams




S.5026W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply
available on request with surcharge.




1 wide beam + 1 narrow beam




S.5033W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply
available on request with surcharge.




2 narrow beams




S.5040W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply
available on request with surcharge.




4 narrow beams




S.5080W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply
available on request with surcharge.





4 wide beams



S.5090W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply
available on request with surcharge.



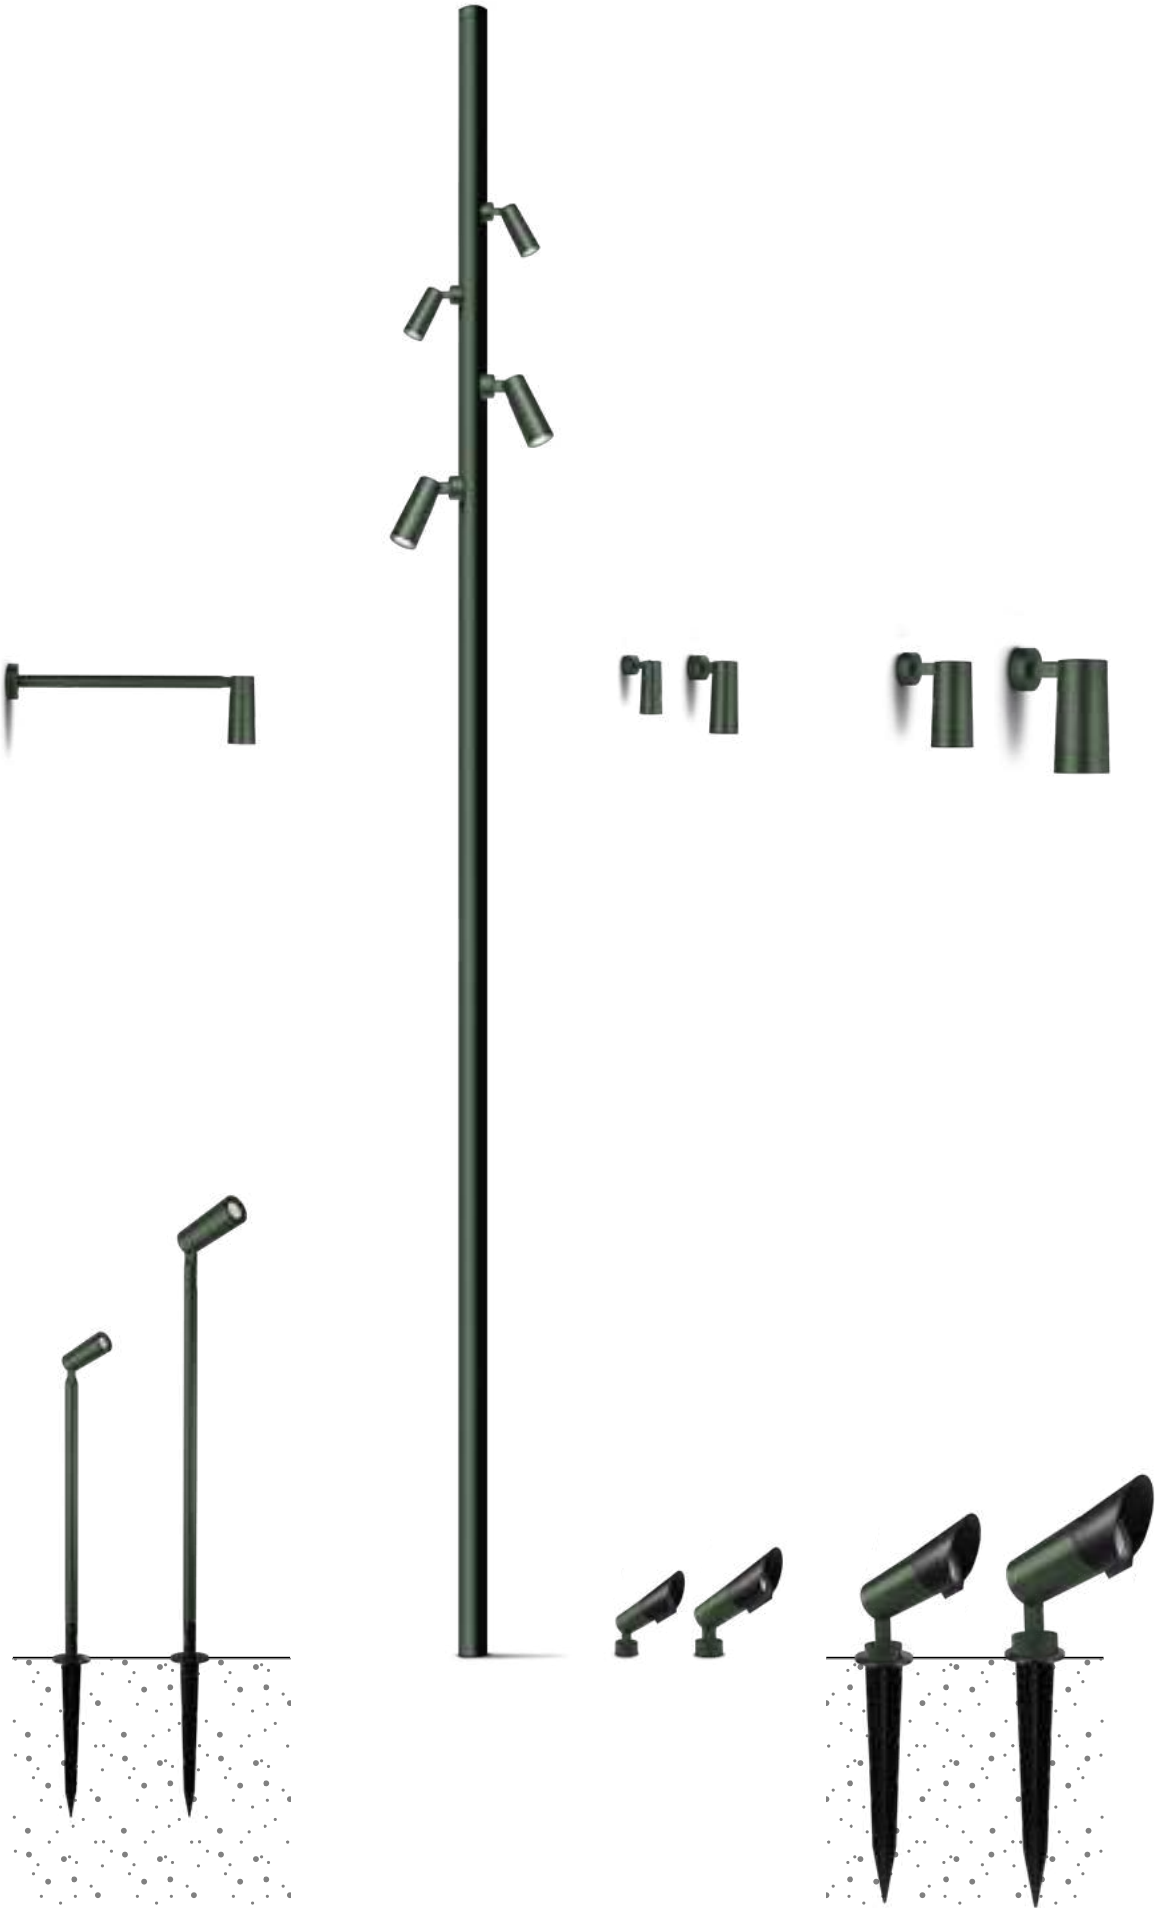

The two smaller dimensions of Flower, Ø25 and Ø35, have high performing Spot, Medium and Flood optics, to create accent of light. The clean design and the absence of visible cables match with the visual comfort obtained thanks to the rearwarded optics and the use of special filters that define the beam. Flower family is available as wall, with arm, with stake and for application on pole.

Flower is also available in ZOOM versions in bigger dimensions with adjustable optics.

TECHNICAL DESCRIPTION
Die-cast aluminium and extruded aluminium structure with high corrosion resistance. Stainless steel A4 screws. Clear toughened glass diffuser. Double joint allowing rotation on three different axis. Luminaire supplied with 5,0m bipolar flat cable for remote connection. Silicone gaskets. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS III ⚡

MECHANICAL RESISTANCE
IK 07

COLOUR

.07 Dark Green



.20 Burnished Bronze

.24 Anthracite Grey




www.simes.it/flower





S.1600W Spot beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
24Vdc PWM





S.1601W Medium beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)
Beam lenses available on request with no surcharge: 63°




S.1609
STAKE for FLOWER 25
in polypropylene

FLOWER 25 bollard including stake

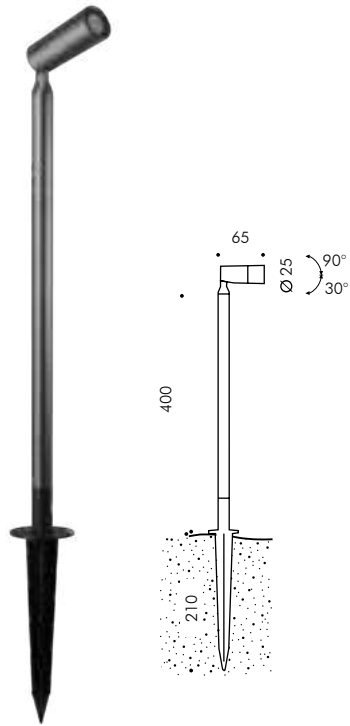

S.1610W Spot beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
24Vdc PWM
Stake included



S.1611W Medium beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
24Vdc PWM
Stake included

Requires constant voltage 24Vdc
remote power supply (page 522-523)
Beam lenses available on request with no surcharge: 63°

Accessory






S.1608
VISOR for FLOWER 25
Colour: black (cod .09)

"Le 3 di Tuccino" hotel, Polignano a Mare, Italy - Arch. M+T Architects © I Talamona Snc - Ph. M+T Architects

FLOWER 35

SIMES

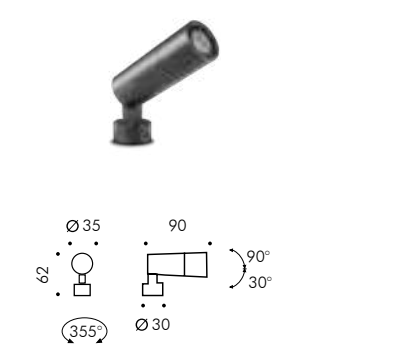




S.1620W Spot beam with lens
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
24Vdc PWM

S.1621W Flood beam with lens
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)
Beam lenses available on request with no surcharge: 24°






S.1609
STAKE for FLOWER 35
in polypropylene

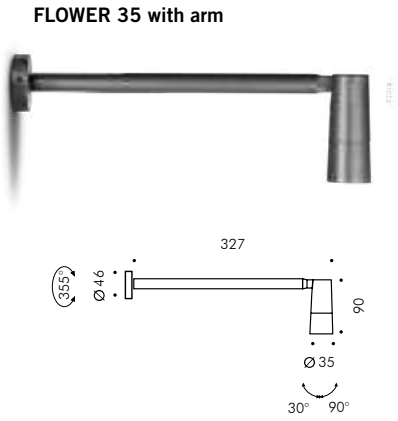

S.1625W Spot beam with lens
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
24Vdc PWM

S.1626W Flood beam with lens
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)
Beam lenses available on request with no surcharge: 24°

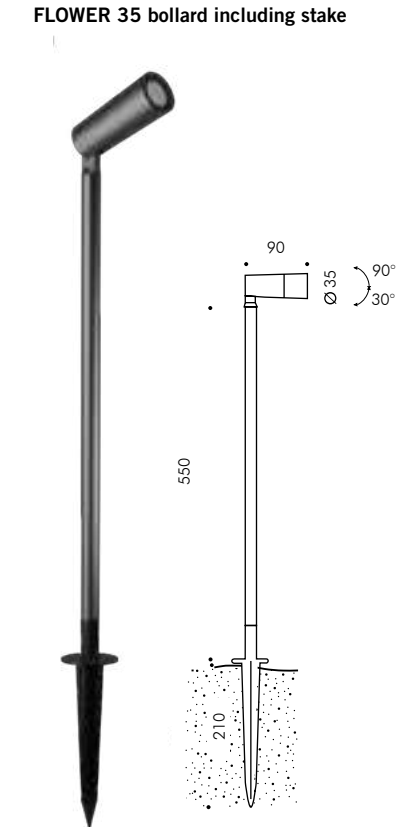

S.1630W Spot beam with lens
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
24Vdc PWM
Stake included

S.1631W Flood beam with lens
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
24Vdc PWM
Stake included

Requires constant voltage 24Vdc
remote power supply (page 522-523)
Beam lenses available on request with no surcharge: 24°

Accessory




S.1628
VISOR for FLOWER 35
Colour: black (cod .09)




Private villa, Italy - Arch. Dutilio Damilano Italy © ph. Mario Bertani / Simes S.p.A.

FLOWER 25 and FLOWER 35 can be installed directly on poles with diameter from Ø38mm to Ø60mm.



S.2805
Ø 38mm CYLINDRICAL POLE
Pole total height 3000mm



S.2806
PLANTED ROOT FOR S.2805
Pole total height 1000mm
To be buried for 500mm



S.1607
STRAP WITH BASE FOR APPLICATIONS ON TREES
Colour: black (cod .09)



Private villa, Italy - Arch. Varischi e Geom. Berendis © ph. Mario Bertani



"Villa Fioraliso" hotel and restaurant, Gardone Riviera, Italy © ph. Mario Bertani

FLOWER ZOOM

The two bigger versions, Flower ZOOM Ø60 and Ø75 differ from the smaller versions, for the possibility of changing the beam angle even once installed. The transition from a concentrated Spot 20° beam to a large Flood 40° beam, takes place smoothly and gradually, offering maximum comfort. The modification takes place through a manual rotation of the front bezel.

TECHNICAL DESCRIPTION

Die-cast aluminium and extruded aluminium structure with high corrosion resistance. Stainless steel A4 screws. Clear toughened glass diffuser. Double joint allowing rotation on three different axis. Silicone gaskets. Double powder paint.

FLOWER ZOOM 60

Luminaire supplied with 5,0m flat bipolar cable for remote connection.

FLOWER ZOOM 75

Luminaire supplied with 5,0m neoprene H05RN-F.

REGISTERED DESIGN

PROTECTION CLASS IP65

ISOLATION CLASS

CLASS III ⚡ FLOWER ZOOM 60
CLASS I ⚡ FLOWER ZOOM 75

MECHANICAL RESISTANCE IK 07

COLOUR

.07 Dark Green

.09 Black

.24 Anthracite Grey





FLOWER ZOOM 20°
Narrow beam for an aiming light


Flower ZOOM's Spot 20° ensures high cone precision of light characterized by an absolutely comfortable and glare-free distribution. The on-site zoom setting allows to shorten lighting design times because it allows to optimize the beam width according to the real impact of the subject in the scene. In the image you can see the light accent focused on the architectural element of the balcony.





FLOWER ZOOM 40°
Wide beam for more diffused light

In Flood 40° mode, Flower ZOOM succeeds to involve a very wide scene without defining a focal point but distributing the light extremely evenly on the surface. It is the ideal solution to illuminate large surfaces, urban contexts, green areas, trees and shrubs subject to change over time. The gradual adjustment that brings the beam from 20°- to 40°- and vice versa is always possible and takes place with a simple manual rotation of the front bezel. The image shows a more distributed illumination on the entire facade.





S.1650W From Medium to Flood beam with lens
LED MODULE **3000K** CRI90 852lm 8,6W
(on request 2700K CRI90 807lm)
(on request 4000K CRI80 1056lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)



S.1660W From Medium to Flood beam with lens
LED MODULE **3000K** CRI90 1342lm 12,5W
(on request 2700K CRI90 1246lm)
(on request 4000K CRI80 1658lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable


Accessories




S.1668
VISOR for FLOWER ZOOM 75
Colour: black (cod .09)



S.1659
STAKE for FLOWER ZOOM 75
in polypropylene



FLOWER 60 ZOOM with arm



S.1655W From Medium to Flood beam with lens
LED MODULE **3000K** CRI90 852lm 8,6W
(on request 2700K CRI90 807lm)
(on request 4000K CRI80 1056lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)


Accessories



S.1658
VISOR for FLOWER ZOOM 60
Colour: black (cod .09)



S.1659
STAKE for FLOWER ZOOM 60
in polypropylene

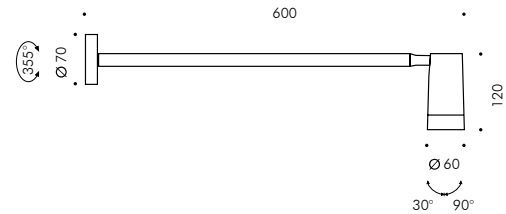



Flower ZOOM 60 and 75 can be installed on poles Ø60/76mm using the pole adaptors.

S.2807
Ø 60mm CYLINDRICAL POLE
Pole total height 3500mm

S.2808
PLANTED ROOT AS ACCESSORY
Pole total height 1000mm
To be buried for 500mm

Accessories for Flower ZOOM 60

S.1657
POLE ADAPTOR Ø60/76mm
in die-cast aluminium
Colour: black (cod .09)

Accessories for Flower ZOOM 75

S.1667
POLE ADAPTOR Ø60/76mm
in die-cast aluminium
Colour: black (cod .09)


S.1627
STRAP WITH BASE
FOR APPLICATIONS ON TREES
FOR FLOWER ZOOM 60/75
Colour: black (cod .09)



Private villa, Italy - Arch. Varischi e Geom. Berlendis © ph. Mario Berani

STAGE ROUND Spotlight

SIMES



www.simes.it/stage-round

STAGE ROUND

The Stage Round is a family of professional spotlights. The range is available from micro to mega sizes, all engineered with more beams, from Spot to Wide Flood, and comfortable optics, obtained thanks to reflectors or lenses designed to maximize the efficiency of the sources. Available for ground, wall or pole application, they can use accessories that optimize their installation such as the visor, the stake or the strap for trees fixation. Peculiarity of the Stage Round family is the micro version, available with a special "light blade" optic that, associated with the swivel body, is able to project lines of light in any direction.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Stainless steel A4 screws. Pure aluminium reflectors, or with concentrating lenses. Radial lens (MICROSTAGE BLADE OF LIGHT). Clear toughened glass diffuser. Silicone gaskets. Double powder paint.

MICROSTAGE (all versions)
Luminaire supplied with 5,0m neoprene H05RN-F cable for remote connections.

MINISTAGE (all versions, except for RGBW)
Luminaire supplied with 5,0m FEP/FEP+PCP cable for remote connections.

MINISTAGE RGBW AND STAGE RGBW
Luminaire supplied with 6,0m FEP+RUBBER cable for remote connections.

STAGE SPOT / ARM AND MEGASTAGE SPOT
Luminaire supplied with neoprene H05RN-F cable and connector for connections the base.

STAGE E MEGASTAGE POLE MOUNTED
Luminaire supplied with 6,0m neoprene H05RN-F cable for remote connections.

MEGASTAGE RGBW
Luminaire supplied with neoprene H05RN-F cable and connector + N°2 DMX cables and connectors for connections in the base.

PATENTED (BLADE OF LIGHT)
REGISTERED DESIGN

PROTECTION CLASS
IP66

ISOLATION CLASS
CLASS II □
CLASS III ◆ MINISTAGE and STAGE RGBW



MECHANICAL RESISTANCE
IK 06 MICROSTAGE ROUND
IK 07 MINISTAGE ROUND
IK 08 STAGE ROUND
IK 09 MEGASTAGE ROUND

COLOURS

.14	Aluminium Grey
.24	Anthracite Grey





Microstage



S.1301W Blade of Light beam with lens
LED MODULE **3000K** CRI80 411lm 3,3W
(on request 2700K CRI80 377lm)
(on request 4000K CRI80 431lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
With Radial Lens 85°x5°

Microstage
Wall arm and garden

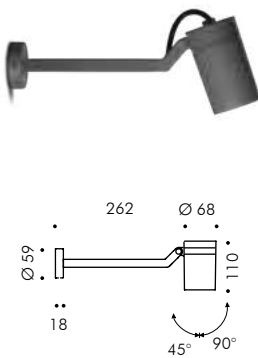

S.1331W Blade of Light beam with lens
LED MODULE **3000K** CRI80 411lm 3,3W
(on request 2700K CRI80 377lm)
(on request 4000K CRI80 431lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
With Radial Lens 85°x5°



S.1309
STAKE for MICROSTAGE ROUND and ARM
in polypropylene.
Colour: black (code 09)

Adhesive gobo
for Microstage

(included in the "Blade of Light" version
S.1301W, S.1331W and S.1339W)



The adhesive gobo for Microstage can be adapted to modify the beam aperture and then applied on the front glass of the fixture. By simply cutting at the level of the required degrees you create a slit to allow the desired light emission.



Adhesive gobo with 70° aperture



Adhesive gobo with 50° aperture



Adhesive gobo with 30° aperture





MICROSTAGE ROUND

SIMES


MINISTAGE ROUND

SIMES

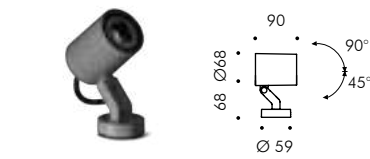


S.1300W Spot beam with lens
LED MODULE **3000K** CRI90 322lm 2,8W
(on request 2700K CRI90 297lm)
(on request 4000K CRI80 396lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Beam lenses available on request with no surcharge: 65°





S.1305W Flood beam with reflector
LED MODULE **3000K** CRI90 356lm 3,0W
(on request 2700K CRI90 339lm)
(on request 4000K CRI80 454lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.1330W Spot beam with lens
LED MODULE **3000K** CRI90 322lm 2,8W
(on request 2700K CRI90 297lm)
(on request 4000K CRI80 396lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Beam lenses available on request with no surcharge: 65°



S.1335W Flood beam with reflector
LED MODULE **3000K** CRI90 356lm 3,0W
(on request 2700K CRI90 339lm)
(on request 4000K CRI80 454lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Accessories





S.1308
VISOR for MICROSTAGE
ROUND SPOT and ARM
Colour: black (cod .09)




S.1627.09
STRAP FOR APPLICATIONS ON TREES
for MICROSTAGE ROUND SPOT
Black strap




S.1309
STAKE for MICROSTAGE ROUND SPOT
and ARM
in polypropylene.
Colour: black (code 09)




S.1310W Spot beam with lenses
LED MODULE **3000K** CRI90 1040lm 8,7W
(on request 2700K CRI90 960lm)
(on request 4000K CRI80 1280lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Beam lenses available on request with no surcharge: 65° and 10°x44°




S.1315W Medium beam with reflector
LED MODULE **3000K** CRI90 1251lm 9,5W
(on request 2700K CRI90 1195lm)
(on request 4000K CRI80 1544lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.1316W Wide Flood beam with reflector
LED MODULE **3000K** CRI90 1251lm 9,5W
(on request 2700K CRI90 1195lm)
(on request 4000K CRI80 1544lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.1313 Flood beam with lenses
LED MODULE **RGBW (W=3000K)** 508lm 7,5W
24V PWM
Requires RGBW constant voltage remote power supply
and DMX or DALI controller (pag. 528-529)




S.1340W Spot beam with lenses
LED MODULE **3000K** CRI90 1040lm 8,7W
(on request 2700K CRI90 960lm)
(on request 4000K CRI80 1280lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Beam lenses available on request with no surcharge: 65° and 10°x44°



S.1345W Medium beam with reflector
LED MODULE **3000K** CRI90 1251lm 9,5W
(on request 2700K CRI90 1195lm)
(on request 4000K CRI80 1544lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.1346W Wide Flood beam with reflector
LED MODULE **3000K** CRI90 1251lm 9,5W
(on request 2700K CRI90 1195lm)
(on request 4000K CRI80 1544lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.1343 Flood beam with lenses
LED MODULE **RGBW (W=3000K)** 508lm 7,5W
24V PWM
Requires RGBW constant voltage remote power supply
and DMX or DALI controller (pag. 528-529)


Accessories



S.1318
VISOR for MINISTAGE
ROUND SPOT and ARM
Colour: black (cod .09)





S.1319
STAKE for MINISTAGE ROUND SPOT and ARM
in polypropylene.
Colour: black (code 09)




S.1320W Spot beam with lenses
LED MODULE **3000K** CRI90 2893lm 25,1W
(on request 2700K CRI90 2671lm)
(on request 4000K CRI80 3561lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Beam lenses available on request with no surcharge: 65° and 10°x44°

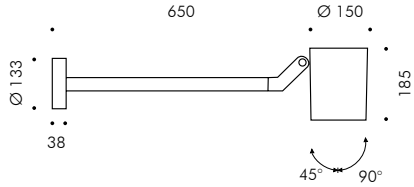


S.1350W Spot beam with lenses
LED MODULE **3000K** CRI90 2893lm 25,1W
(on request 2700K CRI90 2671lm)
(on request 4000K CRI80 3561lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


Beam lenses available on request with no surcharge: 65° and 10°x44°




S.1325W Flood beam with reflector
LED MODULE **3000K** CRI90 4027lm 31,1W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.1326W Wide Flood beam with reflector
LED MODULE **3000K** CRI90 4027lm 31,1W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1355W Flood beam with reflector
LED MODULE **3000K** CRI90 4027lm 31,1W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.1356W Wide Flood beam with reflector
LED MODULE **3000K** CRI90 4027lm 31,1W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.1323 Flood beam with lenses
LED MODULE **RGBW (W=3000K)** 1523lm 22,5W
24V PWM

Requires RGBW constant voltage remote power supply
and DMX or DALI controller (pag. 528-529)



S.1353 Flood beam with lenses
LED MODULE **RGBW (W=3000K)** 1523lm 22,5W
24V PWM

Requires RGBW constant voltage remote power supply
and DMX or DALI controller (pag. 528-529)




Accessories



S.1328
VISOR for STAGE ROUND SPOT and ARM
Colour: black (cod .09)




S.3554
STAKE only for STAGE ROUND SPOT
in polypropylene.
Colour: black (code 09)




S.1360W Spot beam with lenses
LED MODULE **3000K** CRI90 5603lm 49,6W
(on request 2700K CRI90 5173lm)
(on request 4000K CRI80 6897lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


Beam lenses available on request with no surcharge: 65° and 10°x44°




S.1365W Flood beam with reflector
LED MODULE **3000K** CRI90 7152lm 57,3W
(on request 2700K CRI90 6769lm)
(on request 4000K CRI80 8750lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1366W Wide Flood beam with reflector
LED MODULE **3000K** CRI90 7152lm 57,3W
(on request 2700K CRI90 6769lm)
(on request 4000K CRI80 8750lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1363 Flood beam with lenses
LED MODULE **RGBW (W=3000K)** 2540lm 37,5W
220V-240Vac 50/60Hz
Requires DMX controller (pag. 528)



Accessories



S.1368
VISOR for MEGASTAGE ROUND SPOT
Colour: black (cod .09)




S.3554
STAKE for MEGASTAGE ROUND SPOT
in polypropylene.
Colour: black (code 09)





"Art Park", Idroscalo, Milan, Italy © Simes S.p.A.

ø60mm - ø76mm MICROSTAGE
ø76mm - ø102mm MINISTAGE

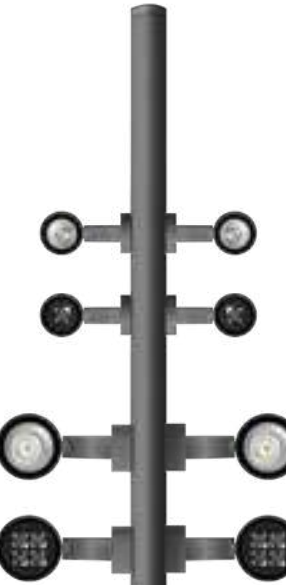


Microstage
Blade of Light





S.1339W Blade of Light beam with lens
LED MODULE **3000K** CRI80 411lm 3,3W
(on request 2700K CRI80 377lm)
(on request 4000K CRI80 431lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
With Radial lens 85°x5°

Microstage




S.1337W Spot beam with lens
LED MODULE **3000K** CRI90 322lm 2,8W
(on request 2700K CRI90 297lm)
(on request 4000K CRI80 396lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Beam lenses available on request
with no surcharge: 65°




S.1338W Flood beam with reflector
LED MODULE **3000K** CRI90 356lm 3,0W
(on request 2700K CRI90 339lm)
(on request 4000K CRI80 454lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Ministage




S.1370W Spot Optic with lenses
LED MODULE **3000K** CRI90 1040lm 8,7W
(on request 2700K CRI90 960lm)
(on request 4000K CRI80 1280lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Beam lenses available on request
with no surcharge: 65° and 10°x44°





S.1375W Medium Optic with reflector
LED MODULE **3000K** CRI90 1251lm 9,5W
(on request 2700K CRI90 1195lm)
(on request 4000K CRI80 1544lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.1376W Wide Flood Optic with reflector
LED MODULE **3000K** CRI90 1251lm 9,5W
(on request 2700K CRI90 1195lm)
(on request 4000K CRI80 1544lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

ø76mm - ø102mm


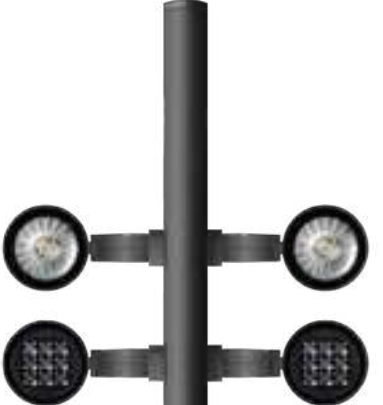


S.1380W Spot beam with lenses
LED MODULE **3000K** CRI90 2893lm 25,1W
(on request 2700K CRI90 2671lm)
(on request 4000K CRI80 3561lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Beam lenses available on request
with no surcharge: 65° and 10°x44°





S.1385W Medium beam with reflector
LED MODULE **3000K** CRI90 4027lm 31,1W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.1386W Wide Flood beam with reflector
LED MODULE **3000K** CRI90 4027lm 31,1W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Ø102mm - Ø120mm

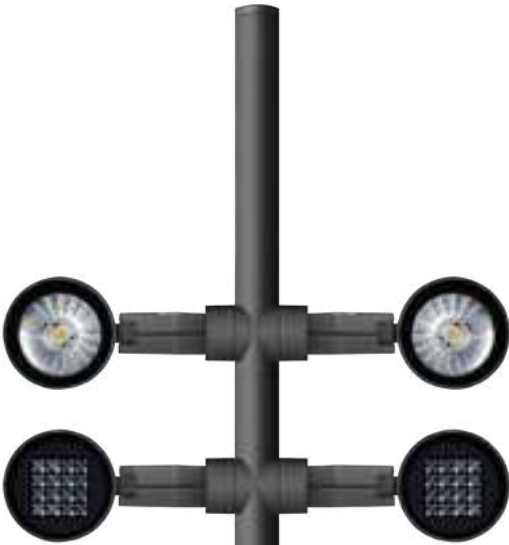


S.1390W Spot beam with lenses
LED MODULE **3000K** CRI90 5603lm 49,6W
(on request 2700K CRI90 5173lm)
(on request 4000K CRI80 6897lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


Beam lenses available on request
with no surcharge: 65° and 10°x44°



S.1395W Flood beam with reflector
LED MODULE **3000K** CRI90 7152lm 57,3W
(on request 2700K CRI90 6769lm)
(on request 4000K CRI80 8750lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1396W Wide Flood beam with reflector
LED MODULE **3000K** CRI90 7152lm 57,3W
(on request 2700K CRI90 6769lm)
(on request 4000K CRI80 8750lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



Pivot is a family of unconventional spotlights totally adjustable on the three axes, able to direct its beam at any point in the space. The peculiarity of Pivot is the extreme versatility, guaranteed by the easy change of the optical filters: from Spot 10°, to Flood 31°, to Wide Flood 60°, up to the Elliptical 10° x 60°. These filters are interchangeable by directly accessing the optics and removing the front visor. Everything is conducted without losing the IP rating of the spotlight. With its long and thin shape, Pivot stands as a light and flexible tool at the service of the scene to be illuminated. Pivot is offered with thin base, in current max 850mA and requires the remote power supply, while Pivot 230V is proposed with standard base housing the power supply.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Clear toughened glass 4 mm thick. Not visible Stainless steel A4 screws. Silicone gaskets. Double powdered paint.

PIVOT 850mA
Luminaire supplied with 5,0m bipolar flat cable for remote connection.

PIVOT TUNABLE WHITE
Luminaire supplied with 5,0m quadripolar cable for remote connection.

PIVOT 230V
Luminaire supplied with 5,0m neoprene H05RN-F cable for remote connection.

PROTECTION CLASS
IP66

ISOLATION CLASS
CLASS III ⚡ PIVOT 850mA / PIVOT 24V
CLASS I ⚡ PIVOT 230V

MECHANICAL RESISTANCE
IK 07

COLOUR
.24 Anthracite Grey

REGISTERED DESIGN
PATENT PENDING





PIVOT 850mA

SIMES

PIVOT

4LED with flat base (850mA)


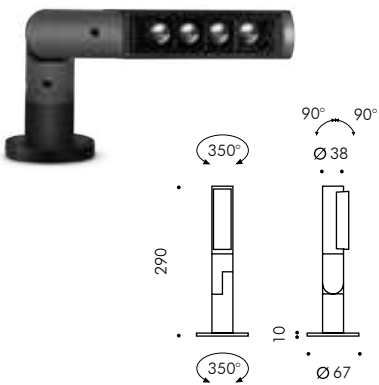


S.1751W Flood beam with lenses
LED MODULE **3000K** CRI90 874lm 9,3W
(on request 2700K CRI90 830lm)
(on request 4000K CRI80 1068lm)
max 850mA (Vf 12,8V)

Requires constant current Vout 120Vdc max
remote power supply (page 524-525)

Code	Beam filter accessories for Pivot 4 LED
S.1752	Spot 10°
S.1753	Wide Flood 60°
S.1754	Elliptical 60° x 10°

7 LED with flat base (850mA)


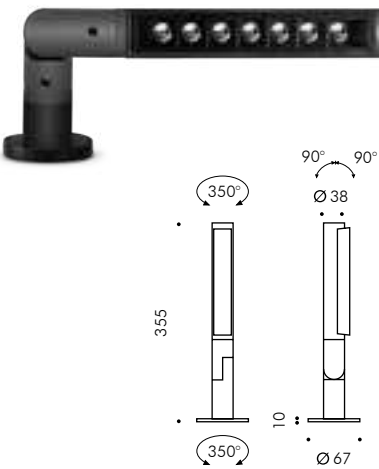


S.1761W Flood beam with lenses
LED MODULE **3000K** CRI90 1530lm 16,4W
(on request 2700K CRI90 1453lm)
(on request 4000K CRI80 1870lm)
max 850mA (Vf 22,4V)

Requires constant current Vout 120Vdc max
remote power supply (page 524-525)

Code	Beam filter accessories for Pivot 7 LED
S.1762	Spot 10°
S.1763	Wide Flood 60°
S.1764	Elliptical 60° x 10°

12 LED with flat base (850mA)

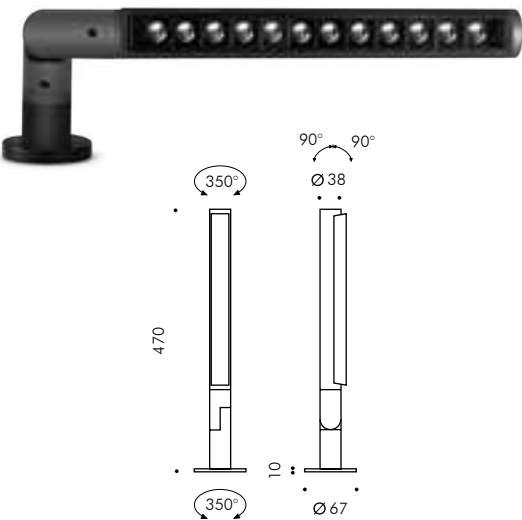

S.1771W Flood beam with lenses
LED MODULE **3000K** CRI90 2622lm 28,0W
(on request 2700K CRI90 2490lm)
(on request 4000K CRI80 3205lm)
max 850mA (Vf 38,4V)

Requires constant current Vout 120Vdc max
remote power supply (page 524-525)

Code	Beam filter accessories for Pivot 12 LED
S.1772	Spot 10°
S.1773	Wide Flood 60°
S.1774	Elliptical 60° x 10°

Accessory



S.1768
STAKE FOR PIVOT 850mA / 24V PWM
in polypropylene
Colour: black (code 09)

PIVOT,
THE SYNTHESIS OF DESIGN
AND PERFORMANCE

The Pivot luminaire is composed of a cylindrical lighting body containing the LED source, and is furthermore completed by a separate frontal visor. Specially designed to house the cowel for each LED, it ensures glare-free beams and perfectly contoured light projections.

This black protruding frontal visor considerably increases the technical possibilities of the product: thanks to various optional filters, it allows to provide different light beams, switching Pivot from a 10° Spot beam, for aiming elements at a distance, to a 31° Flood beam or 60° Wide Flood beam for large subjects, and once again to an Elliptical beam 10° x 60° for thin elements.



VARIOUS BEAMS OBTAINED WITH DIFFERENT OPTICAL FILTER ACCESSORIES



10° filter



31° standard optic





60° filter



10° x 60° filter



7 LED with base (power supply integrated)

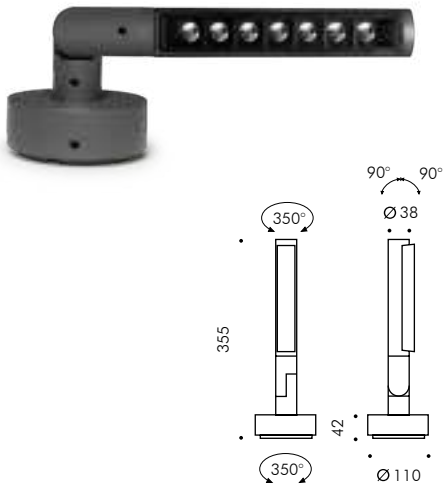

S.1766W Flood beam with lenses
LED MODULE **3000K** CRI90 1530lm 22W
(on request 2700K CRI90 1453lm)
(on request 4000K CRI80 1870lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable


Code	Beam filter accessories for Pivot 7 LED
S.1762	Spot 10°
S.1763	Wide Flood 60°
S.1764	Elliptical 60° x 10°

12 LED with base (power supply integrated)

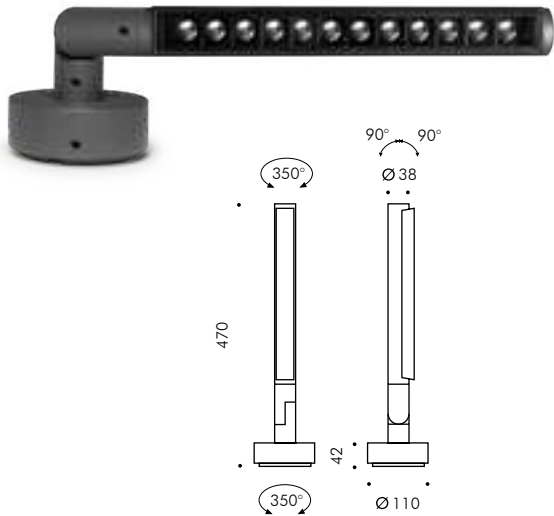

S.1776W Flood beam with lenses
LED MODULE **3000K** CRI90 2622lm 28,0W
(on request 2700K CRI90 2490lm)
(on request 4000K CRI80 3205lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Code	Beam filter accessories for Pivot 12 LED
S.1772	Spot 10°
S.1773	Wide Flood 60°
S.1774	Elliptical 60° x 10°



Accessory

S.1319
STAKE FOR PIVOT 230V
in polypropylene
Colour: black (code 09)

LED TUNABLE WHITE with flat base (24V PWM)

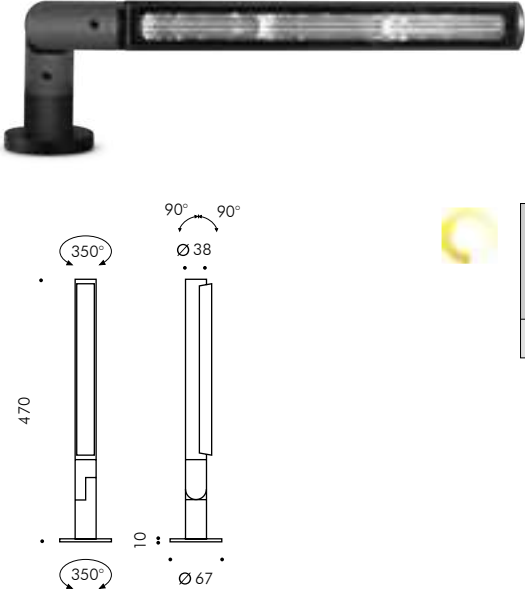

S.1777T Simmetrical optic with lenses
LED MODULE TUNABLE WHITE **2700K-4000K**
CRI90 1908lm 12W
24V PWM

Requires constant voltage remote power supply for TUNABLE WHITE and DMX or DALI controllers (pag. 526-527).

The optical filter accessories are not suitable for this version

Accessory

S.1768
STAKE FOR PIVOT 850mA / 24V PWM
in polypropylene
Colour: black (code 09)



Pivot 850mA version or 24V PWM version with thin base can be installed on ø60mm or ø76mm poles using the pole adaptor.


Accessory

S.1758

POLE ADAPTOR Ø 60/76mm
for PIVOT 850mA or 24V PWM
Colour: black (cod .09)



Simes headquarter, Corte Franca, Brescia, Italy - Artwork Stefano Bombardieri © Ph. Mario Bertani

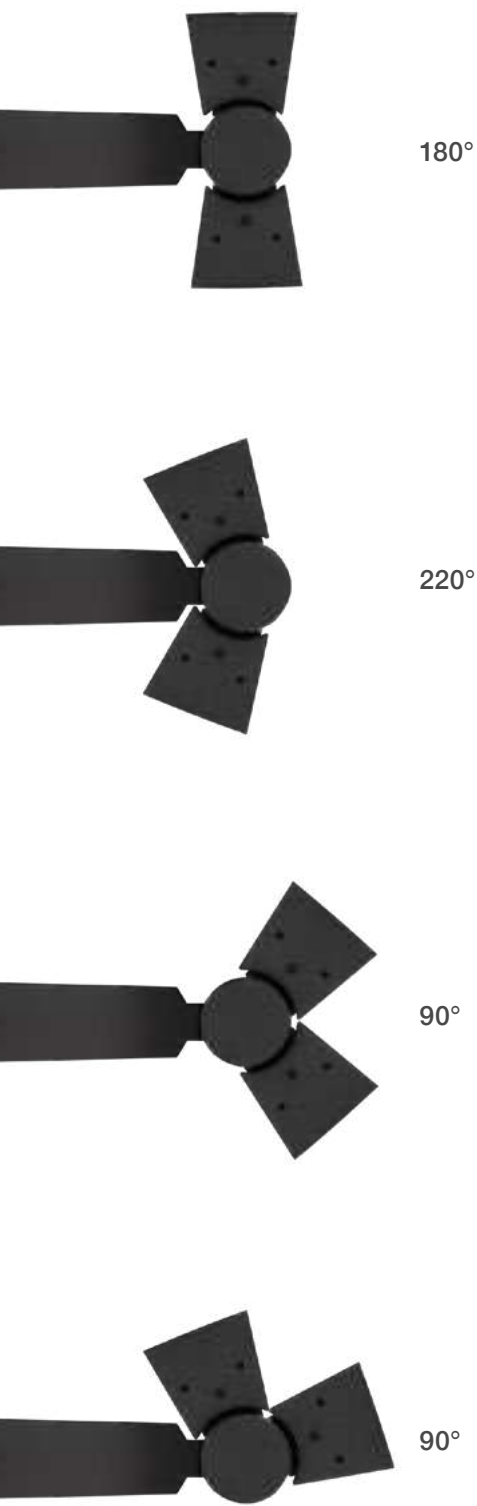

Between is a projector available in two versions: with single-emission and with double emission. This second one is composed of two lighting housings rotating around a central joint that allows them to be independently oriented to each other. The visor is an integral part of the design and ensures glare-free light distribution. The peculiarity of Between is the extreme versatility, guaranteed by the easy change of the optical filters: from Spot 10°, to Flood 38°, to Wide Flood 60°, up to the Elliptical 10° x 60°. The fixation base houses the driver.

TECHNICAL DESCRIPTION
Die-cast aluminium housing, extruded aluminium structure with high corrosion resistance. Toughened glass diffuser 5mm thick. Stainless steel A4 screws. Luminaire supplied with 5,0m neoprene H05RN-F cable. Silicone gaskets. Double powder paint

REGISTERED DESIGN
PATENT PENDING

PROTECTION CLASS
IP66

ISOLATION CLASS
CLASS I ⚡

MECHANICAL RESISTANCE
IK 07



COLOURS
.09 Black (optic black)





BETWEEN 4 LED

SIMES

BETWEEN

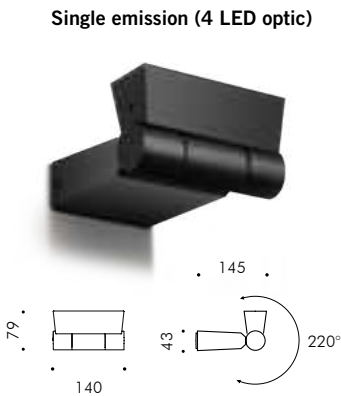



S.2600W Flood beam with lenses
LED MODULE **3000K** CRI90 874lm 9,4W
(on request 2700K CRI90 830lm)
(on request 4000K CRI80 1068lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

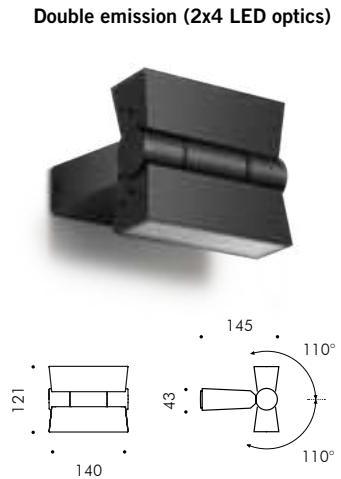



S.2602W Flood beam with lenses
2x LED MODULE **3000K** CRI90 874lm 9,4W
(on request 2700K CRI90 830lm)
(on request 4000K CRI80 1068lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Code	Beam filter accessory for Between 4 LED
S.2605	Spot 10°
S.2606	Wide Flood 60°
S.2607	Elliptical 60° x 10°

BETWEEN 7 LED

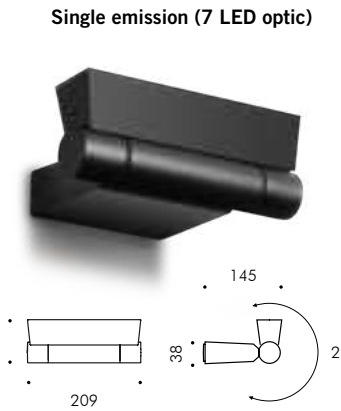

S.2610W Flood beam with lenses
LED MODULE **3000K** CRI90 1530lm 16,4W
(on request 2700K CRI90 1435lm)
(on request 4000K CRI80 1870lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

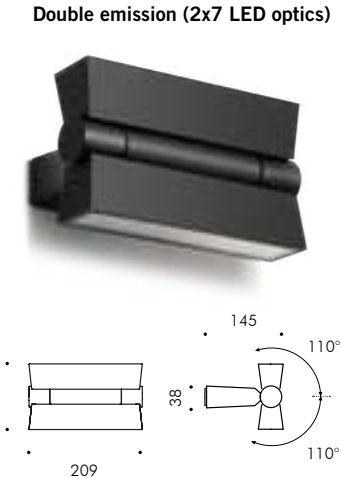


S.2612W Flood beam with lenses
2x LED MODULE **3000K** CRI90 1530lm 16,4W
(on request 2700K CRI90 1435lm)
(on request 4000K CRI80 1870lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Code	Beam filter accessory for Between 4 LED
S.2615	Spot 10°
S.2616	Wide Flood 60°
S.2617	Elliptical 60° x 10°


MULTIPLE APPLICATIONS

Between can be installed on wall or ground and it offers a wide range of lighting solutions, that are adaptable on site by using optical filters. Thanks to the joint between the two houses, the double version allow to orient the lighting beams independently.

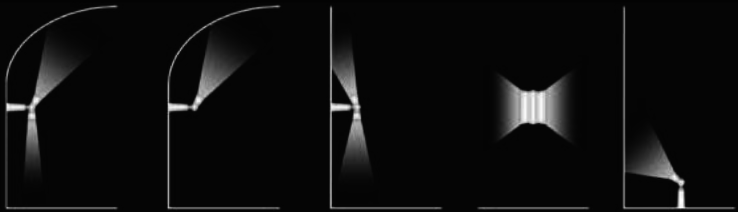

INDEPENDENT AND ADJUSTABLE OPTICS


Between is supplied with 31° optic for both the up and down houses. Thanks to the availability of various optical filters, 10° Narrow beam, 31° Medium beam or 60° Wide beam and Elliptical beam 10° x 60°, it is possible to change individually the light distribution. This possibility allows to combine various beams angle in the same product pointing different subjects.

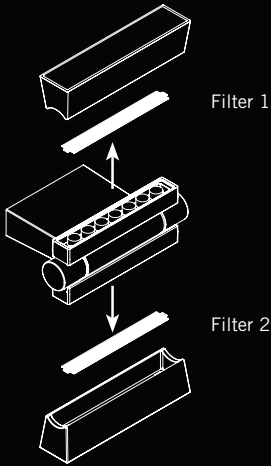

VARIOUS BEAMS OBTAINED WITH DIFFERENT OPTICAL FILTER ACCESSORIES





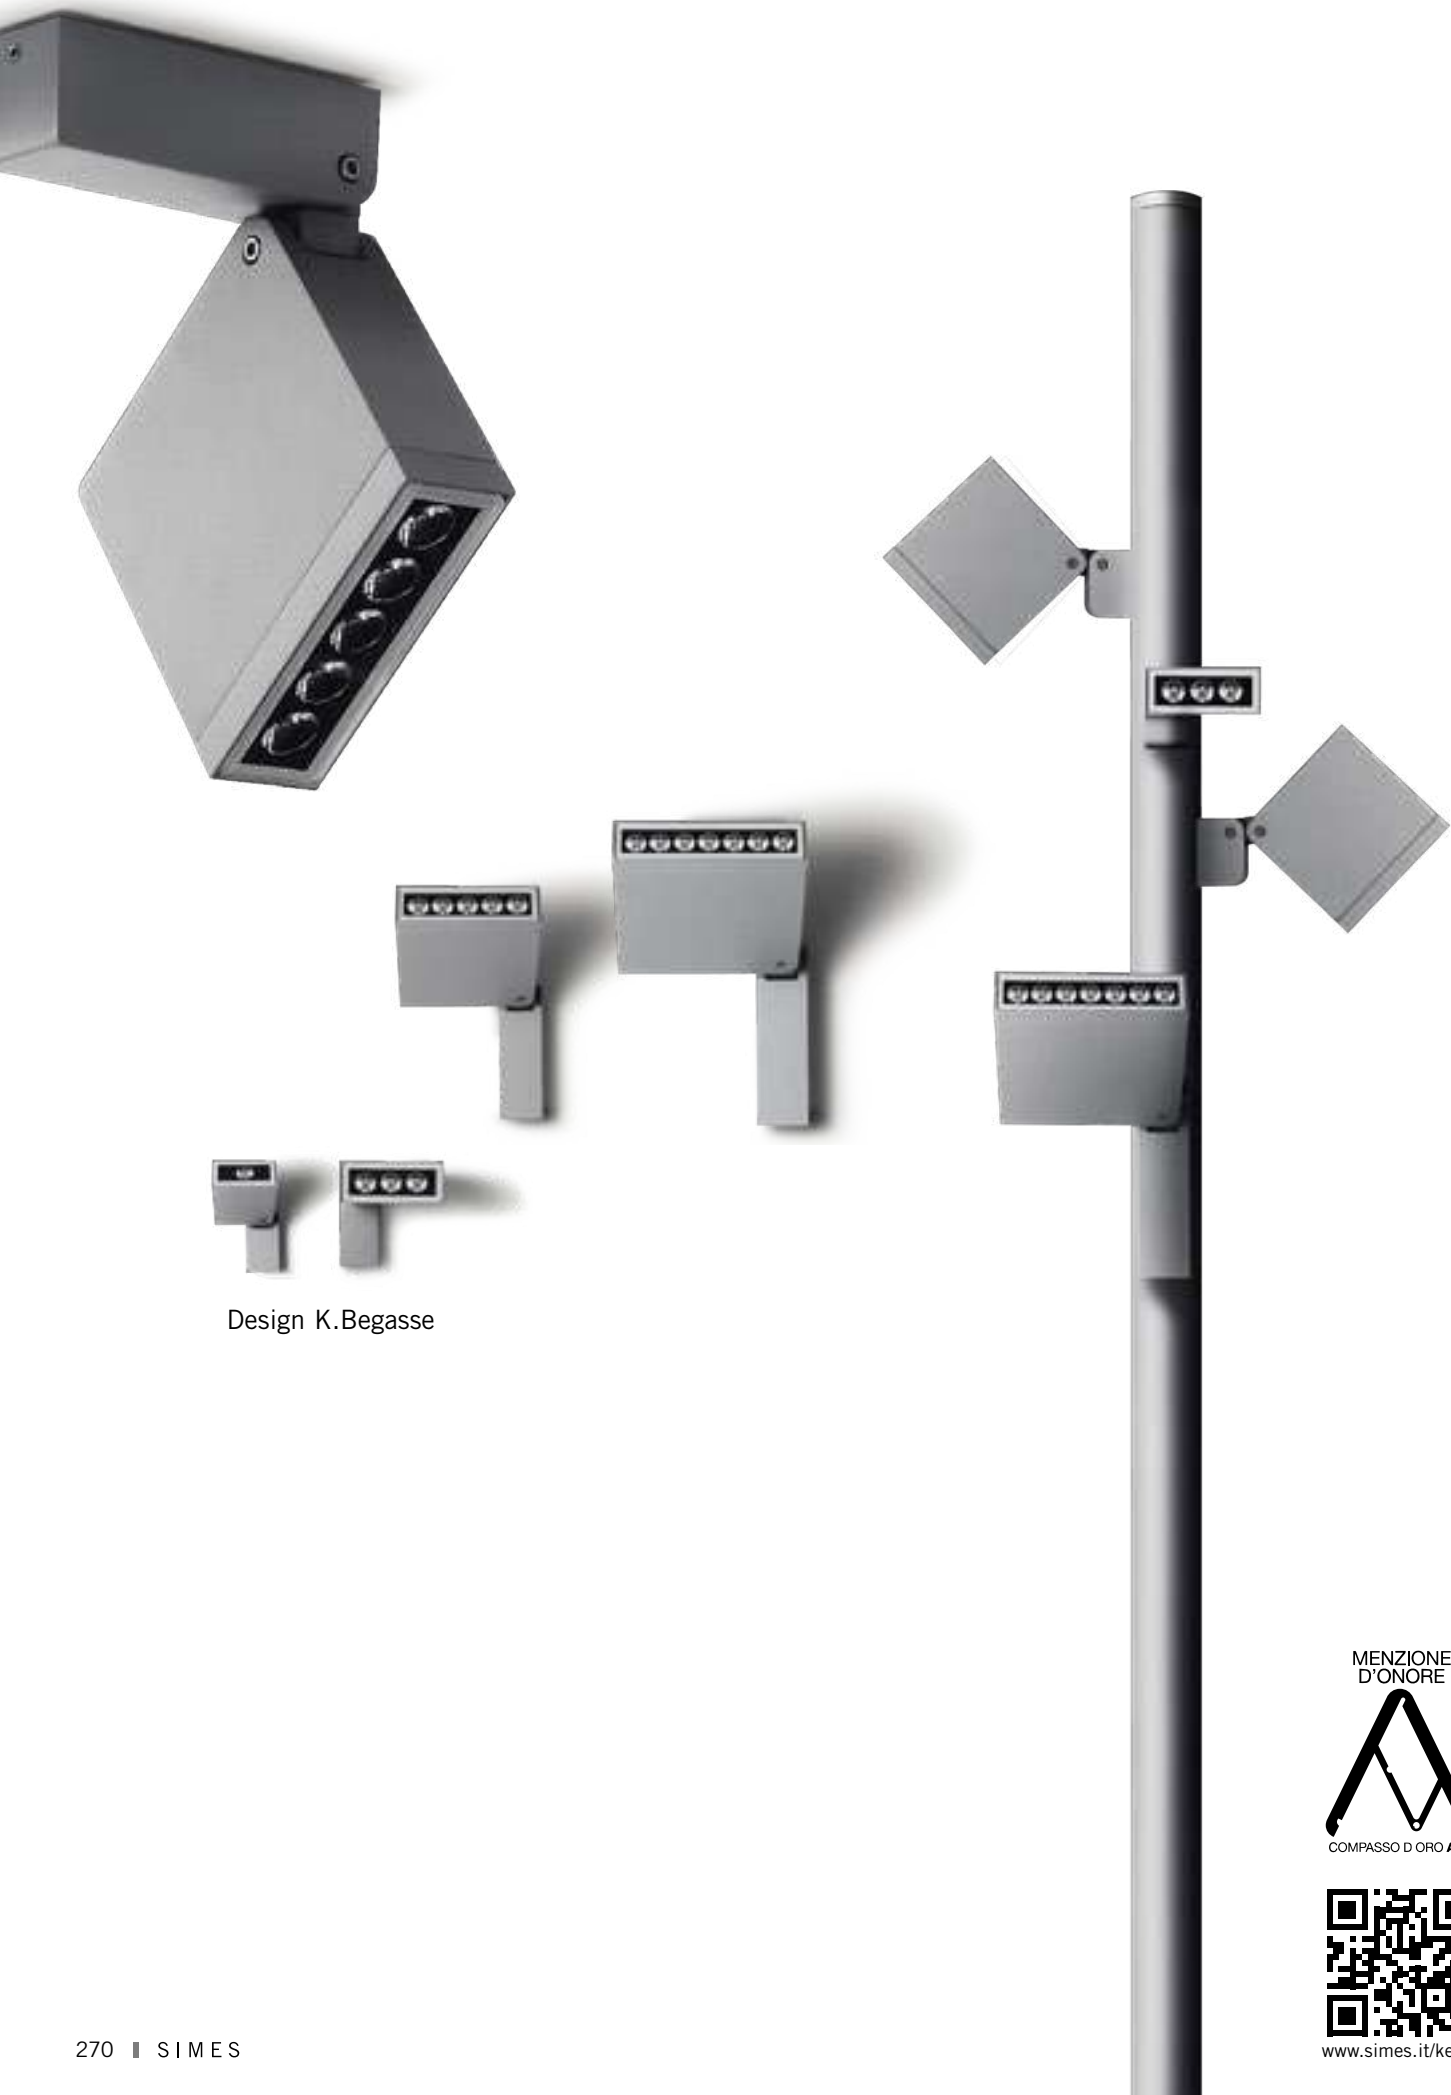

Design K.Begasse



www.simes.it/keen

Keen represents the evolution of outdoor lighting spotlight. A special double joint allows the fitting to take infinite positions for different light effects. Its minimal design makes it suitable for a wide range of architectural project applications. Available in four sizes, Keen is engineered with the most advanced LED technology and different optical solutions, ensuring a performing light effect and energy saving characteristics.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Stainless steel A4 screws. Clear toughened glass diffuser. Double joint allowing rotation on three different axis. Silicone gaskets. Double powder paint.

MICROKEEN and MINIKEEN
Luminaire supplied with 1,5m neoprene H05RN-F cable.

KEEN and MEGAKEEN
Luminaire supplied with neoprene H05RN-F cable.

**PATENTED
REGISTERED DESIGN**

PROTECTION CLASS
IP65


ISOLATION CLASS
CLASS II



MECHANICAL RESISTANCE
IK 07 MICRO, MINIKEEN
IK 06 KEEN, MEGAKEEN

 MICROKEEN, MINIKEEN

COLOURS

- | | |
|-----|----------------|
| .01 | White |
| .14 | Aluminium Grey |

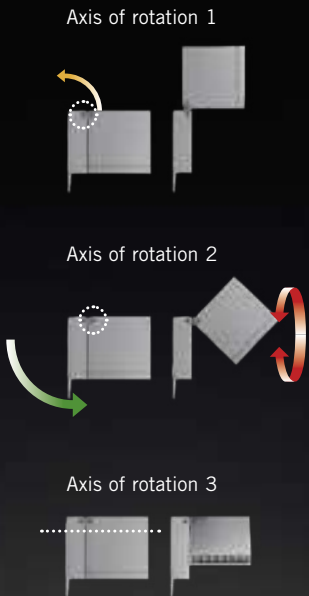

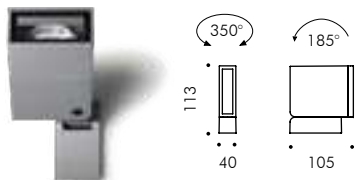

S.1506W Blade of Light beam with lens
LED MODULE **3000K** CRI80 411lm 3,3W
(on request 2700K CRI80 377lm)
(on request 4000K CRI80 431lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
With Radial Lens 92°x3°




S.1508
ACCESSORY FOR VERTICAL
INSTALLATION of MICROKEEN



S.1014
STAKE for MICROKEEN,
MINIKEEN and KEEN
Accessory for vertical
installation only

Adhesive gobo for Microkeen
(included in the "Blade of Light" version S.1506W and S.1546W)

 The adhesive gobo for Microkeen "Blade of Light "can be adapted to modify the aperture of the beam and then applied on the front glass of the fixture. By simply cutting at the level of the required degrees you create a slit to allow the desired light emission.

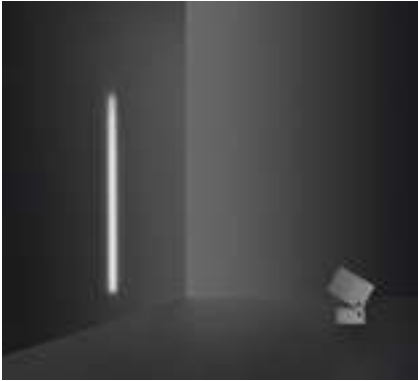

Adhesive gobo with 70° aperture



Adhesive gobo with 50° aperture



Adhesive gobo with 30° aperture



Simes headquarter, Corte Franca, Brescia, Italy

MICROKEEN

SIMES

KEEN

SIMES



S.1505W Spot beam with lens
LED MODULE **3000K** CRI90 403lm 3,7W
(on request 2700K CRI90 372lm
(on request 4000K CRI80 496lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Beam lenses available on request with no surcharge: 24°, 42° and 12°x40°




S.1508
ACCESSORY FOR VERTICAL
INSTALLATION of MICROKEEN




S.1014
STAKE for MICROKEEN,
MINIKEEN and KEEN
Accessory for vertical
installation only



S.1510W Spot beam with lenses
LED MODULE **3000K** CRI90 1607lm 14W
(on request 2700K CRI90 1484lm)
(on request 4000K CRI80 1978lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1511W Medium beam with lenses
LED MODULE **3000K** CRI90 1607lm 14W
(on request 2700K CRI90 1484lm)
(on request 4000K CRI80 1978lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1513W Ellyptical beam with lenses
LED MODULE **3000K** CRI90 1607lm 14W
(on request 2700K CRI90 1484lm)
(on request 4000K CRI80 1978lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Beam lenses available on request with no surcharge: 42°





S.1519
ACCESSORY FOR VERTICAL
INSTALLATION of KEEN




S.1014
STAKE for MICROKEEN, MINIKEEN
and KEEN
Accessory for vertical installation only

MINIKEEN

MEGAKEEN



S.1500W Spot beam with lenses
LED MODULE **3000K** CRI90 780lm 6,5W
(on request 2700K CRI90 720lm
(on request 4000K CRI80 960lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.1501W Medium beam with lenses
LED MODULE **3000K** CRI90 780lm 6,5W
(on request 2700K CRI90 720lm
(on request 4000K CRI80 960lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable


Beam lenses available on request with no surcharge: 42° and 12°x40°




S.1509
ACCESSORY FOR VERTICAL
INSTALLATION of MINIKEEN




S.1014
STAKE for MICROKEEN,
MINIKEEN and KEEN
Accessory for vertical
installation only




Megakeen projector in standard
version can be fixed also to poles.



S.1515W Spot beam with lenses
LED MODULE **3000K** CRI90 2548lm 22,8W
(on request 2700K CRI90 2352lm)
(on request 4000K CRI80 3137lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1516W Medium beam with lenses
LED MODULE **3000K** CRI90 2548lm 22,8W
(on request 2700K CRI90 2352lm)
(on request 4000K CRI80 3137lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1517W Ellyptical beam with lenses
LED MODULE **3000K** CRI90 2548lm 22,8W
(on request 2700K CRI90 2352lm)
(on request 4000K CRI80 3137lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Beam lenses available on request with no surcharge: 42°




S.3049
STAKE for MEGAKEEN



KEEN Pole mounted



The Keen, Minikeen and Microkeen pole versions have extended the project application configurations of this new projector. Thanks to the special anchor base the luminaire can be fixed to new or existing poles of diameter of no less than 60mm. Pre-wired luminaire with 6m of neoprene cable.

SIMES

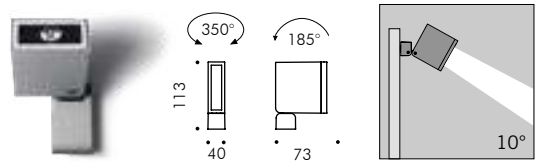


S.1545W Spot beam with lens
LED MODULE **3000K** CRI90 403lm 3,7W
(on request 2700K CRI90 372lm)
(on request 4000K CRI80 496lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Beam lenses available on request
with no surcharge: 24°, 42° and 12°x40°



S.1546W Blade of Light beam with lens
LED MODULE **3000K** CRI80 411lm 3,3W
(on request 2700K CRI80 377lm)
(on request 4000K CRI80 431lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
With Radial Lens 92°x3°




S.1520W Spot beam with lenses
LED MODULE **3000K** CRI90 780lm 6,5W
(on request 2700K CRI90 720lm)
(on request 4000K CRI80 960lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





S.1521W Medium beam with lenses
LED MODULE **3000K** CRI90 780lm 6,5W
(on request 2700K CRI90 720lm)
(on request 4000K CRI80 960lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable


Beam lenses available on request
with no surcharge: 42° and 12°x40°



S.1530W Spot beam with lenses
LED MODULE **3000K** CRI90 1607lm 14W
(on request 2700K CRI90 1484lm)
(on request 4000K CRI80 1978lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1531W Medium beam with lenses
LED MODULE **3000K** CRI90 1607lm 14W
(on request 2700K CRI90 1484lm)
(on request 4000K CRI80 1978lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1533W Elliptical beam with lenses
LED MODULE **3000K** CRI90 1607lm 14W
(on request 2700K CRI90 1484lm)
(on request 4000K CRI80 1978lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

42° beam lenses available on request
with no surcharge



Tottenham Hotspur Stadium, London, Great Britain © Ph. Faruk Pinjo

Movit is a tiltable mid-power floodlight available in three dimensions for wall, ground, with arm and on pole, to be used as direct or indirect lighting. Elegant in its thin proportions, Movit has a reduced visible impact. Easy to install it is available with symmetric or asymmetric distribution, to guarantee the maximum project flexibility for various applications.

TECHNICAL DESCRIPTION
Die-cast aluminium housing and extruded aluminium structure (arm version) with high corrosion resistance. Stainless steel A4 screws. Clear toughened glass diffuser. Aluminium reflectors. Silicone gaskets. Double powder paint.

MOVIT RECTANGULAR and SQUARE 220mm
Luminaire supplied with 1,5m neoprene H05RN-F cable

MOVIT SQUARE 320mm
Luminaire supplied with neoprene H05RN-F cable and connector in the base.

REGISTERED DESIGN

PROTECTION CLASS
IP66

ISOLATION CLASS
CLASS I ⚡

MECHANICAL RESISTANCE
IK 09
IK 10 MOVIT SQUARE 320mm



COLOURS

- .01 White
- .14 Aluminium Grey
- .24 Anthracite Grey




Design K.Begasse



www.simes.it/movit




Rectangular with base




S.3005W Very Wide Flood beam with reflector
LED MODULE **3000K** CRI90 919lm 7,7W
(on request 2700K CRI90 873lm)
(on request 4000K CRI80 1174lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Rectangular with base



S.3000W Asymmetrical beam with reflector
LED MODULE **3000K** CRI90 919lm 7,7W
(on request 2700K CRI90 873lm)
(on request 4000K CRI80 1174lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





Accessory




S.3049
ACCESSORY STAKE
FOR MOVIT SQUARE 220mm
and MOVIT RECTANGULAR 130mm
In polypropylene
Colour: black (code .09)

Rectangular with arm

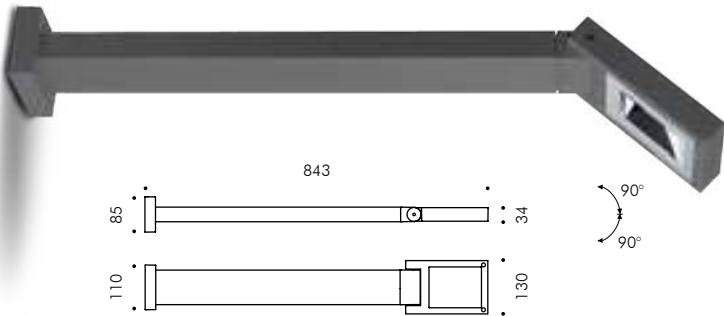

S.3010W Very Wide Flood beam with reflector
LED MODULE **3000K** CRI90 919lm 7,7W
(on request 2700K CRI90 873lm)
(on request 4000K CRI80 1174lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable


Square with base



S.3055W Very Wide Flood beam with reflector
LED MODULE **3000K** CRI90 2258lm 19,1W
(on request 2700K CRI90 2075lm)
(on request 4000K CRI80 3011lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply
available on request with surcharge.

Square with base



S.3050W Asymmetrical beam with reflector
LED MODULE **3000K** CRI90 2258lm 19,1W
(on request 2700K CRI90 2075lm)
(on request 4000K CRI80 3011lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Version with DALI 2 / PUSH power supply
available on request with surcharge.

Accessory



S.3049
ACCESSORY STAKE
FOR MOVIT SQUARE 220mm
and MOVIT RECTANGULAR 130mm
In polypropylene
Colour: black (code .09)


Square with arm

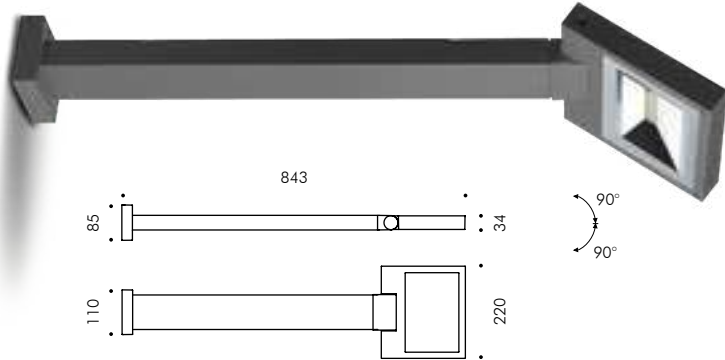

S.3060W Very Wide Flood beam with reflector
LED MODULE **3000K** CRI90 2258lm 19,1W
(on request 2700K CRI90 2075lm)
(on request 4000K CRI80 3011lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable


Version with DALI 2 / PUSH power supply
available on request with surcharge.

Square with base




S.3075W Very Wide Flood beam with reflector
LED MODULE **3000K** CRI90 4725lm 40,1W
(on request 2700K CRI90 4488lm)
(on request 4000K CRI80 6037lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Square with base



S.3070W Asymmetrical beam with reflector
LED MODULE **3000K** CRI90 4725lm 40,1W
(on request 2700K CRI90 4488lm)
(on request 4000K CRI80 6037lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



Accessory




S.3079
ACCESSORY STAKE
FOR MOVIT SQUARE 320mm
In polypropylene
Colour: black (code .09)




MOVIT Pole mounted

Movit Rectangular, Movit Square 220mm and Movit Square 320mm can be installed on the pole using the fixation accessory.

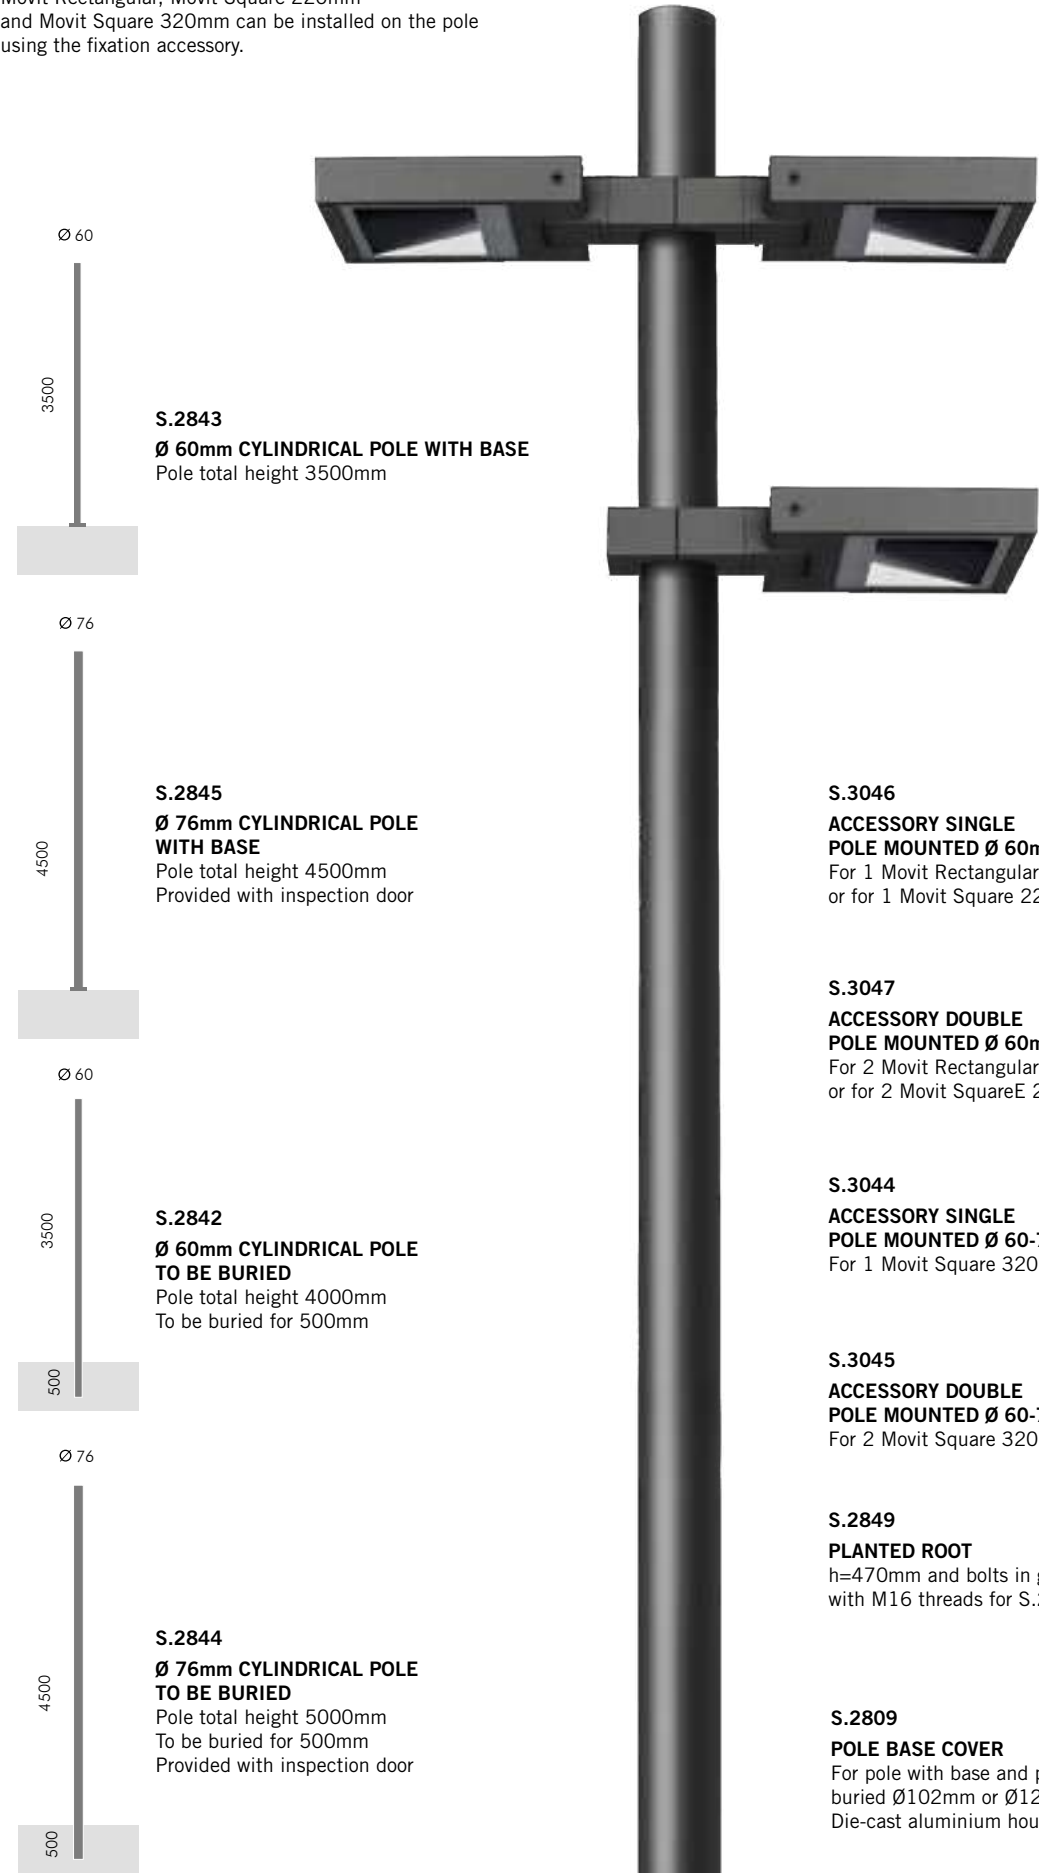


SIMES


S.3046
ACCESSORY SINGLE
POLE MOUNTED Ø 60mm
For 1 Movit Rectangular 130mm
or for 1 Movit Square 220mm




S.3047
ACCESSORY DOUBLE
POLE MOUNTED Ø 60mm
For 2 Movit Rectangular 130mm
or for 2 Movit SquareE 220mm




S.3044
ACCESSORY SINGLE
POLE MOUNTED Ø 60-76mm
For 1 Movit Square 320mm



S.3045
ACCESSORY DOUBLE
POLE MOUNTED Ø 60-76mm
For 2 Movit Square 320mm



S.2849
PLANTED ROOT
h=470mm and bolts in galvanized steel
with M16 threads for S.2843 / S.2845




S.2809
POLE BASE COVER
For pole with base and pole to be
buried Ø102mm or Ø121mm.
Die-cast aluminium housing.



ON REQUEST ADAPTOR
For cylindrical poles Ø 60mm / Ø 76mm
for S.2809 pole base cover



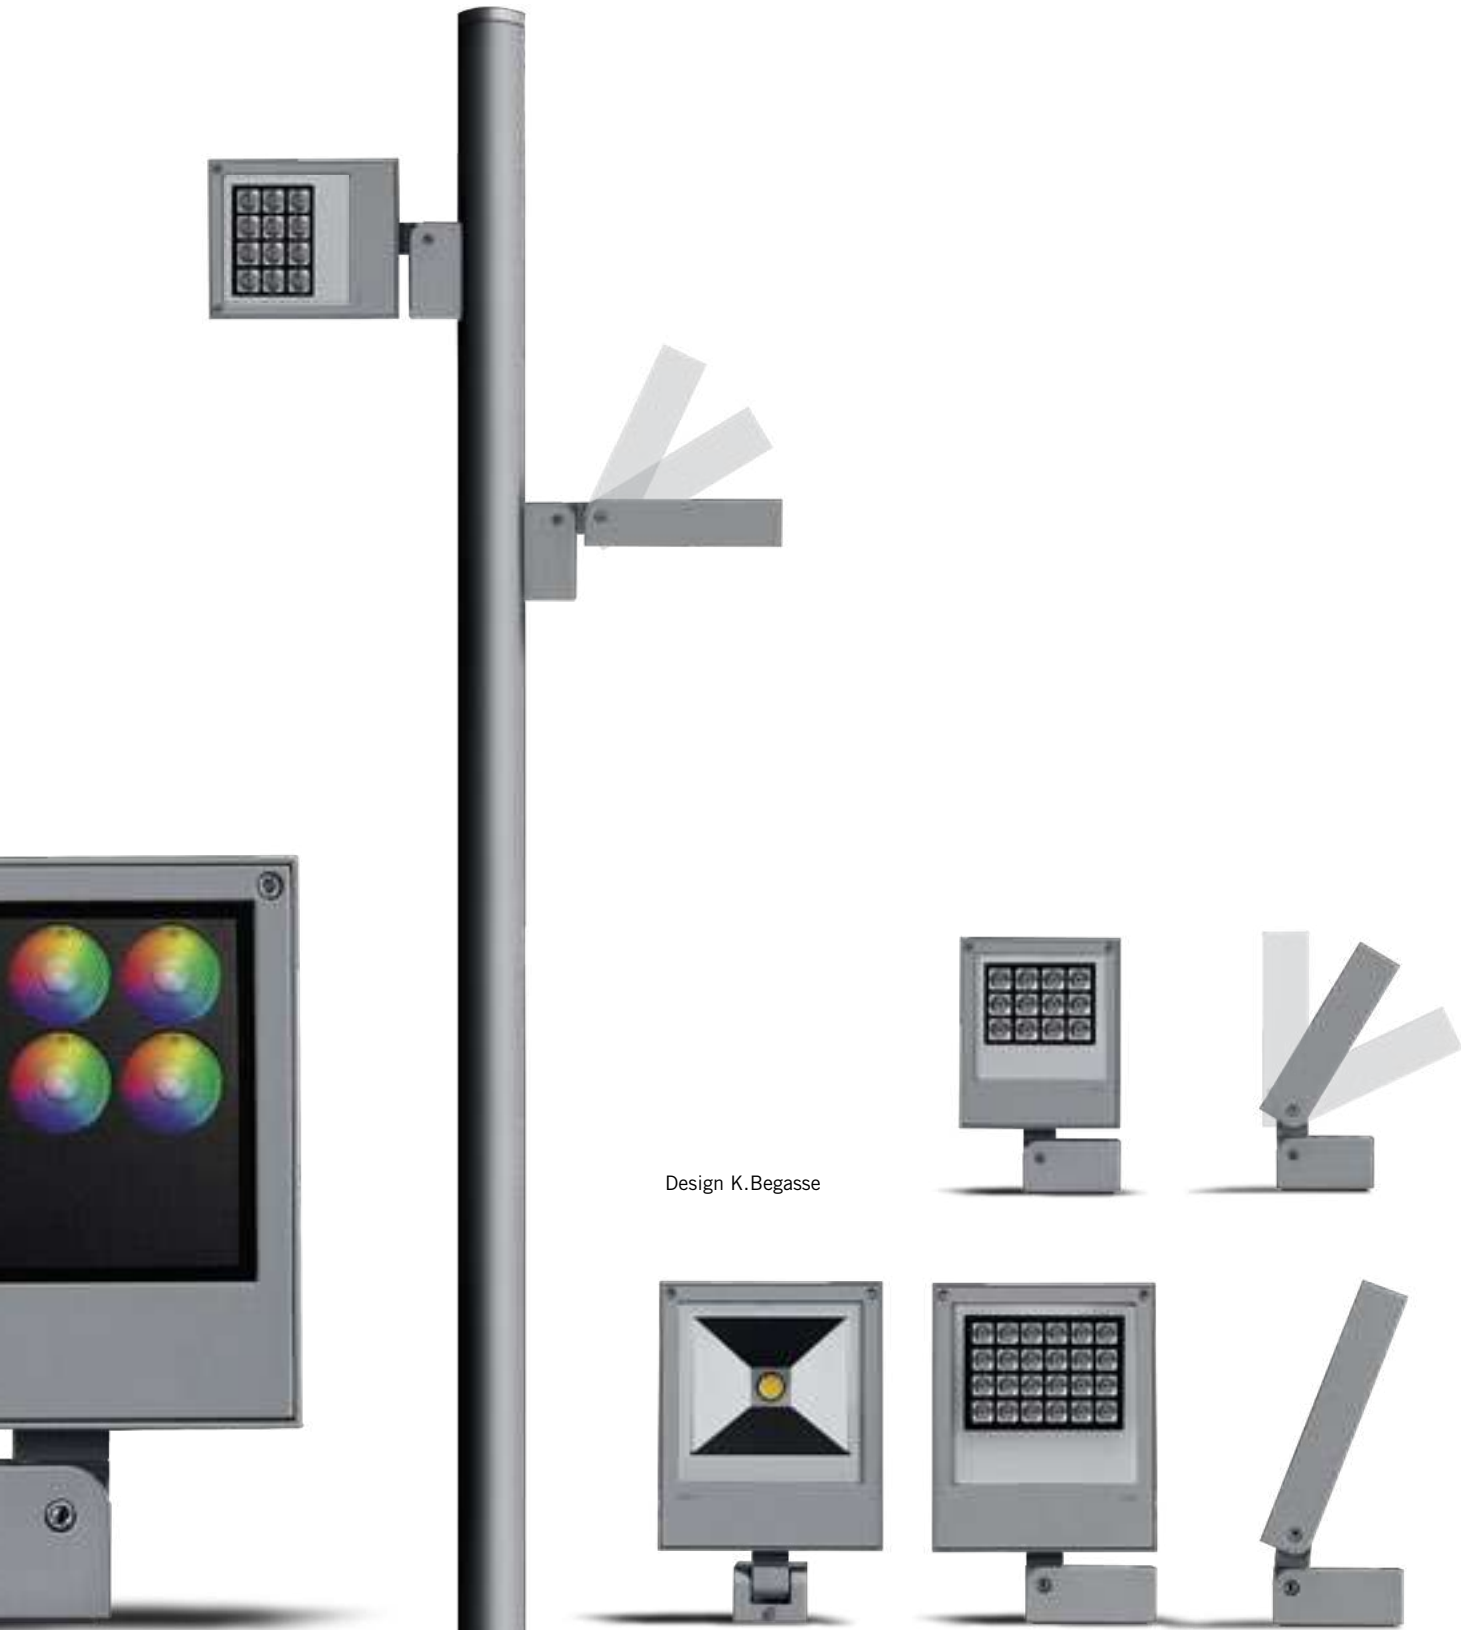

Design K.Begasse



www.simes.it/twist

The Twist spotlight covers a wide range of project applications and gives multiple solutions with different lighting effects. Developed from the same concept of Keen and Movit, this new projector is characterized by a special adjustable base combined with a series of optics and reflectors that allow for infinite lighting solutions. It can easily satisfy the most difficult project requirements. Available in two sizes, Twist can be wall and ceiling mounted or pole and floor mounted together with a pole bracket or ground stake.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Stainless steel A4 screws. Clear toughened glass diffuser. Aluminium reflectors (LED COB versions). Luminaire supplied with 6,0m neoprene H05RN-F cable. Silicone gaskets. Double powder paint.

**PATENTED
REGISTERED DESIGN**

PROTECTION CLASS
IP65
ISOLATION CLASS
CLASS I ⊕
CLASS III ⬢ TWIST RGBW

MECHANICAL RESISTANCE
IK 07 MINITWIST
IK 09 TWIST


COLOURS
14 Aluminium Grey

Axis of rotation 1 (max 90°)




Axis of rotation 2 (max 90°)




Axis of rotation 3 (max 280°)



Minitwist




S.3015W Spot beam with lenses
MODULE LED **3000K** CRI90 3120lm 25,1W
(on request 2700K CRI90 2880lm
(on request 4000K CRI80 3840lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.3016W Flood beam with lenses
MODULE LED **3000K** CRI90 3120lm 25,1W
(on request 2700K CRI90 2880lm
(on request 4000K CRI80 3840lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


Beam lenses available on request with no surcharge: 66° and 12°x40°




S.3018W Very Wide Flood beam with reflector
MODULE LED **3000K** CRI90 2162lm 15,3W
(on request 2700K CRI90 2029lm
(on request 4000K CRI80 2556lm)
220V-230V AC 50/60Hz
Dimmable DALI 2 / PUSH



Twist




S.3065W Spot beam with lenses
MODULE LED **3000K** CRI90 5455lm 43,1W
(on request 2700K CRI90 5035lm
4000K CRI80 6715lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.3066W Flood beam with lenses
MODULE LED **3000K** CRI90 5455lm 43,1W
(on request 2700K CRI90 5035lm
4000K CRI80 6715lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Beam lenses available on request with no surcharge: 66° and 12°x40°




S.3068W Very Wide Flood beam with reflector
MODULE LED **3000K** CRI90 4816lm 35,4W
(on request 2700K CRI90 4732lm
4000K CRI80 5999lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.3067 Ottica Flood with lenses
MODULE LED **RGBW (W=3000K)** 2192lm 31,9W
24V PWM

Requires RGBW constant voltage remote power supply
and DMX or DALI controller (pag. 528-529)



Minitwist and Twist can be installed on poles (min Ø60mm, max Ø300mm) using the pole adaptor.



S.3019
POLE ADAPTOR
MINITWIST



S.3069
POLE ADAPTOR
TWIST



MAINA Headquarter Arch. Gianni Arnaudo, Fossano, Cuneo, Italy © Ph. Mario Bertani / Simes S.p.A.



Outline is a spotlight with minimalist design. It expresses the “solids and voids” concept of Simes, designed to minimize the visual impact of the product in favor of the architecture. Outline is available with various optics: Spot 10° and Flood 29° for ground, wall and pole applications. Outline is also offered with a Very Wide optic 91° x 116° for wall and pole application to illuminate wide areas, parks, squares and parking places.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Stainless steel A4 screws. Clear toughened glass diffuser 5mm thick. HI-GRADE aluminium reflectors for Outline Flood. Concentrating or diffusing lenses for Outline Spot. Luminaire supplied with neoprene H05RN-F cable and connector in the base. Silicone gaskets. Double powder paint.

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⚡

MECHANICAL RESISTANCE
IK 08




REGISTERED DESIGN

COLOURS

.14 Aluminium Grey

.24 Anthracite Grey

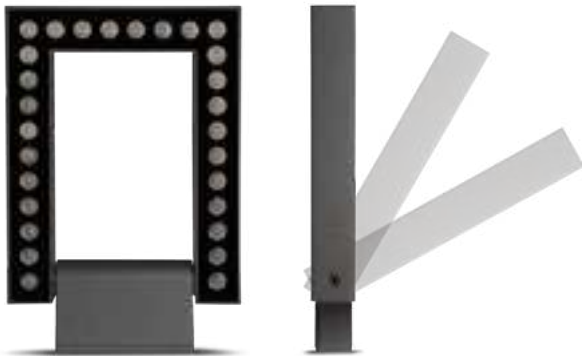


Design K.Begasse




www.simes.it/outline






S.3100W Spot beam with lenses
LED MODULE **3000K** CRI90 6720lm 54,9W
(on request 2700K CRI90 6384lm)
(on request 4000K CRI80 8372lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.3101W Medium beam with lenses
LED MODULE **3000K** CRI90 6720lm 54,9W
(on request 2700K CRI90 6384lm)
(on request 4000K CRI80 8372lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Beam lenses available on request with no surcharge: 42°



S.3105W Very Wide Flood beam with reflector
LED MODULE **3000K** CRI90 5600lm 42W
(on request 2700K CRI90 5320lm)
(on request 4000K CRI80 6975lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




Accessory




S.3079 STAKE FOR OUTLINE
In polypropylene
Colour: black (code .09)



S.2843
Ø 60mm CYLINDRICAL POLE WITH BASE
Pole total height 3500mm



S.2845
Ø 76mm CYLINDRICAL POLE WITH BASE
Pole total height 4500mm
Provided with inspection door



S.2842
Ø 60mm CYLINDRICAL POLE TO BE BURIED
Pole total height 4000mm
To be buried for 500mm



S.2844
Ø 76mm CYLINDRICAL POLE TO BE BURIED
Pole total height 5000mm
To be buried for 500mm
Provided with inspection door

Outline can be installed on the pole using the fixation accessory.


S.3044
ACCESSORY SINGLE POLE MOUNTED Ø 60-76mm
For 1 Outline



S.3045
ACCESSORY DOUBLE POLE MOUNTED Ø 60-76mm
For 2 Outline



S.2849
PLANTED ROOT
h=470mm and bolts in galvanized steel with M16 threads for S.2843 / S.2845



S.2809
POLE BASE COVER
For pole with base and pole to be buried Ø102mm or Ø121mm.
Die-cast aluminium housing.



ON REQUEST ADAPTOR
For cylindrical poles Ø 60mm / Ø 76mm for S.2809 pole base cover







Stage rectangular is a family of three dimensions of high performing power projectors, with slim design and characterized by a discreet and minimal aesthetic. Stage Rectangular in its reduced dimensions, assures high luminous package and it is offered with four beams: asymmetric, Spot 19°, Flood 37° and Very Wide Flood 100°.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Stainless steel A4 screws. Pure aluminium reflectors, or with concentrating or diffusing lenses. Clear toughened glass diffuser. Luminaire with double cable entry and cable glands. Silicone gaskets. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP66

ISOLATION CLASS
See single product

MECHANICAL RESISTANCE
IK 07



COLOURS


.14 Aluminium Grey

.24 Anthracite Grey




www.simes.it/stage







S.1225W Asymmetrical beam with reflector
LED MODULE **3000K** CRI80 4550lm 32,6W
(on request 2700K CRI80 4322lm)
(on request 4000K CRI80 4900lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
CLASS II




S.1226W Medium beam with lenses
LED MODULE **3000K** CRI80 5652lm 34,5W
(on request 2700K CRI80 5356lm)
(on request 4000K CRI80 5720lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
CLASS II



S.1227W Flood beam with lenses
LED MODULE **3000K** CRI80 5652lm 34,5W
(on request 2700K CRI80 5356lm)
(on request 4000K CRI80 5720lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
CLASS II




S.1220W Very Wide Flood beam with reflector
LED MODULE **3000K** CRI80 5644lm 35,3W
(on request 2700K CRI80 5434lm)
(on request 4000K CRI80 5906lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
CLASS II




Accessory




S.1005
STAKE FOR MINISTAGE
In polypropylene
Colour: black (code .09)




S.1205W Asymmetrical beam with reflector
LED MODULE **3000K** CRI80 14381lm 78,1W
(on request 2700K CRI80 13661lm)
(on request 4000K CRI80 17136lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
CLASS II




S.1210W Medium beam with lenses
LED MODULE **3000K** CRI80 14118lm 93,4W
(on request 2700K CRI80 13380lm)
(on request 4000K CRI80 14292lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
CLASS I




S.1212W Flood beam with lenses
LED MODULE **3000K** CRI80 14118lm 93,4W
(on request 2700K CRI80 13380lm)
(on request 4000K CRI80 14292lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
CLASS I




S.1200W Very Wide Flood beam with reflector
LED MODULE **3000K** CRI80 16068lm 78,1W
(on request 2700K CRI80 15304lm)
(on request 4000K CRI80 16445lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
CLASS II







S.1235W Asymmetrical beam with reflector
LED MODULE **3000K** CRI80 20020lm 143,2W
(on request 2700K CRI80 19019lm)
(on request 4000K CRI80 21560lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
CLASS II





S.1236W Medium beam with lenses
LED MODULE **3000K** CRI80 21276lm 134,4W
(on request 2700K CRI80 20160lm)
(on request 4000K CRI80 21540lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
CLASS I



S.1237W Flood beam with lenses
LED MODULE **3000K** CRI80 21276lm 134,4W
(on request 2700K CRI80 20160lm)
(on request 4000K CRI80 21540lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
CLASS I



S.1230W Very Wide Flood beam with reflectors
LED MODULE **3000K** CRI80 28212lm 173,9W
(on request 2700K CRI80 26948lm)
(on request 4000K CRI80 28876lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
CLASS I

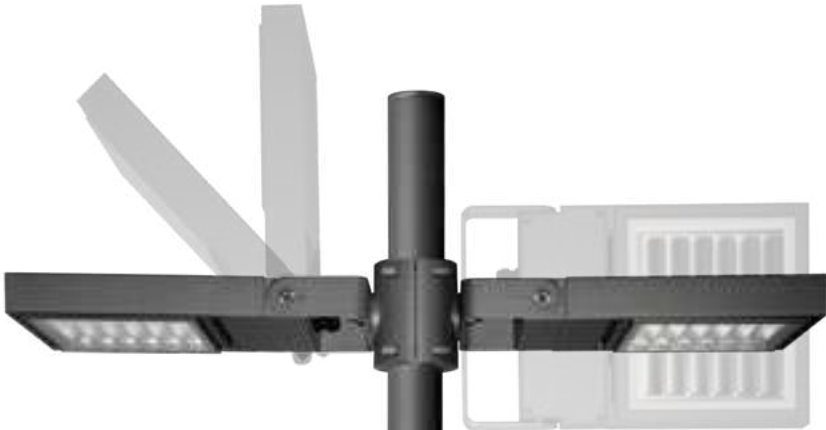

Ministage, Stage and Megastage can be installed on the pole using the fixation accessory.



S.1016
FLANGE FOR POLE Ø60mm INSTALLATION
Flange in die-cast aluminium for Ministage and Stage, suitable only for Ø60mm poles. The flange can be used for maximum 2 projectors, one for each side.



S.1017
FLANGE FOR POLE Ø76mm INSTALLATION
Flange in die-cast aluminium for Ministage and Stage, suitable only for Ø76mm poles. The flange can be used for maximum 2 projectors, one for each side.




S.1018
FLANGE FOR POLE Ø102mm INSTALLATION
Flange in die-cast aluminium for Ministage, Stage and Megastage, suitable only for Ø102mm poles. The flange can be used for maximum 2 projectors, one for each side.



S.1239
FLANGE FOR POLE Ø120mm INSTALLATION
Flange in die-cast aluminium for Ministage, Stage and Megastage, suitable only for Ø120 mm poles. The flange can be used for maximum 2 projectors, one for each side.





www.simes.it/streamline

Streamline is a family of linear fixed and tiltable floodlights for wall and ground application. The fixed version ensures a grazing lighting effect and it's perfect as facade lighting and wall. It can be tilted from 0°, to -5°, till -10° with an asymmetric light distribution. Streamline in the 180° tiltable version is offered with Spot 12°, Flood 31° and asymmetric optic, for a precise light distribution.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Clear toughened glass diffuser. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

PROJECTOR
Luminaire supplied with 1,5m neoprene H05RN-F cable.

WALL MOUNTED
Luminaire with one single cable entry and grommet. Luminaire with double cable entry and grommet version available on request with surcharge.

REGISTERED DESIGN


PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⚡



MECHANICAL RESISTANCE
IK 07

- COLOURS**
- .14 Aluminium Grey
 - .24 Anthracite Grey






S.1247W Asimmetrical beam with lenses
LED MODULE **3000K** CRI80 3192lm 20,5W
(on request 2700K CRI80 3032lm)
(on request 4000K CRI80 3778lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





S.1245W Spot beam with lenses
LED MODULE **3000K** CRI90 3900lm 32,6W
(on request 2700K CRI90 3600lm)
(on request 4000K CRI80 4800lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.1246W Flood beam with lenses
LED MODULE **3000K** CRI90 3900lm 32,6W
(on request 2700K CRI90 3600lm)
(on request 4000K CRI80 4800lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable


Beam lenses available on request
with no surcharge: 66° and 10°x40°

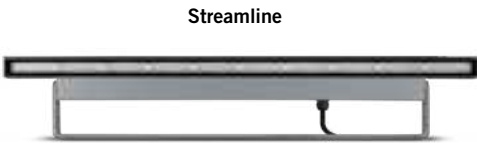

S.1257W Asimmetrical beam with lenses
LED MODULE **3000K** CRI80 8400lm 54W
(on request 2700K CRI80 6840lm)
(on request 4000K CRI80 9000lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.1255W Spot beam with lenses
LED MODULE **3000K** CRI90 9360lm 78,1W
(on request 2700K CRI90 8640lm)
(on request 4000K CRI80 11520lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.1256W Flood beam with lenses
LED MODULE **3000K** CRI90 9360lm 78,1W
(on request 2700K CRI90 8640lm)
(on request 4000K CRI80 11520lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Beam lenses available on request
with no surcharge: 66° and 10°x40°

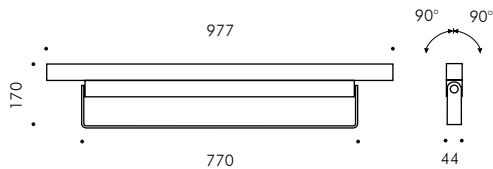


Ministreamline



Streamline

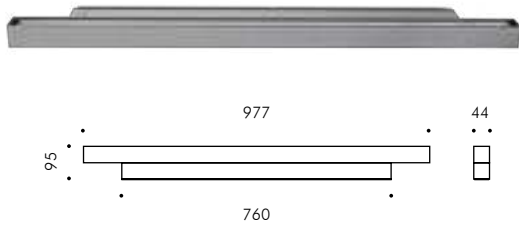

S.1240W Asimmetrical beam with lenses
LED MODULE **3000K** CRI80 3192lm 20,5W
(on request 2700K CRI80 3032lm)
(on request 4000K CRI80 3778lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.1250W Asimmetrical beam with lenses
LED MODULE **3000K** CRI80 8400lm 54W
(on request 2700K CRI80 6840lm)
(on request 4000K CRI80 9000lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Loft is a cubic spotlight with minimal shape, able to fit discreetly into any space. The hight control of the beam allows for a precise and functional lighting design. Available in three different sizes with narrow or wide beam, Loft allows to play with light and to enhance the most difficult context.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Stainless steel A4 screws. Aluminium reflectors or with lenses. Clear toughened glass diffuser. Luminaire with one single cable entry and cable gland (MINILOFT / LOFT). Silicone gaskets. Double powder paint.

PROTECTION CLASS
IP66

ISOLATION CLASS
CLASS II □ MICROLOFT
CLASS I ⊕ MINILOFT, LOFT


MECHANICAL RESISTANCE
IK 06

REGISTERED DESIGN

COLOURS

.14 Aluminium Grey



.24 Anthracite Grey

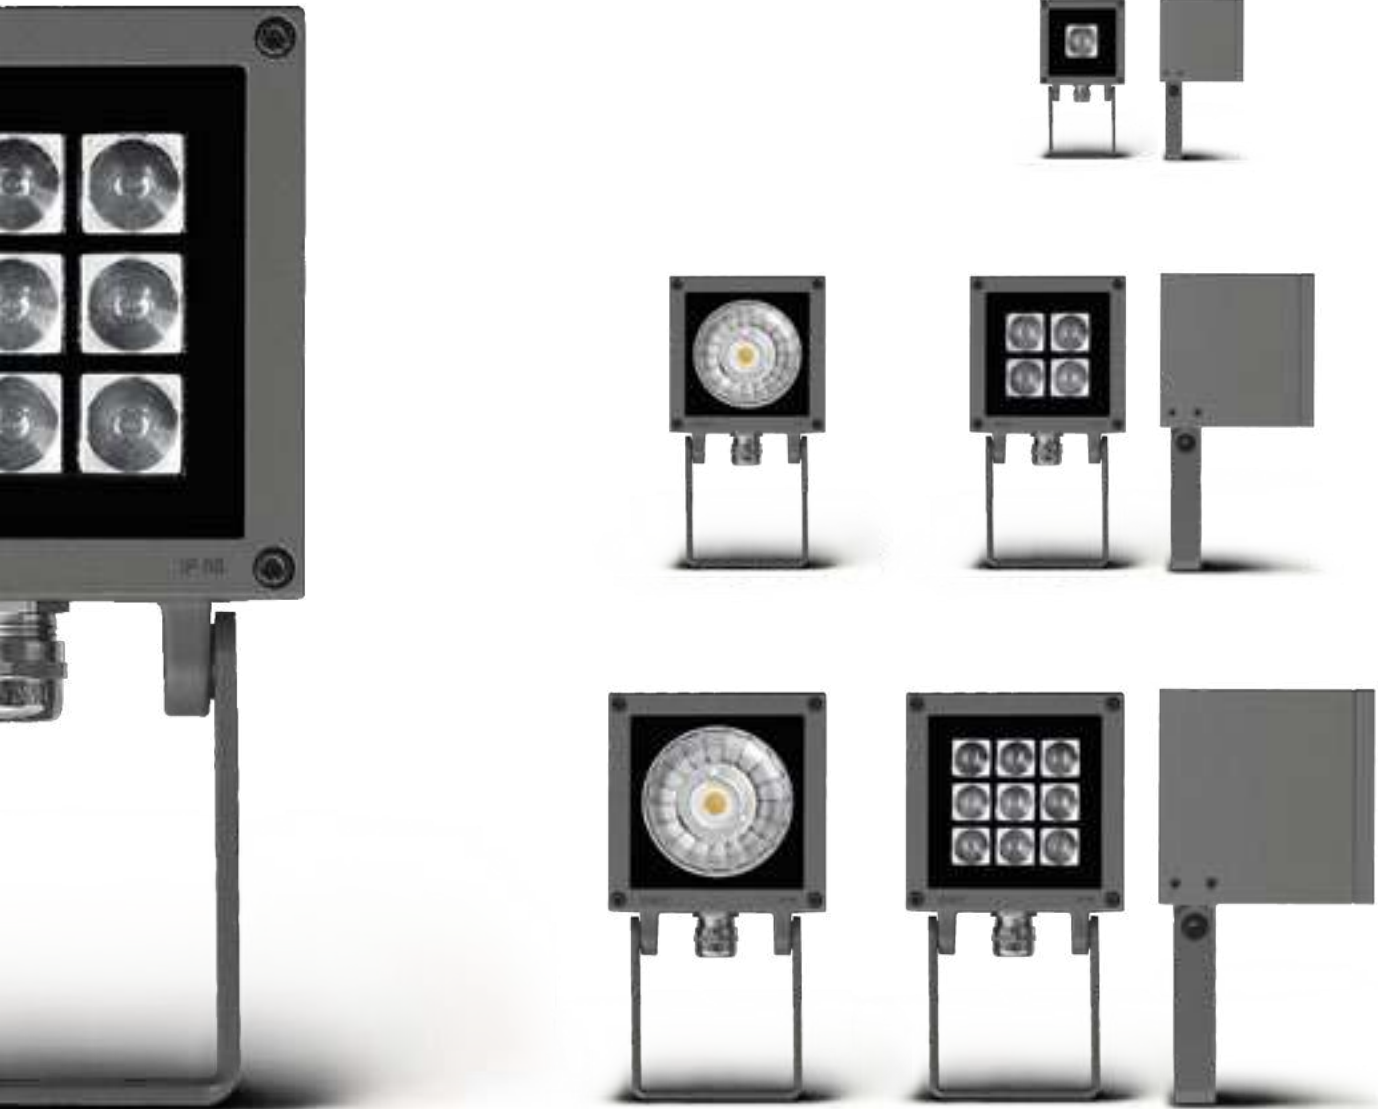


www.simes.it/loft-spot



Microloft




S.6560W Spot beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.6561W Medium beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Miniloft




S.6570W Spot beam with lenses
LED MODULE **3000K** CRI90 774lm 6,2W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.6571W Medium beam with reflector
LED MODULE **3000K** CRI90 1251lm 9,5W
(on request 2700K CRI90 1195lm)
(on request 4000K CRI80 1544lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Loft



S.6580W Spot beam with lenses
LED MODULE **3000K** CRI90 2340lm 19,5W
(on request 2700K CRI90 2160lm)
(on request 4000K CRI80 2880lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.6581W Flood beam with reflector
LED MODULE **3000K** CRI90 3231lm 24,2W
(on request 2700K CRI90 3071lm)
(on request 4000K CRI80 3959lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Accessory



S.1004
STAKE FOR MINILOFT and LOFT
In polypropylene
Colour: black (code .09)

Simes headquarter, Corte Franca, Brescia, Italy - Artwork: Franca Ghitti © Giamattilio Valli



Focus is a range of extremely performing spotlight available in five dimensions with Super Spot, Spot, Medium and Flood light beams. It embodies the synthesis of the characteristics of professional spotlights: mechanical strength and resistance to aggressive environments, superior optical precision, absolute visual comfort, excellent light output, flexible lighting solutions, easy installation and maintenance.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Aluminium reflectors. Clear toughened glass: 3mm thick NANOFOCUS, 5mm MICROFOCUS / MINIFOCUS, 8mm FOCUS / MEGAFOCUS. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

NANOFOCUS
Luminaire supplied with 5,0m neoprene H05RN-F cable.

MICROFOCUS
Luminaire with single cable entry and cable gland.

MINIFOCUS, FOCUS, MEGAFOCUS
Luminaire with double cable entry and double cable gland.

MINIFOCUS RGBW, FOCUS RGBW
Luminaire supplied with neoprene 0,5m H05RN-F cable and connector + N°2 DMX 1,0m cables and connectors for remote connections.

REGISTERED DESIGN

PROTECTION CLASS
IP66

ISOLATION CLASS
CLASS II □ NANOFOCUS
CLASS I ⊕ MICROFOCUS, MINIFOCUS, FOCUS, MEGAFOCUS



MECHANICAL RESISTANCE
IK 06 NANOFOCUS
IK 09 MICROFOCUS, MINIFOCUS
IK 10 FOCUS, MEGAFOCUS

COLOURS NANOFOCUS
.**24** Anthracite Grey


COLOURS MICROFOCUS, MINIFOCUS, FOCUS, MEGAFOCUS
.**14** Aluminium Grey
.**24** Anthracite Grey




Ground stake

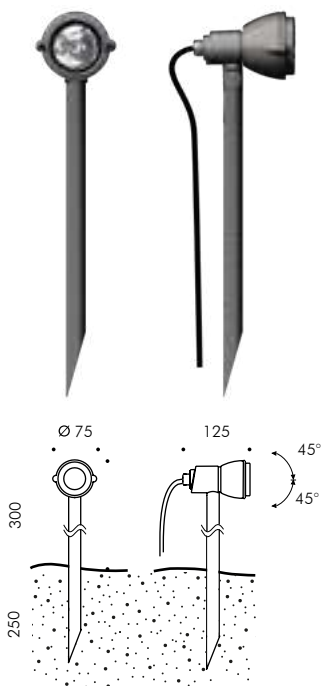

S.1100W Super Spot beam with lens
LED MODULE **3000K** CRI80 210lm 1,9W
(on request 2700K CRI80 180lm)
(on request 4000K CRI80 240lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





S.1101W Spot beam with lens
LED MODULE **3000K** CRI80 210lm 1,9W
(on request 2700K CRI80 180lm)
(on request 4000K CRI80 240lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.1102W Flood beam with lens
LED MODULE **3000K** CRI80 210lm 1,9W
(on request 2700K CRI80 180lm)
(on request 4000K CRI80 240lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Beam lenses available on request
with no surcharge: 45° and 20°x40°


Wall



S.1103W Super Spot beam with lens
LED MODULE **3000K** CRI80 210lm 1,9W
(on request 2700K CRI80 180lm)
(on request 4000K CRI80 240lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.1104W Spot beam with lens
LED MODULE **3000K** CRI80 210lm 1,9W
(on request 2700K CRI80 180lm)
(on request 4000K CRI80 240lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.1105W Flood beam with lens
LED MODULE **3000K** CRI80 210lm 1,9W
(on request 2700K CRI80 180lm)
(on request 4000K CRI80 240lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Beam lenses available on request
with no surcharge: 45° and 20°x40°

Ø 60mm - Ø 76mm



Accessories



S.1109
VISOR
Colour: black (code 09)




S.1107
POLE ATTACHMENT
Nanofocus Spot can be installed on poles Ø60mm, Ø76mm using the fixation accessory.




S.1108
STRAP ATTACHMENT FOR APPLICATIONS ON TREES
Black strap, length 40 cm


Mont Blanc Skyway, Courmayeur, Aosta, Italy

MICROFOCUS





S.1110W Spot beam with reflector
LED MODULE **3000K** CRI90 2074lm 15,9W
(on request 2700K CRI90 1972lm)
(on request 4000K CRI80 2542lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1111W Medium beam with reflector
LED MODULE **3000K** CRI90 2074lm 15,9W
(on request 2700K CRI90 1972lm)
(on request 4000K CRI80 2542lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.1002
VISOR
Colour: black (code 09)




S.1004
STAKE FOR MICROFOCUS
In polypropylene
Colour: black (code .09)

MINIFOCUS






S.1120W Spot beam with reflector
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1121W Medium beam with reflector
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1125 Flood beam with lenses
LED MODULE **RGBW (W=3000K)** 1827lm 26,6W
220V-240Vac 50/60Hz
Requires DMX controller (pag. 528)



S.1022
VISOR
Colour: black (code 09)




S.1005
STAKE FOR MINIFOCUS
In polypropylene
Colour: black (code .09)


SIMES

FOCUS






S.1130W Spot beam with reflector
LED MODULE **3000K** CRI90 7355lm 53,1W
(on request 2700K CRI90 6993lm)
(on request 4000K CRI80 9016lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1131W Flood beam with reflector
LED MODULE **3000K** CRI90 7355lm 53,1W
(on request 2700K CRI90 6993lm)
(on request 4000K CRI80 9016lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH





S.1135 Flood beam with lenses
LED MODULE **RGBW (W=3000K)** 3654lm 53,2W
220V-240Vac 50/60Hz
Requires DMX controller (pag. 528)




S.1032
VISOR
Colour: black (code 09)

MEGAFOCUS

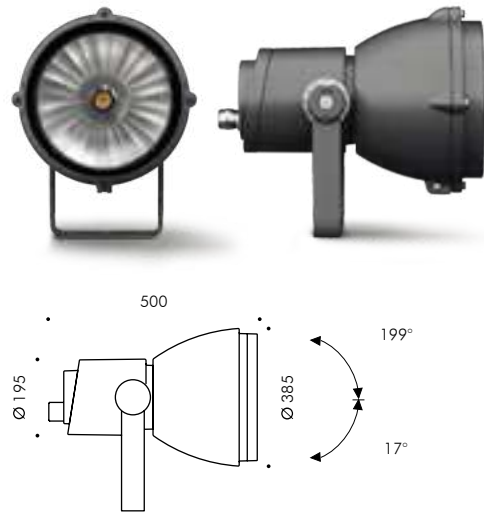



S.1140W Spot beam with reflector
LED MODULE **3000K** CRI90 12013lm 89,2W
(on request 2700K CRI90 11421lm)
(on request 4000K CRI80 14724lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.1141W Flood beam with reflector
LED MODULE **3000K** CRI90 12013lm 89,2W
(on request 2700K CRI90 11421lm)
(on request 4000K CRI80 14724lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1042
VISOR
Colour: black (code 09)


FOCUS Pole mounted

Minifocus, Focus and Megafocus can be installed on poles using the pole adaptor.

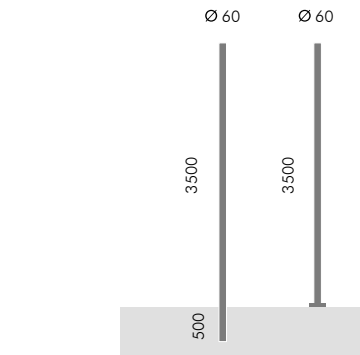

S.2842
Ø 60mm CYLINDRICAL POLE TO BE BURIED
Pole total height 4000mm
To be buried for 500mm

S.2843
Ø 60mm CYLINDRICAL POLE WITH BASE
Pole total height 3500mm

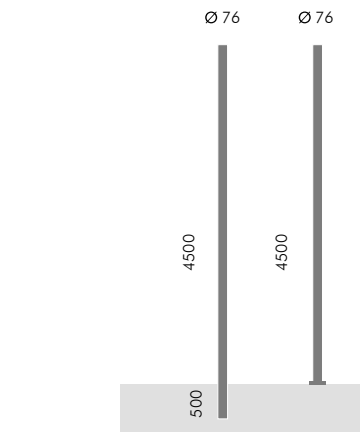

S.2844
Ø 76mm CYLINDRICAL POLE TO BE BURIED
Pole total height 5000mm
To be buried for 500mm
Provided with inspection door

S.2845
Ø 76mm CYLINDRICAL POLE WITH BASE
Pole total height 4500mm
Provided with inspection door



S.2849
PLANTED ROOT
and bolts in galvanized steel
with M16 threads for S.2843 / S.2845

S.2814
Ø 102mm CYLINDRICAL POLE TO BE BURIED
Pole total height 4500mm
To be buried for 500mm
Provided with inspection door
and terminal board.


S.2826
Ø 120mm CYLINDRICAL POLE TO BE BURIED
Pole total height 4800mm
To be buried for 600mm
Provided with inspection door
and terminal board.

S.2846
Ø 120mm CYLINDRICAL POLE WITH BASE
Pole total height 4200mm
Provided with inspection door
and terminal board.

S.2848
Ø 120mm CYLINDRICAL POLE WITH BASE
Pole total height 6000mm
Provided with inspection door
and terminal board.



S.2840
PLANTED ROOT
and bolts in galvanized steel
with M16 threads for S.2846 / S.2848

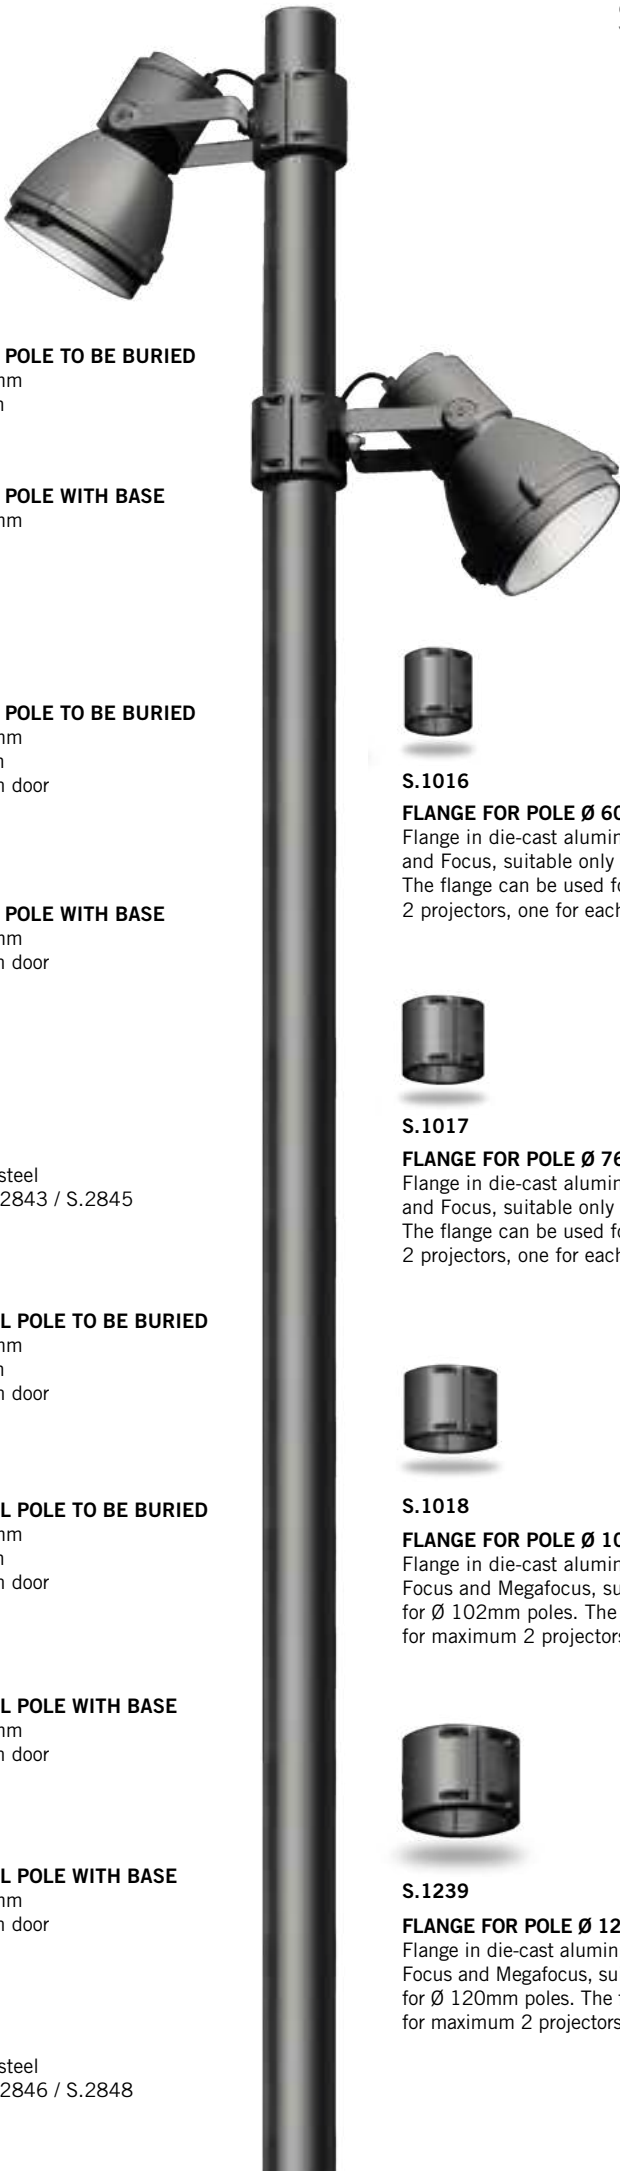

S.1016
FLANGE FOR POLE Ø 60mm INSTALLATION
Flange in die-cast aluminium for Minifocus
and Focus, suitable only for Ø 60mm poles.
The flange can be used for maximum
2 projectors, one for each side.




S.1017
FLANGE FOR POLE Ø 76mm INSTALLATION
Flange in die-cast aluminium for Minifocus
and Focus, suitable only for Ø 76mm poles.
The flange can be used for maximum
2 projectors, one for each side.




S.1018
FLANGE FOR POLE Ø 102mm INSTALLATION
Flange in die-cast aluminium for Minifocus,
Focus and Megafocus, suitable only
for Ø 102mm poles. The flange can be used
for maximum 2 projectors, one for each side.



S.1239
FLANGE FOR POLE Ø 120mm INSTALLATION
Flange in die-cast aluminium for Minifocus,
Focus and Megafocus, suitable only
for Ø 120mm poles. The flange can be used
for maximum 2 projectors, one for each side.

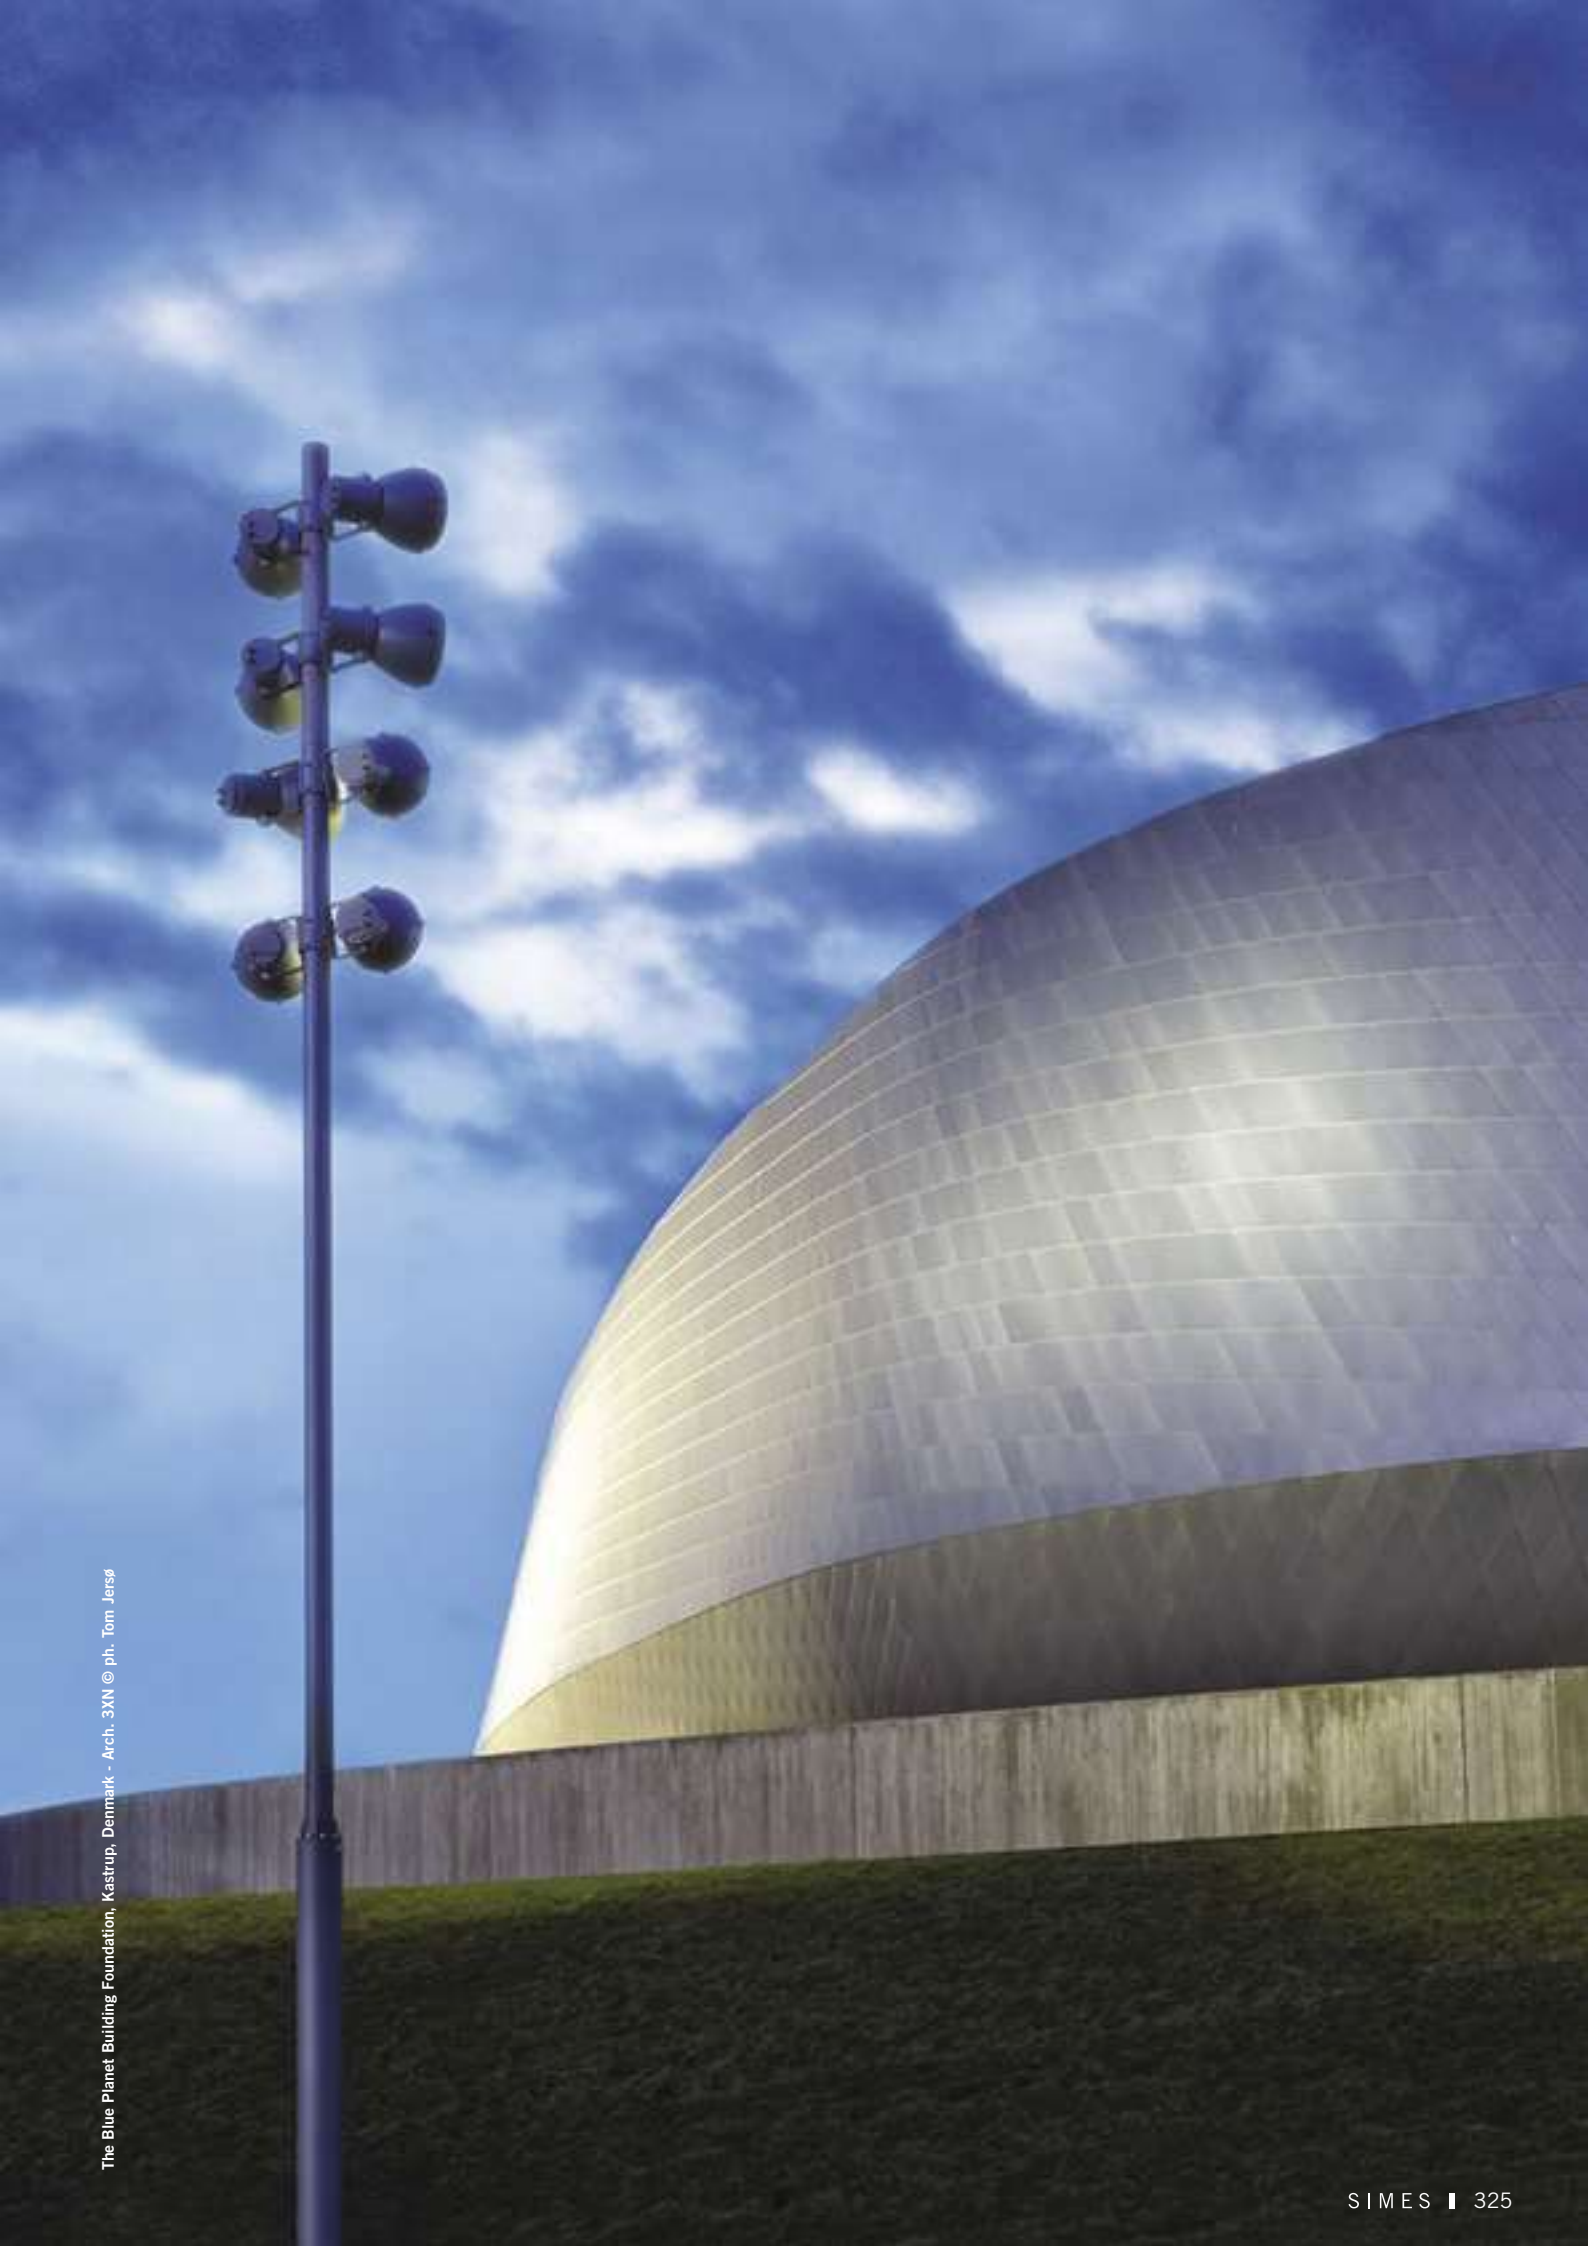

The Blue Planet Building Foundation, Kastrup, Denmark - Arch. 3XN © ph. Tom Jersø

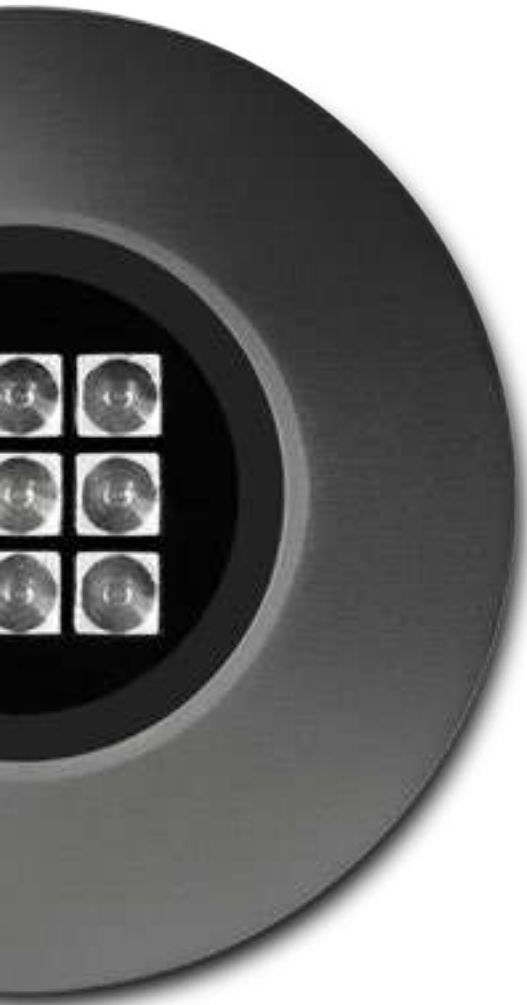

www.simes.it/over-all

Over-all is a non walkover surface mounted uplight. Its easy and fast installation comes through a special nylon fixing plate protecting the product from the ground, that also simplifies the maintenance. Over-all has a thin lighting body with no visible screws with a reduced thickness. It can be used to illuminate trees, bushes and vertical surfaces with grazing light.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Toughened glass 5mm thick MICRO OVER-ALL, 6mm thick MINI OVER-ALL, 8mm thick OVER-ALL. Clear polycarbonate lenses. Stainless steel A4 fixing clips. Insulating nylon fixing plate for direct ground surface mount. Luminaire supplied with 5,0m neoprene H05RN-F cable. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65 / IP67

ISOLATION CLASS
CLASS III

MECHANICAL RESISTANCE
IK 08 MICRO OVER-ALL
IK 07 MINI OVER-ALL
IK 09 OVER-ALL



POWER SUPPLY NOT INCLUDED.


COLOURS

.14 Aluminium Grey


.24 Anthracite Grey




Micro Over-all



S.1925W Asymmetrical beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
700mA Vf 3,1V max



S.1920W Spot beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
700mA Vf 3,1V max



S.1921W Flood beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
700mA Vf 3,1V max


Requires constant current Vout 120Vdc max
remote power supply (page 524-525)
**Beam lenses available on request
with no surcharge: 65° and 10°x44°**

Accessory




S.1014
STAKE for MICRO OVER-ALL
in polypropylene.
Colour: black (code 09)
Length 190 mm


Mini Over-all



S.1905W Asymmetrical beam with lenses
LED MODULE **3000K** CRI90 1040lm 8,7W
(on request 2700K CRI90 960lm)
(on request 4000K CRI80 1280lm)
700mA Vf 12,4V max



S.1900W Spot beam with lenses
LED MODULE **3000K** CRI90 1040lm 8,7W
(on request 2700K CRI90 960lm)
(on request 4000K CRI80 1280lm)
700mA Vf 12,4V max



S.1901W Flood beam with lenses
LED MODULE **3000K** CRI90 1040lm 8,7W
(on request 2700K CRI90 960lm)
(on request 4000K CRI80 1280lm)
700mA Vf 12,4V max


Requires constant current Vout 120Vdc max
remote power supply (page 524-525)
**Beam lenses available on request with no surcharge:
65° and 10°x44°**

Accessory




S.3524
**STAKE for MINI OVER-ALL
and OVER-ALL**
in polypropylene.
Colour: black (code 09)
Length 270 mm


Over-all



S.1915W Asymmetrical beam with lenses
LED MODULE **3000K** CRI90 2340lm 19,5W
(on request 2700K CRI90 2160lm)
(on request 4000K CRI80 2880lm)
700mA Vf 27,9V max



S.1910W Spot beam with lenses
LED MODULE **3000K** CRI90 2340lm 19,5W
(on request 2700K CRI90 2160lm)
(on request 4000K CRI80 2880lm)
700mA Vf 27,9V max



S.1911W Flood beam with lenses
LED MODULE **3000K** CRI90 2340lm 19,5W
(on request 2700K CRI90 2160lm)
(on request 4000K CRI80 2880lm)
700mA Vf 27,9V max

Requires constant current Vout 120Vdc max
remote power supply (page 524-525)
**Beam lenses available on request
with no surcharge: 65° and 10°x44°**

Accessory



S.3524
**STAKE for MINI OVER-ALL
and OVER-ALL**
in polypropylene.
Colour: black (code 09)
Length 270 mm



SHELL Step light and inground

S I M E S

SHELL

Shell is a family of micro-recessed product, ideal for grazing lighting effects for private and residential applications. The non walk over inground version is available in two variants, mono-emission and bi-emission. The wall version is available with two beams: a wide and a narrow one. Both variants are fixed to their recessing box without visible screws.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Optics with radial lens. Protective guard of 5mm thickness. Polycarbonate diffuser. Luminaire supplied with 5,0m neoprene H05RN-F cable for wiring in junction box. Silicone gaskets. Double powder paint. Polypropylene formwork included.

REGISTERED DESIGN


PROTECTION CLASS
IP65 / IP67

ISOLATION CLASS
CLASS III ⚡

MECHANICAL RESISTANCE
IK 10

COLOURS

.09 Black




www.simes.it/shell




SHELL Step light (wall recessed)

2 windows




S.4205W
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)




2 windows




S.4202W
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)




SHELL Inground

1 window



S.4200W
LED MODULE **3000K** CRI90 492lm 5,4W
(on request 2700K CRI90 426lm)
(on request 4000K CRI80 570lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)



Private villa, Carmignano, Firenze, Italy © studio AMDB - Arch. Daniela Bianchi and Arch. Alessandro Marcattii - ph. Pietro Savorelli

Continuous Line is a walk over fitting designed to create paths of light with perfect uniformity and unlimited length. Easy to install, this luminaire can transform any space with style and refinement.

TECHNICAL DESCRIPTION
To-be-fixed supports and recessing box in extruded anodized aluminium housing with high corrosion resistance. Toughened glass diffuser 15 mm thick. Luminaire supplied with cable and connector. Maximum weight 500 Kg. Fixing base and aluminium recessing box included.

PATENTED

PROTECTION CLASS
IP65 / IP67


ISOLATION CLASS
CLASS III ⚡

MECHANICAL RESISTANCE
IK 10

Power supply not included

RECESSING BOX FINISHING


.13 Anodized Aluminium



www.simes.it/continuous-line




3000K



S.7018W 1,0m length - Diffused beam
LED MODULE **3000K** CRI90 737lm 9,6W
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)




S.7023W 1,5m length - Diffused beam
LED MODULE **3000K** CRI90 1105lm 14,4W
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)




TUNABLE WHITE
(2700-4000K)



S.7018T 1,0m length - Diffused beam
LED MODULE **TUNABLE WHITE 2700K-4000K** CRI80 715lm 12W
24Vdc PWM

Requires constant voltage remote power supply for TUNABLE WHITE
and DMX or DALI controllers (page 526-527)




S.7023T 1,5m length - Diffused beam
LED MODULE **TUNABLE WHITE 2700K-4000K** CRI80 1072lm 18W
24Vdc PWM

Requires constant voltage remote power supply for TUNABLE WHITE
and DMX or DALI controllers (page 526-527)




RGBW
(W 2700K)




S.7019 1,0m length - Diffused beam
LED MODULE **RGBW** (W=2700K) 215lm 14,4W
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers (page 528-529)




S.7024 1,5m length - Diffused beam
LED MODULE **RGBW** (W=2700K) 322lm 21,6W
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers (page 528-529)

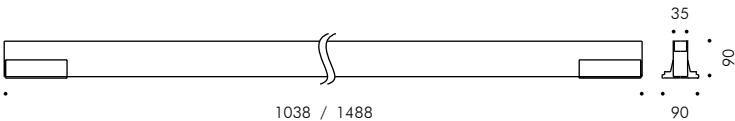


3000K



S.7008W 1,0m length
LED MODULE **3000K** CRI90 737lm 9,6W
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)




S.7013W 1,5m length
LED MODULE **3000K** CRI90 1105lm 14,4W
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)




TUNABLE WHITE
(2700-4000K)



S.7008T 1,0m length
LED MODULE **TUNABLE WHITE 2700K-4000K** CRI80 715lm 12W
24Vdc PWM

Requires constant voltage remote power supply for TUNABLE WHITE
and DMX or DALI controllers (page 526-527)




S.7013T 1,5m length
LED MODULE **TUNABLE WHITE 2700K-4000K** CRI80 1072lm 18W
24Vdc PWM

Requires constant voltage remote power supply for TUNABLE WHITE
and DMX or DALI controllers (page 526-527)




RGBW
(W 2700K)




S.7009 1,0m length
LED MODULE **RGBW** (W=2700K) 215lm 14,4W
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers (page 528-529)



S.7014 1,5m length
LED MODULE **RGBW** (W=2700K) 322lm 21,6W
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers (page 528-529)

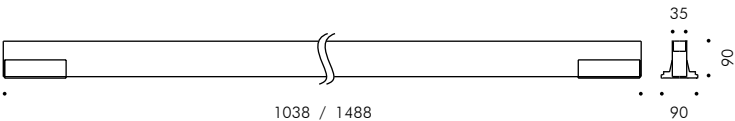





MINILINEAR is a recessed luminaire perfectly flush with the floor, it disappears completely integrating itself with the architecture. The soft or accent lighting effect mark pathways and facades discreetly.

MINIROUND embraces the elegant flush lines of Minilinear in a curved structure able to design striking lighting frames. Miniround emphasizes trees and green foliage, colonnades, sculptures and non-linear paths.

TECHNICAL DESCRIPTION
Die-cast and extruded aluminium housing with high corrosion resistance. Marine grade stainless steel AISI 316L front trim 2mm thick or aluminium. Stainless steel A4 screws. Luminaire supplied with neoprene H07RN-F cable and connector. Double powder paint. Maximun weight 500 Kg

MINILINEAR FULL GLASS
Toughened glass diffuser 6 mm thick. Silicone gaskets.
Recessing box in aluminium included.

MINILINEAR STAINLESS STEEL
Marine grade stainless steel AISI 316L front trim 3 mm thick. Toughened glass diffuser 10 mm.
Recessing box in aluminium included.

MINIROUND
Toughened glass diffuser 6 mm thick.
Recessing box in polypropylene included.

PROTECTION CLASS
IP65 / IP67

ISOLATION CLASS
CLASS I Ⓢ

MECHANICAL RESISTANCE
IK 09 MINILINEAR
IK 08 MINIROUND

FINISHING MINILINEAR
.19 Stainless Steel


REGISTERED DESIGN (MINIROUND)



MINILINEAR Full glass floor level

SIMES



Transparent glass



S.5485W Medium beam with lenses
LED MODULE **3000K** CRI90 1440lm 11,2W
(on request 2700K CRI90 1380lm)
(on request 4000K CRI80 1716lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply
available on request with surcharge.
Beam lenses available on request with no surcharge: 7°, 39°


Acid-etched glass



S.5488W Diffused beam
LED MODULE **3000K** CRI80 1260lm 8,1W
(on request 2700K CRI80 1197lm)
(on request 4000K CRI80 1350lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

MINIROUND Full glass floor level



Transparent glass





S.5400W Medium beam with lenses
LED MODULE **3000K** CRI90 1440lm 11,2W
(on request 2700K CRI90 1380lm)
(on request 4000K CRI80 1716lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Beam lenses available on request with no surcharge: 7°, 39°

Acid-etched glass





S.5402W Diffused beam
LED MODULE **3000K** CRI80 1260lm 8,1W
(on request 2700K CRI80 1197lm)
(on request 4000K CRI80 1350lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Private Villa, Sultzano, Brescia, Italy - © ph. Mario Bertani / Simes S.p.A.



Minilinear transparent glass



S.5495W.19 Medium beam with lenses
LED MODULE **3000K** CRI90 1440lm 11,2W
(on request 2700K CRI90 1380lm)
(on request 4000K CRI80 1716lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply
available on request with surcharge.
Beam lenses available on request with no surcharge: 7°, 39°



Minilinear transparent glass



S.5494W.19 Asymmetrical beam with lenses
LED MODULE **3000K** CRI80 2100lm 13,5W
(on request 2700K CRI80 1995lm)
(on request 4000K CRI80 2250lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Version with DALI 2 / PUSH power supply
available on request with surcharge.

Minilinear acid-etched glass



S.5498W.19 Diffused beam
LED MODULE **3000K** CRI80 1260lm 8,1W
(on request 2700K CRI80 1197lm)
(on request 4000K CRI80 1350lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable


Minilinear transparent glass



S.5475W.19 Medium beam with lenses
LED MODULE **3000K** CRI90 2880lm 23,3W
(on request 2700K CRI90 2760lm)
(on request 4000K CRI80 3432lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



Beam lenses available on request with no surcharge: 7°, 39°

Minilinear transparent glass



S.5474W.19 Asymmetrical beam with lenses
LED MODULE **3000K** CRI80 4200lm 27W
(on request 2700K CRI80 3990lm)
(on request 4000K CRI80 4500lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Minilinear acid-etched glass




S.5478W.19 Diffused beam
LED MODULE **3000K** CRI80 2100lm 13,5W
(on request 2700K CRI80 1995lm)
(on request 4000K CRI80 2250lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

NANOLED

Ceiling recessed mounted
Steplight wall recessed
Inground walkover



SIMES



www.simes.it/nanoled

NANOLED

NANOLED is a walk over inground, wall recessed and ceiling luminaire providing either well defined accent lighting or evocative markers. The main feature of this in-ground luminaire is its extremely reduced dimensions (from 30mm to 85mm diameter). The lighting body is completely manufactured in 316L stainless steel to ensure a high corrosion resistance and has no visible screws. Reduced energy consumption and high lighting performances complete the profile of this recessed spotlight.

NANOLED FRAME creates uniform light on the outer edge of windows, niches, openings changing them into striking luminous volumes. Its wide beam of 120° produces charming light effects on residential, public, historical and artistic facades. Nanoled Frame is a recessed fitting that can be totally integrated into the architecture and it has an extremely reduced size.

TECHNICAL DESCRIPTION

Body made of AISI 316L monoblock stainless steel. Toughened transparent with asymmetric comfort reflector with black painted finishing. Absence of visible screws. Luminaire supplied with 5,0m neoprene H05RN-F cable with cable gland. The luminaire is fixed to the recessing box with O-rings. Supplied with recessing box in polypropylene except for the downlight version.

WALK-OVER

Maximum weight 500 Kg.

DOWNLIGHT

Supplied with two clips for an easy installation in plasterboard ceilings, thickness must be 15÷30mm.

FRAME Ø 60 PROTRUDING GLASS

(Non walkover)

Protruding 15mm shaped glass diffuser.

WALK-OVER BLADE OF LIGHT Ø 85

Maximum weight 500 Kg.

PROTECTION CLASS

IP65 / IP67

ISOLATION CLASS

CLASS III

MECHANICAL RESISTANCE

IK 08


Power supply not included

FINISHING

.19 Stainless Steel




Ø 30mm - Acid - Etched Glass





S.3301W.19 Diffused beam
LED MODULE **3000K** CRI90 36lm 0,2W
(on request 2700K CRI90 34lm)
(on request 4000K CRI80 42lm)
24Vdc PWM

Ø 30mm - Trasparent glass




S.3305W.19 Medium beam with lens
LED MODULE **3000K** CRI90 36lm 0,2W
(on request 2700K CRI90 34lm)
(on request 4000K CRI80 42lm)
24Vdc PWM



S.3306W.19 Flood beam with lens
LED MODULE **3000K** CRI90 36lm 0,2W
(on request 2700K CRI90 34lm)
(on request 4000K CRI80 42lm)
24Vdc PWM


Requires constant voltage 24Vdc remote power supply
(page 522-523)

Ø 45mm - Acid - Etched Glass





S.3330W.19 Diffused beam
LED MODULE **3000K** CRI90 72lm 0,5W
(on request 2700K CRI90 69lm)
(on request 4000K CRI80 86lm)
24Vdc PWM

Ø 45mm - Trasparent glass




S.3340W.19 Spot beam with lens
LED MODULE **3000K** CRI90 72lm 0,5W
(on request 2700K CRI90 69lm)
(on request 4000K CRI80 86lm)
24Vdc PWM



S.3364W.19 Medium beam with lens
LED MODULE **3000K** CRI90 72lm 0,5W
(on request 2700K CRI90 69lm)
(on request 4000K CRI80 86lm)
24Vdc PWM


Requires constant voltage 24Vdc remote power supply
(page 522-523)

Ø 60mm - Acid - Etched Glass





S.3300W.19 Diffused beam
LED MODULE **3000K** CRI90 180lm 1,4W
(on request 2700K CRI90 173lm)
(on request 4000K CRI80 214lm)
24Vdc PWM

Ø 60mm - Trasparent glass




S.3310W.19 Spot beam with lens
LED MODULE **3000K** CRI90 180lm 1,4W
(on request 2700K CRI90 173lm)
(on request 4000K CRI80 214lm)
24Vdc PWM



S.3384W.19 Medium beam with lens
LED MODULE **3000K** CRI90 180lm 1,4W
(on request 2700K CRI90 173lm)
(on request 4000K CRI80 214lm)
24Vdc PWM


Requires constant voltage 24Vdc remote power supply
(page 522-523)

Ø 85mm - Acid - Etched Glass





S.3311W.19 Diffused beam
LED MODULE **3000K** CRI90 240lm 2,0W
(on request 2700K CRI90 230lm)
(on request 4000K CRI80 286lm)
24Vdc PWM

Ø 85mm - Trasparent glass




S.3312W.19 Spot beam with lens
LED MODULE **3000K** CRI90 240lm 2,0W
(on request 2700K CRI90 230lm)
(on request 4000K CRI80 286lm)
24Vdc PWM





S.3313W.19 Medium beam with lens
LED MODULE **3000K** CRI90 240lm 2,0W
(on request 2700K CRI90 230lm)
(on request 4000K CRI80 286lm)
24Vdc PWM

Ø 85mm - Trasparent glass





S.3315W.19 Flood beam with reflector
LED MODULE **3000K** CRI90 356lm 3,0W
(on request 2700K CRI90 339lm)
(on request 4000K CRI80 454lm)
24V DC



Requires constant voltage 24Vdc remote power supply
(page 522-523)

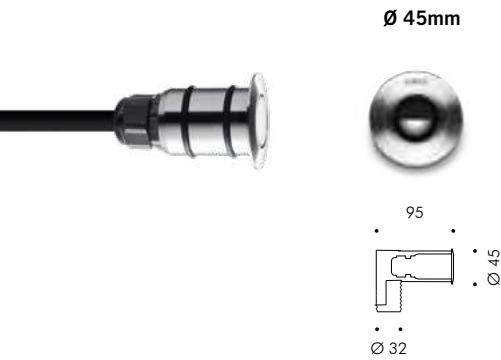

S.3354W.19 Asymmetrical beam with visor
LED MODULE **3000K** CRI90 72lm 0,5W
(on request 2700K CRI90 69lm)
(on request 4000K CRI80 86lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523)

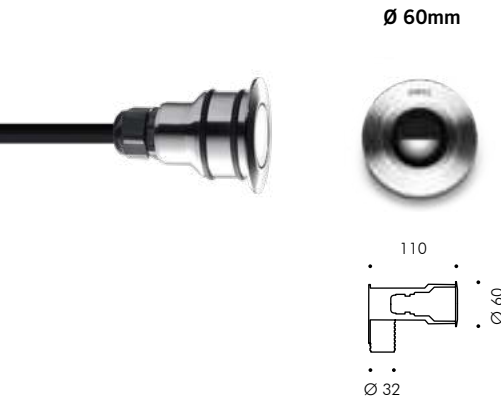

S.3374W.19 Asymmetrical beam with visor
LED MODULE **3000K** CRI90 180lm 1,4W
(on request 2700K CRI90 173lm)
(on request 4000K CRI80 214lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523)

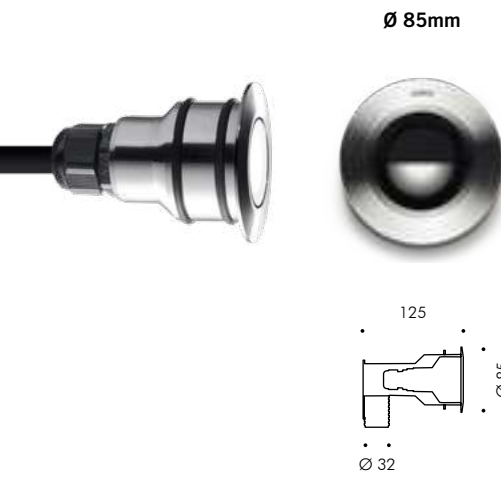



S.3317W.19 Asymmetrical beam with visor
LED MODULE **3000K** CRI90 240lm 2,0W
(on request 2700K CRI90 230lm)
(on request 4000K CRI80 286lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523)



Private villa, Camignano, Firenze, Italy © studio AMDB - Arch. Daniela Bianchi and Arch. Alessandro Marcattii - ph. Pietro Savorelli





Ø 60mm



S.3321W.19 Medium beam with lens
LED MODULE **3000K** CRI90 180lm 1,4W
(on request 2700K CRI90 173lm)
(on request 4000K CRI80 214lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523)



Ø 85mm




S.3319W.19 Flood beam with reflector
LED MODULE **3000K** CRI90 356lm 3,0W
(on request 2700K CRI90 339lm)
(on request 4000K CRI80 454lm)
24Vdc PWM
Requires constant voltage 24Vdc remote power supply
(page 522-523)




Private villa, Palazzolo sull'Oglio, Brescia, Italy - Arch. Giuliano Venturini © ph. Mario Bertani

Ø 60mm
Protruding diffuser
(Non walkover)





S.3390W.19 Blade of Light beam with lens
LED MODULE **3000K** CRI80 171lm 1,4W
(on request 2700K CRI80 157lm)
(on request 4000K CRI80 180lm)
24Vdc PWM
With elliptical lens 120°x15°

Requires a remote constant voltage driver
(page 522-523)



NANOLED Ø 85mm - Inground walkover Blade of Light


Ø 85mm
Flat diffuser



S.3316W.19 Blade of Light beam with lens
LED MODULE **3000K** CRI80 240lm 1,9W
(on request 2700K CRI80 220lm)
(on request 4000K CRI80 252lm)
24Vdc PWM
With elliptical lens 82°x4°

We recommend the use of 2 luminaires
to illuminate properly the entire
opening.

Requires a remote constant voltage driver
(page 522-523)



www.simes.it/nanoled-frame





Plano and Compact Comfort are two inground families characterized by a low recessed depth and great optical control. The lighting distribution on the surfaces is maximized and even more precise thanks to its tilttable optics.

TECHNICAL DESCRIPTION
Die cast aluminium housing with high corrosion resistance. Marine grade stainless steel AISI 316L front trim 2mm thick or aluminium. Stainless steel A4 screws. Luminaire supplied with neoprene H07RN-F cable and connector. Silicone gaskets. Double powder paint. Maximum weight 1000 Kg.

PLANO COMFORT
Toughened glass diffuser 6mm for PLANO COMFORT 120, 8mm PLANO COMFORT 190 and 260. Supplied with recessing box in polypropylene with external edge in stainless steel.


COMPACT COMFORT
Marine grade stainless steel AISI 316L front trim 2mm thick. Toughened glass diffuser 12mm. Supplied with recessing box in polypropylene.

PROTECTION CLASS
IP65 / IP67

ISOLATION CLASS
CLASS I ⚡

MECHANICAL RESISTANCE
IK 09

FINISHING COMPACT
 Stainless Steel






PLANO COMFORT Full-glass flush walk-over



SIMES

Ø 120mm - Acid-etched glass




S.5434W Diffused beam
LED MODULE **3000K** CRI90 194lm 1,5W
(on request 2700K CRI90 179lm)
(on request 4000K CRI80 238lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position

Ø 120mm - Transparent glass



S.5426W Spot beam with lenses
LED MODULE **3000K** CRI90 520lm 4,3W
(on request 2700K CRI90 480lm)
(on request 4000K CRI80 640lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic



S.5428W Medium beam with lenses
LED MODULE **3000K** CRI90 520lm 4,3W
(on request 2700K CRI90 480lm)
(on request 4000K CRI80 640lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic

Beam lenses available on request with no surcharge:
65°, 10°x44° and asymmetric

"Masseria Ciura", Massafra, Italy © Arch. Giampaolo Bianco


PLANO COMFORT Full-glass flush walk-over

SIMES

COMPACT COMFORT Stainless steel


SIMES

Ø 190mm - Acid-etched glass




S.5451W Diffused beam
LED MODULE **3000K** CRI90 1106lm 8,7W
(on request 2700K CRI90 1087lm)
(on request 4000K CRI80 1490lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position

Ø 190mm - Transparent glass




S.5440W Spot beam with lenses
LED MODULE **3000K** CRI90 1265lm 9,8W
(on request 2700K CRI90 1167m)
(on request 4000K CRI80 1557lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±10° optic



S.5441W Medium beam with lenses
LED MODULE **3000K** CRI90 1265lm 9,8W
(on request 2700K CRI90 1167m)
(on request 4000K CRI80 1557lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±10° optic


Beam lenses available on request with no surcharge:
65°, 10°x44° and asymmetric

Ø 260mm - Acid-etched glass




S.5460W Diffused beam
LED MODULE **3000K** CRI90 1215lm 9,0W
(on request 2700K CRI90 1125lm)
(on request 4000K CRI80 1305lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position

Ø 260mm - Transparent glass




S.5465W Spot beam with lenses
LED MODULE **3000K** CRI90 2249lm 17,4W
(on request 2700K CRI90 2075lm)
(on request 4000K CRI80 2768lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±10° optic



S.5466W Medium beam with lenses
LED MODULE **3000K** CRI90 2249lm 17,4W
(on request 2700K CRI90 2075lm)
(on request 4000K CRI80 2768lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±10° optic


Beam lenses available on request with no surcharge:
65°, 10°x44° and asymmetric

Ø 200mm - Acid etched glass




S.5181W.19 Diffused beam
LED MODULE **3000K** CRI90 1106lm 8,7W
(on request 2700K CRI90 1087lm, 4000K CRI80 1490lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position

Ø 200mm - Transparent glass




S.5110W.19 Spot beam with lenses
LED MODULE **3000K** CRI90 1265lm 9,8W
(on request 2700K CRI90 1167m)
(on request 4000K CRI80 1557lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±10° optic



S.5111W.19 Medium beam with lenses
LED MODULE **3000K** CRI90 1265lm 9,8W
(on request 2700K CRI90 1167m)
(on request 4000K CRI80 1557lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±10° optic


Beam lenses available on request with no surcharge:
65°, 10°x44° and asymmetric

Ø 275mm - Acid etched glass




S.5128W.19 Diffused beam
LED MODULE **3000K** CRI90 1215lm 9,0W
(on request 2700K CRI90 1125lm)
(on request 4000K CRI80 1305lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position

Ø 275mm - Transparent glass



S.5135W.19 Spot beam with lenses
LED MODULE **3000K** CRI90 2249lm 17,4W
(on request 2700K CRI90 2075lm)
(on request 4000K CRI80 2768lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±10° optic



S.5136W.19 Medium beam with lenses
LED MODULE **3000K** CRI90 2249lm 17,4W
(on request 2700K CRI90 2075lm)
(on request 4000K CRI80 2768lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±10° optic

Beam lenses available on request with no surcharge:
65°, 10°x44° and asymmetric



Zip Comfort with its wide range of solutions is the right answer to many projects. Available in round and square shape, four sizes and two different front ring finishing: stainless steel or black painted aluminium. Four different beam angles, from the soft and diffused effect, To the narrow beam or asymmetrical distribution with cowels. The wider beam is obtained with a comfortable double inner reflector and COB LED. The light distributions are very precise due to the tiltable optics.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Marine grade stainless steel AISI 316L front trim 2mm thick or aluminium. Toughened glass diffuser 8mm thick for MICROZIP, 8mm thick for MINIZIP, 10mm thick for ZIP, 12mm thick for MEGAZIP. Stainless steel A4 screws. Luminaire supplied with neoprene H07RN-F (H05RN-F for MICROZIP) cable and connector. Silicone gaskets. Double powder paint. Supplied with recessing box in polypropylene.

Maximum weight:
500Kg MICROZIP, MINIZIP
1000Kg ZIP, MEGAZIP

PROTECTION CLASS
IP65 / IP67

ISOLATION CLASS
CLASS I ⊕
CLASS III ⚡ RGBW


MECHANICAL RESISTANCE
IK 09

COLOURS AND FINISHING

.09 Black
.19 Stainless Steel



www.simes.it/zip-comfort

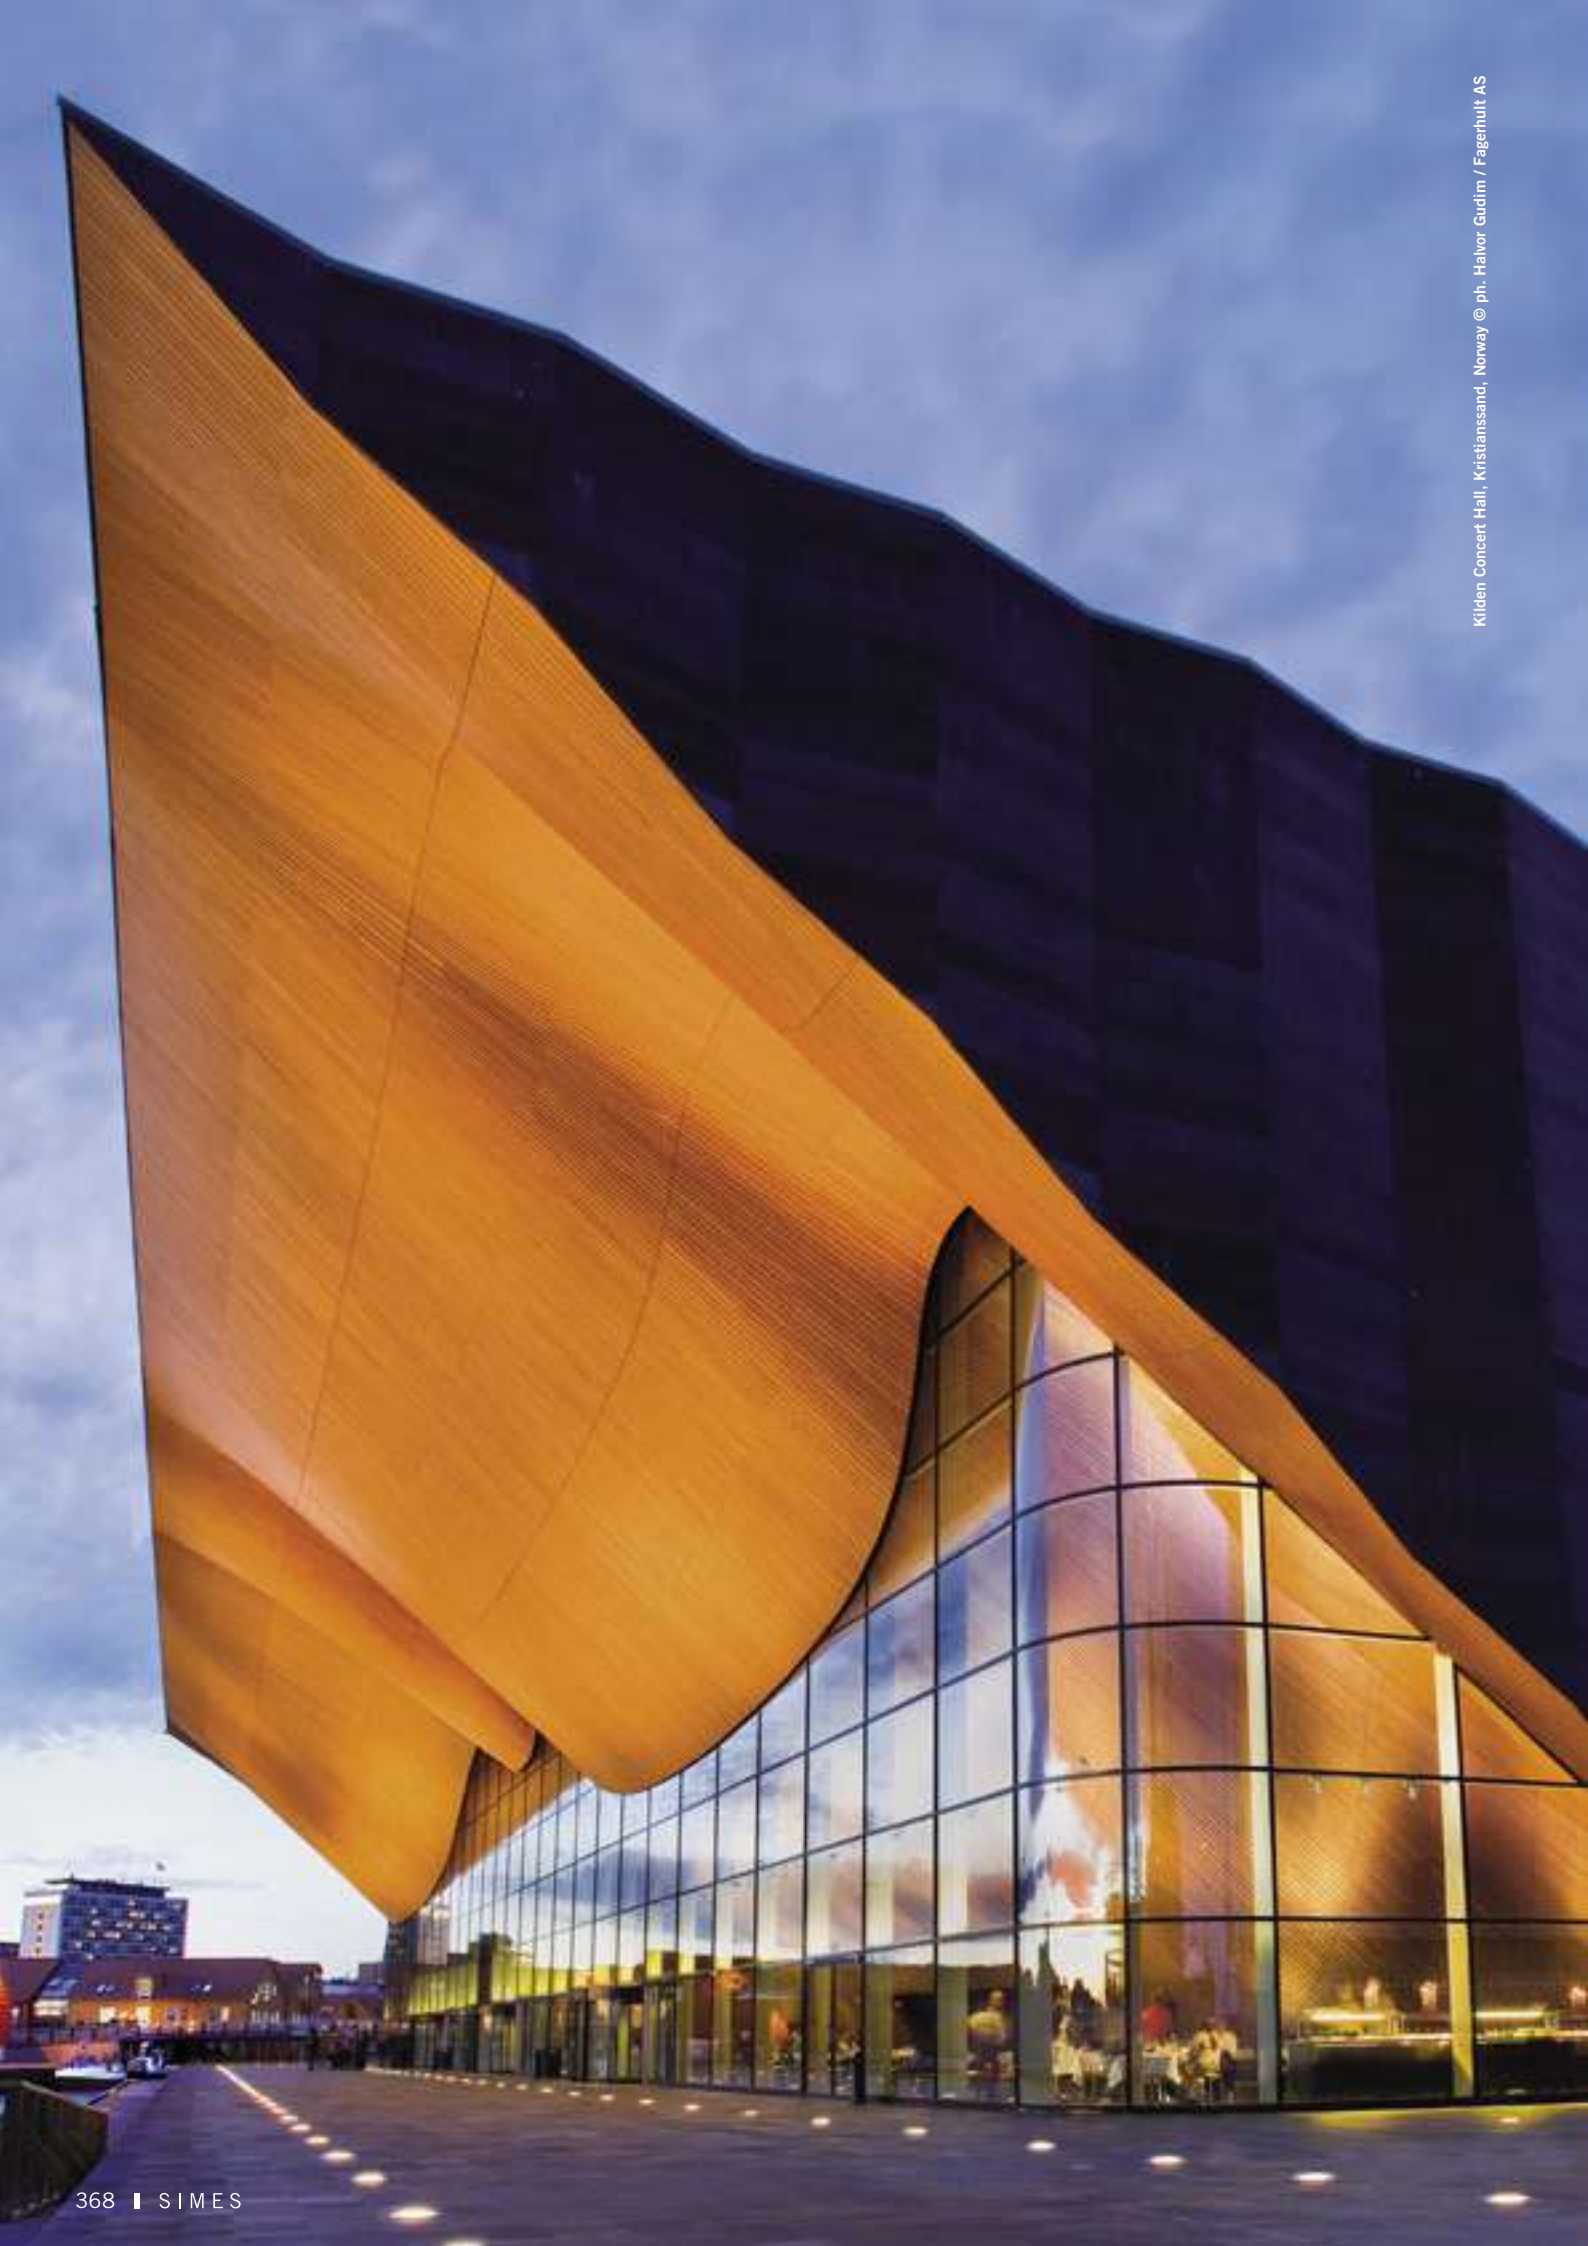


Kliden Concert Hall, Kristiansand, Norway © ph. Halvor Gudim / Fagerhult AS

MICROZIP COMFORT Round stainless-steel front trim



SIMES

Acid - Etched Glass



S.8814W.19 Diffused beam
LED MODULE **3000K** CRI90 141lm 1,1W
(on request 2700K CRI90 129lm)
(on request 4000K CRI80 173lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position

Transparent glass




S.8811W.19 Spot beam with lens
MODULE LED **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic

Beam lenses available on request with no surcharge:
34°, 65° and 10°x44°



MICROZIP COMFORT Round aluminium front trim

Acid - Etched Glass



S.7814W Diffused beam
LED MODULE **3000K** CRI90 141lm 1,1W
(on request 2700K CRI90 129lm)
(on request 4000K CRI80 173lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position


Transparent glass



S.7811W Spot beam with lens
MODULE LED **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic


Beam lenses available on request with no surcharge:
34°, 65° and 10°x44°

Acid - Etched Glass



S.8805W.19 Diffused beam
LED MODULE **3000K** CRI90 194lm 1,5W
(on request 2700K CRI90 179lm)
(on request 4000K CRI80 238lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position


Transparent glass



S.8831W.19 Spot beam with lenses
MODULE LED **3000K** CRI90 520lm 4,3W
(on request 2700K CRI90 480lm)
(on request 4000K CRI80 640lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic



**Beam lenses available on request with no surcharge:
65° and 10°x44°**

Transparent glass




S.8832W.19 Asymmetrical beam with lenses
MODULE LED **3000K** CRI90 520lm 4,3W
(on request 2700K CRI90 480lm)
(on request 4000K CRI80 640lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±5° optic

Transparent glass




S.8833W.19 Flood beam with reflector
MODULE LED **3000K** CRI90 657lm 6,6W
(on request 2700K CRI90 627lm)
(on request 4000K CRI80 837lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic

Acid - Etched Glass



S.7805W Diffused beam
LED MODULE **3000K** CRI90 194lm 1,5W
(on request 2700K CRI90 179lm)
(on request 4000K CRI80 238lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position


Transparent glass



S.7831W Spot beam with lenses
MODULE LED **3000K** CRI90 520lm 4,3W
(on request 2700K CRI90 480lm)
(on request 4000K CRI80 640lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic



**Beam lenses available on request with no surcharge:
65° and 10°x44°**

Transparent glass




S.7832W Asymmetrical beam with lenses
MODULE LED **3000K** CRI90 520lm 4,3W
(on request 2700K CRI90 480lm)
(on request 4000K CRI80 640lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±5° optic


Transparent glass



S.7833W Flood beam with reflector
MODULE LED **3000K** CRI90 657lm 6,6W
(on request 2700K CRI90 627lm)
(on request 4000K CRI80 837lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic




S.8864W.19 Diffused beam
LED MODULE **3000K** CRI90 1106lm 8,4W
(on request 2700K CRI90 1087lm)
(on request 4000K CRI80 1490lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Fixed LED position




S.8891W.19 Spot beam with lenses
LED MODULE **3000K** CRI90 1813lm 14,8W
(on request 2700K CRI90 1748lm)
(on request 4000K CRI80 2331lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic


Beam lenses available on request with no surcharge:
65° and 10°x44°





S.8892W.19 Asymmetrical beam with lenses
LED MODULE **3000K** CRI90 1520lm 14,8W
(on request 2700K CRI90 1748lm)
(on request 4000K CRI80 2331lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±5° optic




S.8893W.19 Medium beam with reflector
LED MODULE **3000K** CRI90 1448lm 11,5W
(on request 2700K CRI90 1391lm)
(on request 4000K CRI80 1734lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic



S.8890.19 Flood beam with lenses
LED MODULE **RGBW (W=3000K)** 1096lm 15,9W
24V PWM
Adjustable ±15° optic
Requires RGBW constant voltage remote power supply
and DMX or DALI controller (pag. 528-529)




S.7864W Diffused beam
LED MODULE **3000K** CRI90 1106lm 8,4W
(on request 2700K CRI90 1087lm)
(on request 4000K CRI80 1490lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Fixed LED position




S.7891W Spot beam with lenses
LED MODULE **3000K** CRI90 1813lm 14,8W
(on request 2700K CRI90 1748lm)
(on request 4000K CRI80 2331lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic


Beam lenses available on request with no surcharge:
65° and 10°x44°




S.7892W Asymmetrical beam with lenses
LED MODULE **3000K** CRI90 1520lm 14,8W
(on request 2700K CRI90 1748lm)
(on request 4000K CRI80 2331lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±5° optic




S.7893W Medium beam with reflector
LED MODULE **3000K** CRI90 1448lm 11,5W
(on request 2700K CRI90 1391lm)
(on request 4000K CRI80 1734lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic








S.8568W.19 Diffused beam
LED MODULE **3000K** CRI90 1238lm 10,5W
(on request 2700K CRI90 1176lm)
(on request 4000K CRI80 1651lm)
220V-240V AC 50/60Hz
Dimmable DALI 2 / PUSH
Fixed LED position




S.8500W.19 Spot beam with lenses
MODULE LED **3000K** CRI90 3900lm 31,1W
(on request 2700K CRI90 3601lm)
(on request 4000K CRI80 4800lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic


**Beam lenses available on request with no surcharge:
65° and 10°x44°**



S.8501W.19 Asymmetrical beam with lenses
MODULE LED **3000K** CRI90 3900lm 31,1W
(on request 2700K CRI90 3601lm)
(on request 4000K CRI80 4800lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±5° optic





S.8502W.19 Medium beam with reflector
MODULE LED **3000K** CRI90 3643lm 28,2W
(on request 2700K CRI90 3419lm)
(on request 4000K CRI80 4306lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic




S.8505.19 Flood beam with lenses
LED MODULE **RGBW (W=3000K)** 1827lm 26,6W
24V PWM
Adjustable ±15° optic

Requires RGBW constant voltage remote power supply
and DMX or DALI controller (pag. 528-529)




S.8578W Diffused beam
LED MODULE **3000K** CRI90 1238lm 10,5W
(on request 2700K CRI90 1176lm)
(on request 4000K CRI80 1651lm)
220V-240V AC 50/60Hz
Dimmable DALI 2 / PUSH
Fixed LED position




S.8570W Spot beam with lenses
MODULE LED **3000K** CRI90 3900lm 31,1W
(on request 2700K CRI90 3601lm)
(on request 4000K CRI80 4800lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic


**Beam lenses available on request with no surcharge:
65° and 10°x44°**



S.8571W Asymmetrical beam with lenses
MODULE LED **3000K** CRI90 3900lm 31,1W
(on request 2700K CRI90 3601lm)
(on request 4000K CRI80 4800lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±5° optic



S.8572W Medium beam with reflector
MODULE LED **3000K** CRI90 3643lm 28,2W
(on request 2700K CRI90 3419lm)
(on request 4000K CRI80 4306lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic






MICROZIP COMFORT Square stainless-steel front trim



SIMES

Acid - Etched Glass



S.8819W.19 Diffused beam
MODULE LED **3000K** CRI90 140lm 1,1W
(on request 2700K CRI90 129lm)
(on request 4000K CRI80 173lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position

Transparent glass




S.8815W.19 Spot beam with lens
MODULE LED **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic

Beam lenses available on request with no surcharge:
34°, 65° and 10°x44°



MICROZIP COMFORT Square aluminium front trim

Acid - Etched Glass



S.7819W Diffused beam
MODULE LED **3000K** CRI90 140lm 1,1W
(on request 2700K CRI90 129lm)
(on request 4000K CRI80 173lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position


Transparent glass



S.7815W Spot beam with lens
MODULE LED **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic


Beam lenses available on request with no surcharge:
34°, 65° and 10°x44°

Acid - Etched Glass



S.8825W.19 Diffused beam
LED MODULE **3000K** CRI90 194lm 1,5W
(on request 2700K CRI90 179lm)
(on request 4000K CRI80 238lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position


Transparent glass



S.8835W.19 Spot beam with lenses
MODULE LED **3000K** CRI90 774lm 6W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic



**Beam lenses available on request with no surcharge:
65° and 10°x44°**

Transparent glass




S.8836W.19 Asymmetrical beam with lenses
MODULE LED **3000K** CRI90 774lm 6W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±5° optic

Transparent glass




S.8837W.19 Flood beam with reflector
MODULE LED **3000K** CRI90 657lm 6,6W
(on request 2700K CRI90 627lm)
(on request 4000K CRI80 837lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic

Acid - Etched Glass



S.7825W Diffused beam
LED MODULE **3000K** CRI90 194lm 1,5W
(on request 2700K CRI90 179lm)
(on request 4000K CRI80 238lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position


Transparent glass



S.7835W Spot beam with lenses
MODULE LED **3000K** CRI90 774lm 6W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic



**Beam lenses available on request with no surcharge:
65° and 10°x44°**

Transparent glass




S.7836W Asymmetrical beam with lenses
MODULE LED **3000K** CRI90 774lm 6W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±5° optic

Transparent glass




S.7837W Flood beam with reflector
MODULE LED **3000K** CRI90 657lm 6,6W
(on request 2700K CRI90 627lm)
(on request 4000K CRI80 837lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic

Acid - etched glass



S.8884W.19 Diffused beam
LED MODULE **3000K** CRI90 1106lm 8,4W
(on request 2700K CRI90 1087lm)
(on request 4000K CRI80 1490lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Fixed LED position


Transparent glass



S.8895W.19 Spot beam with lenses
LED MODULE **3000K** CRI90 1813lm 14,8W
(on request 2700K CRI90 1748lm)
(on request 4000K CRI80 2331lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic


Beam lenses available on request with no surcharge:
65° and 10°x44°

Transparent glass




S.8896W.19 Asymmetrical beam with lenses
LED MODULE **3000K** CRI90 1520lm 14,8W
(on request 2700K CRI90 1748lm)
(on request 4000K CRI80 2331lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable $\pm 5^\circ$ optic

Transparent glass




S.8897W.19 Medium beam with reflector
LED MODULE **3000K** CRI90 1448lm 11,5W
(on request 2700K CRI90 1391lm)
(on request 4000K CRI80 1734lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic

Transparent glass




S.8899.19 Flood beam with lenses
LED MODULE **RGBW (W=3000K)** 1096lm 15,9W
24V PWM
Adjustable $\pm 15^\circ$ optic

Requires RGBW constant voltage remote power supply
and DMX or DALI controller (pag. 528-529)




Acid - etched glass



S.7884W Diffused beam
LED MODULE **3000K** CRI90 1106lm 8,4W
(on request 2700K CRI90 1087lm)
(on request 4000K CRI80 1490lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Fixed LED position


Transparent glass



S.7895W Spot beam with lenses
LED MODULE **3000K** CRI90 11813lm 14,8W
(on request 2700K CRI90 1748lm)
(on request 4000K CRI80 2331lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic


Beam lenses available on request with no surcharge:
65° and 10°x44°

Transparent glass




S.7896W Asymmetrical beam with lenses
LED MODULE **3000K** CRI90 1520lm 14,8W
(on request 2700K CRI90 1748lm)
(on request 4000K CRI80 2331lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable $\pm 5^\circ$ optic


Transparent glass




S.7897W Medium beam with reflector
LED MODULE **3000K** CRI90 1448lm 11,5W
(on request 2700K CRI90 1391lm)
(on request 4000K CRI80 1734lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic








S.8588W.19 **Diffused beam**
LED MODULE **3000K** CRI90 1238lm 10,5W
(on request 2700K CRI90 1176lm)
(on request 4000K CRI80 1651lm)
220V-240V AC 50/60Hz
Dimmable DALI 2 / PUSH
Fixed LED position




S.8580W.19 **Spot beam with lenses**
MODULE LED **3000K** CRI90 3900lm 31,1W
(on request 2700K CRI90 3601lm)
(on request 4000K CRI80 4800lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic


**Beam lenses available on request with no surcharge:
65° and 10°x44°**



S.8581W.19 **Asymmetrical optic with lenses**
MODULE LED **3000K** CRI90 3900lm 31,1W
(on request 2700K CRI90 3601lm)
(on request 4000K CRI80 4800lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±5° optic





S.8582W.19 **Medium beam with reflector**
MODULE LED **3000K** CRI90 3643lm 28,2W
(on request 2700K CRI90 3419lm)
(on request 4000K CRI80 4306lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic




S.8585.19 **Flood beam with lenses**
LED MODULE **RGBW (W=3000K)** 1827lm 26,6W
24V PWM
Adjustable ±15° optic

Requires RGBW constant voltage remote power supply
and DMX or DALI controller (pag. 528-529)




S.8598W **Diffused beam**
LED MODULE **3000K** CRI90 1238lm 10,5W
(on request 2700K CRI90 1176lm)
(on request 4000K CRI80 1651lm)
220V-240V AC 50/60Hz
Dimmable DALI 2 / PUSH
Fixed LED position




S.8590W **Spot beam with lenses**
MODULE LED **3000K** CRI90 3900lm 31,1W
(on request 2700K CRI90 3601lm)
(on request 4000K CRI80 4800lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic


**Beam lenses available on request with no surcharge:
65° and 10°x44°**



S.8591W **Asymmetrical optic with lenses**
MODULE LED **3000K** CRI90 3900lm 31,1W
(on request 2700K CRI90 3601lm)
(on request 4000K CRI80 4800lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±5° optic



S.8592W **Medium beam with reflector**
MODULE LED **3000K** CRI90 3643lm 28,2W
(on request 2700K CRI90 3419lm)
(on request 4000K CRI80 4306lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±15° optic



The project need of an inground drive over fitting with low recessing depth, lead to the development of Ring Comfort, a product characterized by a front ring in stainless steel, high mechanical resistance and excellent lighting performance. Four different beam angles, from the soft and diffused effect, to the narrow beam with cowels to the asymmetrical distribution. The wider beam is obtained with a comfortable double inner reflector and COB LED. The light distributions are very precise due to the tiltable optics.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Marine grade stainless steel AISI 316L 3mm thick front ring. Toughened glass diffuser 12mm thick for MICRORING COMFORT, 15mm thick for MINIRING COMFORT, 19mm thick for RING / MEGARING COMFORT. Stainless steel A4 screws. Luminaire supplied with neoprene H07RN-F cable and connector. Silicone gaskets. Double powder paint. Supplied with polypropylene recessing box.

Maximum weight 5000 Kg - 30Km/h

PROTECTION CLASS
IP65 / IP67


ISOLATION CLASS
CLASS I ☺

MECHANICAL RESISTANCE
IK 10


FINISHING
.19 Stainless Steel



www.simes.it/ring-comfort

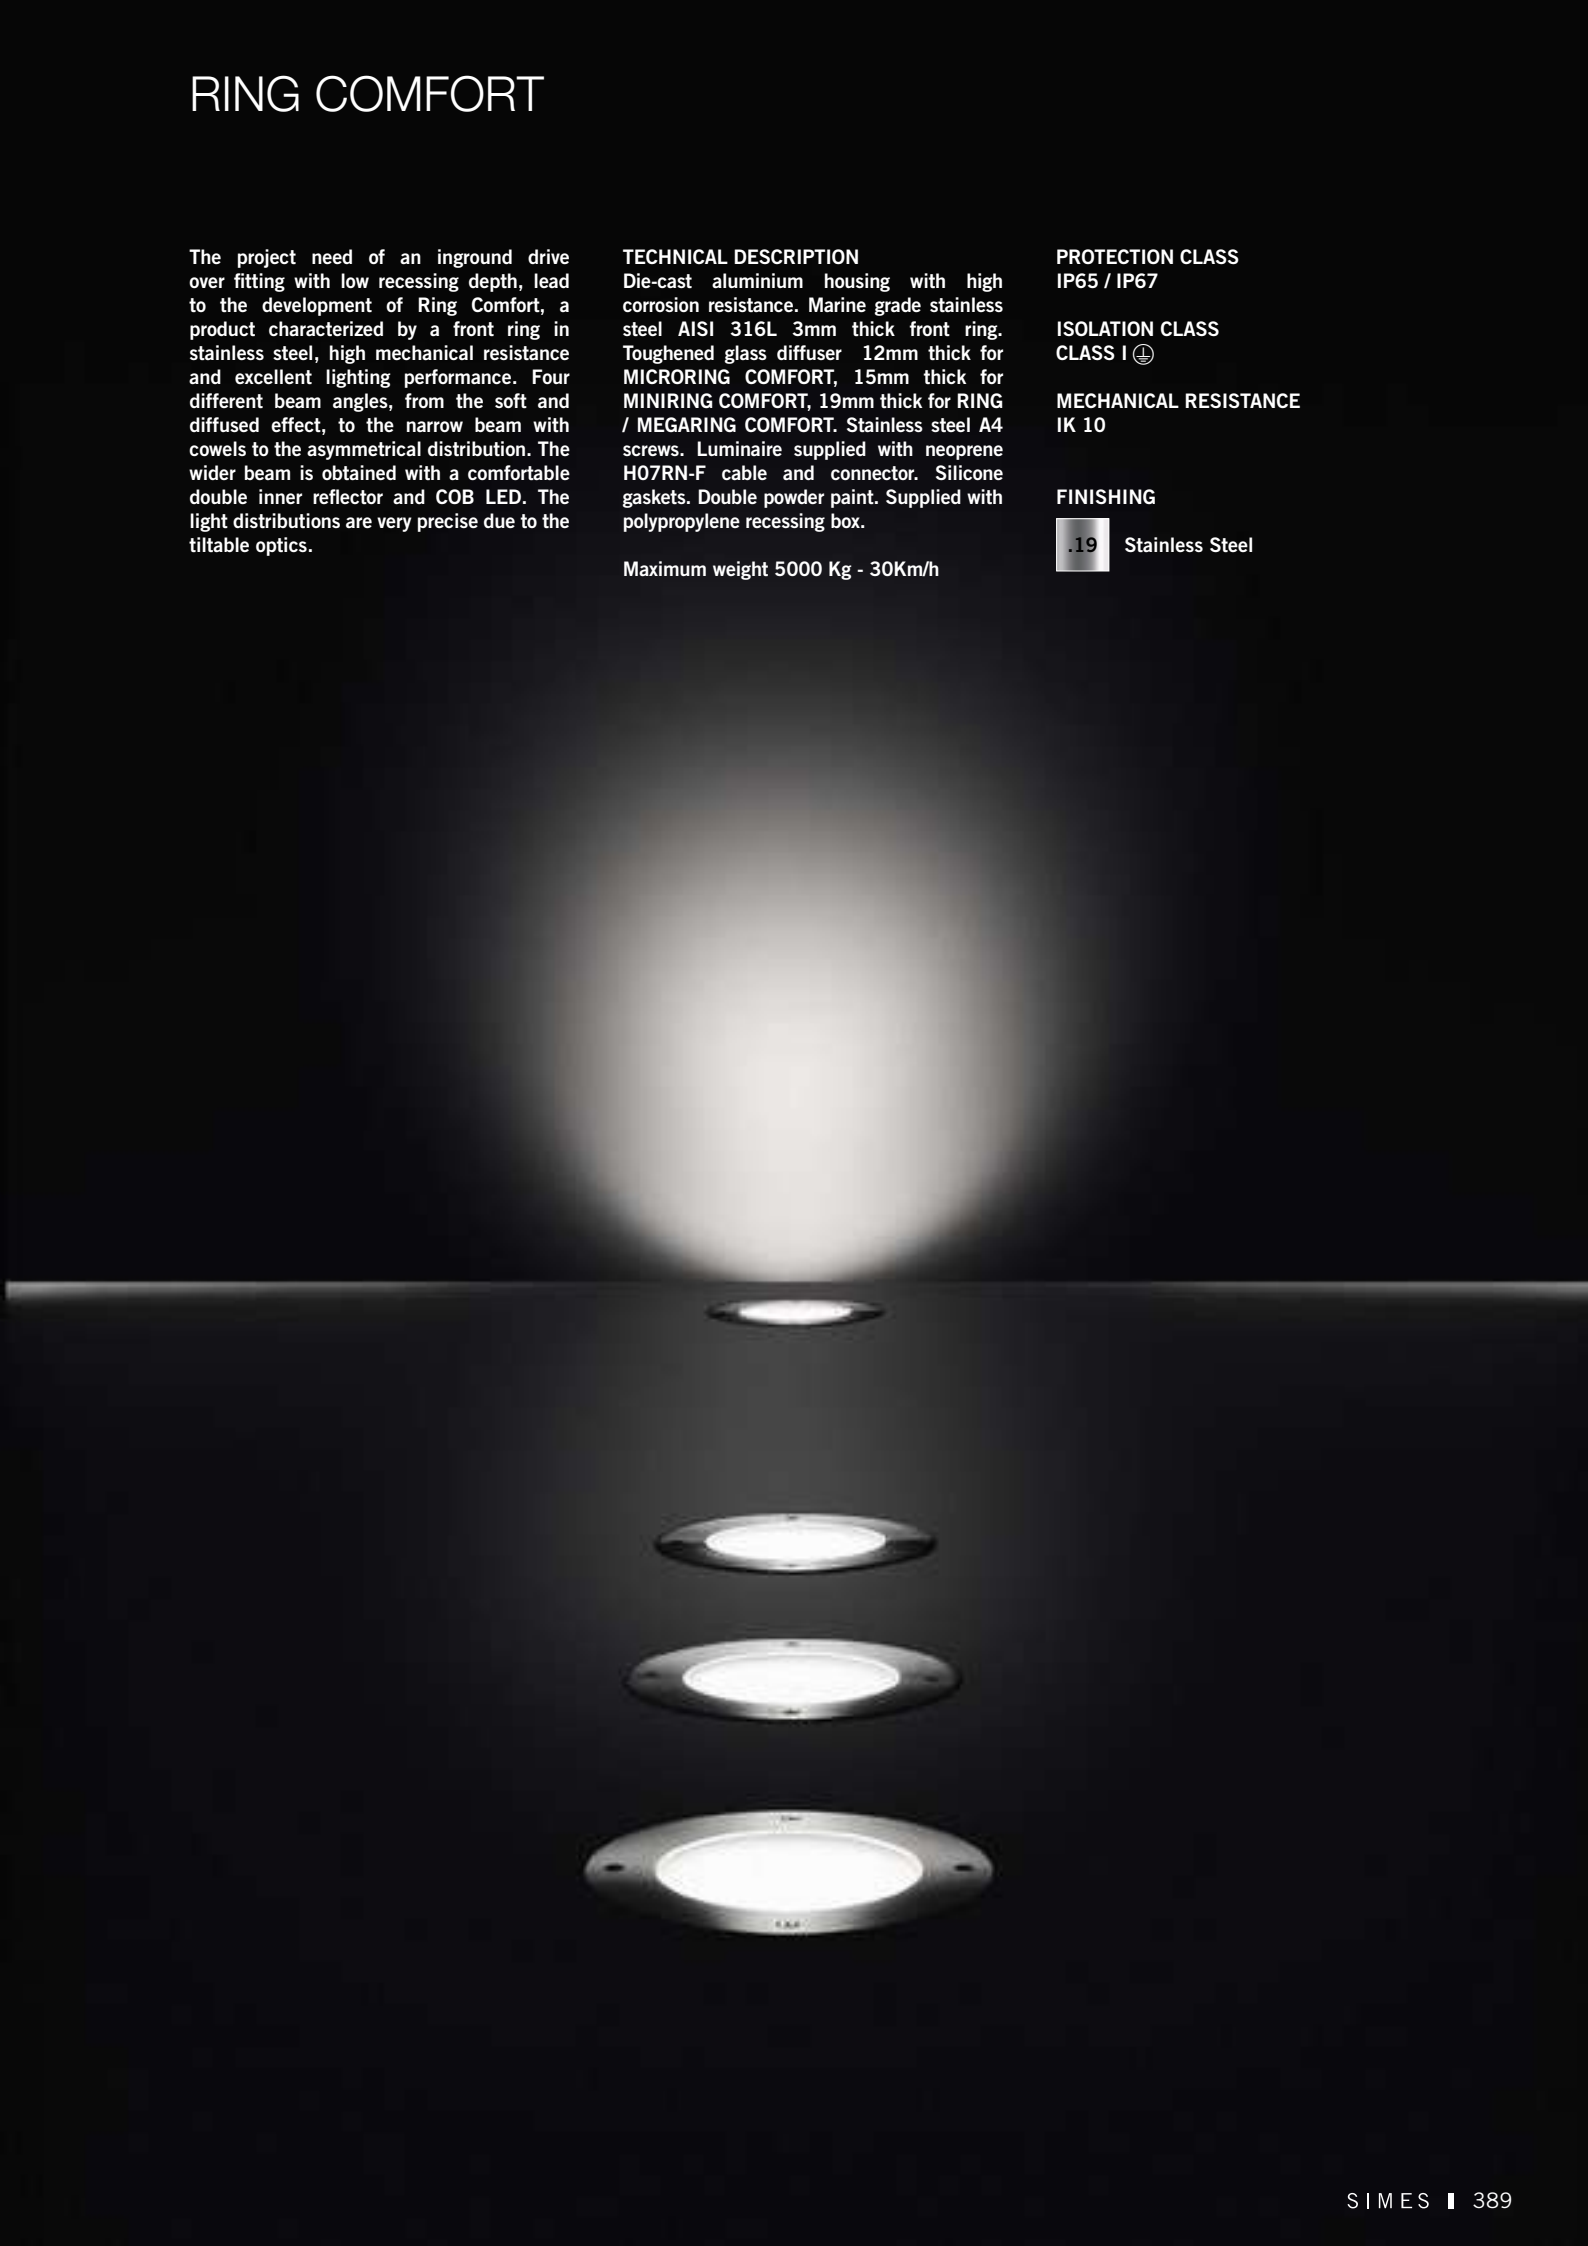


Acid-etched glass




S.4946W.19 Diffused beam
LED MODULE **3000K** CRI90 140lm 1,1W
(on request 2700K CRI90 129lm)
(on request 4000K CRI80 173lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position

Transparent glass




S.7900W.19 Spot beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic

Beam lenses available on request with no surcharge:
34°, 65°, asymmetric and 10°x44°




Acid-etched glass



S.4957W.19 Diffused beam
LED MODULE **3000K** CRI90 421lm 3,0W
(on request 2700K CRI90 389lm)
(on request 4000K CRI80 519lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position


Transparent glass



S.7910W.19 Spot beam with lenses
LED MODULE **3000K** CRI90 774lm 6W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic


Beam lenses available on request with no surcharge:
65° and 10°x44°

Transparent glass





S.7911W.19 Asymmetrical beam with lenses
LED MODULE **3000K** CRI90 774lm 6W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 5^\circ$ optic

Transparent glass




S.7912W.19 Flood beam with reflector
LED MODULE **3000K** CRI90 657lm 6,6W
(on request 2700K CRI90 627lm)
(on request 4000K CRI80 837lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic





S.4971W.19 Diffused beam
LED MODULE **3000K** CRI90 1106lm 8,7W
(on request 2700K CRI90 1087lm)
(on request 4000K CRI80 1490lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position


Version with DALI 2 / PUSH power supply
available on request with surcharge.



S.7920W.19 Spot beam with lenses
LED MODULE **3000K** CRI90 1813lm 14,8W
(on request 2700K CRI90 1748lm)
(on request 4000K CRI80 2331lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic


**Beam lenses available on request with no surcharge:
65° and 10°x44°**

Version with DALI 2 / PUSH power supply
available on request with surcharge.





S.7921W.19 Asymmetrical optic with lenses
LED MODULE **3000K** CRI90 1813lm 14,8W
(on request 2700K CRI90 1748lm)
(on request 4000K CRI80 2331lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 5^\circ$ optic

Version with DALI 2 / PUSH power supply
available on request with surcharge.




S.7922W.19 Medium beam with reflector
LED MODULE **3000K** CRI90 1448lm 11,5W
(on request 2700K CRI90 1391lm)
(on request 4000K CRI80 1734lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic

Version with DALI 2 / PUSH power supply
available on request with surcharge.



S.4908W.19 Diffused beam
LED MODULE **3000K** CRI90 1215lm 9,0W
(on request 2700K CRI90 1125lm)
(on request 4000K CRI80 1305lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Fixed LED position


Version with DALI 2 / PUSH power supply
available on request with surcharge.



S.7930W.19 Spot beam with lenses
LED MODULE **3000K** CRI90 3900lm 31,1W
(on request 2700K CRI90 3601lm)
(on request 4000K CRI80 4800lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic


**Beam lenses available on request with no surcharge:
65° and 10°x44°**

Version with DALI 2 / PUSH power supply
available on request with surcharge.




S.7931W.19 Asymmetrical optic with lenses
LED MODULE **3000K** CRI90 3900lm 31,1W
(on request 2700K CRI90 3601lm)
(on request 4000K CRI80 4800lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 5^\circ$ optic

Version with DALI 2 / PUSH power supply
available on request with surcharge.



S.7932W.19 Medium beam with reflector
LED MODULE **3000K** CRI90 3643lm 28,2W
(on request 2700K CRI90 3419lm)
(on request 4000K CRI80 1306lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable $\pm 15^\circ$ optic

Version with DALI 2 / PUSH power supply
available on request with surcharge.





Suit is a radial high performing surface mounted drive-over, with a high resistant, easy and safe installation, that does not require to be recessed, thanks to its anchor flange. For applications in non drive-over areas Suit can be installed without flange. It is available with 1 window, 2 windows at 180° or 90° and 4 windows.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Reflector in polymers covered with aluminium. Protective guard of 5mm thickness. Polycarbonate diffuser. Stainless steel A4 screws. Luminaire supplied with 5,0m neoprene H07RN-F cable. Silicone gaskets. Double powder paint.

MICROSUIT
It requires constant current 700mA remote power supply.

**PATENTED
REGISTERED DESIGN**

PROTECTION CLASS
IP65 / IP67


ISOLATION CLASS
CLASS III ⬢ MICROSUIT
CLASS I ⊕ MINISUIT, SUIT

MECHANICAL RESISTANCE
IK 10



COLOURS

- .09 Black
- .14 Aluminium Grey

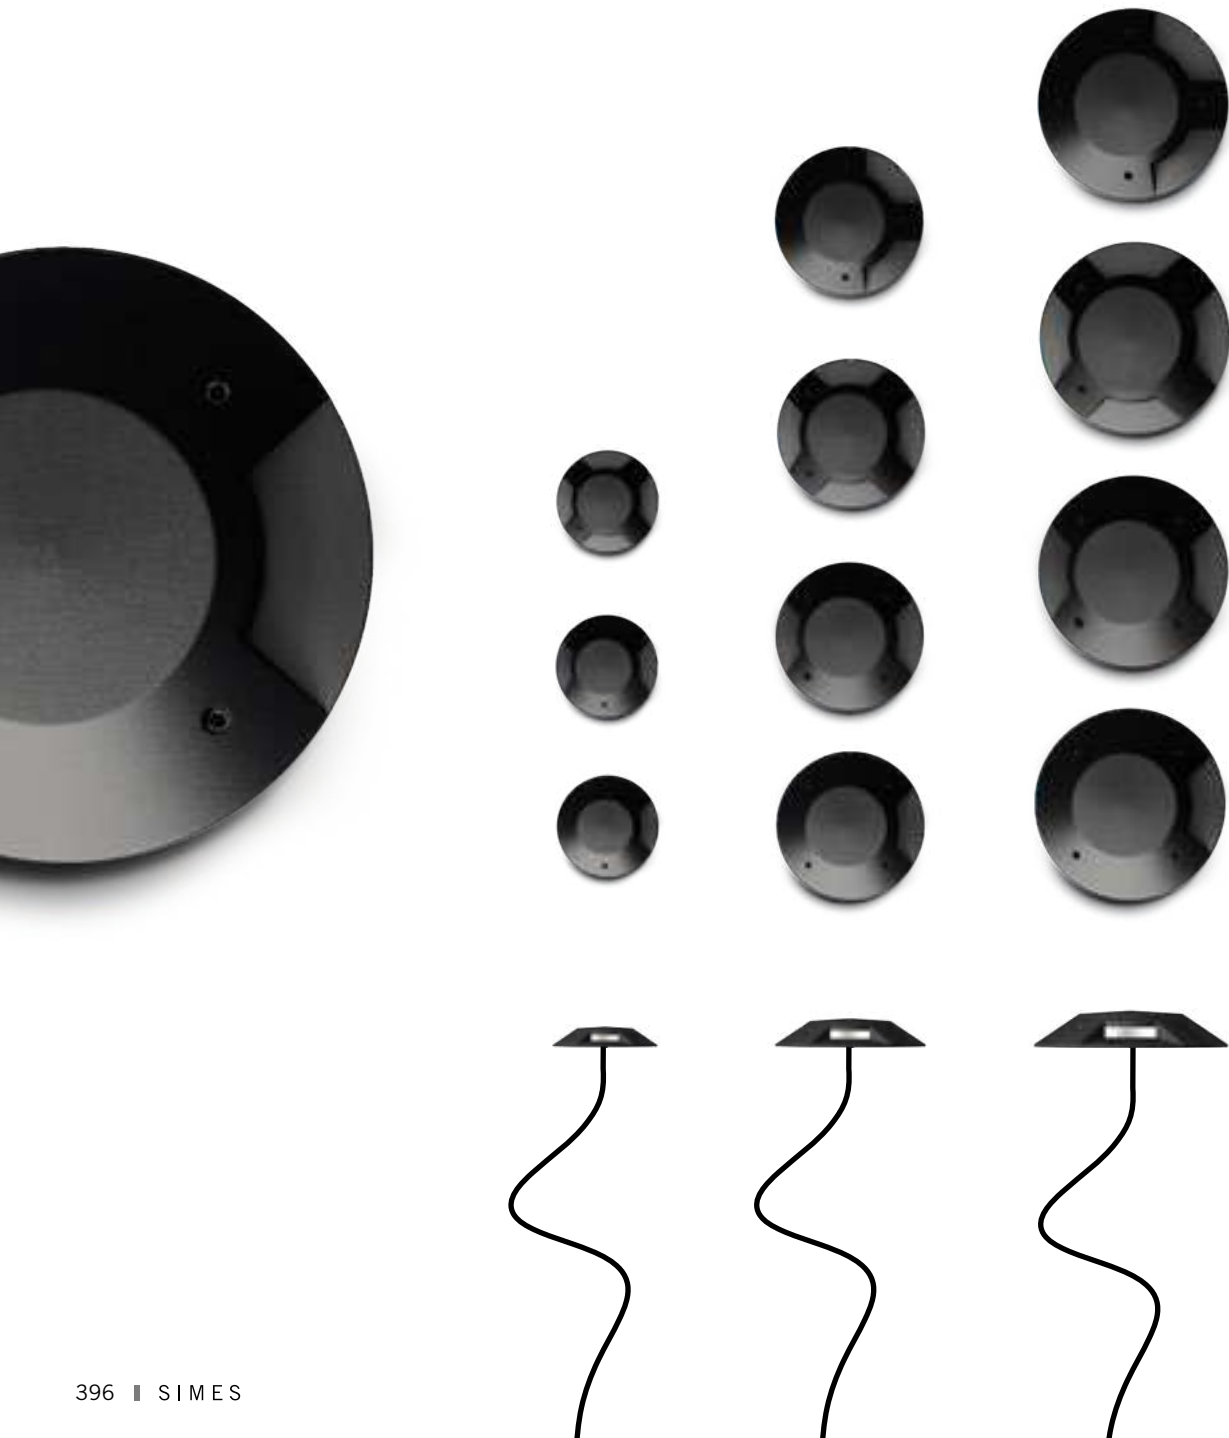


www.simes.it/suit



MICROSUIT 700mA


1 window with lens




S.5681N
LED MODULE **4000K** CRI80 330lm 2,0W
(on request 2700K CRI80 310lm)
(on request 3000K CRI80 346lm)
max 700mA (Vf 3,1V)

Requires constant current Vout 120Vdc max
remote power supply (page 524-525)

(Anchor flange S.5680 not included)




2 opposite windows with lens




S.5683N
LED MODULE **4000K** CRI80 330lm 2,0W
(on request 2700K CRI80 310lm)
(on request 3000K CRI80 346lm)
max 700mA (Vf 3,1V)

Requires constant current Vout 120Vdc max
remote power supply (page 524-525)

(Anchor flange S.5680 not included)





4 windows with lens




S.5685N
LED MODULE **4000K** CRI80 330lm 2,0W
(on request 2700K CRI80 310lm)
(on request 3000K CRI80 346lm)
max 700mA (Vf 3,1V)

Requires constant current Vout 120Vdc max
remote power supply (page 524-525)


(Anchor flange S.5680 not included)



MICROSUIT INSTALLATION
Microsuit is a surface mounted drive-over fitting. Engineered with a safety cable protrusion on its back part. The safety cable protrusion must be inserted directly into the conduit corrugate which need to be minimum 32mm diameter.



ACCESSORIES FLANGE FOR APPLICATIONS IN DRIVEWAY AREAS
MICROSUIT is installed with the drive over anchor flange.
Driveover Max 4000Kg at 10Km/h.





S.5680
FLANGE TO BE ANCHORED IN CONCRETE
for MICROSUIT

Puig Tower, Barcelona, Spain - Arch. Rafael Moneo + Antonio Puig, Josep Riu GCA Architects + Lucho Marcial © Ph. Rafael Vargas





1 window with reflector



S.5695N
LED MODULE **4000K** CRI80 173lm 1,0W
(on request 2700K CRI80 162lm)
(on request 3000K CRI80 181lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

(Anchor flange S.5699 not included)



2 windows 180° with reflectors



S.5696N
2 x LED MODULE **4000K** CRI80 173lm 1,0W
(on request 2700K CRI80 162lm)
(on request 3000K CRI80 181lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

(Anchor flange S.5699 not included)



2 opposite windows with reflectors



S.5697N
2 x LED MODULE **4000K** CRI80 173lm 1,0W
(on request 2700K CRI80 162lm)
(on request 3000K CRI80 181lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable


(Anchor flange S.5699 not included)

4 windows with reflectors



S.5698N
4 x LED MODULE **4000K** CRI80 173lm 1,0W
(on request 2700K CRI80 162lm)
(on request 3000K CRI80 181lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

(Anchor flange S.5699 not included)




ACCESSORIES FLANGE FOR APPLICATIONS IN DRIVEWAY AREAS
MINISUIT is installed with the drive over anchor flange.
Driveover Max 4000Kg at 10Km/h.

S.5699
FLANGE TO BE ANCHORED IN CONCRETE
for MINISUIT




Walkway, Locarno, Switzerland © Simes S.p.A.

1 window with reflector




S.5691N
LED MODULE **4000K** CRI80 330lm 2,0W
(on request 2700K CRI80 310lm)
(on request 3000K CRI80 346lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

(Anchor flange S.5690 not included)




2 windows 180° with reflectors




S.5692N
2 x LED MODULE **4000K** CRI80 330lm 2,0W
(on request 2700K CRI80 310lm)
(on request 3000K CRI80 346lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

(Anchor flange S.5690 not included)




2 opposite windows with reflectors




S.5693N
2 x LED MODULE **4000K** CRI80 330lm 2,0W
(on request 2700K CRI80 310lm)
(on request 3000K CRI80 346lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

(Anchor flange S.5690 not included)





4 windows with reflectors



S.5694N
4 x LED MODULE **4000K** CRI80 330lm 2,0W
(on request 2700K CRI80 310lm)
(on request 3000K CRI80 346lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

(Anchor flange S.5690 not included)



ACCESSORIES FLANGE FOR APPLICATIONS IN DRIVEWAY AREAS
SUIT is installed with the drive over anchor flange.
Driveover Max 4000Kg at 10Km/h.



S.5690
FLANGE TO BE ANCHORED IN CONCRETE
for SUIT

MAINA Headquarter Arch. Gianni Arnaudo, Fossano, Cuneo, Italy © Ph.Mario Bertani

Ceiling is a family of surface mounted downlights with clean lines and compact sizes, that integrates perfectly in any context and architecture. The comfort rearward optics ensure the total absence of glare and excellent light beam distribution. Ceiling is available in three sizes, all with a reduced depth of only 55mm. Thanks to the clip-on fixation mechanism of the body to the base, Ceiling is totally free of visible screws.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Reflectors in polymers covered with aluminium. Nylon black shutters. Toughened glass diffuser 5mm thick in rearward position between the aluminium reflectors and the nylon black shutters. Not visible stainless steel A4 screws. Luminaire pre-wired with 5,0m bipolar flat cable. Double powder paint.

PROTECTION CLASS
IP65


ISOLATION CLASS
CLASS III ⚡

MECHANICAL RESISTANCE
IK 07

COLOURS



.01	White (black optic)
.09	Black (black optic)

REGISTERED DESIGN

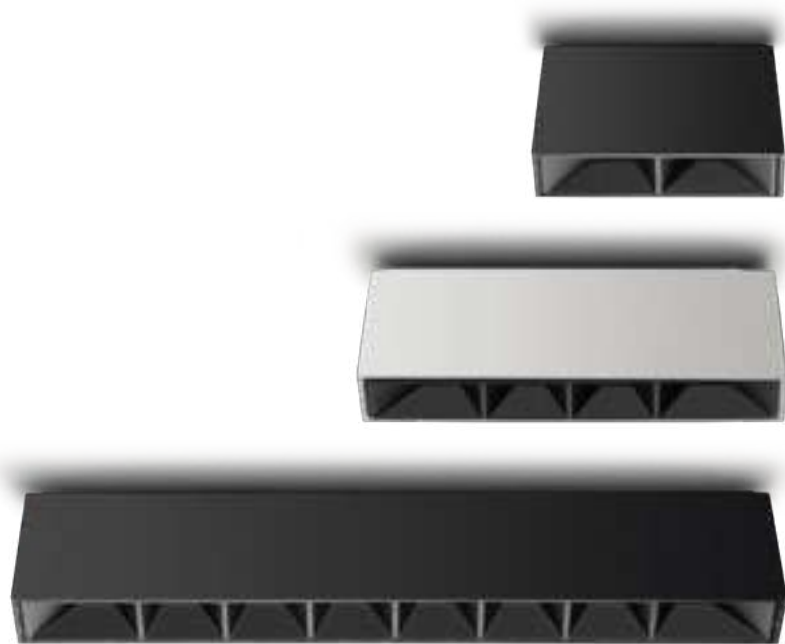



www.simes.it/ceiling

2 LED





S.9060W Wide Flood beam with reflectors
LED MODULE **3000K** CRI90 520lm 4,2W
(on request 2700K CRI90 480lm)
(on request 4000K CRI80 640lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)

4 LED



S.9065W Wide Flood beam with reflectors
LED MODULE **3000K** CRI90 1040lm 8,4W
(on request 2700K CRI90 960lm)
(on request 4000K CRI80 1280lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)

8 LED

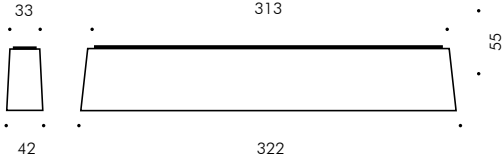

S.9070W Wide Flood beam with reflectors
LED MODULE **3000K** CRI90 2080lm 16,7W
(on request 2700K CRI90 1920lm)
(on request 4000K CRI80 2560lm)
24Vdc PWM
Requires constant voltage 24Vdc
remote power supply (page 522-523)



CATCH Ceiling surface mounted and recessed mounted

SIMES

CATCH

Catch is an innovative downlight range that combines great visual comfort, minimalist dimensions and light orientation of its tilting optical system. Its comfortable optics obtained with cowels grant glare free and high performances. Catch is available in two versions: surface mounted which contains the driver and a recessed version that can be directly installed in plasterboards or with its recessing box, for concrete ceilings. The lighting element of Catch recessed version can be installed flush with the ceiling or protruding for a higher precision of pointing.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Clear polycarbonate lenses. Toughened glass 5mm thick. Stainless steel A4 screws. Double powder paint.

CATCH RECESSED
Aluminium front ring. Luminaire pre-wired with 0,4m neoprene H05RN-F cable. External power box.

CATCH SURFACE
Luminaire pre-wired with 5,0m neoprene H05RN-F cable.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II


MECHANICAL RESISTANCE
IK 08

COLOURS

- .01 White
- .14 Aluminium Grey





www.simes.it/catch




S.7409
RECESSING BOX FOR CONCRETE CEILINGS
for CATCH SQUARE 4 LED ADJUSTABLE OPTIC
Dim. 220 x 380 x 120mm
Recessed box in galvanized steel.

Square 4 LEDs tiltable




S.7400W Flood beam with lenses
LED MODULE **3000K** CRI90 774lm 6,2W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±20°





S.7401W Very Wide Flood beam with lenses
LED MODULE **3000K** CRI90 774lm 6,2W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±20°

Beam lenses available on request with no surcharge:
12°, 10°x44°




S.7469
RECESSING BOX FOR CONCRETE CEILINGS
for CATCH RECTANGULAR 20 LED ADJUSTABLE OPTIC
Dim. 400 x 360 x 120mm
Recessed box in galvanized steel.

Rectangular 20 LEDs tiltable

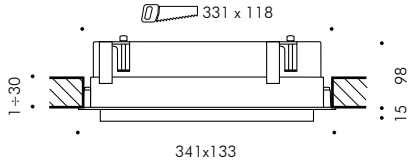


S.7460W Flood beam with lenses
LED MODULE **3000K** CRI90 3870lm 29,9W
(on request 2700K CRI90 3572lm)
(on request 4000K CRI80 4760lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±20° optic





S.7461W Very Wide Flood beam with lenses
LED MODULE **3000K** CRI90 3870lm 29,9W
(on request 2700K CRI90 3572lm)
(on request 4000K CRI80 4760lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±20° optic

Beam lenses available on request with no surcharge:
12°, 10°x44°




S.7429
RECESSING BOX FOR CONCRETE CEILINGS
for CATCH SQUARE 9 LED ADJUSTABLE OPTIC
Dim. 220 x 380 x 120mm
Recessed box in galvanized steel.

Square 9 LEDs tiltable




S.7420W Flood beam with lenses
LED MODULE **3000K** CRI90 1741lm 13,5W
(on request 2700K CRI90 1607lm)
(on request 4000K CRI80 2142lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±20° optic




S.7421W Very Wide Flood beam with lenses
LED MODULE **3000K** CRI90 1741lm 13,5W
(on request 2700K CRI90 1607lm)
(on request 4000K CRI80 2142lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Adjustable ±20° optic

Beam lenses available on request with no surcharge:
12°, 10°x44°

Square 4 LEDs tiltable




S.7500W Flood beam with lenses
LED MODULE **3000K** CRI90 774lm 6,2W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15°




S.7501W Very Wide Flood beam with lenses
LED MODULE **3000K** CRI90 774lm 6,2W
(on request 2700K CRI90 714lm)
(on request 4000K CRI80 952lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15°

Beam lenses available on request with no surcharge:
12°, 10°x44°

Square 9 LEDs tiltable





S.7520W Flood beam with lenses
LED MODULE **3000K** CRI90 1741lm 13,5W
(on request 2700K CRI90 1607lm)
(on request 4000K CRI80 2142lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic




S.7521W Very Wide Flood beam with lenses
LED MODULE **3000K** CRI90 1741lm 13,5W
(on request 2700K CRI90 1607lm)
(on request 4000K CRI80 2142lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic

Beam lenses available on request with no surcharge:
12°, 10°x44°

Rectangular 20 LEDs tiltable

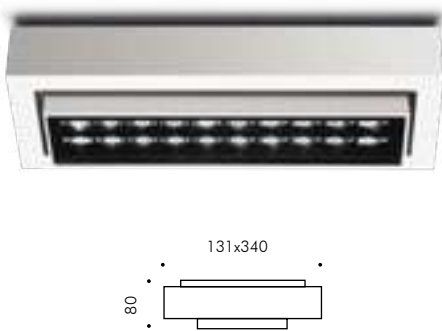

S.7560W Flood beam with lenses
LED MODULE **3000K** CRI90 3870lm 29,9W
(on request 2700K CRI90 3572lm)
(on request 4000K CRI80 4760lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic



S.7561W Very Wide Flood beam with lenses
LED MODULE **3000K** CRI90 3870lm 29,9W
(on request 2700K CRI90 3572lm)
(on request 4000K CRI80 4760lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic

Beam lenses available on request with no surcharge:
12°, 10°x44°



Lobby is an outdoor recessed downlight, highly performing, available in two versions: the basic version has an aluminium front ring and visible screws while the professional one has stainless steel front ring and total absence of visible screws. Both versions are engineered with a double optic system composed of a primary optic that uses a satin glass to better distribute the light and a secondary optic that uses an aluminum reflector to avoid the glare. Lobby can be directly installed in plasterboards or with its recessing box, for concrete ceilings.

TECHNICAL DESCRIPTION
Die-cast EN aluminium housing with high corrosion resistance. Marine grade stainless steel AISI 316L front trim 2mm thick or aluminium. Reflector in polymers covered with aluminium. Toughened glass 10 mm thick. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

LOBBY BASIC
Aluminium front trim with visible screws. Luminaire pre-wired with 0,5m neoprene H05RN-F cable and connector for remote connection.

LOBBY PROFESSIONAL
Marine grade stainless steel AISI 316L front trim with interlocking clips system. Luminaire with double cable entry and cable glands.

PATENTED

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II ☐

MECHANICAL RESISTANCE
IK 10


FINISHING BASIC

.09 Black

FINISHING PROFESSIONAL



.19 Stainless Steel






S.7309
RECESSING BOX FOR CONCRETE CEILINGS
for MINILOBBY BASIC
Dim. 200 x 200 x 120mm
Recessed box in galvanized steel.


Minilobby Aluminium trim



S.7306W Flood beam with reflector
LED MODULE **3000K** CRI90 955lm 6,5W
(on request 2700K CRI90 908lm)
(on request 4000K CRI80 1171lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable





S.7307W Medium beam with reflector
LED MODULE **3000K** CRI90 955lm 6,5W
(on request 2700K CRI90 908lm)
(on request 4000K CRI80 1171lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable




S.7329
RECESSING BOX FOR CONCRETE CEILINGS
for LOBBY BASIC
Dim. 260 x 260 x 150mm
Recessed box in galvanized steel.


Lobby Aluminium trim



S.7326W Very Wide Flood beam with reflector
LED MODULE **3000K** CRI90 2234lm 17,4W
(on request 2700K CRI90 2123lm)
(on request 4000K CRI80 2738lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable





S.7327W Wide Flood beam with reflector
LED MODULE **3000K** CRI90 2234lm 17,4W
(on request 2700K CRI90 2123lm)
(on request 4000K CRI80 2738lm)
220V-230Vac 50/60Hz
ON/OFF Not Dimmable




S.7349
RECESSING BOX FOR CONCRETE CEILINGS
for MINILOBBY PROFESSIONAL
Dim. 360 x 200 x 170mm
Recessed box in galvanized steel.


Minilobby Stainless steel trim



S.7340W.19 Flood beam with reflector
LED MODULE **3000K** CRI90 1618lm 11,8W
(on request 2700K CRI90 1538lm)
(on request 4000K CRI80 1983lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH





S.7345W.19 Medium beam with reflector
LED MODULE **3000K** CRI90 1618lm 11,8W
(on request 2700K CRI90 1538lm)
(on request 4000K CRI80 1983lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.7369
RECESSING BOX FOR CONCRETE CEILINGS
for LOBBY PROFESSIONAL
Dim. 400 x 260 x 170mm
Recessed box in galvanized steel.

Lobby Stainless steel trim



S.7360W.19 Very Wide Flood beam with reflector
LED MODULE **3000K** CRI90 3231lm 24,1W
(on request 2700K CRI90 3071lm)
(on request 4000K CRI80 3959lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.7365W.19 Flood beam with reflector
LED MODULE **3000K** CRI90 3231lm 24,1W
(on request 2700K CRI90 3071lm)
(on request 4000K CRI80 3959lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH





ZIP DOWNLIGHT COMFORT

Zip Downlight is available in two recessing versions, round and square, with stainless steel front ring and it is characterized by a high mechanical resistance. The tilting optic it has been developped on the COB LED. It has a double inner aluminium reflector reducing the glare and granting a high efficiency. Zip Downlight can be directly installed in plasterboards or with its recessing box, for concrete ceilings.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Marine grade stainless steel AISI 316L front trim 2mm thick. Toughened glass diffuser 8mm thick for MICROZIP, 8mm thick for MINIZIP, 10mm thick for ZIP, 12mm thick for MEGAZIP. Stainless steel A4 screws. Luminaire supplied with neoprene 0,5m H05RN-F connector cable. Silicone gaskets. Double powder paint.

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I ⚡

MECHANICAL RESISTANCE
IK 09



FINISHING
.19 Stainless Steel



MICROZIP DOWNLIGHT COMFORT

SIMES

Round with trasparente glass





S.5515W.19 Flood beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic
Beam lenses available on request with no surcharge: 12°, 63° and 10°x44°



S.5512
RECESSING box for installation in concrete ceilings.
Dimensions: Ø 80÷124mm h 120mm
Recessed box in polypropylene.

Square with trasparente glass





S.5525W.19 Flood beam with lens
LED MODULE **3000K** CRI90 260lm 2,2W
(on request 2700K CRI90 240lm)
(on request 4000K CRI80 320lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic
Beam lenses available on request with no surcharge: 12°, 63° and 10°x44°



S.5516
RECESSING box for installation in concrete ceilings.
Dimensions: 80÷124mm h 120mm
Recessed box in polypropylene.

MINIZIP DOWNLIGHT COMFORT

Round with trasparente glass





S.5545W.19 Flood beam with reflector
LED MODULE **3000K** CRI90 657lm 6,6W
(on request 2700K CRI90 627lm)
(on request 4000K CRI80 837lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic



S.5510
RECESSING box for installation in concrete ceilings.
Dimensions: Ø 121÷165mm h 135mm
Recessed box in polypropylene.

Square with trasparente glass



S.5555W.19 Flood beam with reflector
LED MODULE **3000K** CRI90 657lm 6,6W
(on request 2700K CRI90 627lm)
(on request 4000K CRI80 837lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Adjustable ±15° optic



S.5511
RECESSING box for installation in concrete ceilings.
Dimensions: 121÷165mm h 135mm
Recessed box in polypropylene.





“Virgin Active” Fitness And Wellness Center, Brescia, Italy © Franco Scaglia - Ottavio Tomasini

ZIP DOWNLIGHT COMFORT

SIMES

Round with trasparente glass





S.5565W.19 Medium beam with reflector
LED MODULE **3000K** CRI90 1448lm 11,5W
(on request 2700K CRI90 1391lm)
(on request 4000K CRI80 1734lm)
220V-240Vac 50/60Hz
dimnable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic
Beam reflector available on request with no surcharge: 58°



S.5520
RECESSING box for installation in concrete ceilings.
Dimensions: Ø 190mm h 240mm
Recessed box in polypropylene.

Square with trasparente glass





S.5575W.19 Medium beam with reflector
LED MODULE **3000K** CRI90 1448lm 11,5W
(on request 2700K CRI90 1391lm)
(on request 4000K CRI80 1734lm)
220V-240Vac 50/60Hz
dimnable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic
Beam reflector available on request with no surcharge: 58°



S.5521
RECESSING box for installation in concrete ceilings.
Dimensions: $\square$ 190mm h 240mm
Recessed box in polypropylene.

MEGAZIP DOWNLIGHT COMFORT

Round with trasparente glass





S.5585W.19 Medium beam with reflector
LED MODULE **3000K** CRI90 3643lm 28,2W
(on request 2700K CRI90 3419lm)
(on request 4000K CRI80 4306lm)
220V-240Vac 50/60Hz
dimnable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic
Beam reflector available on request with no surcharge: 58°



S.5530
RECESSING box for installation in concrete ceilings.
Dimensions: Ø 260mm h 245mm
Recessed box in polypropylene.

Square with trasparente glass



S.5595W.19 Medium beam with reflector
LED MODULE **3000K** CRI90 3643lm 28,2W
(on request 2700K CRI90 3419lm)
(on request 4000K CRI80 4306lm)
220V-240Vac 50/60Hz
dimnable DALI 2 / PUSH
Adjustable $\pm 15^\circ$ optic
Beam reflector available on request with no surcharge: 58°



S.5531
RECESSING box for installation in concrete ceilings.
Dimensions: $\square$ 260mm h 245mm
Recessed box in polypropylene.

Collina degli studenti - Politecnico di Milano, Italy - Vivipolimi Lab - Prof. Emilio Faroldi, Arch. Giuseppe Mondini, Arch. Matteo Cervini, Arch. Paolo Raffaglio © ph. Mario Bertani

STAGE ROUND Ceiling surface mounted

SIMES

STAGE ROUND

Stage Round is a surface mounted downlight extremely minimal in its design and versatile. Available in four different sizes, Stage Round is equipped with comfortable aluminium double inner optics avoiding glare and granting high performance. Stage Round is easy to install and it fits discreetly both in residential and public ambiances.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Stainless steel A4 screws. Aluminium reflectors with double inner. Clear toughened glass diffuser. Silicone gaskets. Double powder paint.

MICROSTAGE
Luminaire pre-wired with 5,0m neoprene H05RN-F cable.

MINISTAGE
Luminaire pre-wired with 3,0m neoprene H05RN-F cable.

STAGE AND MEGASTAGE
Luminaire pre-wired with neoprene H05RN-F cable and connector.

REGISTERED DESIGN

PROTECTION CLASS
IP66

ISOLATION CLASS
CLASS II

MECHANICAL RESISTANCE
IK 06 MICROSTAGE ROUND
IK 07 MINISTAGE ROUND
IK 08 STAGE
IK 09 MEGASTAGE ROUND


COLOURS

- .01 White
- .09 Black
- .14 Aluminium Grey



Microstage round







S.1405W Flood beam with reflector
LED MODULE **3000K** CRI90 356lm 3,0W
(on request 2700K CRI90 339lm)
(on request 4000K CRI80 454lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Mnistage round







S.1415W Medium beam with reflector
LED MODULE **3000K** CRI90 1251lm 9,5W
(on request 2700K CRI90 1195lm)
(on request 4000K CRI80 1544lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.1416W Wide Flood beam with reflector
LED MODULE **3000K** CRI90 1251lm 9,5W
(on request 2700K CRI90 1195lm)
(on request 4000K CRI80 1544lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Stage round

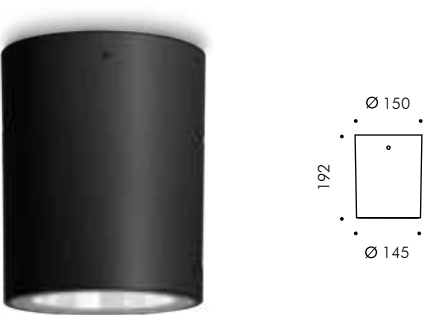





S.1425W Flood beam with reflector
LED MODULE **3000K** CRI90 4028lm 31,1W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.1426W Wide Flood beam with reflector
LED MODULE **3000K** CRI90 4028lm 31,1W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Megastage round

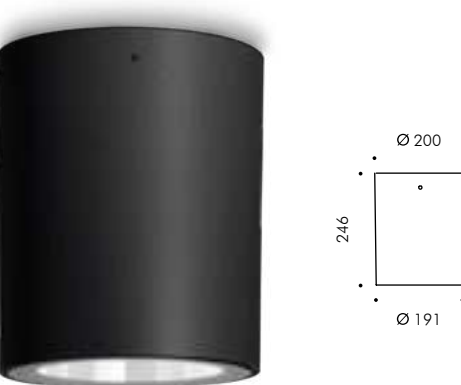



S.1435W Flood beam with reflector
LED MODULE **3000K** CRI90 7152lm 57,3W
(on request 2700K CRI90 6769lm)
(on request 4000K CRI80 8749lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1436W Wide Flood beam with reflector
LED MODULE **3000K** CRI90 7152lm 57,3W
(on request 2700K CRI90 6769lm)
(on request 4000K CRI80 8749lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



Private villa, Sondrio - Italy - Arch. Dutilio Damilano © ph. Mario Bertani



www.simes.it/ikonic

Ikonic is a family of cylindrical bollards, available in three dimensions and different heights. The perfect alignment of glass and aluminium enhances its elegance making it ideal for public and residential spaces. The lighting source on the top of the head directs the light downwards to grant a great distribution on the surface. The optic is black painted and guarantees the total absence of lighting refraction and glare.

TECHNICAL DESCRIPTION
Extruded Ealuminium profile, Die-cast aluminium housing with high corrosion resistance. Borosilicate glass diffuser 7mm thick. Stainless steel A4 screws. Luminaire supplied with neoprene H05RN-F cable and connector. Silicone gaskets.Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II

MECHANICAL RESISTANCE
IK 06

COLOURS

.09

Black

.14

Aluminium Grey





MICRO IKONIC ø 102mm

SIMES

IKONIC ø 200mm

SIMES

Micro Ikonic H 500mm





S.4100W
LED MODULE **3000K** CRI90 1140lm 10,0W
(on request 2700K CRI90 1100lm)
(on request 4000K CRI80 1323lm)
220V-230Vac 50/60Hz
Phase-cut dimmer



S.2149
FLANGE FOR MICRO IKONIC ø 102mm
Flange to be anchored in concrete



MINI IKONIC ø 140mm

Mini Ikonic H 315mm



S.4101W
LED MODULE **3000K** CRI90 1952lm 14,7W
(on request 2700K CRI90 1856lm)
(on request 4000K CRI80 2393lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Mini Ikonic H 755mm


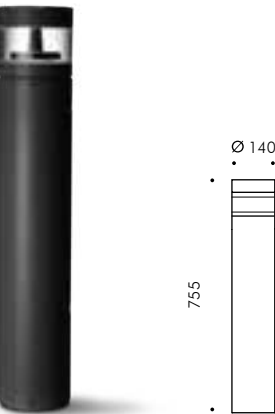


S.4104W
LED MODULE **3000K** CRI90 1952lm 14,7W
(on request 2700K CRI90 1856lm)
(on request 4000K CRI80 2393lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH





S.4172
FLANGE FOR MINI IKONIC ø 140mm
Flange to be anchored in concrete

Ikonic H 410mm



S.4110W
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Ikonic H 890mm


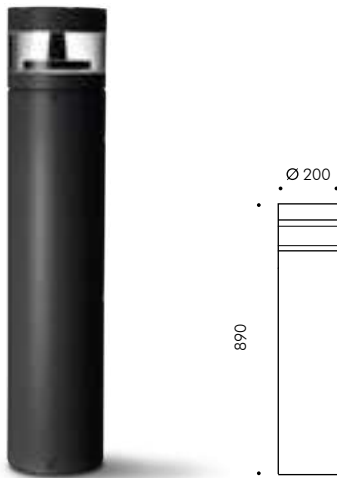


S.4114W
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.4171
FLANGE FOR IKONIC ø 200mm
Flange to be anchored in concrete
for S.4110W e S.4114W

Ikonic H 2415mm

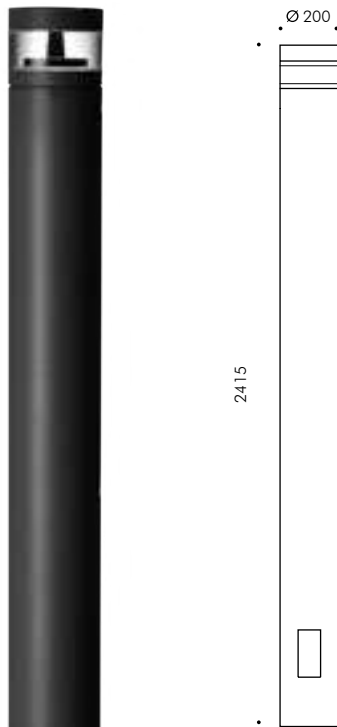

S.4117W
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.4129
FLANGE FOR IKONIC ø 200mm H 2415mm
Flange h 800mm to be anchored in concrete





Tonight is a bollard with an essential design particularly suitable for urban applications. It is characterised by a very slim pole head where the glass is positioned horizontally to protect the optical group that is totally hidden from sight. The opal prismatic glass grant a very uniform light distribution, whilst the milled diffuser absorbs any stray light to assure good visual comfort. Tonight is available in two different dimensions, two heights, with two lighting distributions (180° and 360°).

TECHNICAL DESCRIPTION
Extruded aluminium profile, die-cast aluminium housing with high corrosion resistance. Micro etched prismatic glass diffuser. Stainless steel A4 screws. Luminaire supplied with neoprene H05RN-F cable and connector. Silicone gaskets. Double powder paint.

**PATENTED
REGISTERED DESIGN**

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II ☐

MECHANICAL RESISTANCE
IK 09

COLOUR
.24 Anthracite Grey



www.simes.it/tonight


TONIGHT Ø 200 mm

SIMES

TONIGHT Ø 250 mm

SIMES

180° H 220mm



S.2100W
LED MODULE **3000K** CRI90 2326lm 12W
(on request 2700K CRI90 2209lm)
(on request 4000K CRI80 2674lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 power supply
available on request with surcharge.



360° H 220mm



S.2101W
LED MODULE **3000K** CRI90 4652lm 23,9W
(on request 2700K CRI90 4418lm)
(on request 4000K CRI80 5348lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 power supply
available on request with surcharge.


180° H 800mm

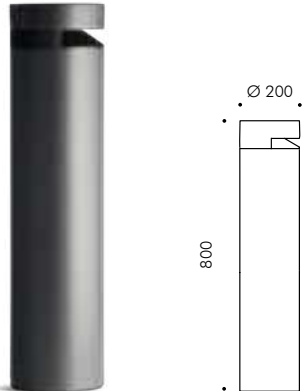

S.2110W
LED MODULE **3000K** CRI90 2326lm 12W
(on request 2700K CRI90 2209lm)
(on request 4000K CRI80 2674lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 power supply
available on request with surcharge.

360° H 800mm

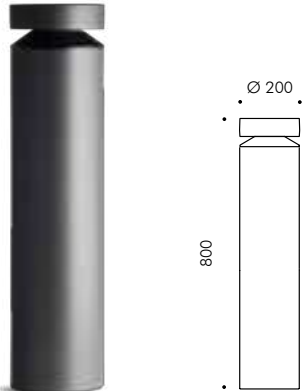


S.2111W
LED MODULE **3000K** CRI90 4652lm 23,9W
(on request 2700K CRI90 4418lm)
(on request 4000K CRI80 5348lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 power supply
available on request with surcharge.




S.4171
FLANGE FOR TONIGHT Ø 200mm
Flange to be anchored in concrete

180° H 275mm




S.2113W
LED MODULE **3000K** CRI90 4071lm 20,9W
(on request 2700K CRI90 3867lm)
(on request 4000K CRI80 4681lm)
220V-240Vac 50/60Hz
Dimmable DALI

360° H 275mm




S.2114W
LED MODULE **3000K** CRI90 8142lm 41,9W
(on request 2700K CRI90 7734lm)
(on request 4000K CRI80 9363lm)
220V-240Vac 50/60Hz
Dimmable DALI

180° H 900mm



S.2115W
LED MODULE **3000K** CRI90 4071lm 20,9W
(on request 2700K CRI90 3867lm)
(on request 4000K CRI80 4681lm)
220V-240Vac 50/60Hz
Dimmable DALI

360° H 900mm



S.2116W
LED MODULE **3000K** CRI90 8142lm 41,9W
(on request 2700K CRI90 7734lm)
(on request 4000K CRI80 9363lm)
220V-240Vac 50/60Hz
Dimmable DALI



S.2119
FLANGE FOR TONIGHT Ø 250mm
Flange to be anchored in concrete





Reef is a range of short bollards with radial lighting emission obtained with a specific conical reflector. Perfect to illuminate with grazing lighting effects walking areas of residential, parks and public spaces, are available in three dimensions. The polycarbonate diffuser ensures a high impact resistance.

TECHNICAL DESCRIPTION
Die-cast and extruded (bollard) aluminium housing with high corrosion resistance. Clear polycarbonate diffuser. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

MICROREEF
Reflector in polymers covered with aluminium. Luminaire with one single cable entry and fast connector.

MINIREEF E REEF
Reflector in aluminium. Luminaire with double cable entry and grommet.

REGISTERED DESIGN

PROTECTION CLASS
IP65


ISOLATION CLASS
CLASS II ☐

MECHANICAL RESISTANCE
IK 10

- COLOURS**
- .14 Aluminium Grey
 - .24 Anthracite Grey





Microreef 180°
with reflector




S.5330W
LED MODULE **3000K** CRI90 880lm 8,4W
(on request 2700K CRI90 820lm)
(on request 4000K CRI80 1081lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Microreef bollard 180°
with reflector

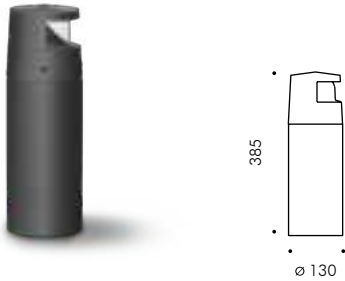



S.5337W
LED MODULE **3000K** CRI90 880lm 8,4W
(on request 2700K CRI90 820lm)
(on request 4000K CRI80 1081lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Microreef 2 x 90°
with reflector




S.5320W
LED MODULE **3000K** CRI90 880lm 8,4W
(on request 2700K CRI90 820lm)
(on request 4000K CRI80 1081lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Microreef bollard 2 x 90°
with reflector

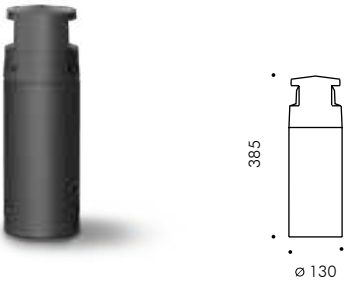



S.5327W
LED MODULE **3000K** CRI90 880lm 8,4W
(on request 2700K CRI90 820lm)
(on request 4000K CRI80 1081lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Microreef 360°
with reflector



S.5311W
LED MODULE **3000K** CRI90 880lm 8,4W
(on request 2700K CRI90 820lm)
(on request 4000K CRI80 1081lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Microreef bollard 360°
with reflector

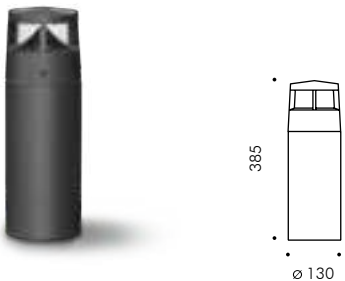

S.5317W
LED MODULE **3000K** CRI90 880lm 8,4W
(on request 2700K CRI90 820lm)
(on request 4000K CRI80 1081lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Accessories



S.5301
**FLANGE ACCESSORY MICROREEF
FOR GROUND APPLICATION**
Flange Ø 130mm to be anchored in concrete



S.3524
STAKE FOR MICROREEF
in polypropylene
(not suitable for bollard versions).

Accessory



S.5301
**FLANGE ACCESSORY MICROREEF
FOR GROUND APPLICATION**
Flange Ø 130mm to be anchored in concrete




Minireef 180°
with reflector



S.5233W
LED MODULE **3000K** CRI90 1952lm 14,7W
(on request 2700K CRI90 1856lm)
(on request 4000K CRI80 2393lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Minireef bollard 180°
with reflector

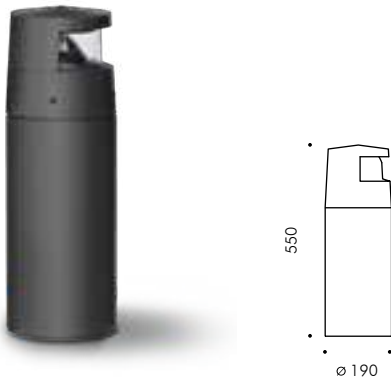

S.5263W
LED MODULE **3000K** CRI90 1952lm 14,7W
(on request 2700K CRI90 1856lm)
(on request 4000K CRI80 2393lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Minireef 2 x 90°
with reflector



S.5223W
LED MODULE **3000K** CRI90 1952lm 14,7W
(on request 2700K CRI90 1856lm)
(on request 4000K CRI80 2393lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Minireef bollard 2 x 90°
with reflector




S.5253W
LED MODULE **3000K** CRI90 1952lm 14,7W
(on request 2700K CRI90 1856lm)
(on request 4000K CRI80 2393lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Minireef 360°
with reflector



S.5210W
LED MODULE **3000K** CRI90 1952lm 14,7W
(on request 2700K CRI90 1856lm)
(on request 4000K CRI80 2393lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Minireef bollard 360°
with reflector

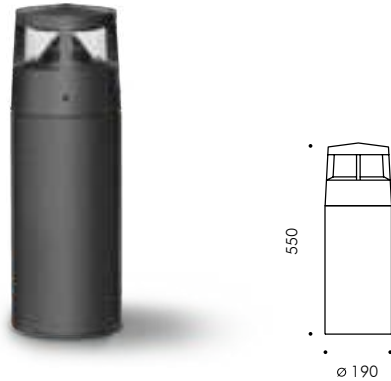

S.5240W
LED MODULE **3000K** CRI90 1952lm 14,7W
(on request 2700K CRI90 1856lm)
(on request 4000K CRI80 2393lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Accessories



S.5200
FLANGE ACCESSORY MINIREEF
FOR GROUND APPLICATION
Flange Ø 190mm to be anchored in concrete




S.3554
STAKE FOR MINIREEF / REEF
in polypropylene
(not suitable for bollard versions).

Accessory




S.5200
FLANGE ACCESSORY MINIREEF
FOR GROUND APPLICATION
Flange Ø 190mm to be anchored in concrete

Reef 180°
with reflector

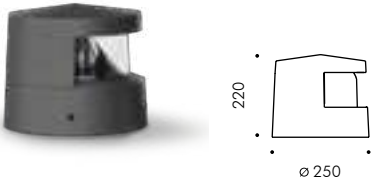


S.5237W
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240V AC 50/60Hz
Dimmable DALI 2 / PUSH

Reef bollard 180°
with reflector

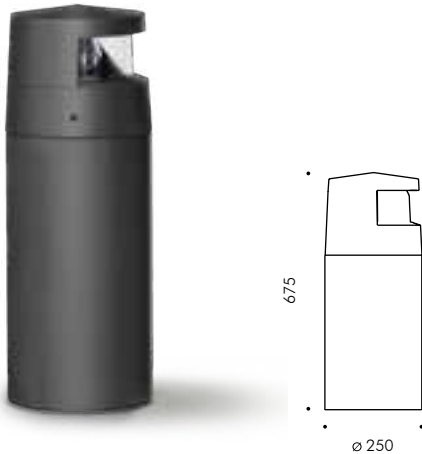


S.5267W
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240V AC 50/60Hz
Dimmable DALI 2 / PUSH

Reef 2 x 90°
with reflector

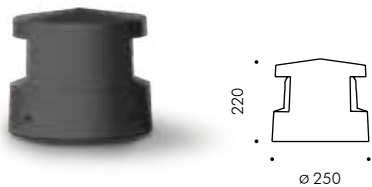


S.5227W
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240V AC 50/60Hz
Dimmable DALI 2 / PUSH

Reef bollard 2 x 90°
with reflector

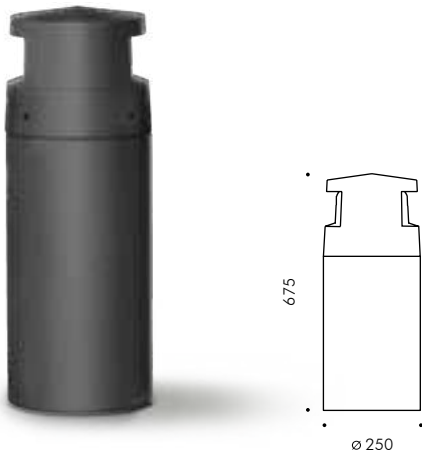


S.5257W
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240V AC 50/60Hz
Dimmable DALI 2 / PUSH

Reef 360°
with reflector

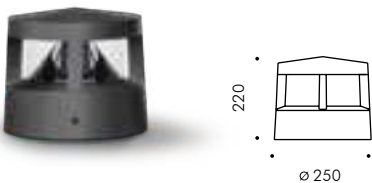

S.5217W
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240V AC 50/60Hz
Dimmable DALI 2 / PUSH

Reef bollard 360°
with reflector

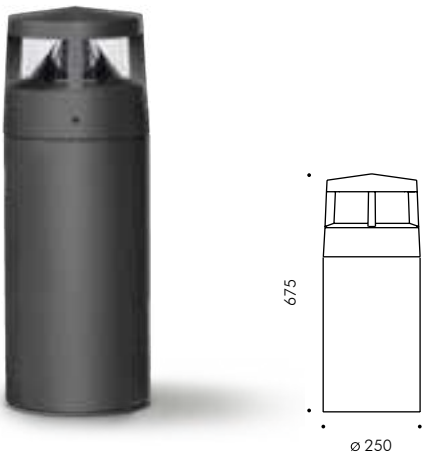

S.5247W
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240V AC 50/60Hz
Dimmable DALI 2 / PUSH



S.3554
STAKE FOR REEF
in polypropylene (not suitable
for bollard versions).



S.5203
**FLANGE ACCESSORY REEF
FOR GROUND APPLICATION**
Flange Ø 250mm to be anchored in concrete



S.5203
**FLANGE ACCESSORY REEF
FOR GROUND APPLICATION**
Flange Ø 250mm to be anchored in concrete



Moai is a bollard family available in two sizes that distinguishes for its archetype and essential design. Its solidity and strenght make it perfect for private and urban contexts. The smooth angled surface and the prismatic glass grant an optimum light distribution with important interdistances.

TECHNICAL DESCRIPTION
Die-cast and extruded aluminium housing with high corrosion resistance. Stainless steel A4 screws. Aluminium reflectors. Clear toughened reeded glass. Luminaire supplied with neoprene H05RN-F cable and connector. Silicone gaskets. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65


ISOLATION CLASS
CLASS I ⊕ MINIMOAI
CLASS II ⊞ MOAI

MECHANICAL RESISTANCE
IK 06

COLOURS

.09 Black


.14 Aluminium Grey

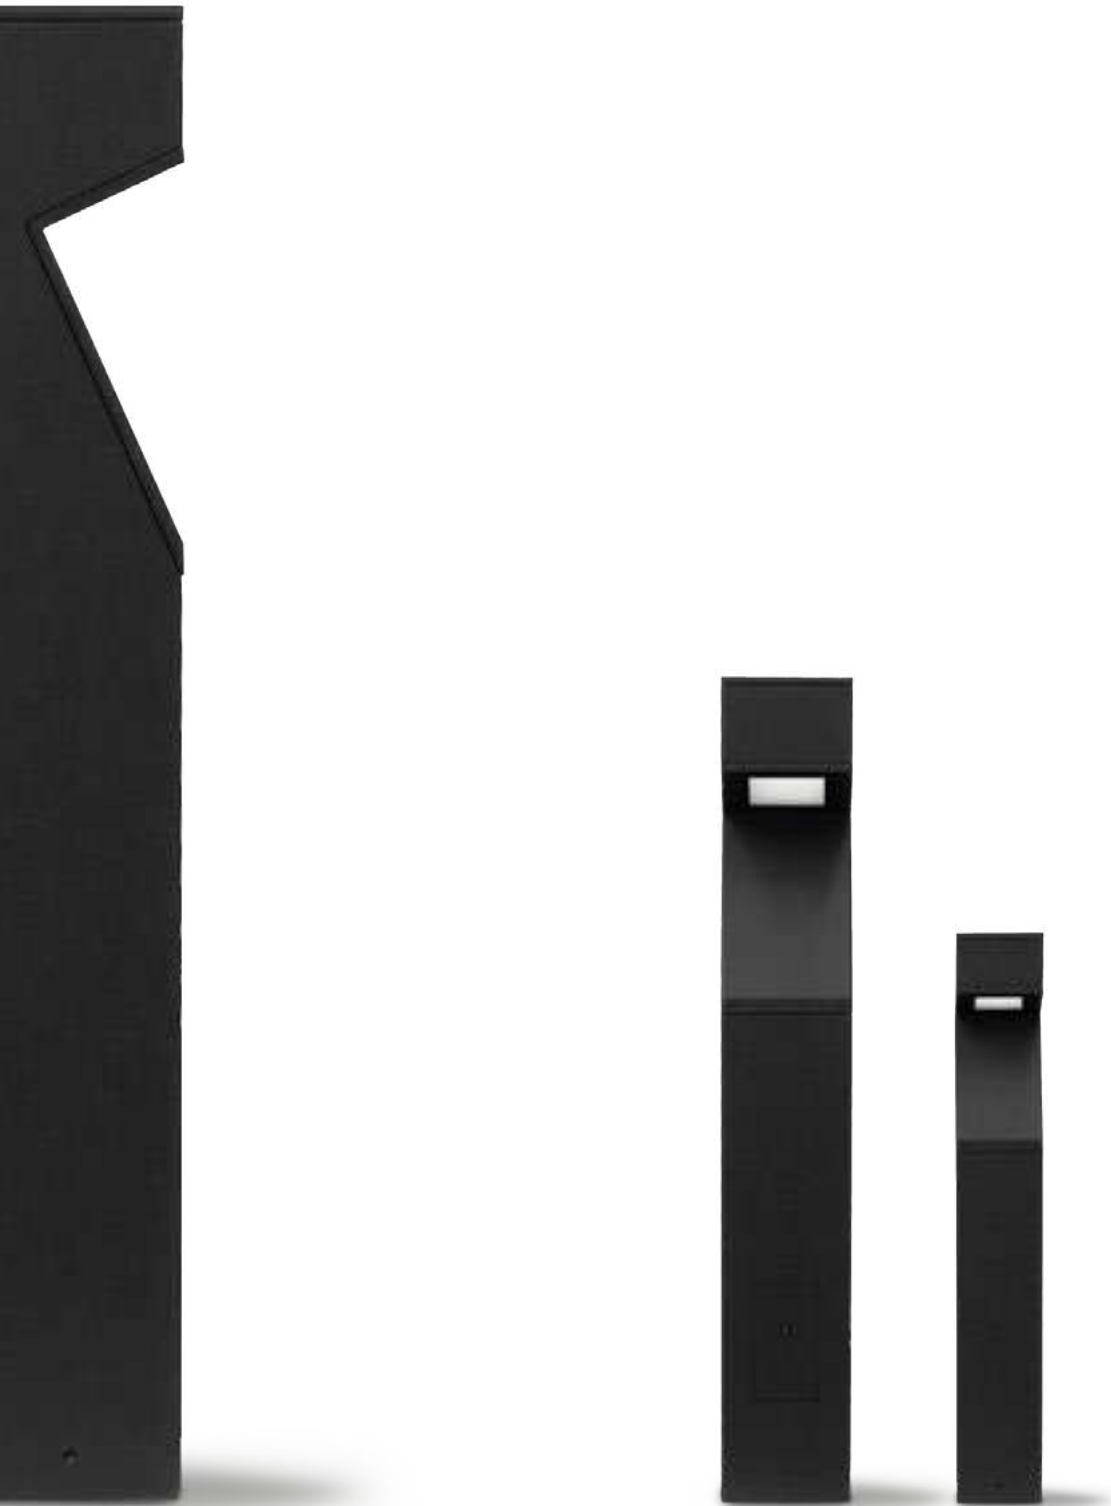


www.simes.it/moai



Minimoai H 800mm



S.6150W
LED MODULE **3000K** CRI90 1828lm 13,6W
(on request 2700K CRI90 1738lm)
(on request 4000K CRI80 2241lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.6159
ANTIGLARE SHIELD for MINIMOAI




S.6309
FLANGE ACCESSORY FOR MINIMOAI
Flange Ø 120mm to be anchored in concrete

Moai H 1150mm



S.6160W
LED MODULE **3000K** CRI90 4314lm 30W
(on request 2700K CRI90 4101lm)
(on request 4000K CRI80 5288lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.6169
ANTIGLARE SHIELD for MOAI



S.5310
FLANGE ACCESSORY FOR MOAI
Flange Ø 180mm to be anchored in concrete



Ystad bathing pier, Sweden © Fagerhult Belysning AB



Cubiks is a range of bollards, available in three dimensions, suitable for residential and urban contexts where robustness and solidity are required. Its particular optic with rilled front glass grant a wide lighting distribution, good uniformity and interdistances.

TECHNICAL DESCRIPTION
Die-cast and extruded aluminium housing with high corrosion resistance. Clear polycarbonate reeded diffuser. Stainless steel A4 screws. Luminaire supplied with neoprene H05RN-F cable and connector. Silicone gaskets. Double powder paint.

CUBIKS AND MEGACUBIKS
Reflector in polymers covered with aluminium.

REGISTERED DESIGN

PROTECTION CLASS
IP65 MINICUBIKS
IP66 CUBIKS, MEGACUBIKS

ISOLATION CLASS
CLASS II

MECHANICAL RESISTANCE
IK 10


- COLOURS**
- .14 Aluminium Grey
 - .24 Anthracite Grey



www.simes.it/cubiks




MINICUBIKS



S.5314W
4 x LED MODULE **3000K** CRI90 728lm 2,0W
(on request 2700K CRI90 672lm)
(on request 4000K CRI80 784lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

S.6309
FLANGE ACCESSORY FOR MINICUBIKS
Flange Ø 120mm to be anchored in concrete


CUBIKS

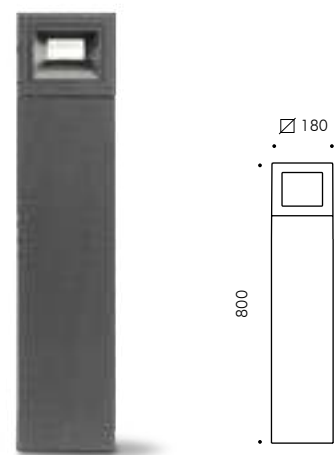

S.5339W
LED MODULE **3000K** CRI90 4904lm 35,1W
(on request 2700K CRI90 4664lm)
(on request 4000K CRI80 6014lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

S.5310
FLANGE ACCESSORY FOR CUBIKS
Flange Ø 180mm to be anchored in concrete

MEGACUBIKS

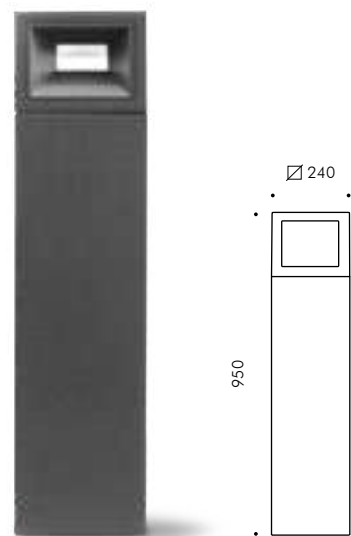

S.5379W
LED MODULE **3000K** CRI90 6474lm 47,2W
(on request 2700K CRI90 6154lm)
(on request 4000K CRI80 7935lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

S.5350
FLANGE ACCESSORY FOR MEGACUBIKS
Flange Ø 240mm to be anchored in concrete

SIMES



BOLLARD
Tomorrow bollard is specifically developed for pedestrian areas and perfect for landscapes as it can blends into hedges, bushes and flowerbeds. Its lighting sources is extremely performing and ensures a 360° homogeneous lighting distribution without shadows. Tomorrow bollard is available in two different heights.

POLE TOP
Tomorrow Pole top is a solution also for retrofit application to substitute obsolete and old generation luminaires. It's available in two different diameters and ideal for installation on pole from 3m to 4,5m height.

TECHNICAL DESCRIPTION
Extruded aluminium profile, die-cast aluminium housing with high corrosion resistance. Micro etched prismatic glass diffuser. Stainless steel A4 screws. Luminaire supplied with neoprene H05RN-F cable and connector for connection in the bollard. Double powder paint.



REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II

MECHANICAL RESISTANCE
IK 06



COLOUR
.09 Black
.24 Anthracite Grey

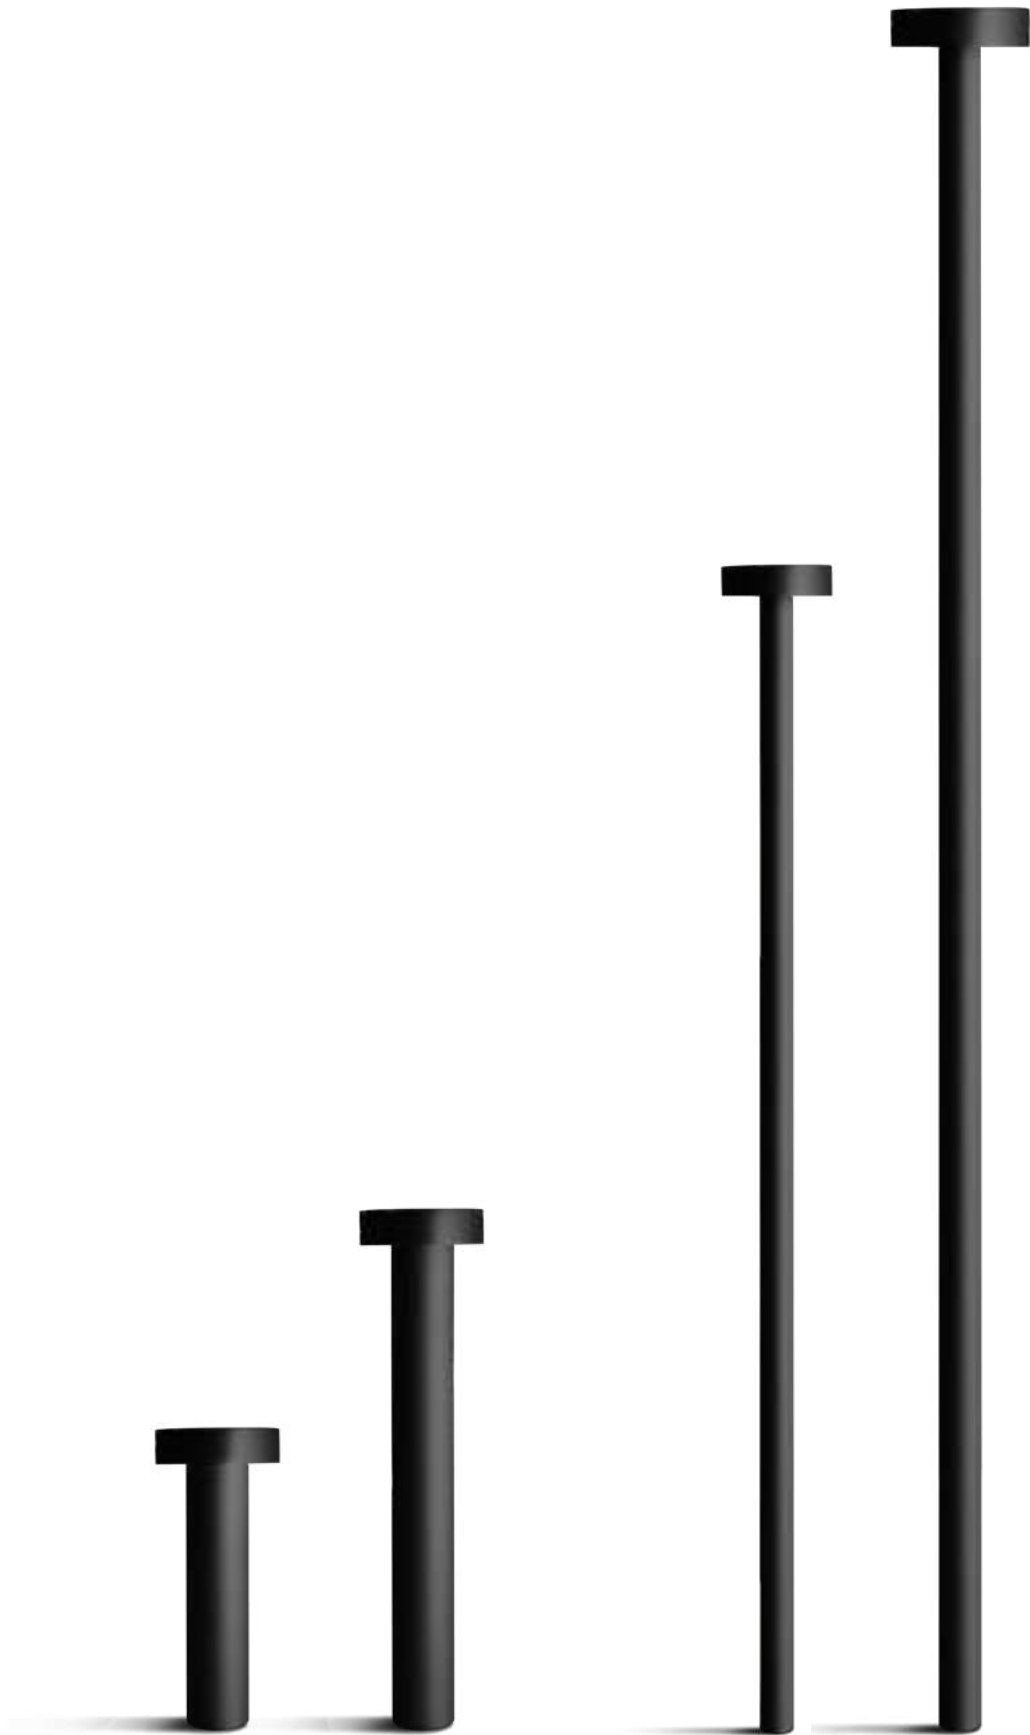

www.simes.it/tomorrow



H 450mm


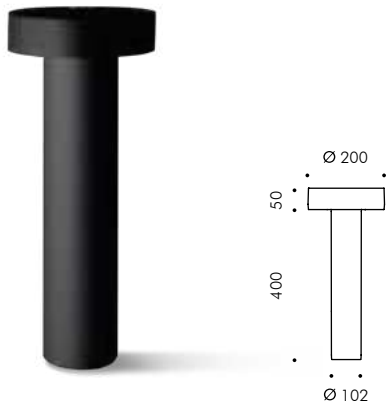


S.2140W
LED MODULE **3000K** CRI90 2326lm 12W
(on request 2700K CRI90 2209lm)
(on request 4000K CRI80 2674lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 power supply
available on request with surcharge.

Luminous flux wasted upward 0%.
Pole included

H 800mm

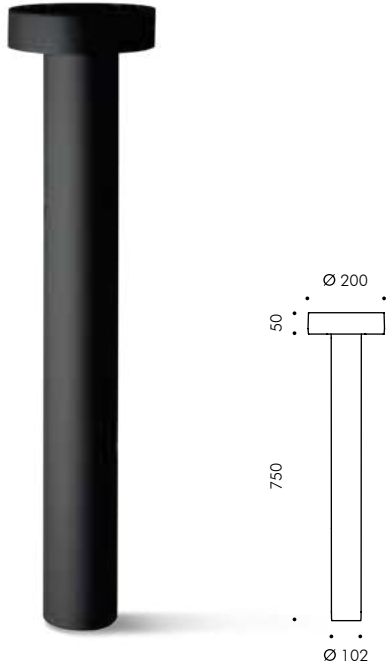

S.2141W
LED MODULE **3000K** CRI90 2326lm 12W
(on request 2700K CRI90 2209lm)
(on request 4000K CRI80 2674lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 power supply
available on request with surcharge.

Luminous flux wasted upward 0%.
Pole included

Accessory




S.2149
FLANGE FOR TOMORROW Ø 102mm
Flange to be anchored in concrete



Private villa, Sondrio, Italy - Arch. Dutilio Damilano © ph. Mario Bertani

TOMORROW Pole top

TOMORROW 250
for Ø 76mm pole



Tomorrow 250 pole top Ø 76mm
(for Ø 60mm pole see instruction leaflet)


S.2136W
LED MODULE **3000K** CRI90 8142lm 41,9W
(on request 2700K CRI90 7162lm)
(on request 4000K CRI80 9363lm)
220V-240Vac 50/60Hz
Dimmable DALI

Luminous flux wasted upward 0%.
Pole not included


Poles for Tomorrow 250

S.2844
Ø 76mm CYLINDRICAL POLE TO BE BURIED
Pole total height 5000mm
To be buried for 500mm
Provided with inspection door

S.2845
Ø 76mm CYLINDRICAL POLE WITH BASE
Pole total height 4500mm
Provided with inspection door

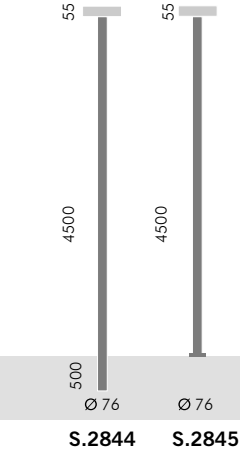

TOMORROW 200
for Ø 60mm pole



Tomorrow 200 pole top Ø 60mm

S.2131W
LED MODULE **3000K** CRI90 4652lm 23,9W
(on request 2700K CRI90 4419lm)
(on request 4000K CRI80 5350lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable


Version with DALI power supply
available on request with surcharge.

Luminous flux wasted upward 0%.
Pole not included

Poles for Tomorrow 200/250

S.2842
Ø 60mm CYLINDRICAL POLE TO BE BURIED
Pole total height 4000mm
To be buried for 500mm
Finished luminaire total height above ground 4550mm

S.2843
Ø 60mm CYLINDRICAL POLE WITH BASE
Pole total height 3500mm
Finished luminaire total height above ground 3550mm

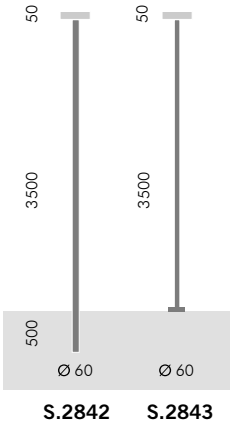

S.2809
POLE BASE COVER for pole with base and pole to be buried
Ø102mm or Ø120mm. Die-cast aluminium housing.

ON REQUEST ADAPTOR for cylindrical poles Ø 60mm /Ø 76mm
for S.2809 pole base cover.

S.2849
PLANTED ROOT FOR Ø 60mm CYLINDRICAL POLE WITH BASE
h=470mm and bolts in galvanized steel with M16 threads.

SIMES



Vivilo restaurant, Corte Franca, Brescia, Italy - Arch. Volpini Giancarlo © ph. Jody Parisi



Cigarette is a pole luminaire specifically developed for urban applications that comes from the combination of an extruded aluminium pole and a polycarbonate diffuser. The use of the two materials ensure an extremely clean and essential design to this pole. With vertical diffused lighting distribution, Cigarette is suitable for creating ambient lighting effects particularly appropriate in urban and landscape applications. The polycarbonate diffuser is UV and impact resistant and guarantees a uniform light distribution throughout its whole height. A modular fixture based on two different aluminium extrusions and two different lengths of polycarbonate diffusers provide different aesthetical and performance solutions.

TECHNICAL DESCRIPTION
Extruded aluminium profile, die-cast aluminium housing with high corrosion resistance. Opal polycarbonate diffuser with UV-ray treatment. Stainless steel A4 screws. Luminaire supplied with neoprene H05RN-F cable and connector. Silicone gaskets. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II

MECHANICAL RESISTANCE
IK 10

COLOUR


.24 Anthracite Grey




www.simes.it/cigarette




S.2002W S.2003W S.2012W S.2013W



S.2002W H 2,0m
LED MODULE **3000K** CRI90 6695lm 47,4W
(on request 2700K CRI90 6159lm)
(on request 4000K CRI80 8315lm)
220V-240Vac 50/60Hz
Dimmable DALI 2



S.2003W H 2,5m
LED MODULE **3000K** CRI90 8970lm 63,5W
(on request 2700K CRI90 8252lm)
(on request 4000K CRI80 9688lm)
220V-240Vac 50/60Hz
Dimmable DALI 2




S.2012W H 3,5m
LED MODULE **3000K** CRI90 6695lm 47,4W
(on request 2700K CRI90 6159lm)
(on request 4000K CRI80 8315lm)
220V-240Vac 50/60Hz
Dimmable DALI 2



S.2013W H 4,0m
LED MODULE **3000K** CRI90 8970lm 63,5W
(on request 2700K CRI90 8252lm)
(on request 4000K CRI80 9688lm)
220V-240Vac 50/60Hz
Dimmable DALI 2



S.2009
FLANGE for CIGARETTE
Flange Ø 150mm h 600mm
to be anchored in concrete

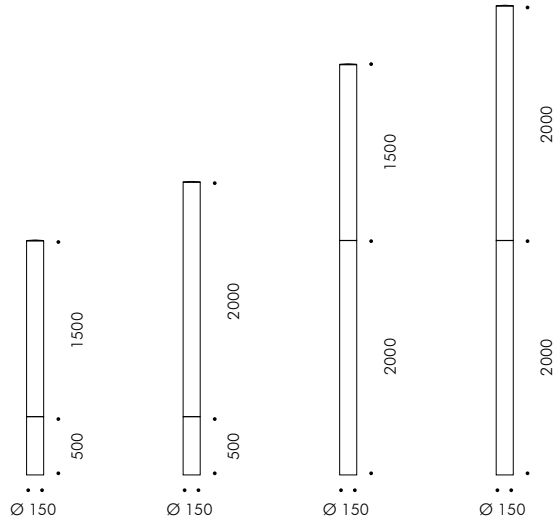

Slot Pole is a pole-top luminaire with cylindrical and essential design, ideal for lighting parking areas, squares and public areas. Its asymmetric optic is completely directed downwards according with the norms of lighting pollution. When installed on the 102mm cylindrical pole with spigot, the pole and pole-top are perfectly alligned.

TECHNICAL DESCRIPTION
Die-cast and extruded aluminium housing with high corrosion resistance. Clear toughened glass 8mm thick. Post top luminaire with Ø 76mm spigot attachment. Stainless steel A4 screws. Luminaire supplied with neoprene H05RN-F cable with cable gland. Controlgear equipped with protections against discharges and high voltage spikes on the mains: 6kV differential mode (L-N), 8kV common mode (PE). Silicone gaskets. Double powder paint.

PROTECTION CLASS
IP65



ISOLATION CLASS
CLASS II 

MECHANICAL RESISTANCE
IK 09

COLOURS

 .14 Aluminium Grey

 .24 Anthracite Grey

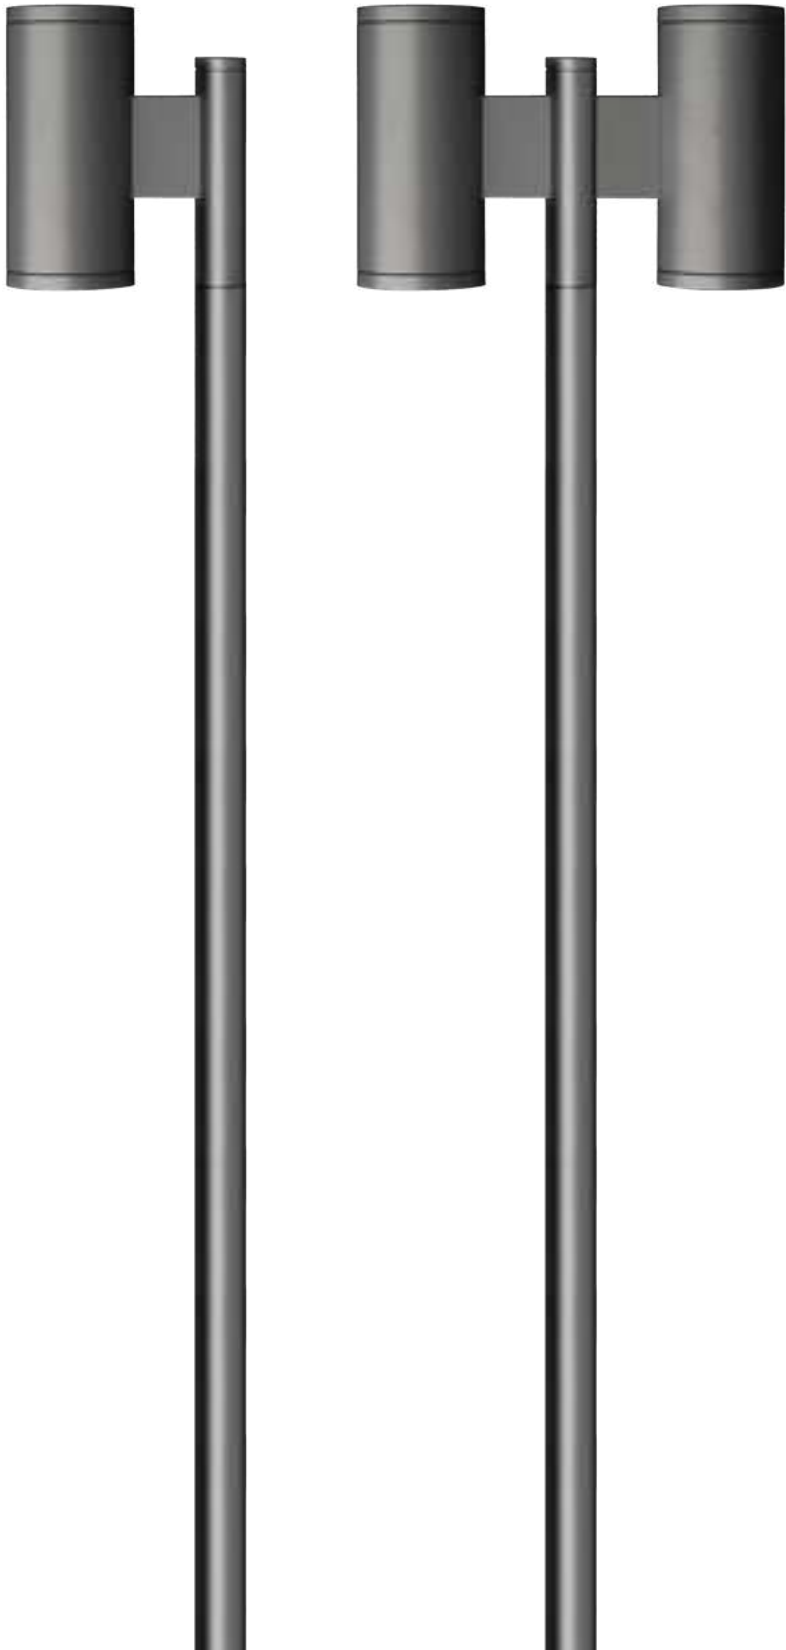



www.simes.it/slot-pole



Double post top





Single post top



Double post top ø 76mm

S.3976N
2 x LED MODULE **4000K** CRI80 6300lm 36,5W
(on request 2700K CRI80 5580lm)
(on request 3000K CRI80 5940lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


With street optics with lenses
Luminous flux wasted upward 0%
Pole not included



Single post top ø 76mm

S.3973N
LED MODULE **4000K** CRI80 6300lm 36,5W
(on request 2700K CRI80 5580lm)
(on request 3000K CRI80 5940lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

With street optics with lenses
Luminous flux wasted upward 0%
Pole not included

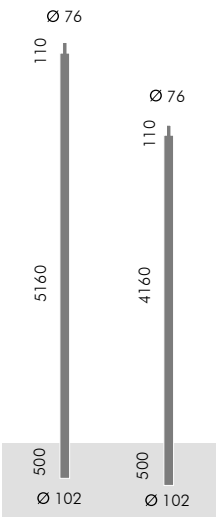

Poles

S.2816
Ø 102mm CYLINDRICAL POLE TO BE BURIED
with Ø 76mm SPIGOT
Pole total height 5770mm
To be buried for 500mm
Finished luminaire total height above ground 5710mm

S.2811
Ø 102mm CYLINDRICAL POLE TO BE BURIED
with Ø 76mm SPIGOT
Pole total height 4770mm
To be buried for 500mm
Finished luminaire total height above ground 4710mm



S.2809
POLE BASE COVER
For pole with base and pole to be buried Ø102mm or Ø120mm.
Die-cast aluminium housing.



Nuovo Teatro dell'Opera, Florence, Italy - ABDR Architetti Associati / Massimiliano Baldieri © Luigi Filetici



Poster is the right solution to enlighten with elegance landscape and urban areas. Its thin triangular geometrical shape ensures an extremely light aspect despite its high mechanical resistance. The lighting source is recessed in the upper part of the structure and it is an integral part of the design. Poster is available in two powers and sizes suitable for 60mm and 76mm diameter poles. It can also be used as retrofit solution to substitute obsolete light fittings on existing poles.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Clear toughened glass 6mm thick. Stainless steel A4 screws. Luminaire supplied with neoprene H05RN-F cable. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II 

MECHANICAL RESISTANCE
IK 07



COLOURS

 .14 Aluminium Grey


 .24 Anthracite Grey



www.simes.it/poster


Miniposter post top





S.7045N
LED MODULE **4000K** CRI80 5334lm 24,3W
(on request 2700K CRI80 4407lm)
(on request 3000K CRI80 4639lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable


Pole not included
Version with DALI 2 power supply
available on request with surcharge.




36 550 565 Ø 60



Accessory



S.7049
ASYMMETRIC SHIELD FOR MINIPOSTER
Black painted steel shield to be mounted when
an asymmetric light distribution is required
from the Miniposter pole top.




Poles for Miniposter

S.2800
Ø 60mm CYLINDRICAL POLE TO BE BURIED
Pole total height 3000mm
To be buried for 500mm
Finished luminaire total height above ground 3065mm

S.2801
Ø 60mm CYLINDRICAL POLE WITH BASE
Pole total height 2500mm
Finished luminaire total height above ground 3065mm


S.2800 S.2801



S.2849
PLANTED ROOT
FOR Ø 60mm AND Ø 76mm
CYLINDRICAL POLE WITH BASE
h=470mm and bolts
in galvanized steel with M16 threads.


Poster post top





S.7050N
LED MODULE **4000K** CRI80 10304lm 57,6W
(on request 2700K CRI80 8960lm)
(on request 3000K CRI80 8960lm)
220V-240Vac 50/60Hz
Dimmable DALI 2


Pole not included




36 850 860 Ø 76



Accessory



S.7059
ASYMMETRIC SHIELD FOR POSTER
Black painted steel shield to be mounted when
an asymmetric light distribution is required
from the Poster pole top.

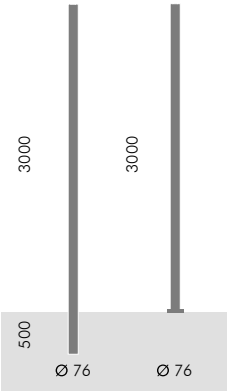


Poles for Poster

S.2812
Ø 76mm CYLINDRICAL POLE TO BE BURIED
Pole total height 3500mm
To be buried for 500mm
Finished luminaire total height above ground 3860mm
Provided with inspection door

S.2813
Ø 76mm CYLINDRICAL POLE WITH BASE
Pole total height 3000mm
Finished luminaire total height above ground 3860mm
Provided with inspection door

S.2812 S.2813



S.2849
PLANTED ROOT
FOR Ø 60mm AND Ø 76mm
CYLINDRICAL POLE WITH BASE
h=470mm and bolts
in galvanized steel with M16 threads.





Park is designed for the urban environment, with specific optics for parking places, squares, walking areas and cycling paths. A simple design, with right angles and elegant junctions, a discrete fitting for urban lighting for landscape or architectural contexts. The light distribution is completely directed downward: this provides a optimal distribution in the urban environment, according with the lighting pollution rules.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Rectangular extruded aluminum pole with inspection door. Steel zinc-plated mounting flange with stainless steel screws. Clear toughened glass 5mm thick. Stainless steel A4 screws. Luminaire supplied with neoprene H05RN-F cable with cable gland. Inspection door perfectly flush with the pole surface. Electrical wiring with fast connector. Controlgear equipped with protections against discharges and high voltage spikes on the mains: 6kV differential mode (L-N), 8kV common mode (PE). Silicone gaskets. Double powder paint.

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II

MECHANICAL RESISTANCE
IK 09




COLOURS

- .14 Aluminium Grey
- .24 Anthracite Grey

REGISTERED DESIGN




www.simes.it/park

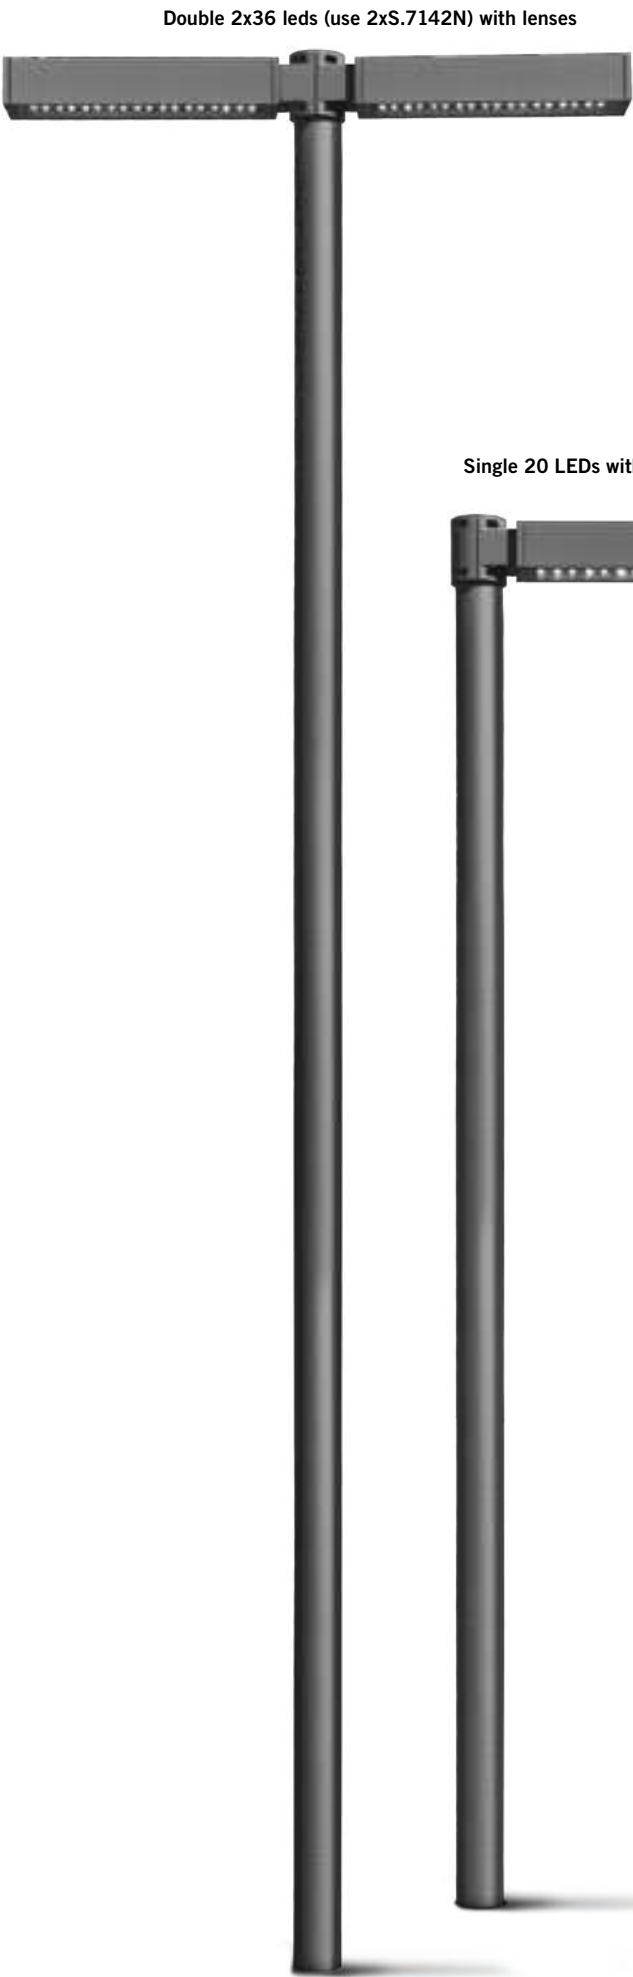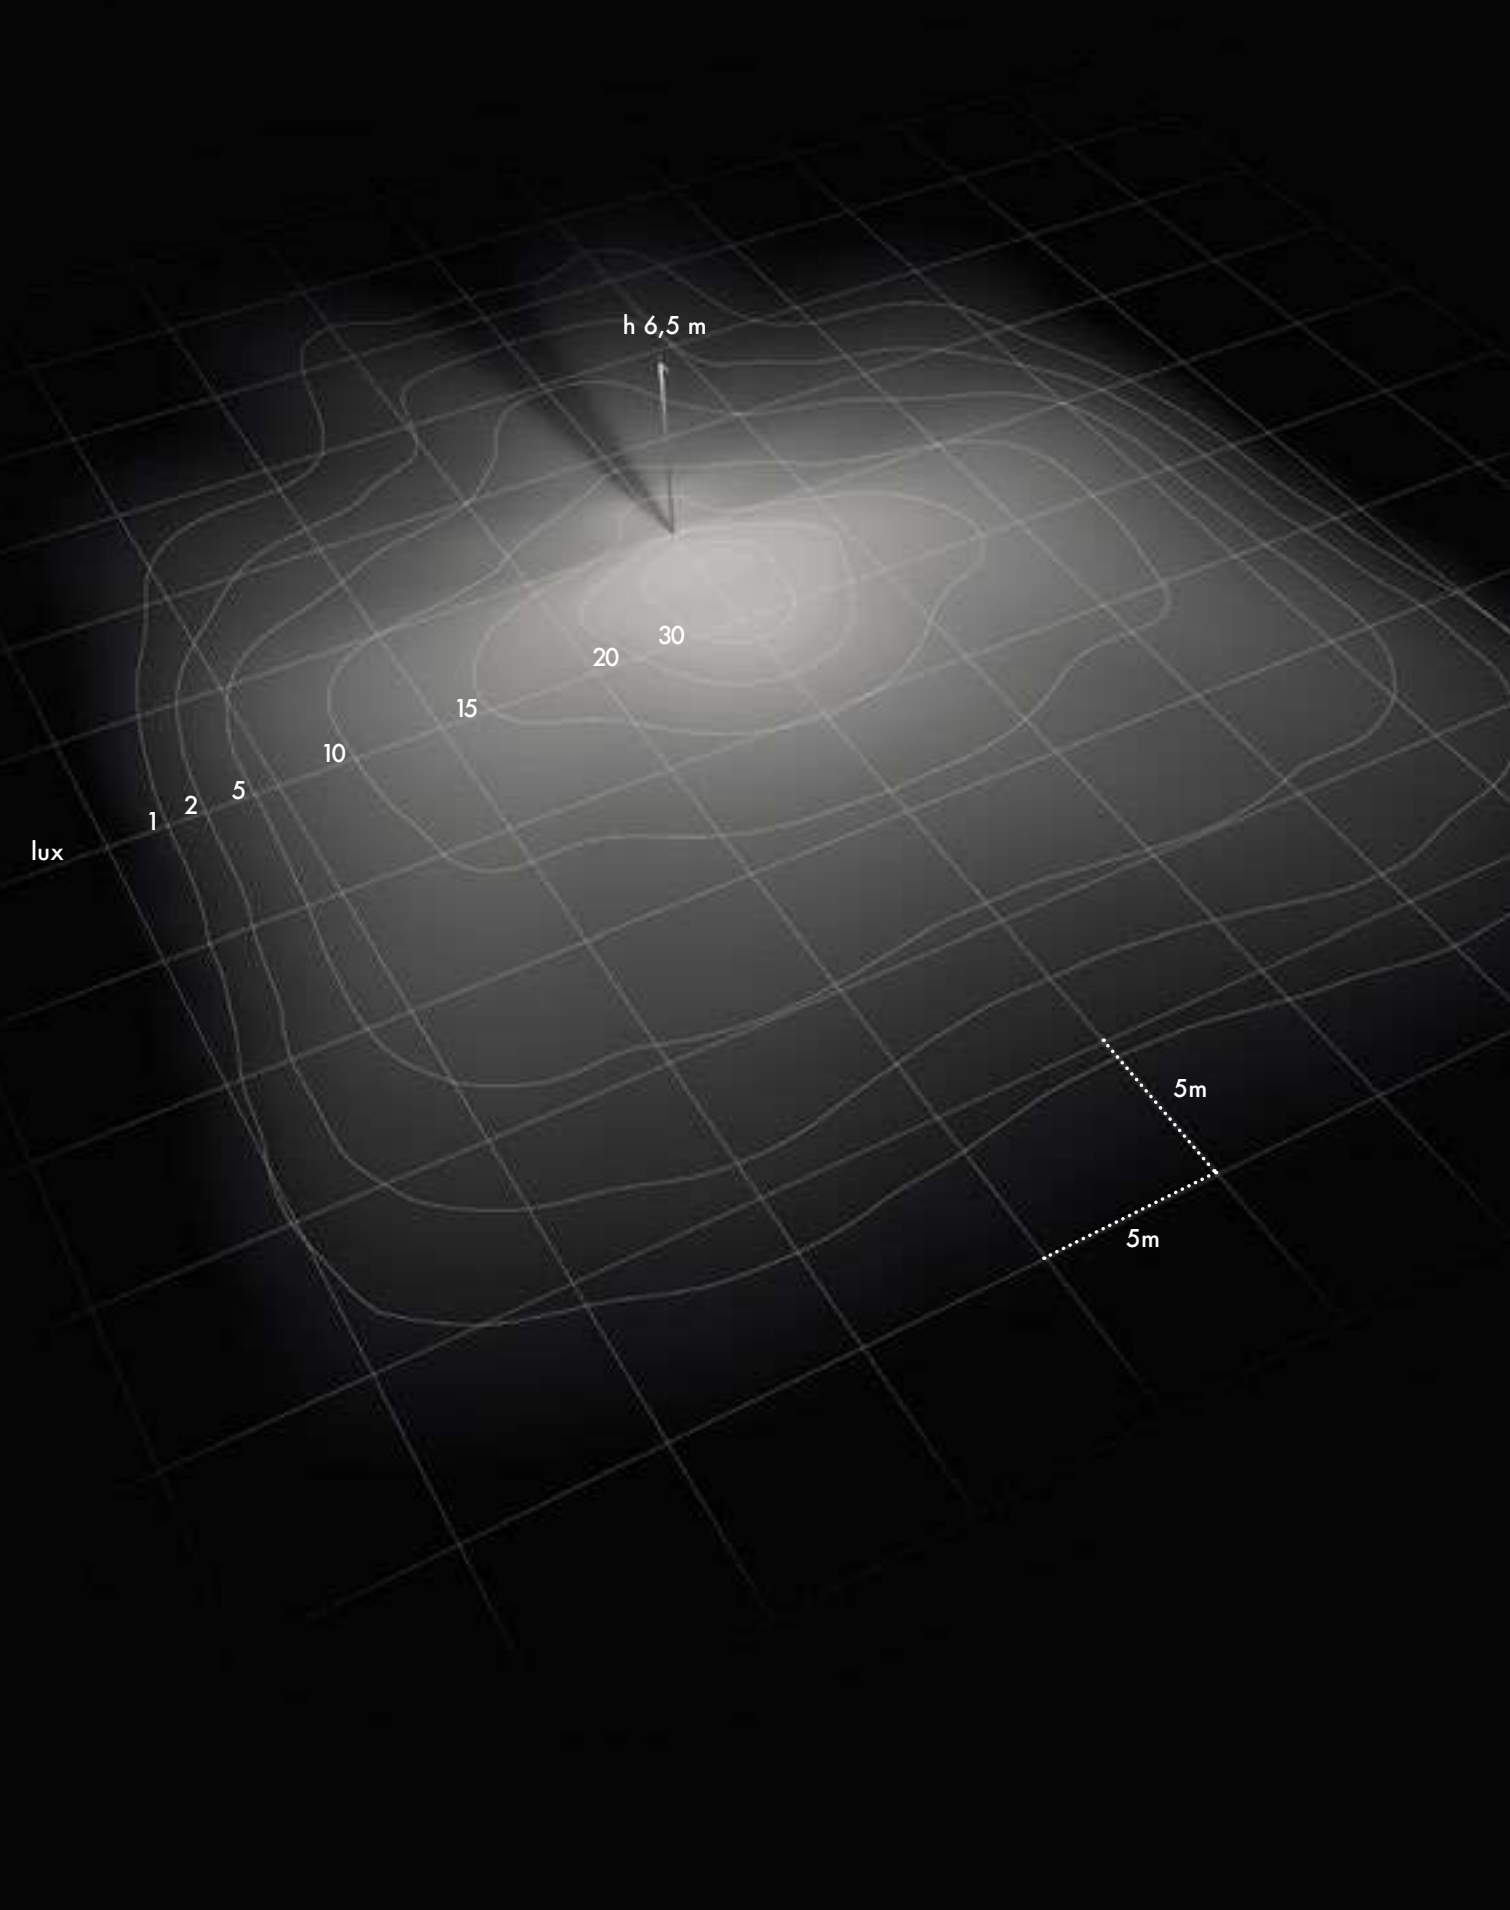

Post top ø 76mm

S.7142N
LED MODULE **4000K** CRI80 11520lm 78,1W
(on request 2700K CRI80 9302lm)
(on request 3000K CRI80 9792lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


Luminous flux wasted upward 0%.
Pole not included



Post top ø 76mm

S.7122N
LED MODULE **4000K** CRI80 6400lm 43,4W
(on request 2700K CRI80 5168lm)
(on request 3000K CRI80 5440lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Luminous flux wasted upward 0%.
Pole not included

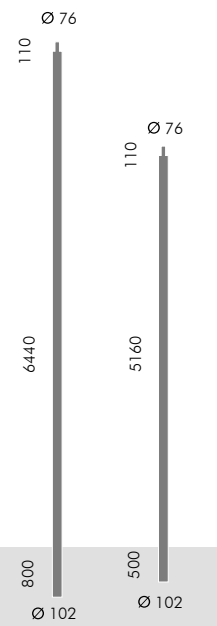

S.2818.14 S.2816.14




Poles

S.2818 Pole h 7350mm
Ø 102mm CYLINDRICAL POLE
TO BE BURIED with Ø 76mm SPIGOT
Pole total height 7350mm
To be buried for 800mm
Finished luminaire total height 6580mm


S.2816 Pole h 5770mm
Ø 102mm CYLINDRICAL POLE
TO BE BURIED with Ø 76mm SPIGOT
Pole total height 5770mm
To be buried for 500mm
Finished luminaire total height 5300mm

S.2809
POLE BASE COVER
For pole with base and pole to be buried Ø102mm or Ø121mm.
Die-cast aluminium housing.

ON REQUEST ADAPTOR
for cylindrical poles Ø 60mm / Ø 76mm
for S.2809 pole base cover

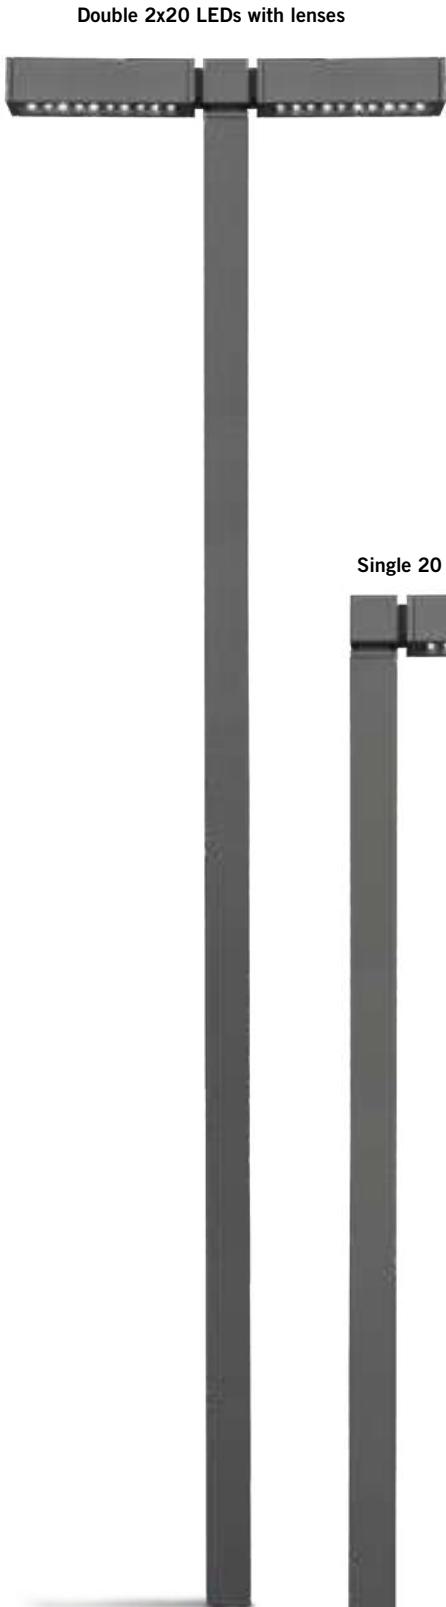


Double 2x20 LEDs with lenses



With rectangular pole H 3500mm

S.7112N
2 x LED MODULE **4000K** CRI80 6400lm 43,4W
(on request 2700K CRI80 5168lm)
(on request 3000K CRI80 5440lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



With rectangular pole H 4500mm


S.7113N
2 x LED MODULE **4000K** CRI80 6400lm 43,4W
(on request 2700K CRI80 5168lm)
(on request 3000K CRI80 5440lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Luminous flux wasted upward 0%.


Single 20 LEDs with lenses



With rectangular pole H 3500mm




S.7102N
LED MODULE **4000K** CRI80 6400lm 43,4W
(on request 2700K CRI80 5168lm)
(on request 3000K CRI80 5440lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



With rectangular pole H 4500mm

S.7103N
LED MODULE **4000K** CRI80 6400lm 43,4W
(on request 2700K CRI80 5168lm)
(on request 3000K CRI80 5440lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Luminous flux wasted upward 0%.

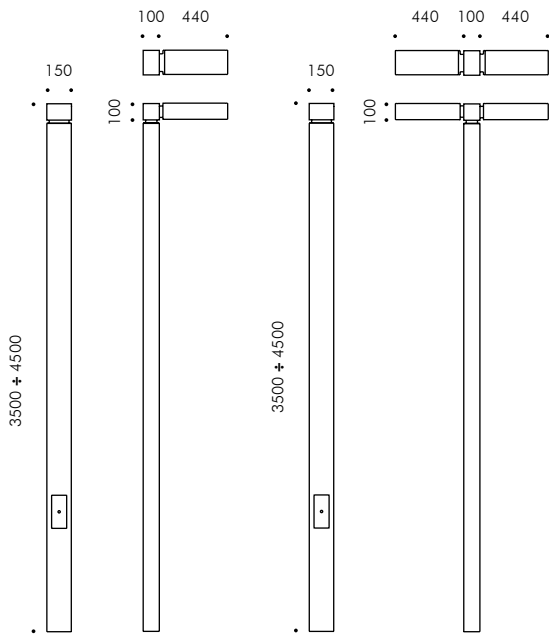

S.7109
FLANGE ACCESSORY FOR PARK RECTANGULAR POLE
Flange 100x150mm h 820mm to be anchored in concrete





Ø 300

S.7108
FIXING BASE FOR PARK RECTANGULAR POLE
Base 300x300mm
Holes spacing 200x200mm
Holes Ø18mm for M16 bolts





20 LEDs with lenses

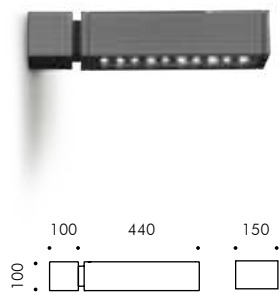

S.7132N
LED MODULE **4000K** CRI80 6400lm 43,4W
(on request 2700K CRI80 5168lm)
(on request 3000K CRI80 5440lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Luminous flux wasted upward 0%.


36 LEDs with lenses

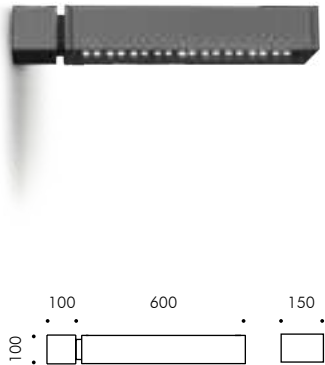


S.7152N
LED MODULE **4000K** CRI80 11520lm 78,1W
(on request 2700K CRI80 9302lm)
(on request 3000K CRI80 9792lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Luminous flux wasted upward 0%.



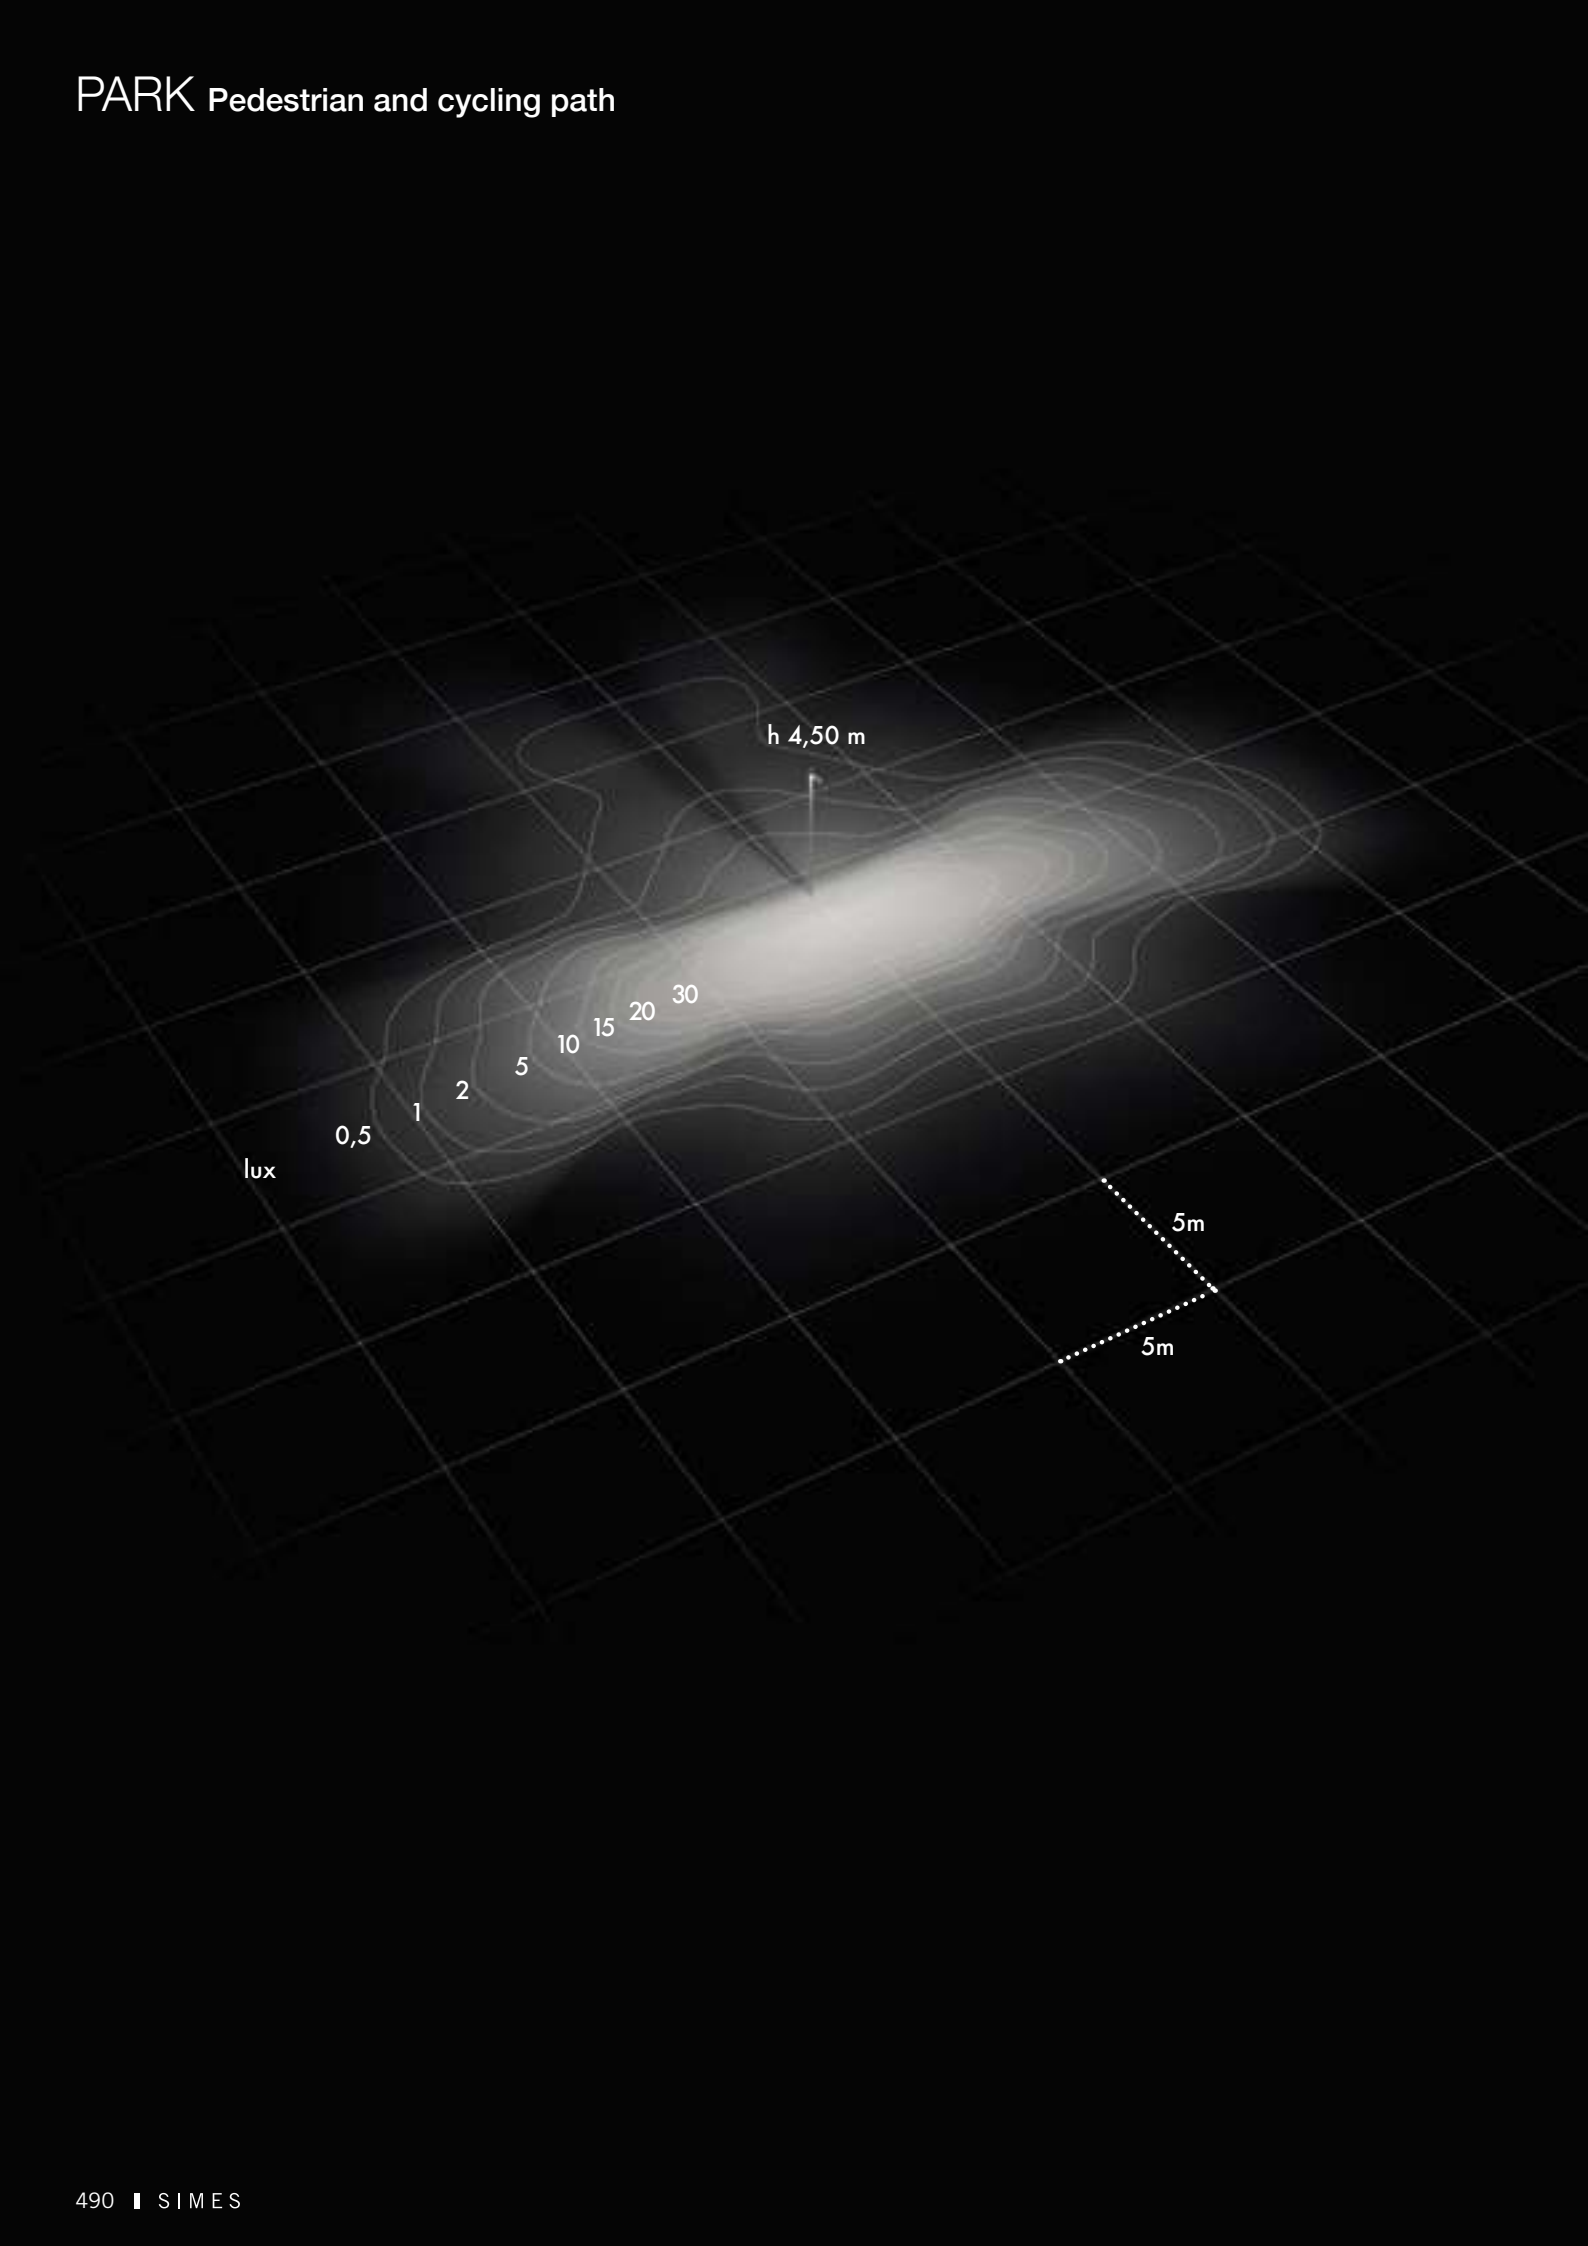

Single 20 LEDs with lenses

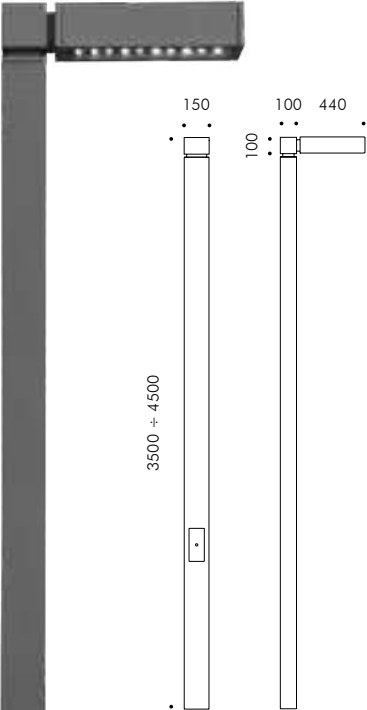

Single 20 LEDs with lenses



With rectangular pole H 3500mm



S.7100N
LED MODULE **4000K** CRI80 6400lm 43,4W
(on request 2700K CRI80 5168lm)
(on request 3000K CRI80 5440lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Luminous flux wasted upward 0%.

With rectangular pole H 4500mm

S.7101N
LED MODULE **4000K** CRI80 6400lm 43,4W
(on request 2700K CRI80 5168lm)
(on request 3000K CRI80 5440lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Luminous flux wasted upward 0%.

Post top ø 76mm

S.7120N
LED MODULE **4000K** CRI80 6400lm 43,4W
(on request 2700K CRI80 5168lm)
(on request 3000K CRI80 5440lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Luminous flux wasted upward 0%.
Pole not included

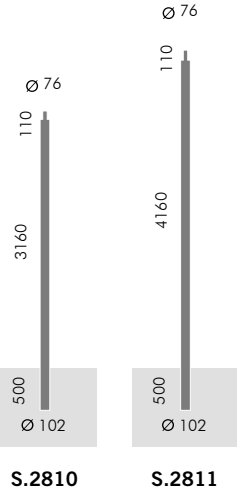

Poles

S.2810
CYLINDRICAL POLE Ø 102mm TO BE RECESSED
with SPIGOT ATTACHMENT Ø 76mm
Total height above ground of the product + post top 3300mm

S.2811
CYLINDRICAL POLE Ø 102mm TO BE RECESSED
with SPIGOT ATTACHMENT Ø 76mm
Total height above ground of the product + post top 4300mm



Boulevard is designed for the urban environment, ideal for any context: from paths, to plazas, from pedestrian crossings to urban streets. It has high-performing optics and is compatible for an eco-sustainable management of the public lighting. It is available as a pole top or pole mounted using a “collar” pole connection as well as wall mounted. The light emission is completely directed downwards for a performant lighting distribution which can reach an interdistance of even four times the height of its installation.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Clear toughened glass 5mm thick. Stainless steel A4 screws. Luminaire supplied with neoprene H05RN-F cable with cable gland. Electrical wiring with fast connector. Controlgear equipped with protections against discharges and high voltage spikes on the mains: 6kV differential mode (L-N), 8kV common mode (PE). Silicone gaskets. Double powder paint.

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II

MECHANICAL RESISTANCE
IK 09

COLOURS


.24 Anthracite Grey

REGISTERED DESIGN




www.simes.it/boulevard

Boulevard pole top is particularly recommended to illuminate roads of category M3 and M4 (as per the european norm EN 13201) and is supplied with a highly performing and versatile optical system, suitable for a wide range of cases.

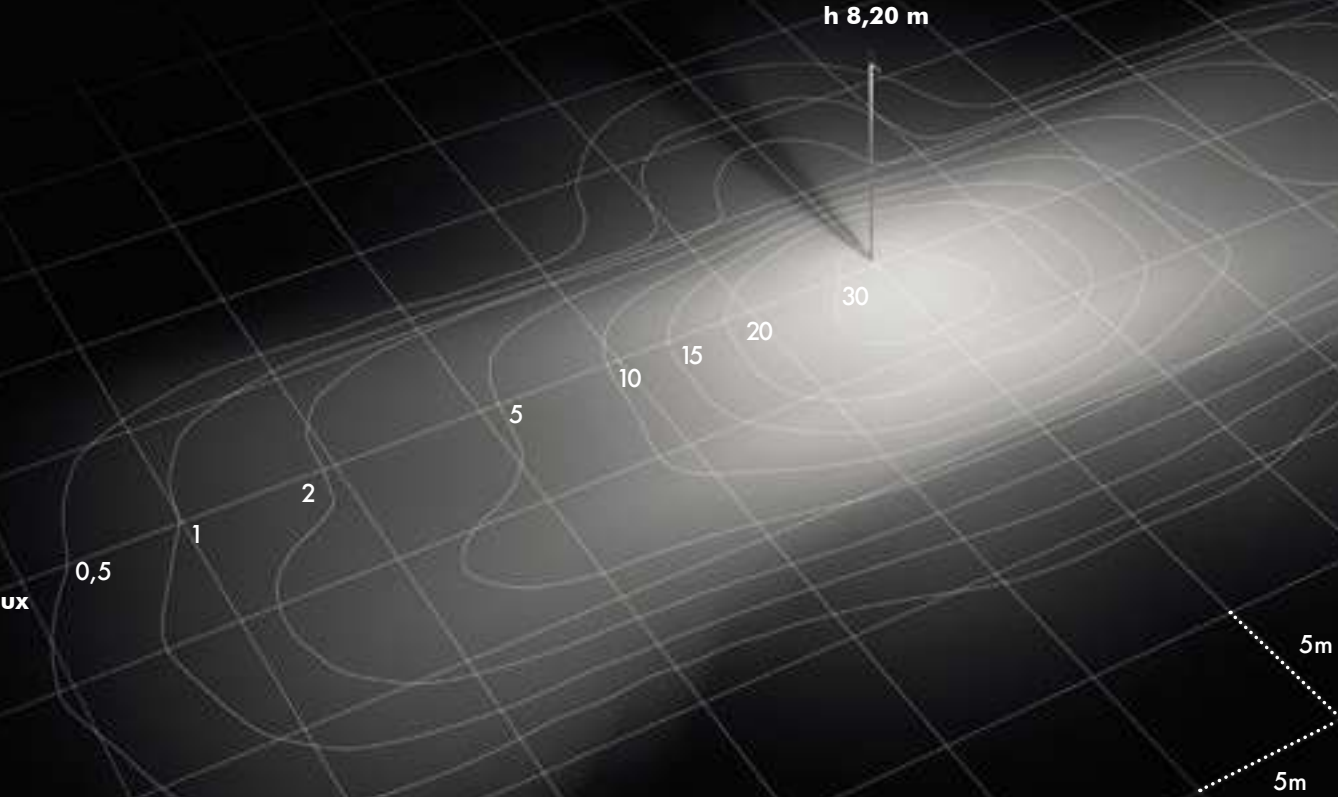


Single 40 LEDs with lenses

Single pole adaptor Ø 102mm




S.7750N
LED MODULE **4000K** CRI80 12480lm 78,9W
(on request 2700K CRI80 10600lm)
(on request 3000K CRI80 11500lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Luminous flux wasted upward 0%

Version with crosswalks optic available on request.
Available with integrated IoT READY ZHAGA power supply
with price change

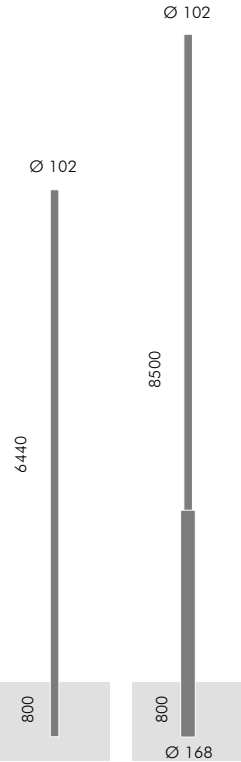

S.2815 S.2817

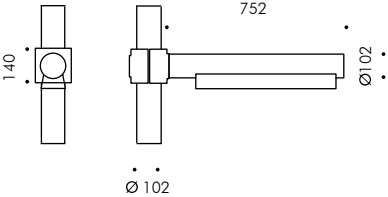

Poles

S.2815
CILINDRICAL POLE Ø 102mm TO BE RECESSED
Total height above ground 6440mm
Height of installation of the product 6200mm

S.2817
CILINDRICAL POLE WITH ATTACHMENT
Ø 168mm / Ø 102mm TO BE RECESSED
Total height above ground 8500mm
Height of installation of the product 8200mm




Boulevard can hosts different optics designed to offer variety of shape and distribution of the light beam. In the version for plaza and car parks, the luminaire body houses 40 LEDs and the light distribution generates a good uniformity in the front area of the pole.

(Boulevard can be supplied with integrated IoT READY ZHAGA power supply with price change)

40 LEDs with lenses




Wall mounted




S.7620N
LED MODULE **4000K** CRI80 12480lm 78,9W
(on request 2700K CRI80 10600lm)
(on request 3000K CRI80 11500lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Luminous flux wasted upward 0%





Single 40 LEDs with lenses




S.7650N
LED MODULE **4000K** CRI80 12480lm 78,9W
(on request 2700K CRI80 10600lm)
(on request 3000K CRI80 11500lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Luminous flux wasted upward 0%

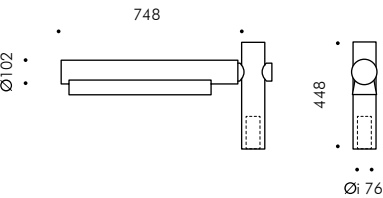

Double 2x40 LEDs with lenses

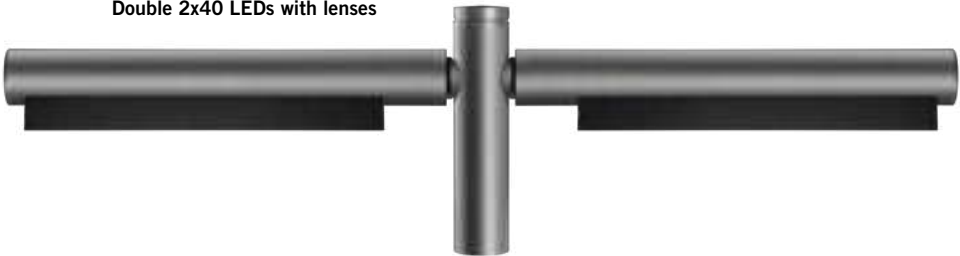


S.7680N
2 x LED MODULE **4000K** CRI80 12480lm 78,9W
(on request 2700K CRI80 10600lm)
(on request 3000K CRI80 11500lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Luminous flux wasted upward 0%

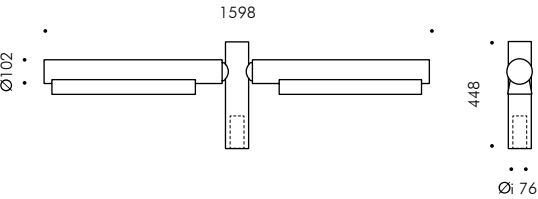




Poles

S.2816
CYLINDRICAL POLE Ø 102mm TO BE RECESSED
with SPIGOT ATTACHMENT Ø 76mm
Total height above ground of the product + post top 5608mm

S.2818
CYLINDRICAL POLE Ø 102mm TO BE RECESSED
with SPIGOT ATTACHMENT Ø 76mm
Total height above ground of the product + post top 6888mm

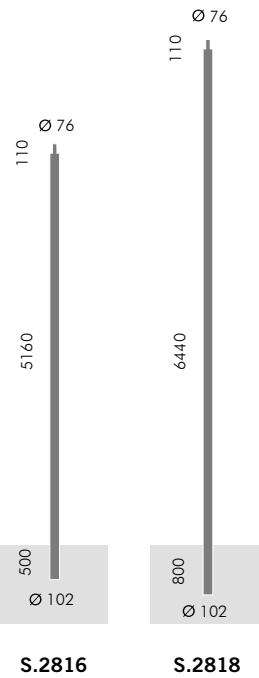



Boulevard 16 LEDs with cyclo-pedestrian optics distributes its performing beam in a narrow and longitudinal way. It is available in pole top version or with collar connection. This last one can also be installed in combination with Boulevard street optics 40 LEDs.

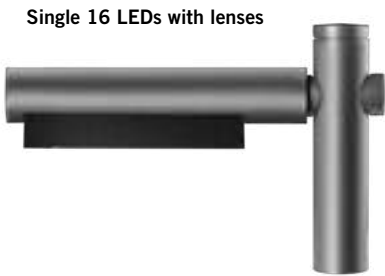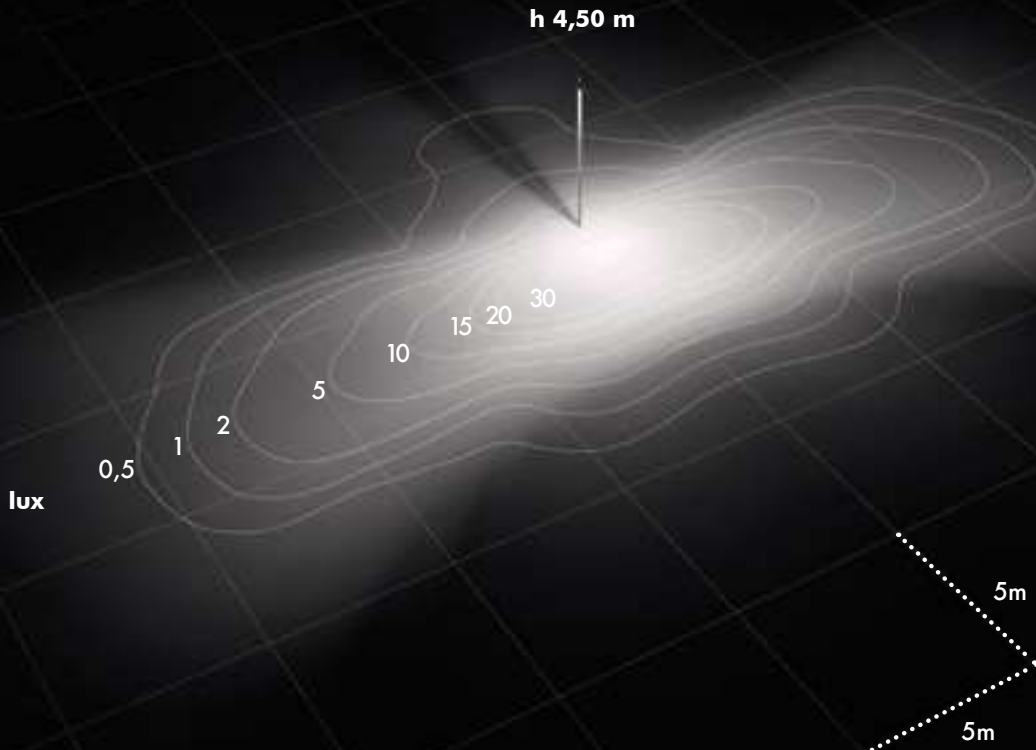

Single pole top $\varnothing$ 76mm

S.7640N
LED MODULE **4000K** CRI80 2776lm 16,2W
(on request 2700K CRI80 2400lm)
(on request 3000K CRI80 2520lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Luminous flux wasted upward 0%

Available with integrated IoT READY ZHAGA power supply with price change

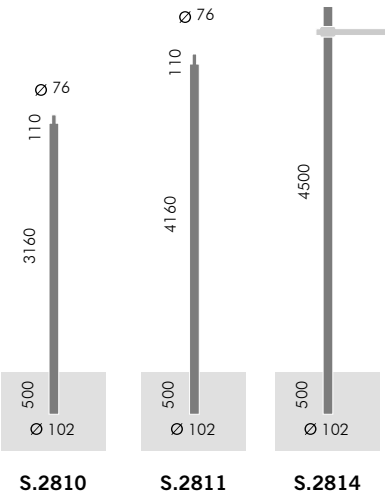


Poles

S.2810
CYLINDRICAL POLE $\varnothing$ 102mm TO BE RECESSED
with SPIGOT ATTACHMENT $\varnothing$ 76mm
Total height above ground of the product + post top 3608mm

S.2811
CYLINDRICAL POLE $\varnothing$ 102 mm TO BE RECESSED
with SPIGOT ATTACHMENT $\varnothing$ 76mm
Total height above ground of the product + post top 4608mm


S.2814
CYLINDRICAL POLE $\varnothing$ 102mm TO BE BURIED
Pole total height 5000mm
To be buried for 500mm



Single pole adaptor $\varnothing$ 102mm

S.7740N
LED MODULE **4000K** CRI80 2776lm 16,2W
(on request 2700K CRI80 2400lm)
(on request 3000K CRI80 2520lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Luminous flux wasted upward 0%

Available with integrated IoT READY ZHAGA power supply with price change







Avenue is designed for the urban environment, ideal for any context. Installed as pole mounted using a “collar” pole connection is available in the short version 16 LED for cycling paths and in the long version 40 LED for parking and street lighting. It has high-performing optics and is compatible for an eco-sustainable management of the public lighting. The light emission is completely directed downwards for a performant lighting distribution which can reach an interdistance of even four times the height of its installation.

TECHNICAL DESCRIPTION
Die-cast aluminium housing, extruded aluminium structure with high corrosion resistance. Clear toughened glass 5mm thick. Stainless steel A4 screws. Luminaire supplied with neoprene H05RN-F cable with cable gland. Silicone gaskets. Double powder paint.




PATENTED

PROTECTION CLASS
IP66
ISOLATION CLASS
CLASS II 
MECHANICAL RESISTANCE
IK 07

COLOUR
 Anthracite Grey





www.simes.it/avenue

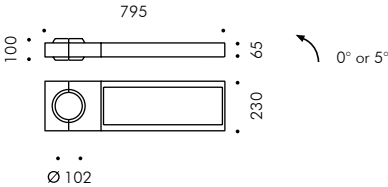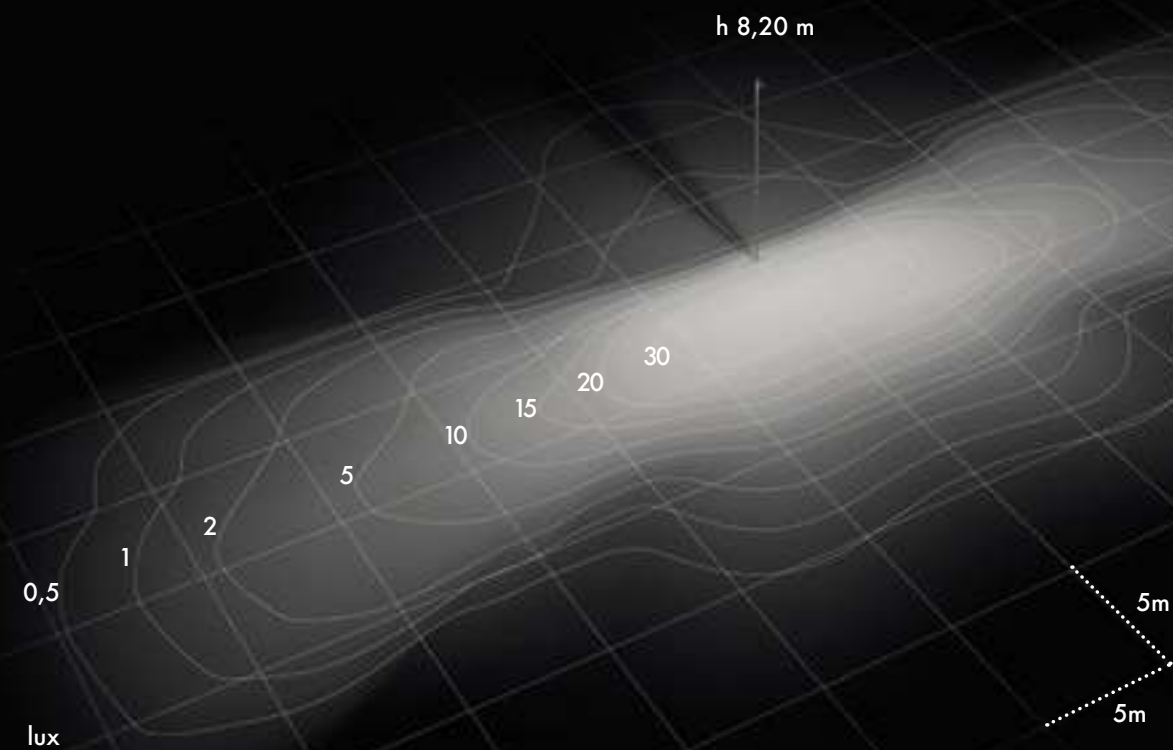

Ø 102mm attachment

S.3092N
LED MODULE **4000K** CRI80 15096lm 105W
(on request 2700K CRI80 12190lm)
(on request 3000K CRI80 12831lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


Luminous flux wasted upward 0%.
Available on request for Ø76mm cylindrical pole
Pole not included

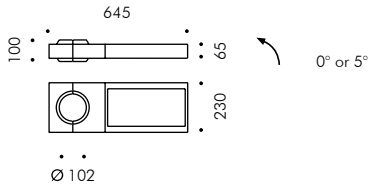

Ø 102mm attachment

S.3096N
LED MODULE **4000K** CRI80 6038lm 42W
(on request 2700K CRI80 4875lm)
(on request 3000K CRI80 5132lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Luminous flux wasted upward 0%.
Available on request for Ø76mm cylindrical pole
Pole not included

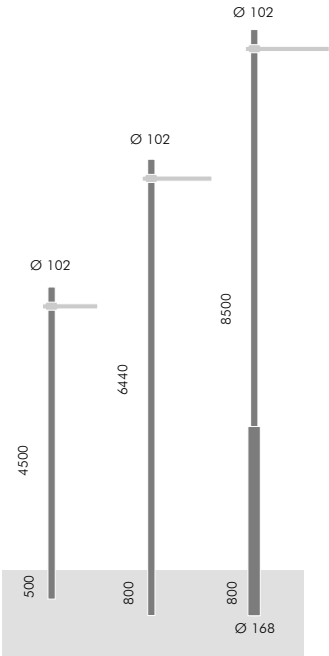

S.2814 S.2815 S.2817




Poles

S.2814
CYLINDRICAL POLE Ø 102mm TO BE BURIED
Pole total height 5000mm
To be buried for 500mm


S.2815
CYLINDRICAL POLE Ø 102mm TO BE BURIED
Pole total height 7240mm
To be buried for 800mm

S.2817
CYLINDRICAL SHAPED POLE
Ø 168mm / Ø 102mm TO BE BURIED
Pole total height 9300mm
To be buried for 800mm



S.2809
POLE BASE COVER
For pole with base and pole
to be buried Ø102mm or Ø120mm.
Die-cast aluminium housing.

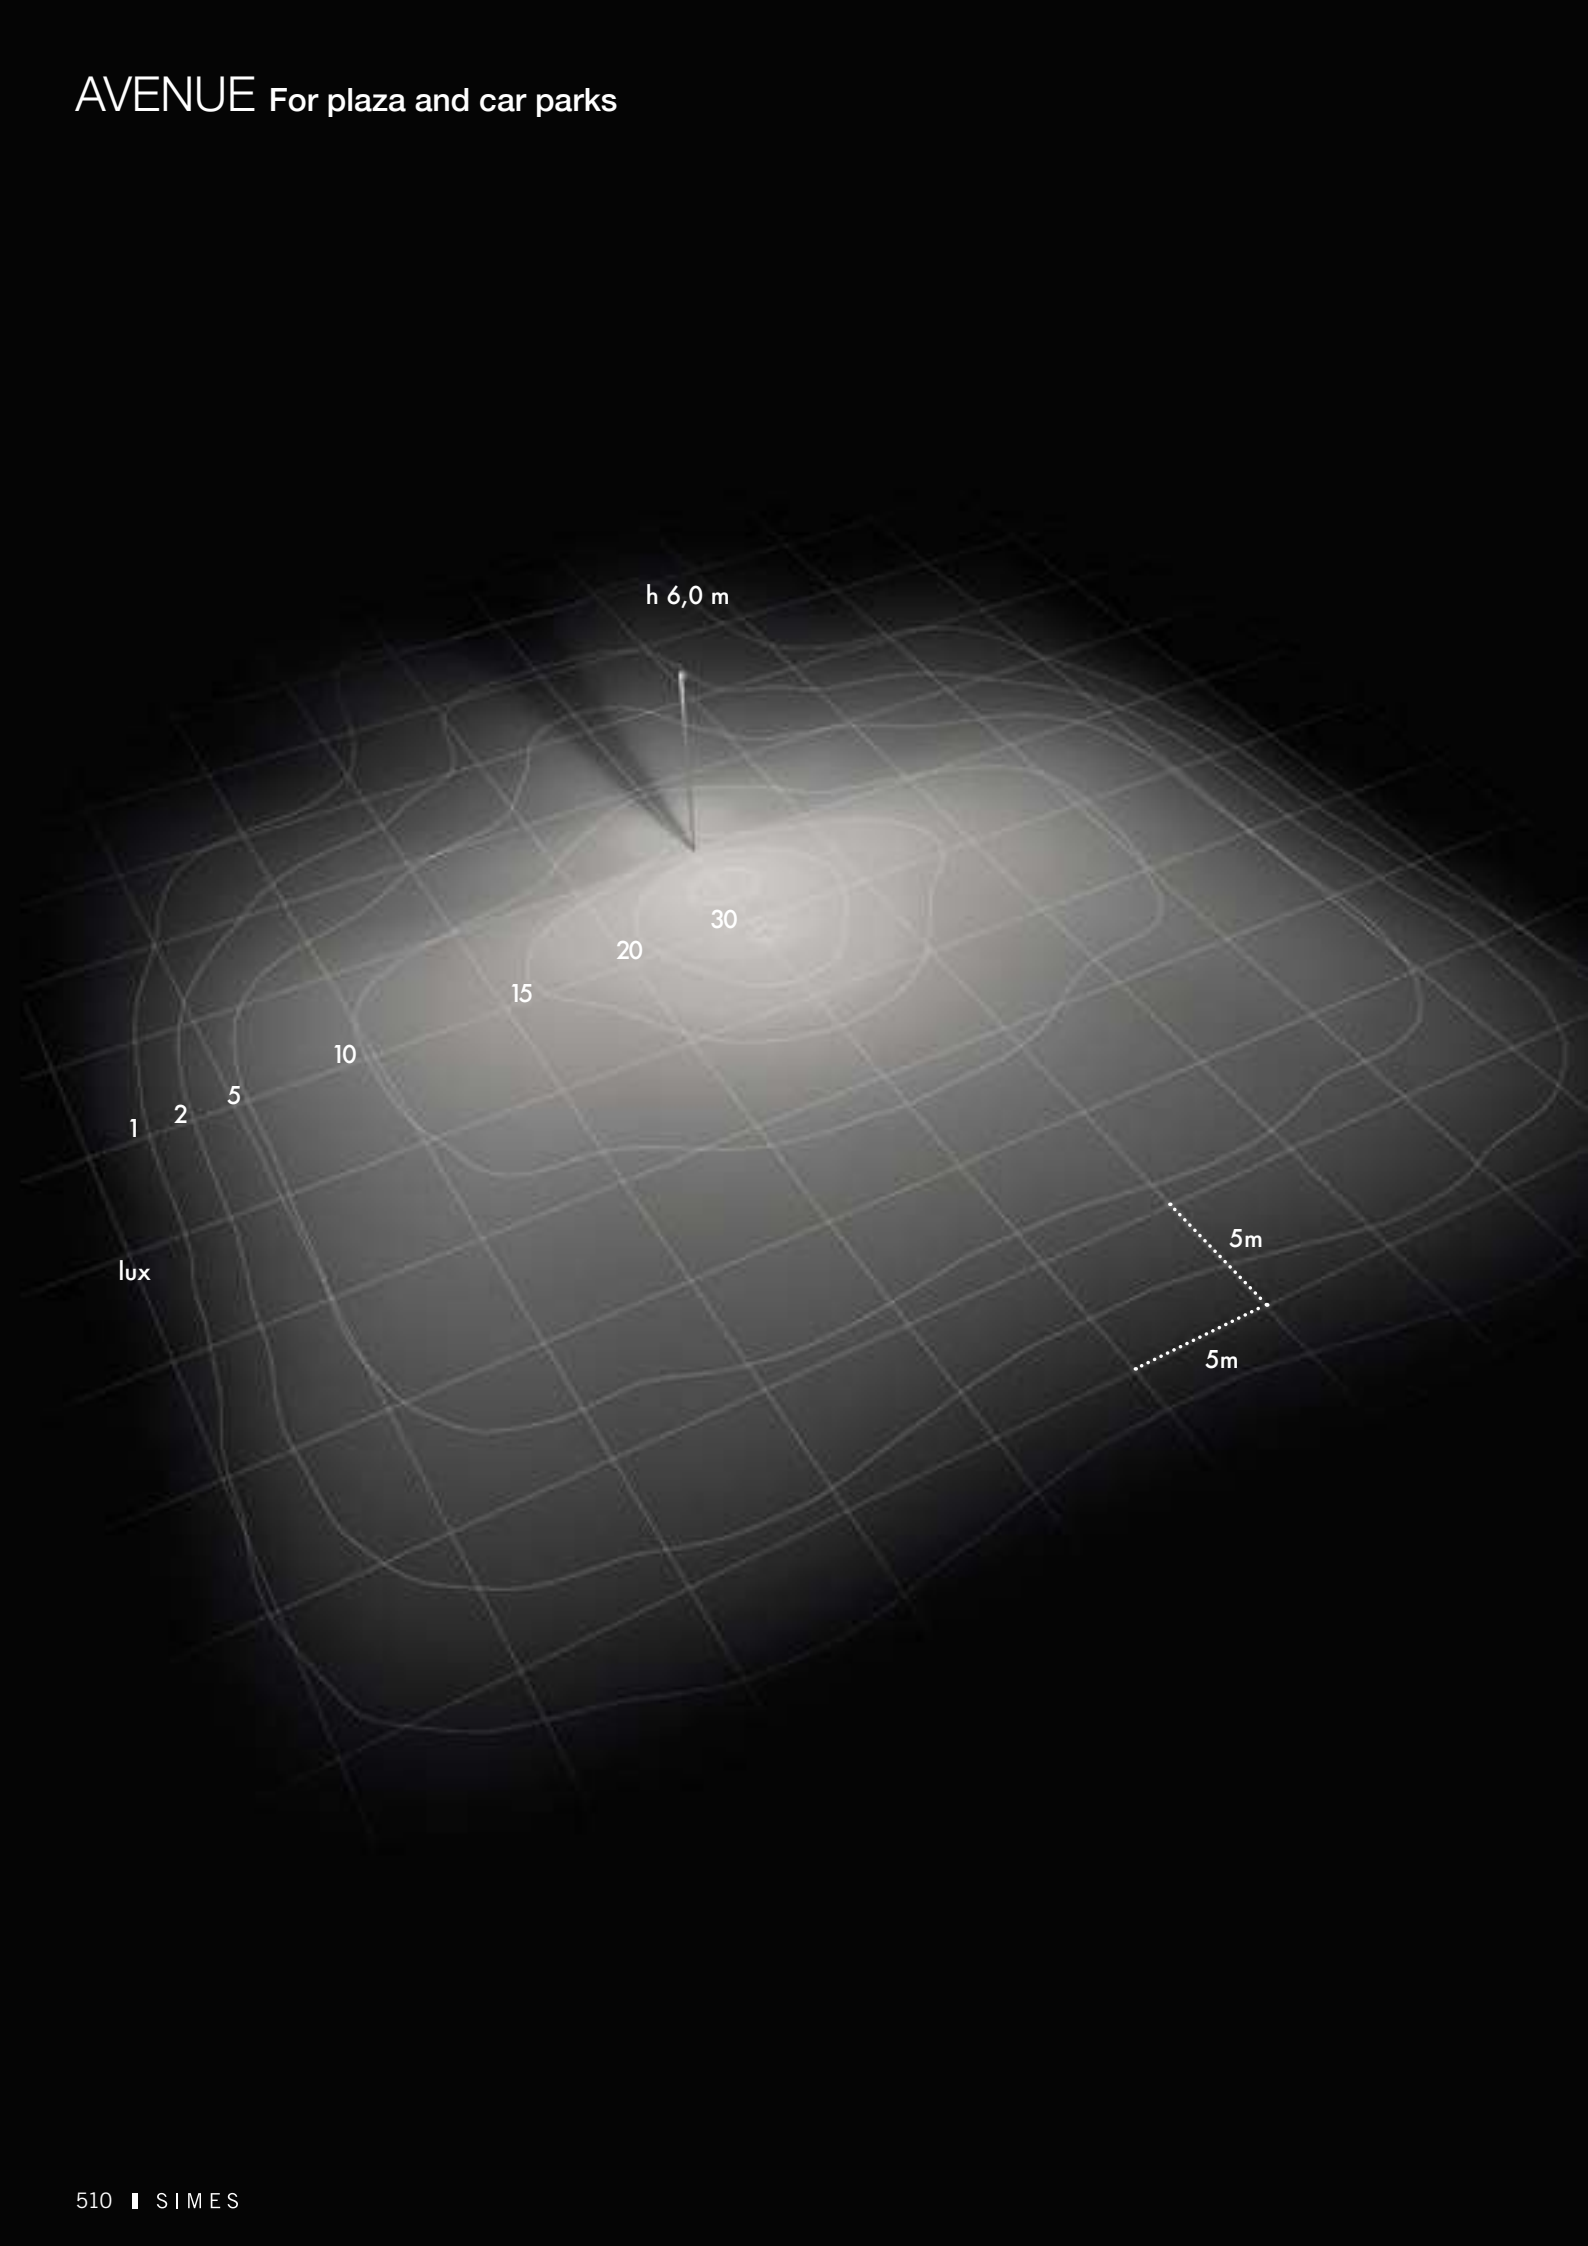

40 LEDs with lenses

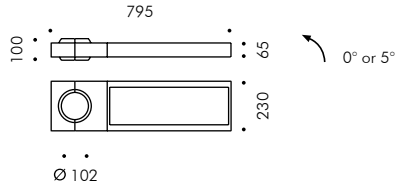

16 LEDs with lenses

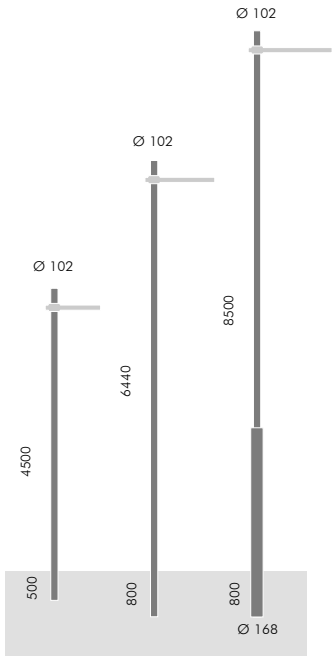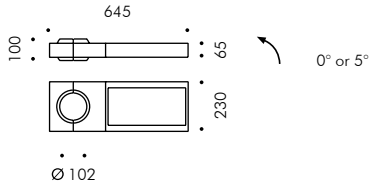

S.2814 S.2815 S.2817



Ø 102mm attachment

S.3098N
LED MODULE **4000K** CRI80 15096lm 105W
(on request 2700K CRI80 12190lm)
(on request 3000K CRI80 12831lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Luminous flux wasted upward 0%.
Available on request for Ø76mm cylindrical pole
Pole not included

Ø 102mm attachment

S.3097N
LED MODULE **4000K** CRI80 6038lm 42W
(on request 2700K CRI80 4875lm)
(on request 3000K CRI80 5132lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Luminous flux wasted upward 0%.
Available on request for Ø76mm cylindrical pole
Pole not included

Poles

S.2814
CYLINDRICAL POLE Ø 102mm TO BE BURIED
Pole total height 5000mm
To be buried for 500mm

S.2815
CYLINDRICAL POLE Ø 102mm TO BE BURIED
Pole total height 7240mm
To be buried for 800mm

S.2817
CYLINDRICAL SHAPED POLE
Ø 168mm / Ø 102mm TO BE BURIED
Pole total height 9300mm
To be buried for 800mm

S.2809
POLE BASE COVER
For pole with base
and pole to be buried Ø102mm or Ø120mm.
Die-cast aluminium housing.



Pool is a high performance underwater luminaire designed specifically for swimming pools and fountains. Available in three dimensions, it is equipped with LED light sources, monochromatic and RGBW, for emotional and charming effects.

TECHNICAL DESCRIPTION

Technopolymer housing. Marine grade stainless steel AISI 316L front trim 2mm thick. Toughened glass diffuser 10mm thick for MICROPOOL, 12mm thick for MINIPOOL, 12mm thick for POOL, 4mm thick for MICROPOOL SPOT, 8mm thick for MINIPOOL SPOT, 8mm thick for POOL SPOT. Luminaire supplied with 6,0m neoprene H07RN-F cable for submersion cable with cable gland. Stainless steel A4 screws. Corrugated plastic pipe 5,0m long for MICROPOOL and MINIPOOL, 7,0m long for POOL. Silicone gaskets.

POOL RECESSED

Recessing box in technopolymer with front ring in stainless steel AISI 316L.

REGISTERED DESIGN

PROTECTION CLASS
IP68 3m

ISOLATION CLASS
CLASS III

MECHANICAL RESISTANCE
IK 10

Power supply not included.

Suitable for swimming pools in concrete and metal, recessed to the wall and on the bottom.

Not suitable for submersion in salt water.

FINISHING


.19 STAINLESS STEEL



www.simes.it/pool




Micropool



S.3607.19 Medium beam with lens
LED MODULE **6000K** CRI70 285lm 2,5W
24Vdc PWM


Requires constant voltage 24Vdc
remote power supply (page 522-523) *

RGBW




S.3603.19 Medium beam with lenses
LED MODULE **RGBW (W=6000K)** 70lm 0,5W
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers (page 528-529)




Minipool



S.3617.19 Flood beam with lenses
LED MODULE **6000K** CRI70 1670lm 20W
24Vdc NOT DIMMABLE


Requires constant voltage 24Vdc
remote power supply (page 522) *

RGBW




S.3629.19 Flood beam with lenses
LED MODULE **RGBW (W=6000K)** 1083lm 7,8W
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers (page 528-529)




Pool



S.3627.19 Flood beam with lenses
LED MODULE **6000K** CRI70 3340lm 34W
24Vdc NOT DIMMABLE


Requires constant voltage 24Vdc
remote power supply (page 522) *

RGBW




S.3630.19 Flood beam with lenses
LED MODULE **RGBW (W=6000K)** 2951lm 21,4W
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers (page 528-529)



* Micropool, Minipool and Pool with 6000K LED
work also with traditional systems 12Vac
(proper to substitute existing lamps for swimming pool
with magnetic transformer 230V/12Vac).


Micropool



S.3676.19 Medium beam with lens
LED MODULE **6000K** CRI70 285lm 2,5W
24Vdc PWM


Requires constant voltage 24Vdc
remote power supply (page 522-523) *

RGBW




S.3673.19 Medium beam with lenses
LED MODULE **RGBW (W=6000K)** 70lm 0,5W
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers (page 528-529)



S.3671
FLANGE for MICROPOL and MINIPOL SPOT
Fixation base plate for Micro and Minipool Spot installation.
Weight of the flange: Kg 1,5


Minipool



S.3686.19 Flood beam with lenses
LED MODULE **6000K** CRI70 1670lm 20W
24Vdc NOT DIMMABLE


Requires constant voltage 24Vdc
remote power supply (page 522) *

RGBW




S.3683.19 Flood beam with lenses
LED MODULE **RGBW (W=6000K)** 1083lm 7,8W
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers (page 528-529)



S.3671
FLANGE for MICROPOL and MINIPOL SPOT
Fixation base plate for Micro and Minipool Spot installation.
Weight of the flange: Kg 1,5


Pool



S.3696.19 Flood beam with lenes
LED MODULE **6000K** CRI70 3340lm 34W
24Vdc NOT DIMMABLE


Requires constant voltage 24Vdc
remote power supply (page 522) *

RGBW



S.3693.19 Flood beam with lenes
LED MODULE **RGBW (W=6000K)** 2951lm 21,4W
24Vdc PWM

Requires constant voltage remote power supply
for RGBW and DMX or DALI controllers (page 528-529)



S.3672
FLANGE for POOL SPOT
Fixation base plate for Pool Spot installation.
Weight of the flange: Kg 3,5

* Micropool, Minipool and Pool with 6000K LED work
also with traditional systems 12Vac
(proper to substitute existing lamps for swimming pool
with magnetic transformer 230V/12Vac).



REMOTE POWER SUPPLY NOT DIMMABLE
24Vdc constant voltage

S I M E S



IP20 Independent

- 

S.3400
10W 230V/24Vdc
IP20 CLASS II SELV
Dimensions 118mm x38mm x21,2mm
- 

S.2430
16W 230V/24Vdc
IP20 CLASS II SELV
Dimensions 110mm x50mm x20mm
- 

S.2400
35W 230V/24Vdc
IP20 CLASS II SELV
Dimensions 195mm x43mm x30,2mm
- 

S.2401
60W 230V/24Vdc
IP20 CLASS II SELV
Dimensions 225mm x43mm x29,8mm
- 

S.2403
100W 230V/24Vdc
IP20 CLASS II SELV
Dimensions 295mm x43mm x29,8mm

IP rated Box

- 

S.3401
10W 230V/24Vdc
IP55 CLASS II SELV
Dimensions 215mm x185mm x80mm
- 

S.2435
16W 230V/24Vdc
IP67 CLASS II SELV
Dimensions 175,5mm x86,5mm x43mm
- 

S.2402
60W 230V/24Vdc
IP55 CLASS II SELV
Dimensions 260mm x240mm x100mm
- 

S.2404
90W 230V/24Vdc
IP55 CLASS II SELV
Dimensions 260mm x240mm x100mm

IP rated Independent

- 

S.3425
8W 230V/24Vdc
It can be housed directly in the recessed box of **MINISKILL ROUND, SQUARE AND VERTICAL FLUSH**
IP54 CLASS II SELV
Dimensions 54mm x32mm x21mm
- 

S.2407
14,4W 230V/24Vdc
Can be housed in the recessed switch box for dry walls or plasterboard of rectangular sizes for **5CENTO RECTANGULAR and RECTANGULAR LONG**.
IP67 CLASS II SELV
Dimensions 79mm x38mm x25mm
- 

S.2433
36W 230V/24Vdc
IP67 CLASS II SELV
Dimensions 120mm x38mm x25mm
- 

S.2405
60W 230V/24Vdc
IP67 CLASS II SELV
Dimensions 150mm x53mm x35mm
- 

S.2406
90W 230V/24Vdc
IP67 CLASS II SELV
Dimensions 171mm x63mm x37,5mm
- 

S.2445
120W 230V/24Vdc
IP67 CLASS II SELV
Dimensions 191mm x63mm x37,5mm
- 

S.2446
320W 230V/24Vdc
IP67 CLASS I SELV
Dimensions 252mm x90mm x43mm

IP Junction rated Box for POOL

- 

S.3664
35W 230V/24Vdc for:
Max N°4 Micropool LED (+N°2 S.3670)
Max N°1 Minipool LED
Max N°1 Pool LED
IP65 CLASS II SELV
Dimensions 200mm x200mm x220mm
- 

S.3665
90W 230V/24Vdc for:
Max N°5 Micropool LED (+N°3 S.3670)
Max N°4 Minipool LED (+N°2 S.3670)
Max N°2 Pool LED
IP65 CLASS II SELV
Dimensions 300mm x300mm x230mm
- 

S.3660
JUNCTION BOX
Junction box IP65 with cable glands for 3 cables IN (possibility of 5 more cables IN with S.3670 accessories)
maximum load capacity 500Kg
Dimensions 300mm x300mm x230mm

REMOTE POWER SUPPLY DIMMABLE
24Vdc constant voltage

S I M E S



IP20 Independent

- 

S.3426
DIMMABLE DALI2
16W 230V/24Vdc
IP20 CLASS II SELV PWM Frequency 2kHz
Dimensions 110mm x50mm x20mm
(not suitable with NANOLED STAINLESS-STEEL, FLOWER 25, MINIPETIT 24V)
- 

S.2441
DIMMABLE DALI, PUSH DIM, 0-10V and 1-10V
24W 230V/24Vdc
IP20 CLASS II SELV PWM Frequency 244Hz
Dimensions 164mm x38mm x24,5mm
- 

S.2420
DIMMABLE DALI, PUSH DIM and DSI
35W 230V/24Vdc
IP20 CLASS II SELV PWM PWM Frequency ~1kHz
Dimensions 195mm x43mm x30,2mm
(not suitable with NANOLED STAINLESS-STEEL, FLOWER 25, MINIPETIT 24V)
- 

S.2421
DIMMABLE DALI, PUSH DIM and DSI
60W 230V/24Vdc
IP20 CLASS II SELV PWM Frequency ~1kHz
Dimensions 225mm x43mm x29,8mm
(not suitable with NANOLED STAINLESS-STEEL, FLOWER 25, MINIPETIT 24V)
- 

S.2424
DIMMABLE 1-10V and PUSH DIM
60W 230V/24Vdc
IP20 CLASS II SELV PWM Frequency 244Hz
Dimensions 125mm x82mm x29mm
- 

S.2442
DIMMABLE DALI, PUSH DIM, 0-10V and 1-10V
75W 230V/24Vdc
IP20 CLASS II SELV PWM Frequency 244Hz
Dimensions 280mm x40mm x29mm
- 

S.2422
DIMMABLE DALI, PUSH DIM and DSI
100W 230V/24Vdc
IP20 CLASS II SELV PWM Frequency >1kHz
Dimensions 295mm x43mm x29,8mm
(not suitable with NANOLED STAINLESS-STEEL, FLOWER 25, MINIPETIT 24V)

IP rated Box

- 

S.2438
DIMMABLE DALI2
16W 230V/24Vdc
IP67 CLASS II SELV PWM Frequency 2kHz
Dimensions 175,5mm x86,5mm x43mm
(not suitable with NANOLED STAINLESS-STEEL, FLOWER 25, MINIPETIT 24V)
- 

S.2439
DIMMABLE 1-10V and PUSH DIM
20W 230V/24Vdc
IP67 CLASS II SELV PWM Frequency 2kHz
Dimensions 175,5mm x86,5mm x43mm
(not suitable with NANOLED STAINLESS-STEEL, FLOWER 25, MINIPETIT 24V)

IP rated Independent

- 

S.2411
DIMMABLE 0-10V and 1-10V
15W 230V/24Vdc
IP68 CLASSE II SELV Frequency PWM 240Hz
Dimensions 121mm x53mm x26mm
- 

S.2427
DIMMABLE 1-10V
60W 230V/24Vdc
IP67 CLASS II SELV PWM Frequency 1,47kHz
Dimensions 150mm x53mm x35mm
(not suitable with NANOLED STAINLESS-STEEL, FLOWER 25, MINIPETIT 24V)
- 

S.2428
DIMMABLE 1-10V
90W 230V/24Vdc
IP67 CLASS II SELV PWM Frequency 1,47kHz
Dimensions 171mm x63mm x37,5mm
(not suitable with NANOLED STAINLESS-STEEL, FLOWER 25, MINIPETIT 24V)
- 

S.2415
DIMMABLE DALI
24W 230V/24Vdc
IP67 CLASS II SELV PWM Frequency 244Hz
Dimensions 185mm x35mm x33mm
- 

S.2416
DIMMABLE DALI
75W 230V/24Vdc
IP67 CLASS II SELV PWM Frequency 244kHz
Dimensions 280mm x40mm x28mm
- 

S.2426
DIMMABLE DALI 2
120W 230V/24Vdc
IP67 CLASS II SELV PWM Frequency 2,5kHz
Dimensions 191mm x63mm x37,5mm
(not suitable with NANOLED STAINLESS-STEEL, FLOWER 25, MINIPETIT 24V)

REMOTE POWER SUPPLY NOT DIMMABLE
constant current

S I M E S



IP20 Independent



S.3424
FIXED-POWER 230V/1200mA
Maximum power consumption 6W
IP20 CLASS II SELV
Dimensions 57mm x31mm x21mm



S.2430
MULTI-POWER 230V/250mA-700mA
Maximum power consumption 20W
IP20 CLASS II SELV
Dimensions 110mm x50mm x20mm



S.2431
MULTI-POWER 230V/350mA-1050mA
Maximum power consumption 39W
IP20 CLASS II SELV
Dimensions 130mm x67mm x21mm



S.2432
MULTI-POWER 230V/350mA-1050mA
Maximum power consumption 50W
IP20 CLASS II SELV
Dimensions 130mm x67mm x21mm

IP rated Box



S.2435
MULTI-POWER 230V/250mA-700mA
Maximum power consumption 20W
IP67 CLASS II SELV
Dimensions 175,5mm x86,5mm x43mm



S.2436
MULTI-POWER 230V/350mA-1050mA
Maximum power consumption 50W
IP55 CLASS II SELV
Dimensions 260mm x260mm x100mm

IP rated Independent



S.2409
FIXED-POWER 230V/1000mA
Maximum power consumption 14W
IP67 CLASS II SELV
Dimensions 70mm x38mm x24mm



S.2434
MULTI-POWER 230V/200mA-700mA
Maximum power consumption 20W
IP67 CLASS II SELV
Dimensions 120mm x38mm x25mm



S.2408
MULTI-POWER 230V/350mA-1050mA
Maximum power consumption 57,8W
IP67 CLASS II SELV
Dimensions 185mm x35mm x35mm

REMOTE POWER SUPPLY DIMMABLE
constant current

S I M E S



IP20 Independent



S.2417
MULTI-POWER DIMMABLE
DALI2 and PUSH
230V/200mA-550mA
Maximum power consumption 20W
IP20 CLASS II SELV
Dimensions 116mm x41mm x22mm



S.3426
MULTI-POWER DIMMABLE DALI2
230V/250mA-700mA
Maximum power consumption 20W
IP20 CLASS II SELV
Dimensions 110mm x50mm x20mm



S.2412
MULTI-POWER DIMMABLE
1-10V and PUSH DIM
230V/250-900mA
Maximum power consumption 20W
IP20 CLASS II SELV
Dimensions 111mm x52mm x22mm



S.2418
MULTI-POWER DIMMABLE
DALI2 and PUSH
230V/700mA-1050mA
Maximum power consumption 35W
IP20 CLASS II SELV
Dimensions 136mm x42mm x24mm



S.3423
MULTI-POWER DIMMABLE 1-10V, PUSH DIM
230V/350mA-1050mA
Maximum power consumption 39W
IP20 CLASS II SELV
Dimensions 130mm x67mm x21mm



S.2413
MULTI-POWER DIMMABLE
DALI, 1-10V e PUSH DIM
230V/250-700mA
Maximum power consumption 60W
IP20 CLASS II SELV 120V
Dimensions 124mm x79mm x22mm



S.3427
MULTI-POWER DIMMABLE DALI2,
1-10V and PUSH DIM
230V/350mA-1050mA
Maximum power consumption 60W
IP20 CLASS II SELV 120V
Dimensions 125mm x80mm x20mm

IP rated Box



S.2438
MULTI-POWER DIMMABLE DALI2
230V/250mA-700mA
Maximum power consumption 20W
IP65 CLASS II SELV
Dimensions 000mm x000mm x000mm



S.2439
MULTI-POWER DIMMABLE 1-10V and PUSH DIM
230V/250mA-900mA
Maximum power consumption 20W
IP65 CLASS II SELV
Dimensions 000mm x000mm x000mm

IP rated Independent



S.2411
FIXED-POWER DIMMABLE 1-10V
230V/700mA
Maximum power consumption 17W
IP68 CLASS II SELV
Dimensions 121mm x53mm x26mm



S.2410
MULTI-POWER DIMMABLE DALI
230V/350mA-1050mA
Maximum power consumption 57,8W
IP67 CLASS II SELV
Dimensions 185mm x35mm x35mm



S.2414
FIXED-POWER DIMMABLE DALI2, 0-10V or 1-10V
230V/1200mA
Maximum power consumption 60W
(Vout min 10V-Vout max 50V)
IP68 CLASS II SELV
Dimensions 135mm x80mm x31mm



S.2443
MULTI-POWER DIMMABLE DALI2 / PUSH
230V/200mA-550mA
Maximum power consumption 20W
IP67 CLASSE II SELV
Dimensions 175,5mm x86,5mm x43mm



S.2444
MULTI-POWER DIMMABLE DALI2 / PUSH
230V/700mA-1050mA
Maximum power consumption 35W
IP67 CLASSE II SELV
Dimensions 175,5mm x86,5mm x43mm



S.2437
MULTI-POWER DIMMABLE DALI2, 1-10V
and PUSH DIM 230V/350mA-1050mA
Maximum power consumption 60W
IP55 CLASS II SELV 120V
Dimensions 57mm x31mm x21mm

REMOTE POWER SUPPLY DIMMABLE TUNABLE WHITE DMX

constant voltage 24V PWM



IP20 Independent



S.2470
75W (2 channels) 230V/24V PWM
controlled by DMX RDM / PUSH DIM
(operating mode BALANCE & DIM)
IP20 CLASS II SELV
Dimensions 293mm x43mm x30mm

IP rated Box



S.2480
60W (2 channels) 230V/24V PWM
controlled by DMX type S.2456
IP55 CLASS II SELV
Dimensions 260mm x260mm x100mm

REMOTE POWER SUPPLY DIMMABLE TUNABLE WHITE DALI

constant voltage 24V PWM



IP20 Independent



S.2475
75W (2 channels) 230V/24V PWM
DIMMABLE DALI DT8, PUSH DIM
(operating mode BALANCE & DIM)
DALI addresses: 1
IP20 CLASS II SELV
Dimensions 293mm x43mm x30mm

IP rated Box



S.2485
60W (2 channels) 230V/24V PWM
DIMMABLE DALI DT6 (operating mode BALANCE & DIM)
DALI addresses: 2
IP55 CLASS II SELV
Dimensions 260mm x260mm x100mm



S.2486
60W (2 channels) 230V/24V PWM
DIMMABLE DALI DT8 (operating mode BALANCE & DIM)
DALI addresses: 2
IP55 CLASS II SELV
Dimensions 260mm x260mm x100mm

TUNABLE WHITE DMX CONTROLLER



S.2455
IP20 TUNABLE WHITE MULTIZONE REMOTE CONTROL
The TUNABLE WHITE remote control is a 4 zones control with a color wheel for changing the color and a slider touch for adjusting the light brightness. Color and brightness is displayed by color light indicator present on the device.The remote connects to any RF device within effective distance (30 meters in open space) and keeps the effect in sync.The device is compatible with the RGBW 4 Zone touch panel (item code S.2456) and/or with the signal Ebox converter box (item code S.2460).



S.2456
TOUCH-PANEL IP20 MULTIZONE
Adjust the color change and intensity of the TUNABLE WHITE lighting devices connected to the relative EBOX CONVERTERS (S.2460) in Wireless mode, or via cable connected directly to the RGBW 24V PWM power supply Boxes (S.2470, S.2480).



S.2459
SURFACE-BOX FOR TOUCHPANEL S.2451
Square surface mounting box, 30 mm depth, for 1- or 2-reduced- module Idea and 2 module Eikon and Plana with relevants mounting frames and cover plates, white.



S.2461
EBOX SIGNAL REPEATER
IP66 Wireless extender box is a wireless signal extension, it is not necessary to pair via its factory default setting, greatly ensures its stability and wide controlling area among wireless communication devices, removing the complex cabling procedure, to make it become more easier for new or retrofit installations.



S.2465
GATEWAY WIFI-106 BOX
The Gateway is a WiFi lighting control system, consisted of APP and WiFi remote controller to change the saved scenes. By installing the related App on our Android (4.0 or above) or iOS (IOS 8.0) mobile devices which support WiFi connection.The device is compatible with the RGBW 4 Zone TOUCH-PANEL (S.2456) and/or with the REMOTE CONTROL (S.2455) and/or APP control through the GATEWAY WIFI -106 box (S.2465).

DALI RELAY SWITCH for TUNABLE WHITE LUMINAIRES

The following devices/interfaces are used to control the color, temperature and brightness of the TUNABLE WHITE LED via DALI (DT6 / DT8) signal. These devices need a 24Vdc power supply Not Dimmable (type S.2405, S.2406, S.2445 and S.2446) and must be placed between the 24Vdc power supply and the luminaires. Therefore choose a 24V power supply based on the maximum power used of the luminaires up to a maximum of 96W.

DALI DT6 / DT8 interface IP20



S.2478
DALI INTERFACE DT6 IP20
(operating mode BALANCE & DIM)
DALI adresses: 2
Requires remote power supply 230V 24Vdc
Maximum power consumption 96W
Dimensions 28mm x14mm x33mm



S.2479
DALI INTERFACE DT8 IP20
(operating mode BALANCE & DIM)
DALI adresses: 2
Requires remote power supply 230V 24Vdc
Maximum power consumption 96W
Dimensions 28mm x14mm x33mm

DALI DT6 / DT8 interface IP67



S.2476
DALI INTERFACE DT6 IP67
(operating mode BALANCE & DIM)
DALI adresses: 2
Requires remote power supply 230V 24Vdc
Maximum power consumption 96W
Dimensions 175,5mm x86,5mm x43mm



S.2477
DALI INTERFACE DT8 IP67
(operating mode BALANCE & DIM)
DALI adresses: 2
Requires remote power supply 230V 24Vdc
Maximum power consumption 96W
Dimensions 175,5mm x86,5mm x43mm

Attention: In case of wireless connection and as any other WIFI product, these accessories should not be placed in a metal enclosure or next to large metal structure. Metal will effectively block all radio signals which are crucial to the operation of the product.

REMOTE POWER SUPPLY DIMMABLE RGBW DMX

S I M E S



IP rated Box

S.3411
60W (15W for 4 channels) 230V/24V PWM
DMX address included
controlled by DMX (type S.2451) protocol
IP55 CLASS II SELV
Dimensions 260mm x260mm x100mm

S.3413
90W (22,5W for 4 channels) 230V/24V PWM
DMX address included
controlled by DMX (type S.2451) protocol
IP55 CLASS II SELV
Dimensions 260mm x260mm x100mm

S.2440
320W (80W for 4 channels) 230V/24V PWM
DMX address included
controlled by DMX (type S.2451) protocol
IP55 CLASS II SELV
Dimensions 326mm x300mm x128mm

Junction rated Box for POOL

S.3668
35W 230V/24V PWM for:
Max N°3 Micropool LED RGBW (+N°2 S.3670)
Max N°2 Minipool LED RGBW (+N°1 S.3670)
Max N°1 Pool LED RGBW
DMX address included
controlled by DMX (type S.2451) protocol
IP65 CLASS II SELV
Dimensions 200mm x200mm x220mm

S.3667
90W 230V/24V PWM for:
Max N°4 Micropool LED RGBW (+N°3 S.3670)
Max N°4 Minipool LED RGBW (+N°3 S.3670)
Max N°2 Pool LED RGBW (+N°1 S.3670)
DMX address included
controlled by DMX (type S.2451) protocol
IP65 CLASS II SELV
Dimensions 300mm x300mm x230mm

RGBW DMX CONTROLLER

S.2450
IP20 RGBW MULTIZONE REMOTE CONTROL
The RGBW remote control is a 4 zones control with a color wheel for changing the color and a slider touch for adjusting the light brightness. Color and brightness is displayed by color light indicator present on the device. The remote connects to any RF device within effective distance (30 meters in open space) and keeps the effect in sync.The device is compatible with the RBGW 4 Zone touch panel (item code S.2451) and/or with the signal Ebox converter box (item code S.2460).

S.2451
TOUCH-PANEL IP20 MULTIZONE
Adjust the color change and intensity of the RGBW lighting devices connected to the relative EBOX CONVERTERS (S.2460) in Wireless mode, or via cable connected directly to the RGBW 24V PWM power supply Boxes (S.3411, S.3413, S.2440, S.3668, S.3667), or directly to 230Vac luminaires with integrated DMX decoder.

S.2460
EBOX SIGNAL CONVERTER
Is a wireless communication protocol and converts the RF signal into DMX. The IP66 device is compatible with the RBGW 4 Zone TOUCH-PANEL (S.2451) and/or with the REMOTE CONTROL (S.2450) and/or APP control through the GATEWAY WIFI -106 box (S.2465).

S.2465
GATEWAY WIFI-106 BOX
The Gateway is a WiFi lighting control system, consisted of APP and WiFi remote controller to change the saved scenes. By installing the related App on our Android (4.0 or above) or iOS (IOS 8.0) mobile devices which support WiFi connection.The device is compatible with the RBGW 4 Zone TOUCH-PANEL (S.2451) and/or with the REMOTE CONTROL (S.2450) and/or APP control through the GATEWAY WIFI -106 box (S.2465).

Attention: In case of wireless connection and as any other WIFI product, these accessories should not be placed in a metal enclosure or next to large metal structure. Metal will effectively block all radio signals which are crucial to the operation of the product.

REMOTE POWER SUPPLY DIMMABLE RGBW DALI

S I M E S



IP rated Box

S.3415
60W (15W for 4 channels) 230V/24V PWM
DALI addresses: 4
controlled by DALI DT6 protocol IP55 CLASS II SELV
Dimensions 260mm x260mm x100mm

S.3416
90W (22,5W for 4 channels) 230V/24V PWM
DALI addresses: 4
controlled by DALI DT6 protocol IP55 CLASS II SELV
Dimensions 260mm x260mm x100mm

S.3417
320W (80W for 4 channels) 230V/24V PWM
DALI addresses: 4
controlled by DALI DT6 protocol IP55 CLASS II SELV
Dimensions 326mm x300mm x128mm

Junction rated Box for POOL

S.3640
35W 230V/24V PWM for:
Max N°4 Micropool LED RGBW (+N°2 S.3670)
Max N°2 Minipool LED RGBW (+N°1 S.3670)
Max N°1 Pool LED RGBW
DALI addresses: 4
controlled by DALI DT6 protocol IP65 CLASS II SELV
Dimensions 200mm x200mm x220mm

S.3642
90W 230V/24V PWM for:
Max N°5 Micropool LED RGBW (+N°3 S.3670)
Max N°5 Minipool LED RGBW (+N°3 S.3670)
Max N°2 Pool LED RGBW (+N°1 S.3670)
DALI addresses: 4
controlled by DALI DT6 protocol IP65 CLASS II SELV
Dimensions 300mm x300mm x230mm

S.3670
1 ADDITIONAL CABLE GLAND
Required for the connection of over 2 luminaires to the junction box /power supply.

DMX and DALI RELAY SWITCH for RGBW LUMINAIRES

The following devices/interfaces are used to control the color and brightness of the RGBW LED through DMX or DALI signal. These devices need a 24Vdc power supply Not Dimmable (type S.2405, S.2406, S.2445 and S.2446) and must be placed between the 24Vdc power supply and the luminaires. Therefore choose a 24V power supply based on the maximum power used of the luminaires up to a maximum of 240W.

DMX IP67 Interface

S.3450
DMX IP67 DIMMER
Requires remote power supply 24Vdc
Maximum power consumption 240W
Dimensions 255mm x100mm x55mm

DALI DT6 IP67 Interface

S.3451
DALI DT6 IP67 DIMMER
DALI addresses: 4
Requires remote power supply 24Vdc
Maximum power consumption 240W
Dimensions 255mm x100mm x55mm

SIGNAL CONVERTER FOR DIMMABLE LUMINAIRES



These signal converter can convert the dimmable signal in different protocol: from PUSH DIM to DALI2, from DALI to PHASE-CUT or from DALI to VIRTUAL MIDNIGHT.

DALI



S.2490
INTERFACE from PUSH DIM to DALI2 IP20
Allowed powering up to 35 DALI-2 interface in BROADCAST
Dimensions 43mm x43mm x18,5mm



S.2491
INTERFACE from DALI to PHASE-CUT IP20
Maximum power consumption 230W
Max switching current 1A
Dimensions 80mm x40mm x24,5mm

PHASE-CUT

VIRTUAL MIDNIGHT



S.2492
INTERFACE from DALI to VIRTUAL MIDNIGHT IP20
Module for automatic power reduction / brightness reduction for night-time.
The device has an integrated bus supply (20mA) for up to 7 DALI luminaires.
Dimensions 60mm x33mm x15mm



S.2494
DALI EXPANDER 64 LUMINAIRES IP20
The DALI Expander has an integrated DALI bus power supply (200mA) which can control up to a maximum of 64 DALI devices within 300 meters.



S.2493
INTERFACE from DALI to VIRTUAL MIDNIGHT IP67
Module for automatic power reduction / brightness reduction for night-time.
The device has an integrated bus supply (20mA) for up to 7 DALI luminaires.
Dimensions 175,5mm x86,5mm x43mm



S.2497
INTERFACE from DALI to VIRTUAL MIDNIGHT + EXPANDER UP TO 64 LUMINAIRES IP67
Module for automatic power reduction / brightness reduction for night-time. The device has an integrated bus supply (20mA) for up to 64 DALI luminaires.
Dimensions 272,5mm x102mm x43mm

DALI RELAY SWITCH for ON-OFF (not dimmable) 230V LUMINAIRES



All not dimmable (ON-OFF) 230V devices can be controlled ON-OFF with the DALI system using the following interface accessories. As a result, the luminaires will be remotely controllable in ON-OFF mode only and not in dimmed mode.

IP20 Independent



S.2495
DALI RELAY SWITCH IP20
Max nominal load 1000VA
Max switching current 8A
Max inrush current 80A
Dimensions 32,5mm x15mm x58,5mm

IP rated Box



S.2496
DALI RELAY SWITCH IP67
Max nominal load 1000VA
Max switching current 8A
Max inrush current 80A
Dimensions 175,5mm x86,5mm x43mm

SURGE PROTECTION DEVICE



Outdoor Lighting fixtures are subject to many different types of temporary, transitional or permanent electrical disturbances. Such disturbances can create permanent damage or failure that can jeopardize the performance or lifetime of the fixtures. Surge protection devices are utilised to limit the damage of such electrical disturbances. Each fixture must be connected to one single device at a distance of no more than 10m away.

A correct protection system against overvoltage or voltage spikes must also provide for the installation of a surge protection device inside the mains electrical switchboard (the selection of this device is the responsibility of the electrician or electrical contractor).

For Class I ⚡ Lighting Fixtures



S.2498
SURGE PROTECTION DEVICE 10kV
Compatible with all lighting fixtures classified under electrical Protection Class I ⚡
Rated voltage 230-277V
SPD type 2+3
Max Surge Protection 10kV
IP67

For Class II ⚡ Lighting Fixtures



S.2499
SURGE PROTECTION DEVICE 10kV
Compatible with all lighting fixtures classified under electrical Protection Class II ⚡
Rated voltage 230-277V
SPD type 2+3
Max Surge Protection 10kV
IP67

CONNECTORS FOR THROUGH WIRING

Where the lighting fixtures are equipped with power supply cable, these accessories are employed for carrying-out a loop in, loop out wiring connection. These connectors can be installed in junction boxes, inside recessing boxes (inground / wall products) or inside the posts of the bollards. Verify the installation compatibility of each lighting fixture by visiting our website.

3 Way connector



S.5504
3 WAY CONNECTOR
for cables up to 3x1,5mm²
diam. min 7mm / max 12mm
IP68



S.5507
3 WAY GEL CONNECTOR
for cables up to 5x1,5mm²
diam. min 6,5mm / max 12mm
IP68

4 Way connector



S.5506
4 WAY GEL CONNECTOR
for cables up to 3x2,5mm²
diam. min 6,5mm / max 12mm
IP68



S.5519
4 WAY GEL CONNECTOR
for cables up to 4x1,5mm²
diam. min 6,5mm / max 12mm
IP68

ARTICLE	PAGE	ARTICLE	PAGE
GLASS LUMINAIRES		L.9231W.01	230Vac ON-OFF 20
		L.9231W.20	230Vac ON-OFF 20
B.9000W.01	24Vdc 52	L.9236W.01	230Vac ON-OFF 20
B.9005W.01	BATTERY 52	L.9236W.20	230Vac ON-OFF 20
B.9009	52	L.9240W.01	230Vac ON-OFF 22
CONCRETE LUMINAIRES		L.9240W.20	230Vac ON-OFF 22
C.8005W.35	230Vac PHASE-CUT 28	L.9241W.01	230Vac ON-OFF 20
C.8006W.35	230Vac PHASE-CUT 28	L.9241W.20	230Vac ON-OFF 20
C.8015W.35	230Vac ON-OFF 28	L.9260W.01	230Vac PHASE-CUT 22
C.8016W.35	230Vac ON-OFF 28	L.9260W.20	230Vac PHASE-CUT 22
C.8020W	24Vdc 34	BRONZE LUMINAIRES	
C.8024W	230Vac ON-OFF 34	S.8000W.01	230Vac ON-OFF 56
C.8025W	24Vdc 36	S.8000W.20	230Vac ON-OFF 56
C.8027W	24Vdc 36	S.8005W.01	230Vac ON-OFF 56
C.8030W	24Vdc 36	S.8005W.20	230Vac ON-OFF 56
C.8033	38	S.8006W.01	230Vac ON-OFF 56
C.8034W	230Vac ON-OFF 38	S.8006W.20	230Vac ON-OFF 56
C.8035	38	S.8020W.01	230Vac ON-OFF 58
C.8036W	230Vac ON-OFF 38	S.8020W.20	230Vac ON-OFF 58
C.8037	38	S.8030W.01	230Vac PHASE-CUT 58
C.8038W	230Vac ON-OFF 38	S.8030W.20	230Vac PHASE-CUT 58
C.8039	38	S.8035W.01	230Vac PHASE-CUT 58
C.8040W	230Vac ON-OFF 38	S.8035W.20	230Vac PHASE-CUT 58
C.8054	30	ALUMINIUM LUMINAIRES	
C.8055W.35	24Vdc 30	S.1002.09	322
C.8100W.35	230Vac ON-OFF 30	S.1004.09	316
C.8101W.35	230Vac ON-OFF 30	S.1005.09	302
C.8105W.35	230Vac ON-OFF 30	S.1014.09	180
C.8106W.35	230Vac ON-OFF 30	S.1016.14	305
C.8120W	24Vdc 46	S.1016.24	305
C.8130W	24Vdc 46	S.1017.14	305
C.8160W.35	max 1050mA (Vf 18,6V) 26	S.1017.24	305
C.8161W.35	max 1050mA (Vf 18,6V) 26	S.1018.14	305
C.8220W	24Vdc 48	S.1018.24	305
C.8230W	24Vdc 48	S.1022.09	322
C.8330W	24Vdc 42	S.1032.09	323
C.8334W	230Vac ON-OFF 42	S.1042.09	323
C.8336W	230Vac ON-OFF 42	S.1100W.24	230Vac ON-OFF 320
C.8338W	230Vac ON-OFF 42	S.1101W.24	230Vac ON-OFF 320
C.8340W	230Vac ON-OFF 42	S.1102W.24	230Vac ON-OFF 320
WOOD LUMINAIRES		S.1103W.24	230Vac ON-OFF 320
L.9201W.01	230Vac ON-OFF 18	S.1104W.24	230Vac ON-OFF 320
L.9201W.20	230Vac ON-OFF 18	S.1105W.24	230Vac ON-OFF 320
L.9202W.01	230Vac ON-OFF 18	S.1107.24	320
L.9202W.20	230Vac ON-OFF 18	S.1108	320
L.9206W.01	230Vac ON-OFF 18	S.1109.09	320
L.9206W.20	230Vac ON-OFF 18	S.1110W.14	230Vac DALI2/PUSH 322
L.9211W.01	230Vac ON-OFF 18	S.1110W.24	230Vac DALI2/PUSH 322
L.9211W.20	230Vac ON-OFF 18	S.1111W.14	230Vac DALI2/PUSH 322
L.9230W.01	24Vdc 22	S.1111W.24	230Vac DALI2/PUSH 322
L.9230W.20	24Vdc 22	S.1120W.14	230Vac DALI2/PUSH 322

ARTICLE	PAGE	ARTICLE	PAGE
S.1120W.24	230Vac DALI2/PUSH 322	S.1230W.14	230Vac ON-OFF 304
S.1121W.14	230Vac DALI2/PUSH 322	S.1230W.24	230Vac ON-OFF 304
S.1121W.24	230Vac DALI2/PUSH 322	S.1235W.14	230Vac ON-OFF 304
S.1125.14	230Vac RGBW DMX 322	S.1235W.24	230Vac ON-OFF 304
S.1125.24	230Vac RGBW DMX 322	S.1236W.14	230Vac ON-OFF 304
S.1130W.14	230Vac DALI2/PUSH 323	S.1236W.24	230Vac ON-OFF 304
S.1130W.24	230Vac DALI2/PUSH 323	S.1237W.14	230Vac ON-OFF 304
S.1131W.14	230Vac DALI2/PUSH 323	S.1237W.24	230Vac ON-OFF 304
S.1131W.24	230Vac DALI2/PUSH 323	S.1239.14	305
S.1135.14	230Vac RGBW DMX 323	S.1239.24	305
S.1135.24	230Vac RGBW DMX 323	S.1240W.14	230Vac ON-OFF 311
S.1140W.14	230Vac DALI2/PUSH 323	S.1240W.24	230Vac ON-OFF 311
S.1140W.24	230Vac DALI2/PUSH 323	S.1245W.14	230Vac ON-OFF 310
S.1141W.14	230Vac DALI2/PUSH 323	S.1245W.24	230Vac ON-OFF 310
S.1141W.24	230Vac DALI2/PUSH 323	S.1246W.14	230Vac ON-OFF 310
S.1200W.14	230Vac ON-OFF 303	S.1246W.24	230Vac ON-OFF 310
S.1200W.24	230Vac ON-OFF 303	S.1247W.14	230Vac ON-OFF 310
S.1205W.14	230Vac ON-OFF 303	S.1247W.24	230Vac ON-OFF 310
S.1205W.24	230Vac ON-OFF 303	S.1250W.14	230Vac ON-OFF 311
S.1210W.14	230Vac ON-OFF 303	S.1250W.24	230Vac ON-OFF 311
S.1210W.24	230Vac ON-OFF 303	S.1255W.14	230Vac ON-OFF 310
S.1212W.14	230Vac ON-OFF 303	S.1255W.24	230Vac ON-OFF 310
S.1212W.24	230Vac ON-OFF 303		

ARTICLE	PAGE	ARTICLE	PAGE
S.1256W.14	230Vac ON-OFF 310	S.1353.14	24Vdc PWM RGBW 249
S.1256W.24	230Vac ON-OFF 310	S.1353.24	24Vdc PWM RGBW 249
S.1257W.14	230Vac ON-OFF 310	S.1355W.14	230Vac DALI2/PUSH 249
S.1257W.24	230Vac ON-OFF 310	S.1355W.24	230Vac DALI2/PUSH 249
S.1300W.14	230Vac ON-OFF 246	S.1356W.14	230Vac DALI2/PUSH 249
S.1300W.24	230Vac ON-OFF 246	S.1356W.24	230Vac DALI2/PUSH 249
S.1301W.14	230Vac ON-OFF 244	S.1360W.14	230Vac DALI2/PUSH 250
S.1301W.24	230Vac ON-OFF 244	S.1360W.24	230Vac DALI2/PUSH 250
S.1305W.14	230Vac ON-OFF 246	S.1363.14	230Vac RGBW DMX 250
S.1305W.24	230Vac ON-OFF 246	S.1363.24	230Vac RGBW DMX 250
S.1308.09	246	S.1365W.14	230Vac DALI2/PUSH 250
S.1309.09	244	S.1365W.24	230Vac DALI2/PUSH 250
S.1310W.14	230Vac ON-OFF 247	S.1366W.14	230Vac DALI2/PUSH 250
S.1310W.24	230Vac ON-OFF 247	S.1366W.24	230Vac DALI2/PUSH 250
S.1313.14	24Vdc PWM RGBW 247	S.1368.09	250
S.1313.24	24Vdc PWM RGBW 247	S.1370W.14	230Vac ON-OFF 252
S.1315W.14	230Vac ON-OFF 247	S.1370W.24	230Vac ON-OFF 252
S.1315W.24	230Vac ON-OFF 247	S.1375W.14	230Vac ON-OFF 252
S.1316W.14	230Vac ON-OFF 247	S.1375W.24	230Vac ON-OFF 252
S.1316W.24	230Vac ON-OFF 247	S.1376W.14	230Vac ON-OFF 252
S.1318.09	247	S.1376W.24	230Vac ON-OFF 252
S.1319.09	247	S.1380W.14	230Vac DALI2/PUSH 253
S.1320W.14	230Vac DALI2/PUSH 248	S.1380W.24	230Vac DALI2/PUSH 253
S.1320W.24	230Vac DALI2/PUSH 248	S.1385W.14	230Vac DALI2/PUSH 253
S.1323.14	24Vdc PWM RGBW 248	S.1385W.24	230Vac DALI2/PUSH 253
S.1323.24	24Vdc PWM RGBW 248	S.1386W.14	230Vac DALI2/PUSH 253
S.1325W.14	230Vac DALI2/PUSH 248	S.1386W.24	230Vac DALI2/PUSH 253
S.1325W.24	230Vac DALI2/PUSH 248	S.1390W.14	230Vac DALI2/PUSH 254
S.1326W.14	230Vac DALI2/PUSH 248	S.1390W.24	230Vac DALI2/PUSH 254
S.1326W.24	230Vac DALI2/PUSH 248	S.1395W.14	230Vac DALI2/PUSH 254
S.1328.09	248	S.1395W.24	230Vac DALI2/PUSH 254
S.1330W.14	230Vac ON-OFF 246	S.1396W.14	230Vac DALI2/PUSH 254
S.1330W.24	230Vac ON-OFF 246	S.1396W.24	230Vac DALI2/PUSH 254
S.1331W.14	230Vac ON-OFF 244	S.1405W.01	230Vac ON-OFF 428
S.1331W.24	230Vac ON-OFF 244	S.1405W.09	230Vac ON-OFF 428
S.1335W.14	230Vac ON-OFF 246	S.1405W.14	230Vac ON-OFF 428
S.1335W.24	230Vac ON-OFF 246	S.1415W.01	230Vac ON-OFF 428
S.1337W.14	230Vac ON-OFF 252	S.1415W.09	230Vac ON-OFF 428
S.1337W.24	230Vac ON-OFF 252	S.1415W.14	230Vac ON-OFF 428
S.1338W.14	230Vac ON-OFF 252	S.1416W.01	230Vac ON-OFF 428
S.1338W.24	230Vac ON-OFF 252	S.1416W.09	230Vac ON-OFF 428
S.1339W.14	230Vac ON-OFF 252	S.1416W.14	230Vac ON-OFF 428
S.1339W.24	230Vac ON-OFF 252	S.1425W.01	230Vac DALI2/PUSH 428
S.1340W.14	230Vac ON-OFF 247	S.1425W.09	230Vac DALI2/PUSH 428
S.1340W.24	230Vac ON-OFF 247	S.1425W.14	230Vac DALI2/PUSH 428
S.1343.14	24Vdc PWM RGBW 247	S.1426W.01	230Vac DALI2/PUSH 428
S.1343.24	24Vdc PWM RGBW 247	S.1426W.09	230Vac DALI2/PUSH 428
S.1345W.14	230Vac ON-OFF 247	S.1426W.14	230Vac DALI2/PUSH 428
S.1345W.24	230Vac ON-OFF 247	S.1435W.01	230Vac DALI2/PUSH 428
S.1346W.14	230Vac ON-OFF 247	S.1435W.09	230Vac DALI2/PUSH 428
S.1346W.24	230Vac ON-OFF 247	S.1435W.14	230Vac DALI2/PUSH 428
S.1350W.14	230Vac DALI2/PUSH 249	S.1436W.01	230Vac DALI2/PUSH 428
S.1350W.24	230Vac DALI2/PUSH 249	S.1436W.09	230Vac DALI2/PUSH 428

ARTICLE	PAGE	ARTICLE	PAGE
S.1353.14	24Vdc PWM RGBW 249	S.1436W.14	230Vac DALI2/PUSH 428
S.1353.24	24Vdc PWM RGBW 249	S.1500W.01	230Vac ON-OFF 274
S.1355W.14	230Vac DALI2/PUSH 249	S.1500W.14	230Vac ON-OFF 274
S.1355W.24	230Vac DALI2/PUSH 249	S.1501W.01	230Vac ON-OFF 274
S.1356W.14	230Vac DALI2/PUSH 249	S.1501W.14	230Vac ON-OFF 274
S.1356W.24	230Vac DALI2/PUSH 249	S.1505W.01	230Vac ON-OFF 274
S.1360W.14	230Vac DALI2/PUSH 250	S.1505W.14	230Vac ON-OFF 274
S.1360W.24	230Vac DALI2/PUSH 250	S.1506W.01	230Vac ON-OFF 272
S.1363.14	230Vac RGBW DMX 250	S.1506W.14	230Vac ON-OFF 272
S.1363.24	230Vac RGBW DMX 250	S.1508.01	272
S.1365W.14	230Vac DALI2/PUSH 250	S.1508.14	272
S.1365W.24	230Vac DALI2/PUSH 250	S.1509.01	274
S.1366W.14	230Vac DALI2/PUSH 250	S.1509.14	274
S.1366W.24	230Vac DALI2/PUSH 250	S.1510W.01	230Vac DALI2/PUSH 275
S.1368.09	250	S.1510W.14	230Vac DALI2/PUSH 275
S.1370W.14	230Vac ON-OFF 252	S.1511W.01	230Vac DALI2/PUSH 275
S.1370W.24	230Vac ON-OFF 252	S.1511W.14	230Vac DALI2/PUSH 275
S.1375W.14	230Vac ON-OFF 252	S.1513W.01	230Vac DALI2/PUSH 275
S.1375W.24	230Vac ON-OFF 252	S.1513W.14	230Vac DALI2/PUSH 275
S.1376W.14	230Vac ON-OFF 252	S.1515W.01	230Vac DALI2/PUSH 275
S.1376W.24	230Vac ON-OFF 252	S.1515W.14	230Vac DALI2/PUSH 275
S.1380W.14	230Vac DALI2/PUSH 253	S.1516W.01	230Vac DALI2/PUSH 275
S.1380W.24	230Vac DALI2/PUSH 253	S.1516W.14	230Vac DALI2/PUSH 275
S.1385W.14	230Vac DALI2/PUSH 253	S.1517W.01	230Vac DALI2/PUSH 275
S.1385W.24	230Vac DALI2/PUSH 253	S.1517W.14	230Vac DALI2/PUSH 275
S.1386W.14	230Vac DALI2/PUSH 253	S.1519.01	275
S.1386W.24	230Vac DALI2/PUSH 253	S.1519.14	275
S.1390W.14	230Vac DALI2/PUSH 254	S.1520W.01	230Vac ON-OFF 278
S.1390W.24	230Vac DALI2/PUSH 254	S.1520W.14	230Vac ON-OFF 278
S.1395W.14	230Vac DALI2/PUSH 254	S.1521W.01	230Vac ON-OFF 278
S.1395W.24	230Vac DALI2/PUSH 254	S.1521W.14	230Vac ON-OFF 278
S.1396W.14	230Vac DALI2/PUSH 254	S.1530W.01	230Vac DALI2/PUSH 278
S.1396W.24	230Vac DALI2/PUSH 254	S.1530W.14	230Vac DALI2/PUSH 278
S.1405W.01	230Vac ON-OFF 428	S.1531W.01	230Vac DALI2/PUSH 278
S.1405W.09	230Vac ON-OFF 428	S.1531W.14	230Vac DALI2/PUSH 278
S.1405W.14	230Vac ON-OFF 428	S.1533W.01	230Vac DALI2/PUSH 278
S.1415W.01	230Vac ON-OFF 428	S.1533W.14	230Vac DALI2/PUSH 278
S.1415W.09	230Vac ON-OFF 428	S.1545W.01	230Vac ON-OFF 278
S.1415W.14	230Vac ON-OFF 428	S.1545W.14	230Vac ON-OFF 278
S.1416W.01	230Vac ON-OFF 428	S.1546W.01	230Vac ON-OFF 278
S.1416W.09	230Vac ON-OFF 428	S.1546W.14	230Vac ON-OFF 278
S.1416W.14	230Vac ON-OFF 428	S.1600W.07	24Vdc 228
S.1425W.01	230Vac DALI2/PUSH 428	S.1600W.20	24Vdc 228
S.1425W.09	230Vac DALI2/PUSH 428	S.1600W.24	24Vdc 228
S.1425W.14	230Vac DALI2/PUSH 428	S.1601W.07	24Vdc 228
S.1426W.01	230Vac DALI2/PUSH 428	S.1601W.20	24Vdc 228
S.1426W.09	230Vac DALI2/PUSH 428	S.1601W.24	24Vdc 228
S.1426W.14	230Vac DALI2/PUSH 428	S.1607.09	232
S.1435W.01	230Vac DALI2/PUSH 428	S.1608.09	228
S.1435W.09	230Vac DALI2/PUSH 428	S.1609.09	228
S.1435W.14	230Vac DALI2/PUSH 428	S.1610W.07	24Vdc 228
S.1436W.01	230Vac DALI2/PUSH 428	S.1610W.20	24Vdc 228
S.1436W.09	230Vac DALI2/PUSH 428	S.1610W.24	24Vdc 228

ARTICLE		PAGE
S.1436W.14	230Vac DALI2/PUSH	428
S.1500W.01	230Vac ON-OFF	274
S.1500W.14	230Vac ON-OFF	274
S.1501W.01	230Vac ON-OFF	274
S.1501W.14	230Vac ON-OFF	274
S.1505W.01	230Vac ON-OFF	274
S.1505W.14	230Vac ON-OFF	274
S.1506W.01	230Vac ON-OFF	272
S.1506W.14	230Vac ON-OFF	272
S.1508.01		272
S.1508.14		272
S.1509.01		274
S.1509.14		274
S.1510W.01	230Vac DALI2/PUSH	275
S.1510W.14	230Vac DALI2/PUSH	275
S.1511W.01	230Vac DALI2/PUSH	275
S.1511W.14	230Vac DALI2/PUSH	275
S.1513W.01	230Vac DALI2/PUSH	275
S.1513W.14	230Vac DALI2/PUSH	275
S.1515W.01	230Vac DALI2/PUSH	275
S.1515W.14	230Vac DALI2/PUSH	275
S.1516W.01	230Vac DALI2/PUSH	275
S.1516W.14	230Vac DALI2/PUSH	275
S.1517W.01	230Vac DALI2/PUSH	275
S.1517W.14	230Vac DALI2/PUSH	275
S.1519.01		275
S.1519.14		275
S.1520W.01	230Vac ON-OFF	278
S.1520W.14	230Vac ON-OFF	278
S.1521W.01	230Vac ON-OFF	278
S.1521W.14	230Vac ON-OFF	278
S.1530W.01	230Vac DALI2/PUSH	278
S.1530W.14	230Vac DALI2/PUSH	278
S.1531W.01	230Vac DALI2/PUSH	278
S.1531W.14	230Vac DALI2/PUSH	278
S.1533W.01	230Vac DALI2/PUSH	278
S.1533W.14	230Vac DALI2/PUSH	278
S.1545W.01	230Vac ON-OFF	278
S.1545W.14	230Vac ON-OFF	278
S.1546W.01	230Vac ON-OFF	278
S.1546W.14	230Vac ON-OFF	278
S.1600W.07	24Vdc	228
S.1600W.20	24Vdc	228
S.1600W.24	24Vdc	228
S.1601W.07	24Vdc	228
S.1601W.20	24Vdc	228
S.1601W.24	24Vdc	228
S.1607.09		232
S.1608.09		228
S.1609.09		228
S.1610W.07	24Vdc	228
S.1610W.20	24Vdc	228
S.1610W.24	24Vdc	228

ARTICLE		PAGE	ARTICLE		PAGE
S.1611W.07	24Vdc	228	S.1754		258
S.1611W.20	24Vdc	228	S.1758.09		262
S.1611W.24	24Vdc	228	S.1761W.24	max 850mA (Vf 22,4V)	258
S.1620W.07	24Vdc	230	S.1762		258
S.1620W.20	24Vdc	230	S.1763		258
S.1620W.24	24Vdc	230	S.1764		258
S.1621W.07	24Vdc	230	S.1766W.24	230Vac ON-OFF	260
S.1621W.20	24Vdc	230	S.1768.09		258
S.1621W.24	24Vdc	230	S.1771W.24	max 900mA (Vf 38,4V)	258
S.1625W.07	24Vdc	230	S.1772		258
S.1625W.20	24Vdc	230	S.1773		258
S.1625W.24	24Vdc	230	S.1774		258
S.1626W.07	24Vdc	230	S.1776W.24	230Vac ON-OFF	260
S.1626W.20	24Vdc	230	S.1777T.24	24Vdc TUNABLE WHITE	261
S.1626W.24	24Vdc	230	S.1801W.01	24Vdc	136
S.1627.09		240	S.1801W.14	24Vdc	136
S.1628.09		230	S.1801W.24	24Vdc	136
S.1630W.07	24Vdc	230	S.1810W.01	230Vac ON-OFF	136
S.1630W.20	24Vdc	230	S.1810W.14	230Vac ON-OFF	136
S.1630W.24	24Vdc	230	S.1810W.24	230Vac ON-OFF	136
S.1631W.07	24Vdc	230	S.1850W.01	230Vac ON-OFF	158
S.1631W.20	24Vdc	230	S.1850W.14	230Vac ON-OFF	158
S.1631W.24	24Vdc	230	S.1850W.24	230Vac ON-OFF	158
S.1650W.07	24Vdc	238	S.1851W.01	230Vac ON-OFF	158
S.1650W.09	24Vdc	238	S.1851W.14	230Vac ON-OFF	158
S.1650W.24	24Vdc	238	S.1851W.24	230Vac ON-OFF	158
S.1655W.07	24Vdc	238	S.1860W.01	230Vac ON-OFF	158
S.1655W.09	24Vdc	238	S.1860W.14	230Vac ON-OFF	158
S.1655W.24	24Vdc	238	S.1860W.24	230Vac ON-OFF	158
S.1657.09		240	S.1861W.01	230Vac ON-OFF	158
S.1658.09		238	S.1861W.14	230Vac ON-OFF	158
S.1659.09		238	S.1861W.24	230Vac ON-OFF	158
S.1660W.07	230Vac ON-OFF	239	S.1870W.01	230Vac ON-OFF	159
S.1660W.09	230Vac ON-OFF	239	S.1870W.14	230Vac ON-OFF	159
S.1660W.24	230Vac ON-OFF	239	S.1870W.24	230Vac ON-OFF	159
S.1667.09		240	S.1871W.01	230Vac ON-OFF	159
S.1668.09		239	S.1871W.14	230Vac ON-OFF	159
S.1700W.01	24Vdc	70	S.1871W.24	230Vac ON-OFF	159
S.1700W.20	24Vdc	70	S.1880W.01	230Vac ON-OFF	159
S.1700W.24	24Vdc	70	S.1880W.14	230Vac ON-OFF	159
S.1705W.01	24Vdc	70	S.1880W.24	230Vac ON-OFF	159
S.1705W.20	24Vdc	70	S.1881W.01	230Vac ON-OFF	159
S.1705W.24	24Vdc	70	S.1881W.14	230Vac ON-OFF	159
S.1706W.01	24Vdc	68	S.1881W.24	230Vac ON-OFF	159
S.1706W.20	24Vdc	68	S.1900W.14	max 700mA (Vf 12,8V)	328
S.1706W.24	24Vdc	68	S.1900W.24	max 700mA (Vf 12,8V)	328
S.1710W.20	24Vdc	68	S.1901W.14	max 700mA (Vf 12,8V)	328
S.1710W.24	24Vdc	68	S.1901W.24	max 700mA (Vf 12,8V)	328
S.1711W.20	24Vdc	70	S.1905W.14	max 700mA (Vf 12,8V)	328
S.1711W.24	24Vdc	70	S.1905W.24	max 700mA (Vf 12,8V)	328
S.1751W.24	max 850mA (Vf 12,8V)	258	S.1910W.14	max 700mA (Vf 28,8V)	329
S.1752		258	S.1910W.24	max 700mA (Vf 28,8V)	329
S.1753		258	S.1911W.14	max 700mA (Vf 28,8V)	329

ARTICLE		PAGE	ARTICLE		PAGE
S.2280W.01	24Vdc	74	S.2405		522
S.2280W.09	24Vdc	74	S.2406		522
S.2281W.01	24Vdc	74	S.2407		522
S.2281W.09	24Vdc	74	S.2408		524
S.2285W.01	24Vdc	76	S.2409		524
S.2285W.09	24Vdc	76	S.2410		525
S.2286W.01	230Vac ON-OFF	76	S.2411		523
S.2286W.09	230Vac ON-OFF	76	S.2412		525
S.2307.01		84	S.2413		525
S.2307.14		84	S.2414		525
S.2308.01		84	S.2415		523
S.2308.14		84	S.2416		523
S.2310T.01	24Vdc TUNABLE WHITE	84	S.2417		525
S.2310T.14	24Vdc TUNABLE WHITE	84	S.2418		525
S.2310W.01	24Vdc	84	S.2420		523
S.2310W.14	24Vdc	84	S.2421		523
S.2311T.01	24Vdc TUNABLE WHITE	84	S.2422		523
S.2311T.14	24Vdc TUNABLE WHITE	84	S.2423		523
S.2311W.01	24Vdc	84	S.2424		523
S.2311W.14	24Vdc	84	S.2425		523
S.2312T.01	24Vdc TUNABLE WHITE	84	S.2426		523
S.2312T.14	24Vdc TUNABLE WHITE	84	S.2427		523
S.2312W.01	24Vdc	84	S.2428		523
S.2312W.14	24Vdc	84	S.2430		522
S.2316.01	24Vdc PWM RGBW	84	S.2431		524
S.2316.14	24Vdc PWM RGBW	84	S.2432		524
S.2317.01	24Vdc PWM RGBW	84	S.2433		522
S.2317.14	24Vdc PWM RGBW	84	S.2434		524
S.2318.01	24Vdc PWM RGBW	84	S.2435		522
S.2318.14	24Vdc PWM RGBW	84	S.2436		524
S.2360T.01	24Vdc TUNABLE WHITE	86	S.2437		525
S.2360T.14	24Vdc TUNABLE WHITE	86	S.2438		523
S.2360W.01	24Vdc	86	S.2439		523
S.2360W.14	24Vdc	86	S.2440		528
S.2361T.01	24Vdc TUNABLE WHITE	86	S.2441		523
S.2361T.14	24Vdc TUNABLE WHITE	86	S.2442		523
S.2361W.01	24Vdc	86	S.2443		525
S.2361W.14	24Vdc	86	S.2444		525
S.2362T.01	24Vdc TUNABLE WHITE	86	S.2445		522
S.2362T.14	24Vdc TUNABLE WHITE	86	S.2446		522
S.2362W.01	24Vdc	86	S.2450		528
S.2362W.14	24Vdc	86	S.2451		528
S.2366.01	24Vdc PWM RGBW	86	S.2455		526
S.2366.14	24Vdc PWM RGBW	86	S.2456		526
S.2367.01	24Vdc PWM RGBW	86	S.2459		526
S.2367.14	24Vdc PWM RGBW	86	S.2460		526
S.2368.01	24Vdc PWM RGBW	86	S.2461		526
S.2368.14	24Vdc PWM RGBW	86	S.2465		526
S.2400		522	S.2466		528
S.2401		522	S.2467		526
S.2402		522	S.2470		526
S.2403		522	S.2475		527
S.2404		522	S.2476		527

ARTICLE	PAGE	ARTICLE	PAGE
S.2616	266	S.2845.24	286
S.2617	266	S.2846.14	324
S.2800.14	478	S.2846.24	324
S.2800.24	478	S.2848.14	324
S.2801.14	478	S.2848.24	324
S.2801.24	478	S.2849	199
S.2805.07	232	S.2900W.09	230Vac ON-OFF 198
S.2805.20	232	S.2900W.14	230Vac ON-OFF 198
S.2805.24	232	S.2905W.09	230Vac ON-OFF 198
S.2806	232	S.2905W.14	230Vac ON-OFF 198
S.2807.07	240	S.2910W.09	230Vac ON-OFF 198
S.2807.09	240	S.2910W.14	230Vac ON-OFF 198
S.2807.20	240	S.2915W.09	230Vac ON-OFF 198
S.2807.24	240	S.2915W.14	230Vac ON-OFF 198
S.2808	240	S.2920W.09	230Vac ON-OFF 198
S.2809.01	286	S.2920W.14	230Vac ON-OFF 198
S.2809.09	466	S.2925W.09	230Vac ON-OFF 198
S.2809.14	286	S.2925W.14	230Vac ON-OFF 198
S.2809.24	286	S.2930W.09	230Vac ON-OFF 199
S.2810.14	491	S.2930W.14	230Vac ON-OFF 199
S.2810.24	491	S.2940W.09	230Vac ON-OFF 199
S.2811.14	474	S.2940W.14	230Vac ON-OFF 199
S.2811.24	474	S.3000W.01	230Vac ON-OFF 282
S.2812.14	479	S.3000W.14	230Vac ON-OFF 282
S.2812.24	479	S.3000W.24	230Vac ON-OFF 282
S.2813.14	479	S.3005W.01	230Vac ON-OFF 282
S.2813.24	479	S.3005W.14	230Vac ON-OFF 282
S.2814.14	324	S.3005W.24	230Vac ON-OFF 282
S.2814.24	324	S.3010W.01	230Vac ON-OFF 282
S.2815.24	497	S.3010W.14	230Vac ON-OFF 282
S.2816.14	474	S.3010W.24	230Vac ON-OFF 282
S.2816.24	474	S.3015W.14	230Vac DALI2/PUSH 290
S.2817.24	497	S.3016W.14	230Vac DALI2/PUSH 290
S.2818.14	485	S.3018W.14	230Vac DALI2/PUSH 290
S.2818.24	485	S.3019.14	292
S.2826.14	324	S.3044.01	286
S.2826.24	324	S.3044.14	286
S.2840	324	S.3044.24	286
S.2842.01	286	S.3045.01	286
S.2842.09	466	S.3045.14	286
S.2842.14	286	S.3045.24	286
S.2842.24	286	S.3046.01	286
S.2843.01	286	S.3046.14	286
S.2843.09	199	S.3046.24	286
S.2843.14	199	S.3047.01	286
S.2843.24	286	S.3047.14	286
S.2844.01	286	S.3047.24	286
S.2844.09	466	S.3049	275
S.2844.14	286	S.3050W.01	230Vac ON-OFF 283
S.2844.24	286	S.3050W.14	230Vac ON-OFF 283
S.2845.01	286	S.3050W.24	230Vac ON-OFF 283
S.2845.09	199	S.3055W.01	230Vac ON-OFF 283
S.2845.14	199	S.3055W.14	230Vac ON-OFF 283

ARTICLE	PAGE
S.3055W.24	230Vac ON-OFF 283
S.3060W.01	230Vac ON-OFF 283
S.3060W.14	230Vac ON-OFF 283
S.3060W.24	230Vac ON-OFF 283
S.3065W.14	230Vac DALI2/PUSH 290
S.3066W.14	230Vac DALI2/PUSH 290
S.3067.14	24Vdc PWM RGBW 290
S.3068W.14	230Vac DALI2/PUSH 290
S.3069.14	292
S.3070W.01	230Vac DALI2/PUSH 284
S.3070W.14	230Vac DALI2/PUSH 284
S.3070W.24	230Vac DALI2/PUSH 284
S.3075W.01	230Vac DALI2/PUSH 284
S.3075W.14	230Vac DALI2/PUSH 284
S.3075W.24	230Vac DALI2/PUSH 284
S.3079	284
S.3092N.24	230Vac DALI2/PUSH 509
S.3096N.24	230Vac DALI2/PUSH 509
S.3097N.24	230Vac DALI2/PUSH 511
S.3098N.24	230Vac DALI2/PUSH 511
S.3100W.14	230Vac ON-OFF 296
S.3100W.24	230Vac ON-OFF 296
S.3101W.14	230Vac ON-OFF 296
S.3101W.24	230Vac ON-OFF 296
S.3105W.14	230Vac ON-OFF 296
S.3105W.24	230Vac ON-OFF 296
S.3152W.01	24Vdc 186
S.3152W.14	24Vdc 186
S.3153W.01	24Vdc 186
S.3153W.14	24Vdc 186
S.3157W.01	24Vdc 186
S.3157W.14	24Vdc 186
S.3158W.01	24Vdc 186
S.3158W.14	24Vdc 186
S.3159.14	186
S.3175W.01	24Vdc 187
S.3175W.14	24Vdc 187
S.3176W.01	24Vdc 187
S.3176W.14	24Vdc 187
S.3177W.01	24Vdc 187
S.3177W.14	24Vdc 187
S.3300W.19	24Vdc 351
S.3301W.19	24Vdc 350
S.3305W.19	24Vdc 350
S.3306W.19	24Vdc 350
S.3310W.19	24Vdc 351
S.3311W.19	24Vdc 351
S.3312W.19	24Vdc 351
S.3313W.19	24Vdc 351
S.3315W.19	24Vdc 351
S.3316W.19	24Vdc 356
S.3317W.19	24Vdc 352
S.3319W.19	24Vdc 354

ARTICLE	PAGE
S.3321W.19	24Vdc 354
S.3330W.19	24Vdc 350
S.3340W.19	24Vdc 350
S.3354W.19	24Vdc 352
S.3364W.19	24Vdc 350
S.3374W.19	24Vdc 352
S.3384W.19	24Vdc 351
S.3390W.19	24Vdc 356
S.3400	522
S.3401	522
S.3411	528
S.3413	528
S.3415	529
S.3416	529
S.3417	529
S.3423	525
S.3424	524
S.3425	522
S.3426	523
S.3427	525
S.3450	529
S.3451	529
S.3524.09	26
S.3554.09	182
S.3603.19	24Vdc PWM RGBW 516
S.3607.19	24Vdc 516
S.3617.19	24Vdc 516
S.3627.19	24Vdc 517
S.3629.19	24Vdc PWM RGBW 516
S.3630.19	24Vdc PWM RGBW 517
S.3640	529
S.3642	529
S.3660	522
S.3664	522
S.3665	522
S.3667	528
S.3668	528
S.3670	529
S.3671	518
S.3672	519
S.3673.19	24Vdc PWM RGBW 518
S.3676.19	24Vdc 518
S.3683.19	24Vdc PWM RGBW 518
S.3686.19	24Vdc 518
S.3693.19	24Vdc PWM RGBW 519
S.3696.19	24Vdc 519
S.3814W.14	230Vac ON-OFF 204
S.3814W.24	230Vac ON-OFF 204
S.3815W.14	230Vac ON-OFF 204
S.3815W.24	230Vac ON-OFF 204
S.3817W.14	230Vac ON-OFF 205
S.3817W.24	230Vac ON-OFF 205
S.3824W.14	230Vac ON-OFF 204

ARTICLE	PAGE
S.3824W.24	230Vac ON-OFF 204
S.3825W.14	230Vac ON-OFF 204
S.3825W.24	230Vac ON-OFF 204
S.3827W.14	230Vac ON-OFF 205
S.3827W.24	230Vac ON-OFF 205
S.3834W.14	230Vac DALI2/PUSH 204
S.3834W.24	230Vac DALI2/PUSH 204
S.3835W.14	230Vac DALI2/PUSH 204
S.3835W.24	230Vac DALI2/PUSH 204
S.3837W.14	230Vac DALI2/PUSH 205
S.3837W.24	230Vac DALI2/PUSH 205
S.3883W.01	230Vac ON-OFF 154
S.3883W.14	230Vac ON-OFF 154
S.3884W.01	230Vac ON-OFF 154
S.3884W.14	230Vac ON-OFF 154
S.3893W.01	230Vac PHASE-CUT 154
S.3893W.14	230Vac PHASE-CUT 154
S.3894W.01	230Vac PHASE-CUT 154
S.3894W.14	230Vac PHASE-CUT 154
S.3973N.14	230Vac DALI2/PUSH 474
S.3973N.24	230Vac DALI2/PUSH 474
S.3976N.14	230Vac DALI2/PUSH 474
S.3976N.24	230Vac DALI2/PUSH 474
S.4100W.09	230Vac PHASE-CUT 432
S.4100W.14	230Vac PHASE-CUT 432
S.4101W.09	230Vac DALI2/PUSH 432
S.4101W.14	230Vac DALI2/PUSH 432
S.4104W.09	230Vac DALI2/PUSH 432
S.4104W.14	230Vac DALI2/PUSH 432
S.4110W.09	230Vac DALI2/PUSH 433
S.4110W.14	230Vac DALI2/PUSH 433
S.4114W.09	230Vac DALI2/PUSH 433
S.4114W.14	230Vac DALI2/PUSH 433
S.4117W.09	230Vac DALI2/PUSH 433
S.4117W.14	230Vac DALI2/PUSH 433
S.4129	433
S.4171	433
S.4172	432
S.4200W.09	24Vdc 334
S.4202W.09	24Vdc 334
S.4205W.09	24Vdc 334
S.4502W.09	230Vac PHASE-CUT 132
S.4502W.14	230Vac PHASE-CUT 132
S.4503	132
S.4511W.09	230Vac PHASE-CUT 132
S.4511W.14	230Vac PHASE-CUT 132
S.4533W.09	230Vac ON-OFF 130
S.4533W.14	230Vac ON-OFF 130
S.4543W.09	230Vac ON-OFF 131
S.4543W.14	230Vac ON-OFF 131
S.4560W.09	230Vac ON-OFF 130
S.4560W.14	230Vac ON-OFF 130
S.4561W.09	230Vac ON-OFF 131

ARTICLE	PAGE
S.4561W.14	230Vac ON-OFF 131
S.4563W.09	230Vac ON-OFF 130
S.4563W.14	230Vac ON-OFF 130
S.4573W.09	230Vac ON-OFF 131
S.4573W.14	230Vac ON-OFF 131
S.4612	130
S.4613	131
S.4653	126
S.4655W.01	230Vac ON-OFF 126
S.4655W.14	230Vac ON-OFF 126
S.4660	126
S.4663.14	126
S.4665W.14	230Vac ON-OFF 126
S.4908W.19	230Vac ON-OFF 393
S.4946W.19	230Vac ON-OFF 390
S.4957W.19	230Vac ON-OFF 391
S.4971W.19	230Vac ON-OFF 392
S.5026W.09	230Vac ON-OFF 224
S.5026W.14	230Vac ON-OFF 224
S.5027W.09	230Vac ON-OFF 220
S.5027W.14	230Vac ON-OFF 220
S.5033W.09	230Vac ON-OFF 224
S.5033W.14	230Vac ON-OFF 224
S.5037W.09	230Vac ON-OFF 220
S.5037W.14	230Vac ON-OFF 220
S.5040W.09	230Vac ON-OFF 225
S.5040W.14	230Vac ON-OFF 225
S.5047W.09	230Vac ON-OFF 221
S.5047W.14	230Vac ON-OFF 221
S.5067W.09	230Vac ON-OFF 220
S.5067W.14	230Vac ON-OFF 220
S.5070W.09	230Vac ON-OFF 224
S.5070W.14	230Vac ON-OFF 224
S.5075W.09	230Vac ON-OFF 224
S.5075W.14	230Vac ON-OFF 224
S.5077W.09	230Vac ON-OFF 220
S.5077W.14	230Vac ON-OFF 220
S.5080W.09	230Vac ON-OFF 225
S.5080W.14	230Vac ON-OFF 225
S.5087W.09	230Vac ON-OFF 221
S.5087W.14	230Vac ON-OFF 221
S.5090W.09	230Vac ON-OFF 225
S.5090W.14	230Vac ON-OFF 225
S.5097W.09	230Vac ON-OFF 221
S.5097W.14	230Vac ON-OFF 221
S.5110W.19	230Vac ON-OFF 363
S.5111W.19	230Vac ON-OFF 363
S.5128W.19	230Vac ON-OFF 363
S.5135W.19	230Vac ON-OFF 363
S.5136W.19	230Vac ON-OFF 363
S.5181W.19	230Vac ON-OFF 363
S.5200.14	448
S.5203.14	450

ARTICLE		PAGE
S.5210W.14	230Vac DALI2/PUSH	448
S.5210W.24	230Vac DALI2/PUSH	448
S.5217W.14	230Vac DALI2/PUSH	450
S.5217W.24	230Vac DALI2/PUSH	450
S.5223W.14	230Vac DALI2/PUSH	448
S.5223W.24	230Vac DALI2/PUSH	448
S.5227W.14	230Vac DALI2/PUSH	450
S.5227W.24	230Vac DALI2/PUSH	450
S.5233W.14	230Vac DALI2/PUSH	448
S.5233W.24	230Vac DALI2/PUSH	448
S.5237W.14	230Vac DALI2/PUSH	450
S.5237W.24	230Vac DALI2/PUSH	450
S.5240W.14	230Vac DALI2/PUSH	449
S.5240W.24	230Vac DALI2/PUSH	449
S.5247W.14	230Vac DALI2/PUSH	451
S.5247W.24	230Vac DALI2/PUSH	451
S.5253W.14	230Vac DALI2/PUSH	449
S.5253W.24	230Vac DALI2/PUSH	449
S.5257W.14	230Vac DALI2/PUSH	451
S.5257W.24	230Vac DALI2/PUSH	451
S.5263W.14	230Vac DALI2/PUSH	449
S.5263W.24	230Vac DALI2/PUSH	449
S.5267W.14	230Vac DALI2/PUSH	451
S.5267W.24	230Vac DALI2/PUSH	451
S.5301.14		444
S.5310.14		118
S.5311W.14	230Vac ON-OFF	444
S.5311W.24	230Vac ON-OFF	444
S.5314W.14	230Vac ON-OFF	460
S.5314W.24	230Vac ON-OFF	460
S.5317W.14	230Vac ON-OFF	445
S.5317W.24	230Vac ON-OFF	445
S.5320W.14	230Vac ON-OFF	444
S.5320W.24	230Vac ON-OFF	444
S.5327W.14	230Vac ON-OFF	445
S.5327W.24	230Vac ON-OFF	445
S.5330W.14	230Vac ON-OFF	444
S.5330W.24	230Vac ON-OFF	444
S.5337W.14	230Vac ON-OFF	445
S.5337W.24	230Vac ON-OFF	445
S.5339W.14	230Vac ON-OFF	460
S.5339W.24	230Vac ON-OFF	460
S.5350.14		182
S.5379W.14	230Vac ON-OFF	460
S.5379W.24	230Vac ON-OFF	460
S.5400W	230Vac ON-OFF	344
S.5402W	230Vac ON-OFF	344
S.5426W	230Vac ON-OFF	361
S.5428W	230Vac ON-OFF	361
S.5434W	230Vac ON-OFF	361
S.5440W	230Vac ON-OFF	362
S.5441W	230Vac ON-OFF	362
S.5451W	230Vac ON-OFF	362

ARTICLE		PAGE
S.5460W	230Vac ON-OFF	362
S.5465W	230Vac ON-OFF	362
S.5466W	230Vac ON-OFF	362
S.5474W.19	230Vac DALI2/PUSH	347
S.5475W.19	230Vac DALI2/PUSH	347
S.5478W.19	230Vac DALI2/PUSH	347
S.5485W	230Vac ON-OFF	344
S.5488W	230Vac ON-OFF	344
S.5494W.19	230Vac ON-OFF	346
S.5495W.19	230Vac ON-OFF	346
S.5498W.19	230Vac ON-OFF	346
S.5504		531
S.5506		531
S.5507		531
S.5510.09		422
S.5511.09		422
S.5512.09		422
S.5515W.19	230Vac ON-OFF	422
S.5516.09		422
S.5519		531
S.5520.09		424
S.5521.09		424
S.5525W.19	230Vac ON-OFF	422
S.5530.09		424
S.5531.09		424
S.5545W.19	230Vac ON-OFF	422
S.5555W.19	230Vac ON-OFF	422
S.5565W.19	230Vac DALI2/PUSH	424
S.5575W.19	230Vac DALI2/PUSH	424
S.5585W.19	230Vac DALI2/PUSH	424
S.5595W.19	230Vac DALI2/PUSH	424
S.5680		398
S.5681N.09	max 700mA (Vf 3,1V)	398
S.5681N.14	max 700mA (Vf 3,1V)	398
S.5683N.09	max 700mA (Vf 3,1V)	398
S.5683N.14	max 700mA (Vf 3,1V)	398
S.5685N.09	max 700mA (Vf 3,1V)	398
S.5685N.14	max 700mA (Vf 3,1V)	398
S.5690		402
S.5691N.09	230Vac ON-OFF	402
S.5691N.14	230Vac ON-OFF	402
S.5692N.09	230Vac ON-OFF	402
S.5692N.14	230Vac ON-OFF	402
S.5693N.09	230Vac ON-OFF	402
S.5693N.14	230Vac ON-OFF	402
S.5694N.09	230Vac ON-OFF	402
S.5694N.14	230Vac ON-OFF	402
S.5695N.09	230Vac ON-OFF	400
S.5695N.14	230Vac ON-OFF	400
S.5696N.09	230Vac ON-OFF	400
S.5696N.14	230Vac ON-OFF	400
S.5697N.09	230Vac ON-OFF	400
S.5697N.14	230Vac ON-OFF	400

ARTICLE		PAGE
S.5698N.09	230Vac ON-OFF	400
S.5698N.14	230Vac ON-OFF	400
S.5699		400
S.6020W.09	230Vac DALI2/PUSH	118
S.6020W.14	230Vac DALI2/PUSH	118
S.6023		118
S.6040W.09	230Vac DALI2/PUSH	118
S.6040W.14	230Vac DALI2/PUSH	118
S.6050W.09	230Vac DALI2/PUSH	117
S.6050W.14	230Vac DALI2/PUSH	117
S.6060W.09	230Vac ON-OFF	116
S.6060W.14	230Vac ON-OFF	116
S.6063		116
S.6070W.09	230Vac DALI2/PUSH	117
S.6070W.14	230Vac DALI2/PUSH	117
S.6073		117
S.6080W.09	230Vac DALI2/PUSH	116
S.6080W.14	230Vac DALI2/PUSH	116
S.6083		116
S.6090W.09	230Vac DALI2/PUSH	117
S.6090W.14	230Vac DALI2/PUSH	117
S.6150W.09	230Vac DALI2/PUSH	456
S.6150W.14	230Vac DALI2/PUSH	456
S.6159		456
S.6160W.09	230Vac DALI2/PUSH	456
S.6160W.14	230Vac DALI2/PUSH	456
S.6169		456
S.6230W.01	24Vdc	106
S.6230W.14	24Vdc	106
S.6230W.24	24Vdc	106
S.6239		106
S.6240W.01	230Vac ON-OFF	108
S.6240W.14	230Vac ON-OFF	108
S.6240W.24	230Vac ON-OFF	108
S.6247		109
S.6250W.01	24Vdc	106
S.6250W.14	24Vdc	106
S.6250W.24	24Vdc	106
S.6255W.01	230Vac DALI2/PUSH	108
S.6255W.14	230Vac DALI2/PUSH	108
S.6255W.24	230Vac DALI2/PUSH	108
S.6256		106
S.6257		109
S.6260W.01	230Vac PHASE-CUT	108
S.6260W.14	230Vac PHASE-CUT	108
S.6260W.24	230Vac PHASE-CUT	108
S.6268		109
S.6270W.01	24Vdc	106
S.6270W.14	24Vdc	106
S.6270W.24	24Vdc	106
S.6278		106
S.6280W.01	230Vac PHASE-CUT	108
S.6280W.14	230Vac PHASE-CUT	108

ARTICLE		PAGE
S.6280W.24	230Vac PHASE-CUT	108
S.6288		109
S.6300W.01	230Vac ON-OFF	180
S.6300W.09	230Vac ON-OFF	180
S.6300W.14	230Vac ON-OFF	180
S.6306W.01	230Vac ON-OFF	180
S.6306W.09	230Vac ON-OFF	180
S.6306W.14	230Vac ON-OFF	180
S.6307W.01	230Vac ON-OFF	180
S.6307W.09	230Vac ON-OFF	180
S.6307W.14	230Vac ON-OFF	180
S.6309.14		117
S.6320W.09	230Vac PHASE-CUT	122
S.6320W.14	230Vac PHASE-CUT	122
S.6325W.14	230Vac ON-OFF	122
S.6329		122
S.6340W.01	230Vac DALI2/PUSH	182
S.6340W.09	230Vac DALI2/PUSH	182
S.6340W.14	230Vac DALI2/PUSH	182
S.6346W.01	230Vac DALI2/PUSH	182
S.6346W.09	230Vac DALI2/PUSH	182
S.6346W.14	230Vac DALI2/PUSH	182
S.6347W.01	230Vac DALI2/PUSH	182
S.6347W.09	230Vac DALI2/PUSH	182
S.6347W.14	230Vac DALI2/PUSH	182
S.6350W.14	230Vac ON-OFF	112
S.6350W.24	230Vac ON-OFF	112
S.6359		30
S.6360W.14	230Vac ON-OFF	112
S.6360W.24	230Vac ON-OFF	112
S.6400W.01	230Vac ON-OFF	164
S.6400W.14	230Vac ON-OFF	164
S.6420W.01	230Vac ON-OFF	216
S.6420W.14	230Vac ON-OFF	216
S.6425W.01	max 1200mA (Vf 3,2V)	216
S.6425W.14	max 1200mA (Vf 3,2V)	216
S.6560W.14	230Vac ON-OFF	316
S.6560W.24	230Vac ON-OFF	316
S.6561W.14	230Vac ON-OFF	316
S.6561W.24	230Vac ON-OFF	316
S.6570W.14	230Vac ON-OFF	316
S.6570W.24	230Vac ON-OFF	316
S.6571W.14	230Vac ON-OFF	316
S.6571W.24	230Vac ON-OFF	316
S.6580W.14	230Vac DALI2/PUSH	316
S.6580W.24	230Vac DALI2/PUSH	316
S.6581W.14	230Vac DALI2/PUSH	316
S.6581W.24	230Vac DALI2/PUSH	316
S.6615W.01	230Vac ON-OFF	192
S.6615W.14	230Vac ON-OFF	192
S.6615W.24	230Vac ON-OFF	192
S.6618W.01	230Vac ON-OFF	193
S.6618W.14	230Vac ON-OFF	193

ARTICLE		PAGE
S.6618W.24	230Vac ON-OFF	193
S.6622W.01	230Vac ON-OFF	194
S.6622W.14	230Vac ON-OFF	194
S.6622W.24	230Vac ON-OFF	194
S.6625W.01	230Vac ON-OFF	193
S.6625W.14	230Vac ON-OFF	193
S.6625W.24	230Vac ON-OFF	193
S.6628W.01	230Vac ON-OFF	194
S.6628W.14	230Vac ON-OFF	194
S.6628W.24	230Vac ON-OFF	194
S.6646W.01	230Vac ON-OFF	192
S.6646W.14	230Vac ON-OFF	192
S.6646W.24	230Vac ON-OFF	192
S.6655W.01	230Vac ON-OFF	193
S.6655W.14	230Vac ON-OFF	193
S.6655W.24	230Vac ON-OFF	193
S.6658W.01	230Vac ON-OFF	194
S.6658W.14	230Vac ON-OFF	194
S.6658W.24	230Vac ON-OFF	194
S.6675W.01	230Vac DALI2/PUSH	192
S.6675W.14	230Vac DALI2/PUSH	192
S.6675W.24	230Vac DALI2/PUSH	192
S.6678W.01	230Vac DALI2/PUSH	193
S.6678W.14	230Vac DALI2/PUSH	193
S.6678W.24	230Vac DALI2/PUSH	193
S.6680W.01	230Vac DALI2/PUSH	194
S.6680W.14	230Vac DALI2/PUSH	194
S.6680W.24	230Vac DALI2/PUSH	194
S.6689W.01	230Vac DALI2/PUSH	194
S.6689W.14	230Vac DALI2/PUSH	194
S.6689W.24	230Vac DALI2/PUSH	194
S.6695W.01	230Vac DALI2/PUSH	193
S.6695W.14	230Vac DALI2/PUSH	193
S.6695W.24	230Vac DALI2/PUSH	193
S.6950W.01	230Vac PHASE-CUT	210
S.6950W.09	230Vac PHASE-CUT	210
S.6950W.14	230Vac PHASE-CUT	210
S.6955W.01	230Vac PHASE-CUT	210
S.6955W.09	230Vac PHASE-CUT	210
S.6955W.14	230Vac PHASE-CUT	210
S.6960W.01	230Vac PHASE-CUT	211
S.6960W.09	230Vac PHASE-CUT	211
S.6960W.14	230Vac PHASE-CUT	211
S.6965W.01	230Vac PHASE-CUT	211
S.6965W.09	230Vac PHASE-CUT	211
S.6965W.14	230Vac PHASE-CUT	211
S.6980W.01	230Vac DALI2/PUSH	210
S.6980W.09	230Vac DALI2/PUSH	210
S.6980W.14	230Vac DALI2/PUSH	210
S.6981W.01	230Vac ON-OFF	210
S.6981W.09	230Vac ON-OFF	210
S.6981W.14	230Vac ON-OFF	210
S.6985W.01	230Vac DALI2/PUSH	210

ARTICLE		PAGE
S.6985W.09	230Vac DALI2/PUSH	210
S.6985W.14	230Vac DALI2/PUSH	210
S.6986W.01	230Vac ON-OFF	210
S.6986W.09	230Vac ON-OFF	210
S.6986W.14	230Vac ON-OFF	210
S.6990W.01	230Vac DALI2/PUSH	211
S.6990W.09	230Vac DALI2/PUSH	211
S.6990W.14	230Vac DALI2/PUSH	211
S.6991W.01	230Vac ON-OFF	211
S.6991W.09	230Vac ON-OFF	211
S.6991W.14	230Vac ON-OFF	211
S.6995W.01	230Vac DALI2/PUSH	211
S.6995W.09	230Vac DALI2/PUSH	211
S.6995W.14	230Vac DALI2/PUSH	211
S.6996W.01	230Vac ON-OFF	211
S.6996W.09	230Vac ON-OFF	211
S.6996W.14	230Vac ON-OFF	211
S.7008T.13	24Vdc TUNABLE WHITE	339
S.7008W.13	24Vdc	339
S.7009.13	24Vdc PWM RGBW	339
S.7013T.13	24Vdc TUNABLE WHITE	339
S.7013W.13	24Vdc	339
S.7014.13	24Vdc PWM RGBW	339
S.7018T.13	24Vdc TUNABLE WHITE	338
S.7018W.13	24Vdc	338
S.7019.13	24Vdc PWM RGBW	338
S.7023T.13	24Vdc TUNABLE WHITE	338
S.7023W.13	24Vdc	338
S.7024.13	24Vdc PWM RGBW	338
S.7045N.14	230Vac ON-OFF	478
S.7045N.24	230Vac ON-OFF	478
S.7049.14		478
S.7049.24		478
S.7050N.14	230Vac DALI2/PUSH	479
S.7050N.24	230Vac DALI2/PUSH	479
S.7059.14		479
S.7059.24		479
S.7100N.14	230Vac DALI2/PUSH	491
S.7100N.24	230Vac DALI2/PUSH	491
S.7101N.14	230Vac DALI2/PUSH	491
S.7101N.24	230Vac DALI2/PUSH	491
S.7102N.14	230Vac DALI2/PUSH	486
S.7102N.24	230Vac DALI2/PUSH	486
S.7103N.14	230Vac DALI2/PUSH	486
S.7103N.24	230Vac DALI2/PUSH	486
S.7108.14		486
S.7108.24		486
S.7109		486
S.7112N.14	230Vac DALI2/PUSH	486
S.7112N.24	230Vac DALI2/PUSH	486
S.7113N.14	230Vac DALI2/PUSH	486
S.7113N.24	230Vac DALI2/PUSH	486
S.7120N.14	230Vac DALI2/PUSH	491

ARTICLE		PAGE
S.7120N.24	230Vac DALI2/PUSH	491
S.7122N.14	230Vac DALI2/PUSH	485
S.7122N.24	230Vac DALI2/PUSH	485
S.7132N.14	230Vac DALI2/PUSH	488
S.7132N.24	230Vac DALI2/PUSH	488
S.7142N.14	230Vac DALI2/PUSH	485
S.7142N.24	230Vac DALI2/PUSH	485
S.7152N.14	230Vac DALI2/PUSH	488
S.7152N.24	230Vac DALI2/PUSH	488
S.7201W.01	230Vac ON-OFF	146
S.7201W.14	230Vac ON-OFF	146
S.7201W.20	230Vac ON-OFF	146
S.7201W.24	230Vac ON-OFF	146
S.7202W.01	230Vac ON-OFF	146
S.7202W.14	230Vac ON-OFF	146
S.7202W.20	230Vac ON-OFF	146
S.7202W.24	230Vac ON-OFF	146
S.7206W.01	230Vac ON-OFF	148
S.7206W.14	230Vac ON-OFF	148
S.7206W.20	230Vac ON-OFF	148
S.7206W.24	230Vac ON-OFF	148
S.7211W.01	230Vac ON-OFF	148
S.7211W.14	230Vac ON-OFF	148
S.7211W.20	230Vac ON-OFF	148
S.7211W.24	230Vac ON-OFF	148
S.7215W.01	230Vac ON-OFF	148
S.7215W.14	230Vac ON-OFF	148
S.7215W.20	230Vac ON-OFF	148
S.7215W.24	230Vac ON-OFF	148
S.7216W.01	24Vdc	148
S.7216W.14	24Vdc	148
S.7216W.20	24Vdc	148
S.7216W.24	24Vdc	148
S.7217W.01	24Vdc	148
S.7217W.14	24Vdc	148
S.7217W.20	24Vdc	148
S.7217W.24	24Vdc	148
S.7219		148
S.7220W.01	230Vac ON-OFF	148
S.7220W.14	230Vac ON-OFF	148
S.7220W.20	230Vac ON-OFF	148
S.7220W.24	230Vac ON-OFF	148
S.7231W.01	230Vac ON-OFF	168
S.7231W.09	230Vac ON-OFF	168
S.7231W.14	230Vac ON-OFF	168
S.7236W.01	230Vac ON-OFF	168
S.7236W.09	230Vac ON-OFF	168
S.7236W.14	230Vac ON-OFF	168
S.7241W.01	230Vac ON-OFF	168
S.7241W.09	230Vac ON-OFF	168
S.7241W.14	230Vac ON-OFF	168
S.7245W.01	230Vac PHASE-CUT	170
S.7245W.09	230Vac PHASE-CUT	170

ARTICLE		PAGE
S.7245W.14	230Vac PHASE-CUT	170
S.7246W.01	230Vac PHASE-CUT	170
S.7246W.09	230Vac PHASE-CUT	170
S.7246W.14	230Vac PHASE-CUT	170
S.7249		18
S.7250W.01	230Vac PHASE-CUT	146
S.7250W.14	230Vac PHASE-CUT	146
S.7250W.20	230Vac PHASE-CUT	146
S.7250W.24	230Vac PHASE-CUT	146
S.7252W.01	230Vac PHASE-CUT	146
S.7252W.14	230Vac PHASE-CUT	146
S.7252W.20	230Vac PHASE-CUT	146
S.7252W.24	230Vac PHASE-CUT	146
S.7260W.01	230Vac DALI2/PUSH	150
S.7260W.14	230Vac DALI2/PUSH	150
S.7260W.20	230Vac DALI2/PUSH	150
S.7260W.24	230Vac DALI2/PUSH	150
S.7261W.01	230Vac DALI2/PUSH	150
S.7261W.14	230Vac DALI2/PUSH	150
S.7261W.20	230Vac DALI2/PUSH	150
S.7261W.24	230Vac DALI2/PUSH	150
S.7262W.01	230Vac DALI2/PUSH	150
S.7262W.14	230Vac DALI2/PUSH	150
S.7262W.20	230Vac DALI2/PUSH	150
S.7262W.24	230Vac DALI2/PUSH	150
S.7265W.01	230Vac DALI2/PUSH	150
S.7265W.14	230Vac DALI2/PUSH	150
S.7265W.20	230Vac DALI2/PUSH	150
S.7265W.24	230Vac DALI2/PUSH	150
S.7266W.01	230Vac DALI2/PUSH	150
S.7266W.14	230Vac DALI2/PUSH	150
S.7266W.20	230Vac DALI2/PUSH	150
S.7266W.24	230Vac DALI2/PUSH	150
S.7267W.01	230Vac DALI2/PUSH	150
S.7267W.14	230Vac DALI2/PUSH	150
S.7267W.20	230Vac DALI2/PUSH	150
S.7267W.24	230Vac DALI2/PUSH	150
S.7269		150
S.7270W.01	230Vac PHASE-CUT	170
S.7270W.09	230Vac PHASE-CUT	170
S.7270W.14	230Vac PHASE-CUT	170
S.7280W.01	230Vac DALI2/PUSH	176
S.7280W.09	230Vac DALI2/PUSH	176
S.7280W.14	230Vac DALI2/PUSH	176
S.7281W.01	230Vac ON-OFF	174
S.7281W.09	230Vac ON-OFF	174
S.7281W.14	230Vac ON-OFF	174
S.7282W.01	230Vac ON-OFF	174
S.7282W.09	230Vac ON-OFF	174
S.7282W.14	230Vac ON-OFF	174
S.7284		174
S.7285W.01	230Vac DALI2/PUSH	176
S.7285W.09	230Vac DALI2/PUSH	176

ARTICLE		PAGE
S.7285W.14	230Vac DALI2/PUSH	176
S.7286W.01	230Vac ON-OFF	174
S.7286W.09	230Vac ON-OFF	174
S.7286W.14	230Vac ON-OFF	174
S.7287W.01	230Vac ON-OFF	174
S.7287W.09	230Vac ON-OFF	174
S.7287W.14	230Vac ON-OFF	174
S.7288		174
S.7289		176
S.7290W.01	230Vac DALI2/PUSH	176
S.7290W.09	230Vac DALI2/PUSH	176
S.7290W.14	230Vac DALI2/PUSH	176
S.7295W.01	230Vac DALI2/PUSH	176
S.7295W.09	230Vac DALI2/PUSH	176
S.7295W.14	230Vac DALI2/PUSH	176
S.7306W.09	230Vac ON-OFF	416
S.7307W.09	230Vac ON-OFF	416
S.7309		416
S.7326W.09	230Vac ON-OFF	416
S.7327W.09	230Vac ON-OFF	416
S.7329		416
S.7340W.19	230Vac DALI2/PUSH	417
S.7345W.19	230Vac DALI2/PUSH	417
S.7349		417
S.7360W.19	230Vac DALI2/PUSH	417
S.7365W.19	230Vac DALI2/PUSH	417
S.7369		417
S.7400W.01	230Vac DALI2/PUSH	410
S.7400W.14	230Vac DALI2/PUSH	410
S.7401W.01	230Vac DALI2/PUSH	410
S.7401W.14	230Vac DALI2/PUSH	410
S.7409		410
S.7420W.01	230Vac DALI2/PUSH	410
S.7420W.14	230Vac DALI2/PUSH	410
S.7421W.01	230Vac DALI2/PUSH	410
S.7421W.14	230Vac DALI2/PUSH	410
S.7429		410
S.7460W.01	230Vac DALI2/PUSH	411
S.7460W.14	230Vac DALI2/PUSH	411
S.7461W.01	230Vac DALI2/PUSH	411
S.7461W.14	230Vac DALI2/PUSH	411
S.7469		411
S.7500W.01	230Vac ON-OFF	412
S.7500W.14	230Vac ON-OFF	412
S.7501W.01	230Vac ON-OFF	412
S.7501W.14	230Vac ON-OFF	412
S.7520W.01	230Vac ON-OFF	412
S.7520W.14	230Vac ON-OFF	412
S.7521W.01	230Vac ON-OFF	412
S.7521W.14	230Vac ON-OFF	412
S.7560W.01	230Vac ON-OFF	412
S.7560W.14	230Vac ON-OFF	412
S.7561W.01	230Vac ON-OFF	412

ARTICLE		PAGE
S.7561W.14	230Vac ON-OFF	412
S.7620N.24	230Vac DALI2/PUSH	501
S.7640N.24	230Vac DALI2/PUSH	503
S.7650N.24	230Vac DALI2/PUSH	501
S.7680N.24	230Vac DALI2/PUSH	501
S.7740N.24	230Vac DALI2/PUSH	503
S.7750N.24	230Vac DALI2/PUSH	497
S.7805W.09	230Vac ON-OFF	371
S.7811W.09	230Vac ON-OFF	369
S.7814W.09	230Vac ON-OFF	369
S.7815W.09	230Vac ON-OFF	379
S.7819W.09	230Vac ON-OFF	379
S.7825W.09	230Vac ON-OFF	381
S.7831W.09	230Vac ON-OFF	371
S.7832W.09	230Vac ON-OFF	371
S.7833W.09	230Vac ON-OFF	371
S.7835W.09	230Vac ON-OFF	381
S.7836W.09	230Vac ON-OFF	381
S.7837W.09	230Vac ON-OFF	381
S.7864W.09	230Vac DALI2/PUSH	373
S.7884W.09	230Vac DALI2/PUSH	383
S.7891W.09	230Vac DALI2/PUSH	373
S.7892W.09	230Vac DALI2/PUSH	373
S.7893W.09	230Vac DALI2/PUSH	373
S.7895W.09	230Vac DALI2/PUSH	383
S.7896W.09	230Vac DALI2/PUSH	383
S.7897W.09	230Vac DALI2/PUSH	383
S.7900W.19	230Vac ON-OFF	390
S.7910W.19	230Vac ON-OFF	391
S.7911W.19	230Vac ON-OFF	391
S.7912W.19	230Vac ON-OFF	391
S.7920W.19	230Vac ON-OFF	392
S.7921W.19	230Vac ON-OFF	392
S.7922W.19	230Vac ON-OFF	392
S.7930W.19	230Vac ON-OFF	393
S.7931W.19	230Vac ON-OFF	393
S.7932W.19	230Vac ON-OFF	393
S.8500W.19	230Vac DALI2/PUSH	376
S.8501W.19	230Vac DALI2/PUSH	376
S.8502W.19	230Vac DALI2/PUSH	376
S.8505.19	24Vdc PWM RGBW	376
S.8568W.19	230Vac DALI2/PUSH	376
S.8570W.09	230Vac DALI2/PUSH	377
S.8571W.09	230Vac DALI2/PUSH	377
S.8572W.09	230Vac DALI2/PUSH	377
S.8578W.09	230Vac DALI2/PUSH	377
S.8580W.19	230Vac DALI2/PUSH	386
S.8581W.19	230Vac DALI2/PUSH	386
S.8582W.19	230Vac DALI2/PUSH	386
S.8585.19	24Vdc PWM RGBW	386
S.8588W.19	230Vac DALI2/PUSH	386
S.8590W.09	230Vac DALI2/PUSH	387
S.8591W.09	230Vac DALI2/PUSH	387

ARTICLE		PAGE
S.8592W.09	230Vac DALI2/PUSH	387
S.8598W.09	230Vac DALI2/PUSH	387
S.8805W.19	230Vac ON-OFF	370
S.8811W.19	230Vac ON-OFF	369
S.8814W.19	230Vac ON-OFF	369
S.8815W.19	230Vac ON-OFF	379
S.8819W.19	230Vac ON-OFF	379
S.8825W.19	230Vac ON-OFF	380
S.8831W.19	230Vac ON-OFF	370
S.8832W.19	230Vac ON-OFF	370
S.8833W.19	230Vac ON-OFF	370
S.8835W.19	230Vac ON-OFF	380
S.8836W.19	230Vac ON-OFF	380
S.8837W.19	230Vac ON-OFF	380
S.8864W.19	230Vac DALI2/PUSH	372
S.8884W.19	230Vac DALI2/PUSH	382
S.8890.19	24Vdc PWM RGBW	372
S.8891W.19	230Vac DALI2/PUSH	372
S.8892W.19	230Vac DALI2/PUSH	372
S.8893W.19	230Vac DALI2/PUSH	372
S.8895W.19	230Vac DALI2/PUSH	382
S.8896W.19	230Vac DALI2/PUSH	382
S.8897W.19	230Vac DALI2/PUSH	382
S.8899.19	24Vdc PWM RGBW	382
S.9001W.01	24Vdc	92
S.9001W.09	24Vdc	92
S.9002W.01	24Vdc	92
S.9002W.09	24Vdc	92
S.9003W.01	24Vdc	92
S.9003W.09	24Vdc	92
S.9004W.01	24Vdc	92
S.9004W.09	24Vdc	92
S.9005W.01	24Vdc	92
S.9005W.09	24Vdc	92
S.9006W.01	24Vdc	92
S.9006W.09	24Vdc	92
S.9007W.01	24Vdc	92
S.9007W.09	24Vdc	92
S.9008W.01	24Vdc	92
S.9008W.09	24Vdc	92
S.9010W.01	24Vdc	96
S.9010W.09	24Vdc	96
S.9011W.01	24Vdc	96
S.9011W.09	24Vdc	96
S.9015W.01	24Vdc	96
S.9015W.09	24Vdc	96
S.9016W.01	24Vdc	96
S.9016W.09	24Vdc	96
S.9020W.01	24Vdc	96
S.9020W.09	24Vdc	96
S.9030W.01	24Vdc	98
S.9030W.09	24Vdc	98
S.9031W.01	24Vdc	98

ARTICLE		PAGE
S.9031W.09	24Vdc	98
S.9035W.01	24Vdc	98
S.9035W.09	24Vdc	98
S.9036W.01	24Vdc	98
S.9036W.09	24Vdc	98
S.9045W.01	24Vdc	94
S.9045W.09	24Vdc	94
S.9050W.01	24Vdc	94
S.9050W.09	24Vdc	94
S.9060W.01	24Vdc	406
S.9060W.09	24Vdc	406
S.9065W.01	24Vdc	406
S.9065W.09	24Vdc	406
S.9070W.01	24Vdc	406
S.9070W.09	24Vdc	406
S.9090.01		92
S.9090.09		92
S.9091.01		92
S.9091.09		92

COLOUR CODE LIST: Specify the colour/finishing by adding the following code to the article


COLOUR:

White	cod.	.01
Dark Green	cod.	.07
Black	cod.	.09
Aluminium Grey	cod.	.14
Burnished Bronze	cod.	.20
Anthracyte Grey	cod.	.24

FINISHING:

Anodized Aluminium	cod.	.13
Stainless Steel	cod.	.19
Concrete	cod.	.35

Printed by
Euroteam Srl Brescia - Italy
www.euroteam.eu



S I M E S

The present catalogue can not be reproduced even partially. All rights reserved.

Due to continual luminaire development and improvement, any photographs, luminaire descriptions, measurements, illustrations, drawings and specifications in this catalogue may be approximations, and the company is not liable. We reserve the right to change specifications without prior notice. The technical data contained in this catalogue is update up to the date of print (September 2022). For updated data, see technical sheets and installing instructions available on the website.

Luminaires in this catalogue are REGISTERED and/or PATENTED.

www.simes.it