





-  SCR Dimming
-  0-10V Dimming
-  DALI Dimming
-  Bluetooth Dimming
-  Tuya Dimming
-  High-power LED SDCM<3
-  CRI > 90
-  Anti-Glare



Code No.:DL509-A

Power	MAX 8W
Voltage	AC 220~240V
Current	200mA
Angle	10° 15° 24° 36° 50°
Lumen	525LM 642LM 670LM 680LM 473LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

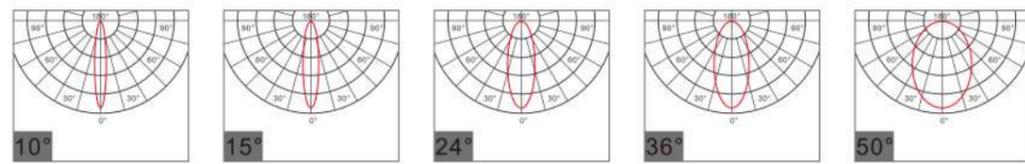

Code No.:DL509-B

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

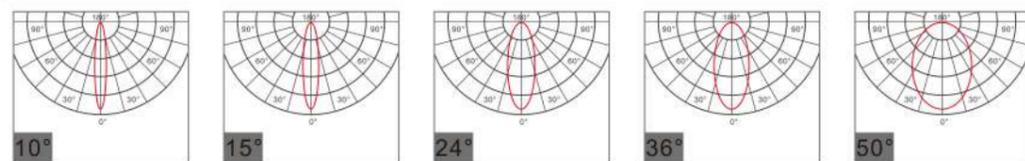

Code No.:DL509A-A

Power	MAX 8W
Voltage	AC 220~240V
Current	200mA
Angle	10° 15° 24° 36° 50°
Lumen	525LM 642LM 670LM 680LM 473LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

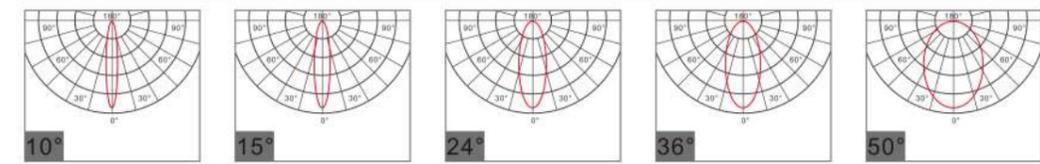

Code No.:DL509A-B

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K


Angle

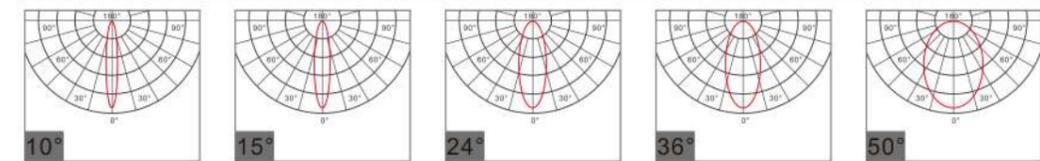




Code No.:DL509C-A

Power	MAX 8W
Voltage	AC 220~240V
Current	200mA
Angle	10° 15° 24° 36° 50°
Lumen	525LM 642LM 670LM 680LM 473LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

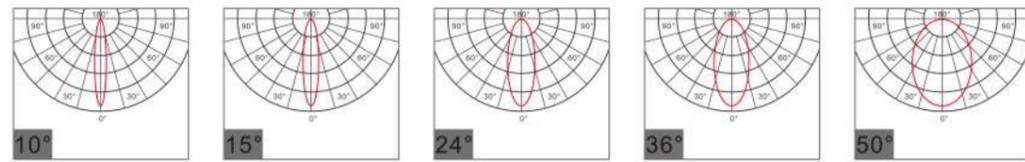


Code No.:DL509C-B

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

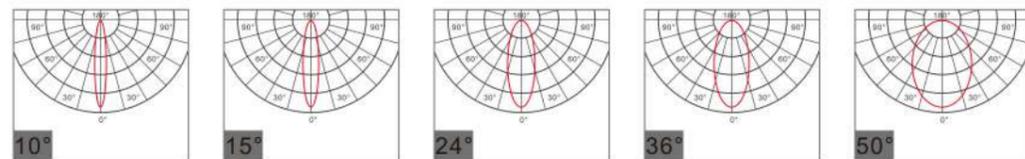


Code No.:DL509B-A

Power	MAX 8W
Voltage	AC 220~240V
Current	200mA
Angle	polarized
Lumen	458LM
CRI	90/98
IP	20
Installation	Surface mounted



White Black

Reflector



2700K / 3000K / 3500K / 4000K / 5000K




Code No.:DL509B-B

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	polarized
Lumen	605LM
CRI	90/98
IP	20
Installation	Surface mounted



White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

BAL Light Begins Here



Code No.: DL509-D

Power	MAX 10W
Voltage	AC 220-240V
Current	3W 700mA 10W 250mA
Angle	3° 7° 15° 24° 36° 60°
Lumen	342LM 379LM 803LM 838LM 850LM 591LM
CRI	90/98
IP	20
Installation	Embedded

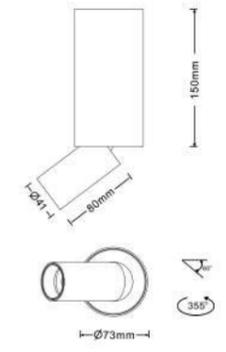

Reflector



Angle

