



## Specification

---

Diecast aluminium.

Excellent lighting efficiency and visual comfort.


Versions suitable for use in settings with UGR <19 video terminals.

Available with different color reflector.

Available with electronic wiring and DALI/1-10V Dimmable version.


IP65 on the visible body of the mount after installation.

## Adjustable Downlight With Frame




CODE	WATT (W)	FWHM (°)	lm
DL65-XY8WA15	8	15	640
DL65-XY8WA24	8	24	640
DL65-XY8WA36	8	36	640
DL65-XY8WA50	8	50	640

Power: AC220V  
Water proof: IP20/IP65



CODE	WATT (W)	FWHM (°)	lm
DL85-XY15WA15	15	15	1200
DL85-XY15WA24	15	24	1200
DL85-XY15WA36	15	36	1200
DL85-XY15WA50	15	50	1200


Power: AC220V  
Water proof: IP20/IP65

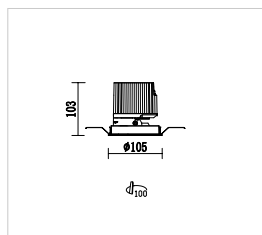

CODE	WATT (W)	FWHM (°)	lm
DL110-XY25WA15	25	15	2000
DL110-XY25WA24	25	24	2000
DL110-XY25WA36	25	36	2000
DL110-XY25WA50	25	50	2000


Power: AC220V  
Water proof: IP20/IP65

## Adjustable Downlight Frameless

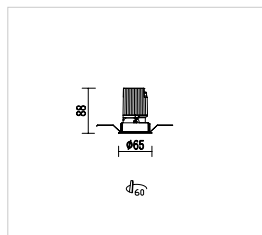


CODE	WATT (W)	FWHM (°)	lm
DL65-XYW8WA15	8	15	640
DL65-XYW8WA24	8	24	640
DL65-XYW8WA36	8	36	640
DL65-XYW8WA50	8	50	640

Power: AC220V  
Water proof: IP20/IP65



CODE	WATT (W)	FWHM (°)	lm
DL85-XYW15WA15	15	15	1200
DL85-XYW15WA24	15	24	1200
DL85-XYW15WA36	15	36	1200
DL85-XYW15WA50	15	50	1200

Power: AC220V  
Water proof: IP20/IP65


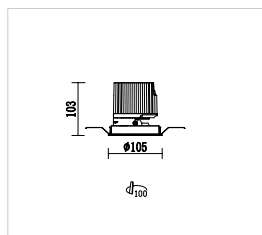


CODE	WATT (W)	FWHM (°)	lm
DL110-XYW25WA15	25	15	2000
DL110-XYW25WA24	25	24	2000
DL110-XYW25WA36	25	36	2000
DL110-XYW25WA50	25	50	2000

Power: AC220V  
Water proof: IP20/IP65

# Downlight

**BAL** Light  
Begins  
Here

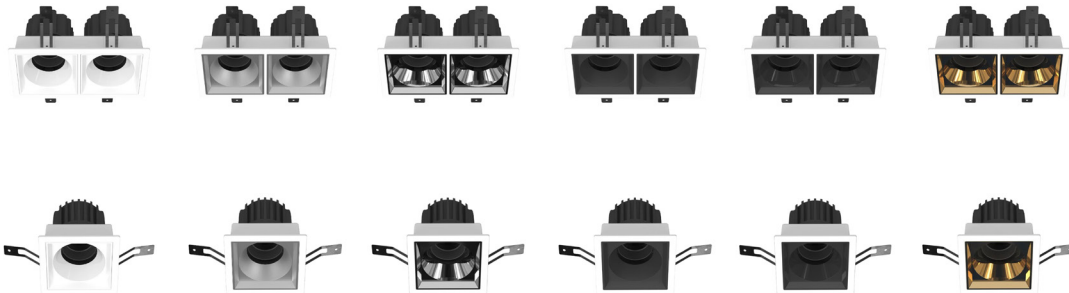
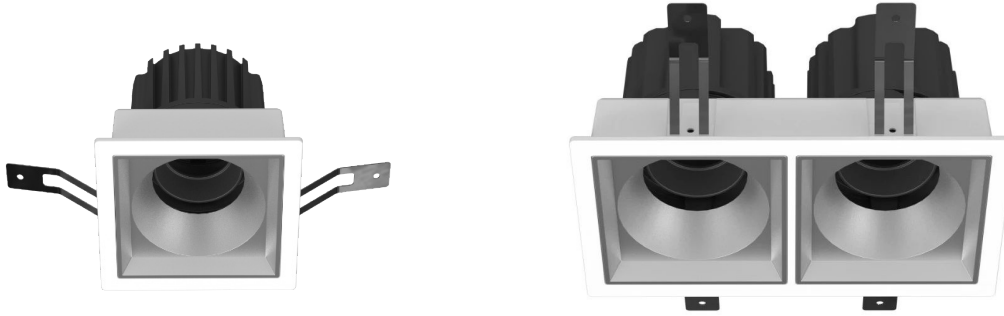


## Specification

---



- Diecast aluminium.
- Excellent lighting efficiency and visual comfort.
- Versions suitable for use in settings with UGR <19 video terminals.
- Available with different color reflector.
- Available with electronic wiring and DALI/1-10V Dimmable version.
- IP65 on the visible body of the mount after installation.

## Adjustable Downlight With Frame





CODE	WATT (W)	FWHM (°)	lm
DL65-XYF8WA15	8	15	640
DL65-XYF8WA24	8	24	640
DL65-XYF8WA36	8	36	640
DL65-XYF8WA50	8	50	640

Power: AC220V  
Water proof: IP20/IP65

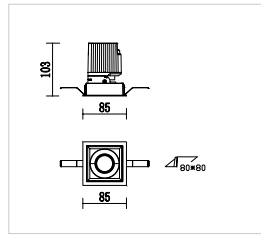

CODE	WATT (W)	FWHM (°)	lm
DL85-XYF15WA15	15	15	1200
DL85-XYF15WA24	15	24	1200
DL85-XYF15WA36	15	36	1200
DL85-XYF15WA50	15	50	1200



Power: AC220V  
Water proof: IP20/IP65

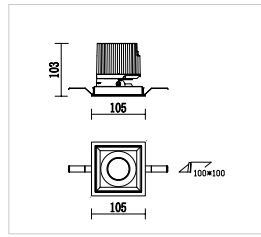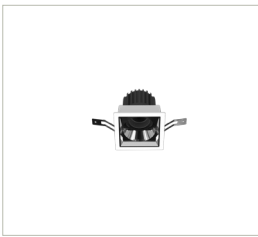

CODE	WATT (W)	FWHM (°)	lm
DL110-XYF25WA15	25	15	2000
DL110-XYF25WA24	25	24	2000
DL110-XYF25WA36	25	36	2000
DL110-XYF25WA50	25	50	2000



Power: AC220V  
Water proof: IP20/IP65

## Adjustable Downlight With Frame

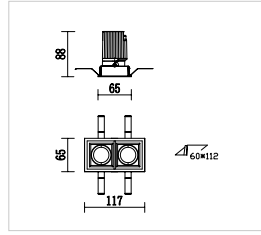


CODE	WATT (W)	FWHM (°)	lm
DL65-XYF8*2WA15	8	15	640
DL65-XYF8*2WA24	8	24	640
DL65-XYF8*2WA36	8	36	640
DL65-XYF8*2WA50	8	50	640

Power: AC220V  
Water proof: IP20/IP65

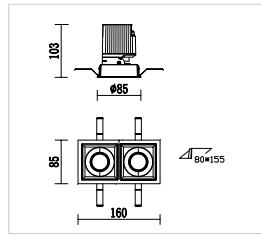

CODE	WATT (W)	FWHM (°)	lm
DL85-XYF15*2WA15	15	15	1200
DL85-XYF15*2WA24	15	24	1200
DL85-XYF15*2WA36	15	36	1200
DL85-XYF15*2WA50	15	50	1200


Power: AC220V  
Water proof: IP20/IP65

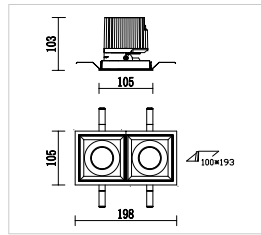

CODE	WATT (W)	FWHM (°)	lm
DL110-XYF25*2WA15	25	15	2000
DL110-XYF25*2WA24	25	24	2000
DL110-XYF25*2WA36	25	36	2000
DL110-XYF25*2WA50	25	50	2000

Power: AC220V  
Water proof: IP20/IP65


## Recessed Downlight

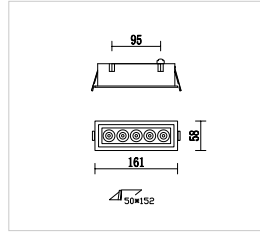

CODE	WATT (W)	FWHM (°)	lm
DLL49-XL0045TA15	12	15	960
DLL49-XL0045TA24	12	24	960
DLL49-XL0045TA36	12	36	960

Power: AC220V  
Water proof: IP65


## Ceiling Downlight

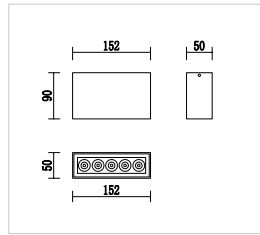

CODE	WATT (W)	FWHM (°)	lm
DLL49-XC0045TA15	12	15	960
DLL49-XC0045TA24	12	24	960
DLL49-XC0045TA36	12	36	960

Power: AC220V  
Water proof: IP65


## Wall mounted Downlight

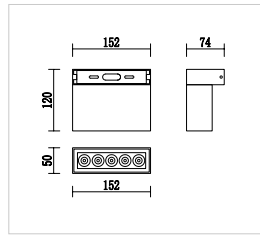

CODE	WATT (W)	FWHM (°)	lm
DLL49-XW0045TA15	12	15	960
DLL49-XW0045TA24	12	24	960
DLL49-XW0045TA36	12	36	960

Power: AC220V  
Water proof: IP65


## Ceiling Downlight

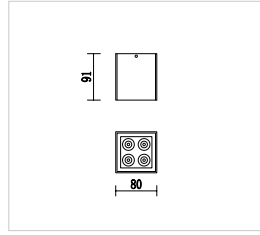

CODE	WATT (W)	FWHM (°)	lm
DL85-XC004S10WA15	10	15	800
DL85-XC004S10WA24	10	24	800
DL85-XC004S10WA36	10	36	800

Power: AC220V  
Water proof: IP65


## Ceiling Downlight

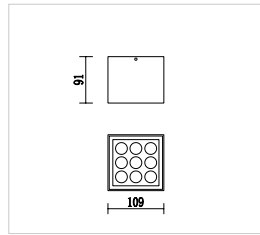

CODE	WATT (W)	FWHM (°)	lm
DL110-XC004S20WA15	20	15	1600
DL110-XC004S20WA24	20	24	1600
DL110-XC004S20WA36	20	36	1600

Power: AC220V  
Water proof: IP65


## Wall Mounted Downlight

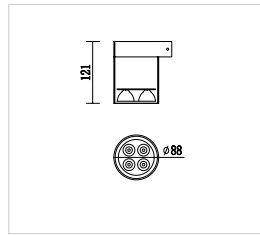

CODE	WATT (W)	FWHM (°)	lm
DL85-XW004R10WA15	10	15	800
DL85-XW004R10WA24	10	24	800
DL85-XW004R10WA36	10	36	800

Power: AC220V  
Water proof: IP65

## Wall Mounted Downlight

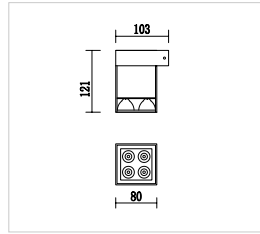

CODE	WATT (W)	FWHM (°)	lm
DL85-XC004R10WA15	10	15	800
DL85-XC004R10WA24	10	24	800
DL85-XC004R10WA36	10	36	800

Power: AC220V  
Water proof: IP65