


CVV

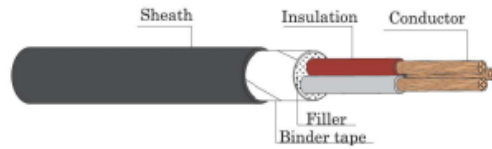


600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH CONTROL CABLE

การใช้งาน

- ใช้เดินในวงจรควบคุม
- เดินลอยในอากาศ
- ร้อยท่อฝังดิน
- เดินเกาะผนัง
- เดินใน Cable tray, Cable Ladder

No. of Cores	Baht/m. (บาท/เมตร)				
	Size (mm ²)				
	0.75	1	1.5	2.5	4
2 C	34.30	36.50	40.30	54.50	74.80
3 C	38.10	41.90	49.30	68.80	94.30
4 C	47.80	49.40	59.80	85.30	125.60
5 C	58.30	65.00	76.20	109.20	152.50
6 C	65.55	76.75	92.25	135.50	190.70
7 C	68.80	78.50	94.30	137.80	198.90
8 C	100.05	105.35	127.85	180.80	251.05
9 C	91.30	106.20	129.40	183.80	263.20
10 C	98.70	114.40	140.40	201.80	290.00
11 C	108.30	127.50	157.45	232.50	338.10
12 C	109.90	128.60	158.50	233.20	342.20
13 C	120.85	139.55	175.45	260.40	383.15
14 C	121.80	140.50	176.40	261.60	386.10
15 C	129.30	152.70	194.20	290.05	439.00
16 C	130.80	153.90	195.00	292.50	445.90
17 C	144.37	166.20	215.23	311.97	472.73
18 C	146.87	173.2	222.13	338.77	503.43
19 C	148.70	175.80	224.50	341.90	517.40
20 C	166.60	196.85	247.20	375.35	567.70
21 C	167.70	198.90	250.90	379.60	572.00
22 C	181.37	215.63	271.27	419.53	620.13
23 C	183.87	218.83	278.77	431.33	635.83
24 C	185.90	219.70	280.80	439.40	647.40
25 C	200.43	235.00	301.73	474.40	695.33
26 C	204.93	237.20	309.23	480.20	712.03
27 C	206.70	239.20	312.40	484.40	722.20
28 C	219.07	255.37	332.63	520.17	769.67
29 C	219.57	259.07	340.13	527.97	789.37
30 C	221.00	261.30	341.90	531.70	795.80

CVV-S

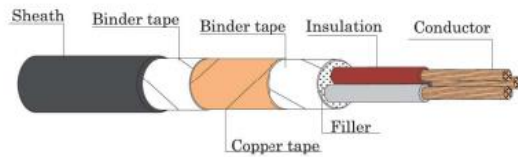

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH CONTROL CABLE

การใช้งาน

- ใช้เดินในวงจรควบคุม
- เดินลอยในอากาศ
- ร้อยท่อฝังดิน
- เดินเกาะผนัง
- เดินใน Cable tray, Cable Ladder

No. of Cores	Baht/m. (บาท/เมตร)				
	Size (mm ²)				
	0.75	1	1.5	2.5	4
2 C	62.80	65.65	73.20	91.30	121.20
3 C	68.80	74.80	83.70	109.00	145.60
4 C	80.60	85.30	98.80	130.00	176.40
5 C	94.30	101.70	116.60	158.60	209.30
6 C	103.75	115.65	136.15	186.85	250.95
7 C	109.20	119.60	141.70	191.10	262.60
8 C	126.55	143.75	166.65	225.15	314.45
9 C	133.90	147.90	171.60	239.20	326.30
10 C	146.90	159.90	187.20	261.30	366.60
11 C	153.75	169.05	203.25	281.25	396.75
12 C	158.60	174.20	209.30	291.20	406.90
13 C	171.40	189.60	223.70	316.80	456.35
14 C	174.20	195.00	230.10	322.40	475.80
15 C	182.70	206.95	247.95	354.90	519.40
16 C	187.20	211.90	254.80	361.40	533.00
17 C	198.17	224.00	270.73	382.60	557.67
18 C	202.67	233.00	278.63	405.40	580.37
19 C	209.30	239.20	283.40	416.00	598.00
20 C	220.45	251.45	300.90	453.90	652.00
21 C	228.80	258.70	309.40	470.60	676.00
22 C	240.07	272.90	328.23	505.53	731.50
23 C	245.57	279.10	336.73	520.33	742.20
24 C	254.80	289.90	349.70	530.40	773.50
25 C	264.20	302.50	366.37	557.30	816.20
26 C	270.70	308.70	374.87	569.10	831.90
27 C	278.20	313.30	383.50	581.10	847.60
28 C	286.43	323.77	406.77	615.43	895.03
29 C	290.93	331.47	415.27	624.23	914.73
30 C	295.10	339.30	425.10	633.10	926.90

CABLE STRUCTURE

Conductor : Flexible annealed copper wire

Insulation : Polyvinyl chloride(PVC/D)

Core identification

2-cores : Blue, Brown

3-cores : Brown, Black, Grey

4-cores : Blue, Brown, Black, Grey

More than 4 Cores :

Black with marking numbers, colored white, printed continuously throughout the whole length of insulated wires for the purpose of core identification.

TECHNICAL DATA

Classification : Maximum conductor temperature 70 °C
: Circuit voltage not exceeding 600 volts.

Testing voltage : 2,000 Volts

Reference standard : THAI YAZAKI STANDARD

Filler : polypropylene (non-hygroscopic material)

Binder tape and Separator tape : Spunbond tape

Shield : Copper tape

Sheath : Black Polyvinyl chloride(PVC)