


FD-06/1KV-CV

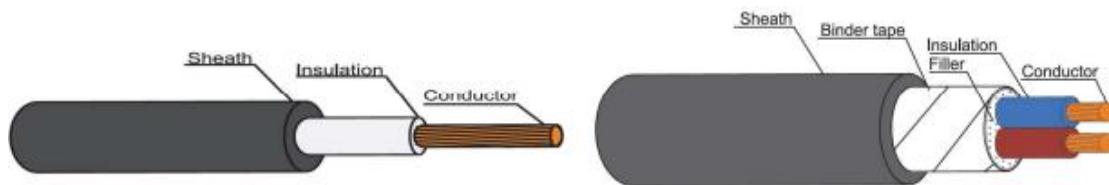

0.6/1 Kv 90°C CROSS-LINKED POLYETHYLENE INSULATED PVE SHEATHED FLAME RETARDANT POWER CABLE

การใช้งาน

- ฟังดินโอดตรง
- ร้อยท่อฟังดิน
- ร้อยท่อฟังผนังคอนกรีต, ร้อยท่อเดินใต้ฝ้าอาคาร
- เดินเกาะผนัง, เดินบนฉนวนลูกถ้วย
- เดินใน Cable tray, Cable Ladder

Size (mm²)	Baht/m. (บาท/เมตร)			
	1-Core	2-Cores	3-Cores	4-Cores
1.5	ติดต่อฝ่ายขาย			
2.5	26.29	59.54	74.45	91.89
4	33.18	75.42	97.05	120.99
6	43.47	98.74	128.42	161.05
10	57.43	126.45	173.87	236.04
16	85.53	195.35	266.10	348.47
25	127.19	303.81	411.95	538.62
35	175.62	410.12	557.85	730.37
50	242.00	546.96	751.29	995.87
70	339.18	758.76	1060.82	1402.06
95	467.98	1045.45	1451.45	1931.82
120	593.40	1317.85	1847.27	2456.14
150	727.27	1617.77	2272.73	3026.86
185	908.34	2010.30	2852.73	3810.50
240	1189.30	2628.60	3724.28	4989.71
300	1506.71	3295.15	4664.60	6511.87
400	1927.84	4193.81	6082.47	8216.49
500	2574.67			
630	3292.18			
800	4128.87			
1000	5442.84			

*สาย CV ติดต่อฝ่ายขาย

CABLE STRUCTURE

Conductor : Non-compacted and compacted round annealed copper
 : Single-core : Size 1.5 mm² up to 1000 mm²
 : Multi core : Size 1.5 mm² up to 400 mm²

Insulation : Cross-Linked polyethylene (XLPE)

Core identification

Single-cores : Natural (Translucent)
 2-cores : Blue, Brown
 3-cores : Brown, Black, Grey
 4-cores : Blue, Brown, Black, Grey

Sheath : Black flame retardant polyvinyl chloride (PVC/ST2)

TECHNICAL DATA

Classification : Maximum conductor temperature 90 °C
 : Circuit voltage not exceeding 1,200 volts.

Rated voltage : 600 Volts between Line to Earth
 : 1,000 Volts between Line to Line

Testing Voltage : 3,500 Volts

Reference standard : IEC 60502-1, IEC 60228, IEC 60332-1
 IEC 60332-3-24 (Cat.C)