




**Ratio 70:1 Capacity 3000 g/min**

**Polyurethane Seals**

**Series 900 industrial air-operated pumps for short/long distance grease distribution, for high pressure greasing.**  
 Ideal for transferring grease and high-viscosity oil. The double action guarantees the delivery of a continuous and constant flow, suitable for the numerous needs of modern industry. The high quality of the materials used and the anticorrosion treatments reduce internal friction and limit wear over time.

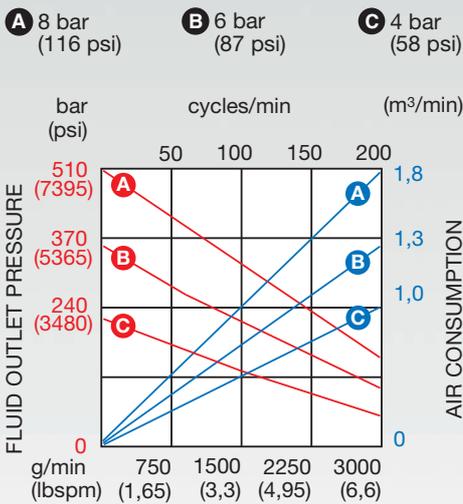

KIND OF FLUID: grease NLGI 1 - 20 °C

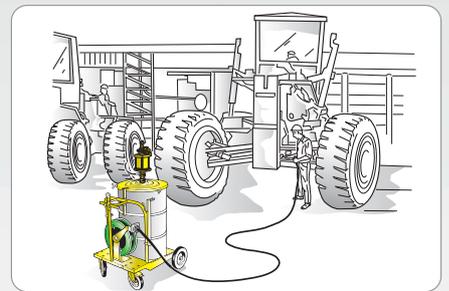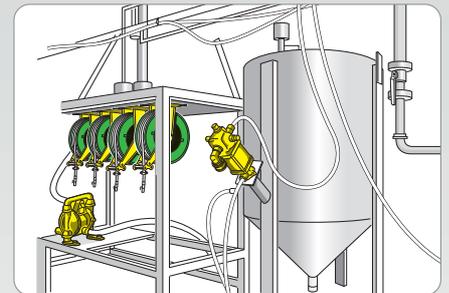

Article	91C/701
Compatible fluids	greases, high viscosity oils
Type of seals	polyurethane/PU
Suction tube upper body	aluminium
Suction tube	carbon steel
Air inlet connection	F 1/2"G
Fluid outlet connection	F 1/2"G
Suction tube diameter	ø 45
Suction tube length	940 mm
Suitable for drums	180 - 220 Kg
Relative flowrate (free outlet at 6 bar)	3000 g/min
Max. air consumption 8 bar	1,6 m³/min
Noise level	80 dB
Max. feed pressure	8 bar
	No. 1 packing m <sup>3</sup> 0,070 kg 19