



The best performing street tyre.

ADVAN
Sport V105



คุณสมบัติเด่น




ตอบสนองการบังคับควบคุม แม่นยำ ฉับไว

Handling

ยาง ADVAN Sport V105 ให้สมรรถนะการบังคับควบคุมที่แม่นยำ ผู้ขับขี่สามารถรู้สึกได้ถึงการตอบสนองที่ดีของพวงมาลัยแม้ในขณะขับขี่ด้วยความเร็วสูง

- โครงสร้างยางแบบ matrix ช่วยเพิ่มสมรรถนะและการตอบสนองที่ดีในการบังคับควบคุม

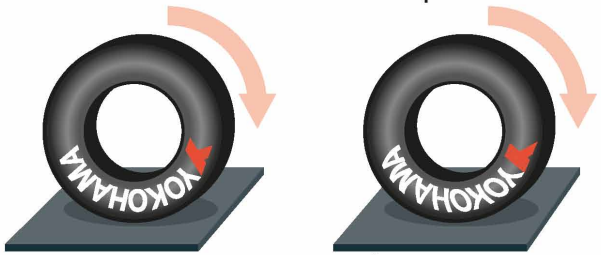

ADVAN Sport V105 ใช้ Matrix Body Ply Structure

ยางที่ไม่ได้ใช้ Matrix Body Ply Structure (แก้มยางเสี้ยวรูป)

*This diagram is a conceptual image.




High Speed

มั่นคงขณะขับขี่แม้ขณะขับ ด้วยความเร็วสูง

ด้วยการควบคุมการเปลี่ยนรูปทรงของยางและมั่นใจด้วยหน้ายางสัมผัสพื้นถนนอย่างทั่วถึง ทำให้มีสมรรถนะในการยึดเกาะถนนดีเยี่ยมในขณะใช้ความเร็วสูง



- “Mound Profile” ช่วยเพิ่มความมั่นคงในขณะใช้ความเร็วสูง

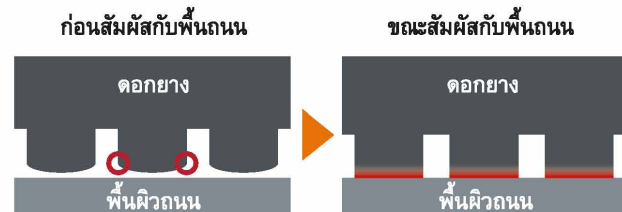

High Grip

ยึดเกาะดีเยี่ยมบนถนนแห้งและ ถนนเปียก

สมรรถนะการยึดเกาะถนนที่ดีเยี่ยมในทุกสภาวะ ไม่ว่าจะทางตรงทางโค้ง ถนนแห้งหรือถนนเปียก

- ลายดอกยางแบบไม่สมมาตรช่วยเสริมสร้างสมรรถนะทั้งบนถนนแห้งและถนนเปียก



*This diagram is a conceptual image.



Comfort

ให้ความเงียบและนุ่มนวลมากกว่า

ADVAN Sport V105 ให้ความเงียบและนุ่มนวลสำหรับรถสมรรถนะสูง ด้วยเทคโนโลยีที่ช่วยลดเสียงรบกวน ลิขสิทธิ์เฉพาะของโยโกฮามา


- เทคโนโลยีช่วยลดเสียง

ลายดอกยางแบบไม่สมมาตร และมีขนาดต่างกัน ช่วยเพิ่มสมรรถนะในการขับขี่และลดเสียงรบกวนลง

ร่องดอกยางลดเสียง ช่วยลดเสียงจากภายนอกของยางในขณะหมุน




■ น้ำหนักของยางลดลง 3.9%

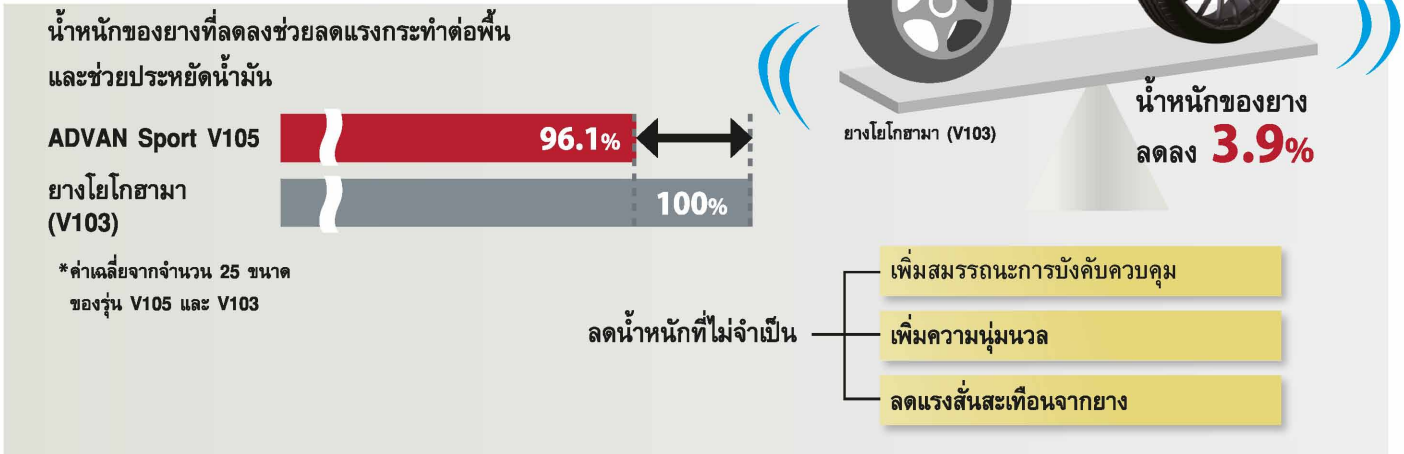

■ เนื้อยางสูตรใหม่พัฒนาพร้อมกับผู้ผลิตรถยนต์ชั้นนำ

เพิ่มสมรรถนะการยึดเกาะจากส่วนผสม “ไมโครซิลิกา และ สารช่วยกระจายตัวซิลิกา”

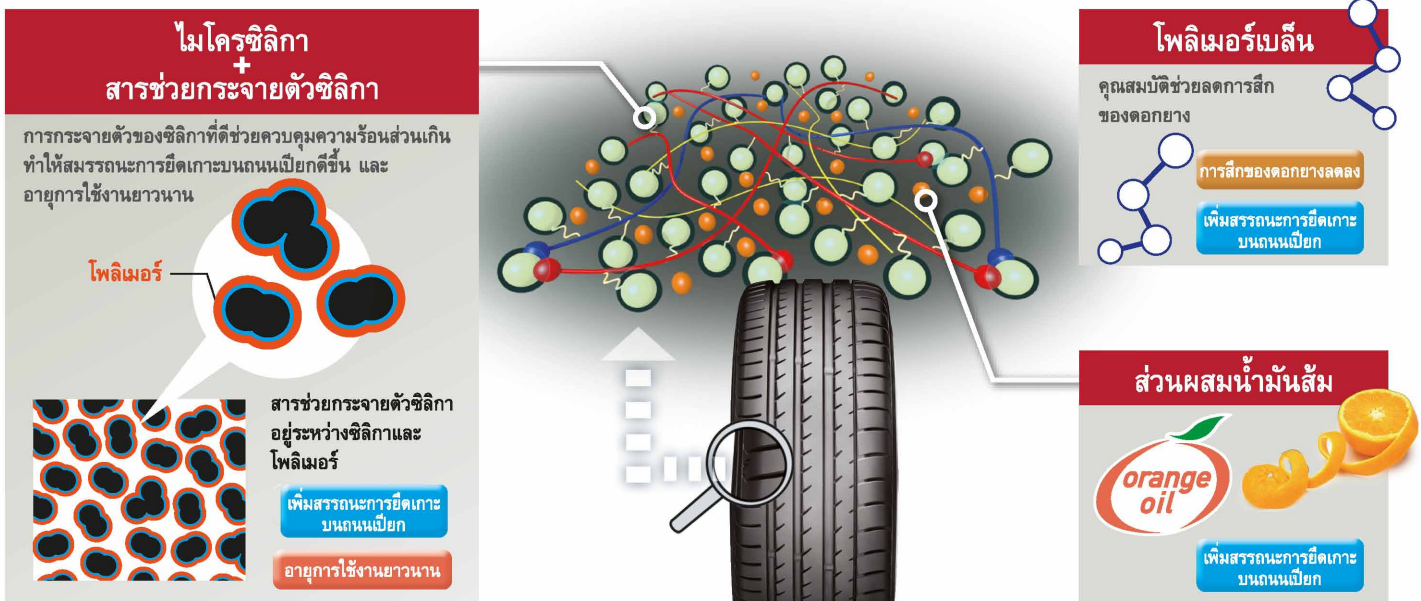

■ ลายดอกยาง




ADVAN Sport V105



Inch	Series	Dimensions			Overall Diameter (mm)	Approved Rim Width (Inch)
20	30	255/30ZR20 (92Y)	XL	#	662	8.5-9.5
		285/30ZR20 99Y	XL	#	679	9.5-10.5
		295/30ZR20 101Y	XL	#	685	10-11
	35	225/35ZR20 (90Y)	XL	#	666	7.5-9
		255/35ZR20 97Y	XL	#	686	8.5-10
		265/35ZR20 99Y	XL	#	694	9-10.5
19	30	275/35ZR20 102Y		#	700	9.5-11
		255/30ZR19 91Y		#	636	8.5-9.5
		265/30ZR19 (93Y)	XL	#	643	9-10
		285/30ZR19 (98Y)	XL	#	655	9.5-10.5
		295/30ZR19 (100Y)	XL	#	661	10-11
	35	225/35ZR19 88Y	XL	#	641	7.5-9
		235/35ZR19 (91Y)	XL	#	647	8-9.5
		255/35ZR19 (96Y)	XL	#	661	8.5-10
		265/35ZR19 (98Y)	XL	#	699	9-10.5
		225/40ZR19 93Y	XL	#	663	7-8.5
	40	255/40ZR19 (100Y)	XL	#	687	8.5-10
		275/40ZR19 (105Y)	XL	#	703	9-11
		285/40ZR19 (103Y)	XL	#	711	9.5-10.5
		245/45ZR19 98Y		#	703	7.5-9
	18	35	255/35ZR18 94Y	XL	#	635
265/35ZR18 97Y			XL	#	643	9-10.5
285/35R18 97Y				MO ##	657	9.5-11
40		225/40ZR18 92Y	XL	#	637	7-8.5
		235/40ZR18 (95Y)	XL	#	645	8-9.5
		245/40ZR18 97Y	XL	#	653	8-9.5
		255/40R18 99Y		MO ##	661	8.5-10
		265/40ZR18 (101Y)	XL	#	669	9-10.5
45		225/45ZR18 95Y	XL	#	659	7-8.5
		245/45ZR18 100Y	XL	#	677	7.5-9
	255/45ZR18 103Y	XL	#	687	8.5-10	
17	50	245/50ZR18 104Y		#	702	8.5-9.5
	40	245/40R17 91W		MO	628	8-9.5
		225/45ZR17 94Y	XL	#	634	7-8.5
		225/45R17 91W		MO	634	7-8.5
		235/45ZR17 97Y	XL	#	644	7.5-9
	45	245/45ZR17 99Y	XL	#	652	7.5-9
		205/50ZR17 93Y	XL	#	638	5.5-7.5
16	50	225/50ZR17 98Y	XL	#	658	6-8
	55	225/50R16 92V		MO	632	6-8
		205/55R16 91V		MO	632	5.5-7.5

*Type of vehicles and tyre sizes available differ depending on region.

RF : Reinforced # : V105S available size MO : Mercedes-Benz specification
 XL : Extra Load ## : V105+ available size

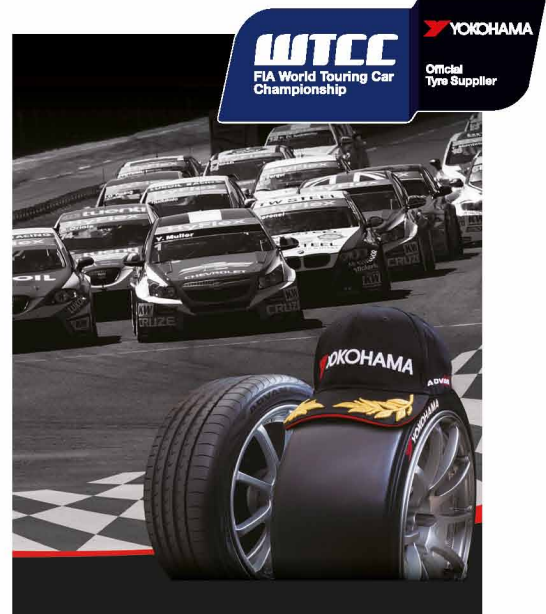

The technology amassed from the WTCC has been incorporated into the ADVAN Sport V105.

User Information

- Never mount a tyre on a rim that is damaged or which has been repaired by welding or brazing.
- Never inflate beyond 280kPa (2.8bar, 40psi) to seat beads. After beads are fully seated, never exceed the maximum tyre pressure indicated on the sidewall.
- Inflation should be done in a safety cage.
- Do not mix tyres of different size designation or construction on the same axle, except for limited use of temporary spare tyres.
- Rim diameter should be the same as the rim diameter code of the tyre.
- Make sure to follow instructions in the car owner's manual or on the vehicle tyre information placard in the car to maintain proper tyre pressure.
- Never bleed or reduce air pressure when tyres are hot from driving.
- Over- or under- inflation is dangerous and could lead to accidents or tyre damage.
- Check tyre inflation pressure (including spare tyre) at least once a month and before every long trip.
- Stones, gravel and other foreign objects stuck in the tyre tread may damage the tyre. Remove foreign objects from the tyre tread.
- Tyres should only be mounted by professionally trained persons.



YOKOHAMA TIRE SALES (THAILAND) CO., LTD.

TEL : 02-652-6996-7 FAX : 02-652-6998

www.yokohamathailand.com