



BluEarth-Es ES32

Grip the Earth.



SPEED RANGE

W/V/H/T

18 17 16 15 14 13
inch inch inch inch inch inch

Orange Oil



Wet



Comfort



Mileage



Fuel Saving



Family Car

Pattern No.ES32

Large Family Car

Small Family Car

The all new Powerful and Comfortable Tread Design

Extra Powerful Pro

High rigidity and tough, Anti-uneven wear

Multiple Powerful Shoulder

Combination of deep lugs and sipes
Stability, Evacuation, Anti-uneven wear

5 Pitch Tread Pattern

Low pattern noise,
Anti-uneven wear



Extra Powerful Profile

High rigidity and proper edge volume
Safety, Drainage on Wet roads

Wide Straight Grooves

Anti-Hydro, Water draining on Wet braking
Straight driving and handling

Simple and Powerful shoulder block design delivers reliable grip and excellent durability.

Optimised tread design adopted for each size width.



ES32 standard design
WIDTH: 145-215



ES32A wide-design
WIDTH: 225 and more

The all new Powerful and Comfortable Tread Design

Contact pressure homogenization and improvement of uneven wear.



Current standard tyre AE01




BluEarth-Es ES32

nano BLEND compound

- Polymer having super low rolling resistance characteristics.
- Bonded with MICRO Silica.

The technology to control chemical reactions of each compounds by nano level.

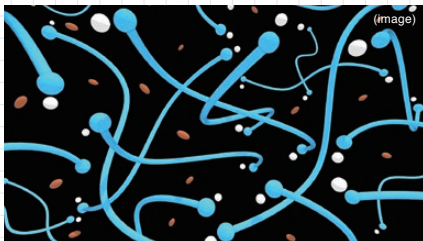

Micro Silica

Well dispersed silica controls excessive heat for wet grip and long mileage

Blend Polymer

Mixed super low rolling resistance polymer bonded with MICRO Silica.

Orange Oil

Makes tyre softer to get more contact surface on wet and dry.



BluEarth-Es ES32										Pattern No. ES32	
Inch	Series	Dimensions	Pattern	RF/XL	Overall Diameter (mm)	Approved Rim Width (inch)					
18	40	225/40R18 92W	❖	XL	637	7.5-9					
		235/40R18 95W	❖	XL	645	8-9.5					
17	40	205/40R17 84V		XL	596	7-8					
		215/40R17 87V		XL	604	7-8.5					
	45	245/40R17 91V	❖		628	8-9.5					
		205/45R17 84V			616	6.5-7.5					
16	45	215/45R17 91V		XL	626	7-8					
		225/45R17 94V	❖	XL	634	7-8.5					
	50	235/45R17 97V	❖	XL	644	7.5-9					
		215/50R17 95V		XL	648	6-7.5					
	55	225/50R17 94V	❖		658	6-8					
		215/55R17 94V			668	6-7.5					
15	45	195/45R16 80V			582	6-7.5					
		205/45R16 83V			590	6.5-7.5					
		195/50R16 84V			602	5.5-7					
		205/50R16 87V			612	5.5-7.5					
	55	185/55R16 83V			610	5-6.5					
		195/55R16 87V			620	5.5-7					
		205/55R16 91H			632	5.5-7.5					
		205/55R16 91V			632	5.5-7.5					
		215/55R16 93H			642	6-7.5					
		215/55R16 97V		XL	642	6-7.5					
		225/55R16 95V	❖		654	6-8					
14	60	175/60R16 82H			616	5-6					
		195/60R16 89H			640	5.5-7					
		205/60R16 92H			652	5.5-7.5					
		215/60R16 95H			664	6-7.5					
	65	215/60R16 99H		XL	664	6-7.5					
		215/60R16 99V		XL	664	6-7.5					
		225/60R16 98V	❖		676	6-8					
		205/65R16 95H			672	5.5-7.5					
	50	195/50R15 82V			577	5.5-7					
		175/55R15 77V			573	5-6					
		185/55R15 82H			585	5-6.5					
		185/55R15 82V			585	5-6.5					
13	70	195/55R15 85H			595	5.5-7					
		195/55R15 85V			595	5.5-7					
		175/70R14 81T			588	4-5.5					
		165/70R14 85T		XL	588	4-5.5					

Inch	Series	Dimensions	RF/XL	Overall Diameter (mm)	Approved Rim Width (inch)					
15	60	155/60R15 74H		567	4.5-5.5					
		165/60R15 77H		579	4.5-6					
		175/60R15 81H		591	5-6					
		185/60R15 84H		603	5-6.5					
		185/60R15 88H	XL	603	5-6.5					
	65	195/60R15 88H		615	5.5-7					
		205/60R15 91H		627	5.5-7.5					
		145/65R15 72H		569	4-5					
		175/65R15 84H		609	5-6					
		185/65R15 88H		621	5-6.5					
14	55	195/65R15 91H		635	5.5-7					
		195/65R15 91T		635	5.5-7					
		195/65R15 95V	XL	635	5.5-7					
		205/65R15 94H		647	5.5-7.5					
		205/65R15 99H	XL	647	5.5-7.5					
	60	165/55R14 72H		538	4.5-6					
		165/60R14 75T		554	4.5-6					
		185/60R14 82H		578	5-6.5					
		195/60R14 86H		590	5.5-7					
		155/65R14 75T		558	4.5-5.5					
13	65	165/65R14 79T		570	4.5-6					
		175/65R14 82H		584	5-6					
		175/65R14 82T		584	5-6					
		185/65R14 86H		596	5-6.5					
		185/65R14 86T		596	5-6.5					
	70	195/65R14 89H		610	5.5-7					
		165/70R14 81T		588	4-5.5					
		165/70R14 85T	XL	588	4-5.5					
		175/70R14 84H		602	4.5-6					
		175/70R14 84T		602	4.5-6					

XL = Extra Load

❖ = ES32A Available size