

## SPECIFICATIONS

Model	OS-101	OS-102	OS-103	OS-105	OS-107
<b>Telescope</b>					
Magnification / Resolving power	30x / 2.5"				30x / 3.5"
Others	Length: 171mm (6.7in.), Objective aperture: 45mm (1.8in.) (48mm (1.9in.) for EDM), Image: Erect, Field of view: 1°30' (26m/1,000m), Minimum focus: 1.3m (4.3ft.), Reticle illumination: 5 brightness levels				
<b>Angle measurement</b>					
Display resolution	0.5" / 1" (0.0001 / 0.0002gon, 0.002 / 0.005mil)	1" / 5" (0.0002 / 0.001gon, 0.005 / 0.02mil)			
Accuracy (ISO 17123-3:2001)	1"	2"	3"	5"	7"
Dual-axis compensator / Collimation compensation	Dual-axis liquid tilt sensor, working range: ±6' (±111mgon) / Collimation compensation available				
<b>Distance measurement</b>					
Laser output *1	Reflectorless mode: Class 3R / Prism/sheet mode: Class 1				
Measuring range (under average conditions *3)	Reflectorless *5	0.3 to 500m (1.0 to 1,640ft.)			
	Reflective sheet *4 *5	RS90N-K: 1.3 to 500m (4.3 to 1,640ft.), RS50N-K: 1.3 to 300m (4.3 to 980ft.), RS10N-K: 1.3 to 100m (4.3 to 320ft.)			
	Mini prism	1.3 to 500m (1,640ft.)			
	One prism	1.3 to 4,000m (4.3 to 13,120ft.) / Under good conditions *6: 1.3 to 5,000m (16,400ft.)			
	Three prisms	to 5,000m (16,400ft.) / Under good conditions *6: to 6,000m (19,680ft.)			
Display resolution	Fine/Rapid: 0.001m / 0.01ft. / 1/8in. Tracking: 0.01m / 0.1ft. / 1/2in.				
Accuracy *2	Reflectorless *5	(3 + 2ppm x D) mm *7			
	Reflective sheet *4	(3 + 2ppm x D) mm			
	Prism	(2 + 2ppm x D) mm			
Measuring time *8	Fine: 0.9s (initial 1.7s), Rapid: 0.7s (initial 1.4s), Tracking: 0.3s (initial 1.4s)				
<b>OS, Interface and Data management</b>					
Operating system / Application	Microsoft Windows® CE 6.0 / MAGNET Field				
Display / Keyboard	3.5inch, Semi-transmissive TFT QVGA color LCD with LED backlight, Touch screen, Automatic brightness control / 26 keys with backlight				
Control panel location *9	On both faces (Face 2 is only touch screen display)				On one face
Trigger key	On right instrument support				
Data storage	Internal memory	500MB internal memory (includes memory for program files)			
	Plug-in memory device	USB flash memory (max. 8GB)			
Interface	Serial RS-232C, USB2.0 (Type A / mini B)				
Bluetooth modem (Factory Option) *10	Bluetooth Class 1, Ver.2.1+EDR, Operating range: up to 300m (980ft.) *11				
<b>General</b>					
Laser-pointer *12	Coaxial red laser using EDM beam				
Guide light *12	Green LED (524nm) and Red LED (626nm), Operating range: 1.3 to 150m (4.3 to 490ft.) *2				
Levels	Graphic	6' (inner circle)			
	Circular level	10' / 2mm			
Optical plummet	Magnification: 3x, Minimum focus: 0.3m (11.8in.) from tribrach bottom				
Laser plummet (option)	Red laser diode (635nm±10nm), Beam accuracy: ≤1.0mm@1.3m, Class 2 laser product				
Dust and water protection	IP65 (IEC 60529:2001)				
Operating temperature *13	-20 to +50°C (-4 to +122°F)				
Size with handle *9	Control panel on both faces: W191 x D190 x H348mm (W7.5 x D7.5 x H13.7in.) Control panel on one face: W191 x D174 x H348mm (W7.5 x D6.9 x H13.7in.)				
Weight with battery & tribrach	Approx. 5.7kg (12.6 lb.)				
<b>Power supply</b>					
Battery	BDC70 detachable battery	Li-ion rechargeable battery			
Operating time (20°C)	BDC70	Approx. 20hours (single distance measurement every 30 seconds)			
	External battery (option) *14	BT-73Q: approx. 49hours (single distance measurement every 30 seconds)			

\*1 IEC60825-1:Ed.2.0:2007 / FDA CDRH 21 CFR Part 1040.10 and 11

\*2 Average conditions: Slight haze, visibility about 20km (12 miles), sunny periods, weak scintillation.

\*3 Fine mode. With Kodak Gray Card White Side (90% reflective). When brightness on measured surface is 30,000 lx. or less. Reflectorless range/accuracy may vary according to measuring objects, observation situations and environmental conditions.

\*4 When the measuring beam's incidence angle is within 30° in relation to the reflective sheet target.

\*5 Measuring range in temperatures of -30 to -20°C (-22 to -4°F) with Low Temperature models and 50 to 60°C (122 to 140°F) with High Temperature models: RS90N-K: 1.3 to 300m (4.3 to 980ft.), RS50N-K: 1.3 to 180m (4.3 to 590ft.), RS10N-K: 1.3 to 60m (4.3 to 190ft.)

\*6 Good conditions: No haze, visibility about 40km (25 miles), overcast, no scintillation.

\*7 Measuring range: 0.3 to 200m

\*8 Typical, under good conditions. Reflectorless measurement time may vary according to measuring objects, observation situations and environmental conditions.

\*9 Control panel location may vary depending on region or model.

\*10 Usage approval of Bluetooth wireless technology varies according to country. Please consult your local office or representative in advance.

\*11 No obstacles, few vehicles or sources of radio emissions/interference in the near vicinity of the instrument, no rain.

\*12 The laser-pointer and the guide light do not work simultaneously.

\*13 Low Temperature models: -30 to 50 °C (-22 to 122°F) and High Temperature models: -20 to 60°C (-4 to 140°F, No direct sunlight) are available on built-to-order basis.

\*14 For OS-101, OS-102 and Low Temperature models.



## Highly functional total station with outstanding operability

- Windows® CE is ready in a lightweight, compact body
- MAGNET™ Field On-Board Application Software
- Fast and Powerful Reflectorless EDM
- LongLink Data Communication\*
- Advanced Angle Measurement System
- Long-lasting battery
- Rugged and User-friendly Design

\*Factory Option



All functions needed in the field are packed into a compact, lightweight body Windows® CE total station.



**Windows® CE is ready in a lightweight, compact body**

- Windows® CE provides a familiar, comfortable operating environment.
- Completely new onboard application "MAGNET™ Field" is installed as standard feature.

**MAGNET™ Field**

Data collection, stakeout, roads, and coordinate geometry.



**LongLink Data Communication\***


- Long-distance communications with Bluetooth® Class 1.
- Bluetooth Class1 communications ensures a long-distance, stable connection.
- Link between total station and rover-end data collector, both equipped with Bluetooth Class1, facilitates quick surveying only by sighting the object.

\* Offered as a factory option.




**Fast and Powerful Reflectorless EDM**

- Fast and accurate pinpointing with phase shift technology.
- Fast distance measurement of 0.9s regardless of object.
- Minimum reflectorless measuring distance - just 30cm.
- Improved collimation with super-bright pointer.
- Smaller EDM beam spot size for minimal distance measuring error.
- Dependable measuring even at shallow incidence angles.
- Ensures accurate reflective sheet distance measurement.

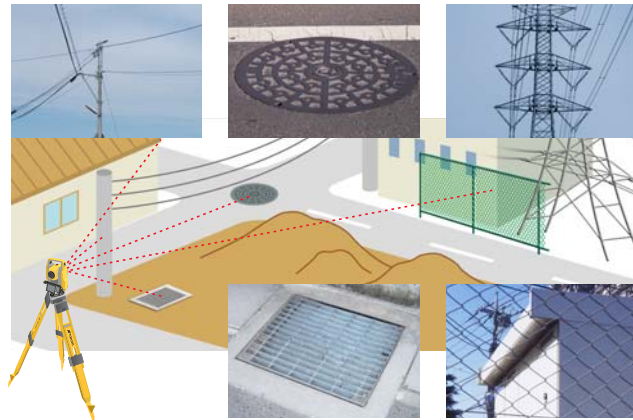

The ultra-narrow EDM beam can precisely measure walls, corners, manholes on the surface, even chain-link fences and tree branches.



**Advanced Angle Measurement System**

- OS features advanced absolute encoders for long-term reliability in all work conditions. Dual-axis compensation ensures accurate leveling even on rough terrain.
- Motion clamp and tangent screw ensure stable angle measurement.
- OS-101 and OS-102 equipped with ground-breaking technology for extremely reliable angle measurement.



**Rugged Design**

- IP65 dustproof/waterproof performance Standard usage temperature range -20°C to +50°C. Low temperature models can be used as low as -30°C\* and High temperature Models up to +60°C.\*

\* Low and High temperature models available as options.

**PRIMARY FEATURES**

USB Type A and Type miniB port



Long-lasting battery: one battery provides 20 hours of power.



Green/red Guide Light is built into the telescope as a standard feature, enhancing setting-out work efficiency in a range of 1.3 to 150m.



Trigger key lets you take a series of measurements without taking your eye off the telescope. Trigger key is ergonomically placed so that measurement can be taken at any time with just the push of a button.



Star key [★] instantly brings up functions.



Control panel consists of 10-key pad with color LCD touch screen display for easy viewing of graphics\*.

\*Control panel location may vary depending on region or model.

Built-in laser plummet is equipped for quick instrument setting. 5 brightness levels are ready for optimum visibility.\*

\*Offered as an option in some areas.

**MAGNET™**



Cloud-based Solutions for Precise Positioning MAGNET™ is a software family that uses the cloud to seamlessly connect data in the field and office. Real-time connections. When you need it, Where you need it. For data exchange, communications, asset tracking and more.

**KIT COMPONENTS**

**Standard package components**

- OS main unit
- Battery (BDC70)
- Battery charger (CDC68)
- Power Cable
- Lens cap
- Lens hood
- Tool pouch
- Screwdriver
- Lens brush
- Adjusting pin × 2
- Cleaning cloth
- Operation manual
- USB memory key
- Laser caution sign-board
- Carrying case
- Carrying strap

