
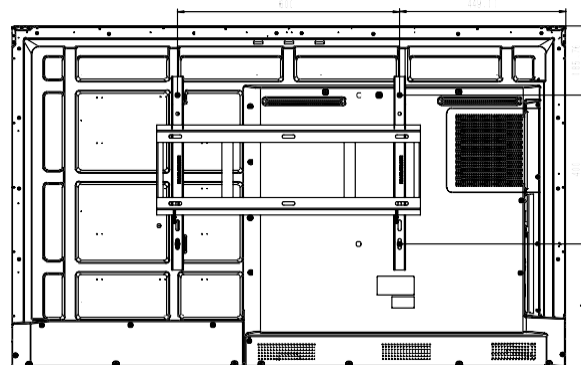


Hisense Interactive Board 65"

1500 x 922 x 105mm 39.0 kg

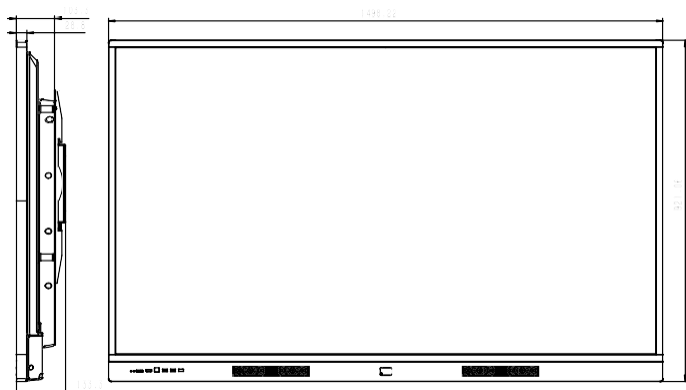

Model			65WR60AE		
Panel	LCD Size		65"		
	Backlight Type		D-LED		
	Resolution		3840x2160(pixels)		
	Brightness		360cd/m²(typ.)		
	Contrast Ratio		1200:1(typ.)		
	Response Time		8ms (typ.)		
	Refreshing Frequency		60Hz		
	Viewing Angle		178°(H) / 178°(V)		
	Life Time		30,000 hrs (min.)		
	Color Gamut(X% NTSC)		72%		
Display Colors		107B(10bit)			
System	Chipset		Hi3751V811		
	CPU	Architecture	ARM A73+A53		
		Working Frequency	1.7GHz		
		Core	8 Core		
	GPU		MaliG51		
	RAM		3GB		
ROM		32GB			
OS		Android 8.0			
Connectivity	Input	HDMI IN	x2		
		DP IN	x1		
		VGA IN	x1		
		AV IN	/		
		YPBPR IN	/		
		OPS (optional)	x1		
		LAN	x1		
		USB	x4		
		Touch	x1		
		PC-Audio IN	x1		
	RS232 IN	x1			
	Output	RS232 OUT	/		
		HDMI OUT	x1		
		AV OUT	/		
S/PDIF OUT		x1			
Model			65WR60AE		
Power	Power Requirements		AC 100 V ~ 240 V, 50/60 Hz		
	Power Consumption Without OPS		220W		
	Standby Condition		<0.5W		
	Audio Output Power		2x15W/8Ω		
Touch	Sensing Type		Infrared Touch Frame		
	Surface Protection		4mm Anti-Glare Glass		
	Infrared Touch		≤20 points		
	Touch Accuracy		90%(±1mm)		
	Response Time		≤8ms		
	Theory Clicks		Unlimited		
	Minimum Touch Object		≥2mm		
	Connect Type		USB2.0 Full Speed		
	Voltage		DC+5V±5%		
	Power Consumption		≤2W		
Windows 10/8/7,Android		Multi Touch			
Windows XP,Linux,Mac OS X,Chrome		Single Touch			
Physical	Product Size(W x H x D)		1500x922x105mm		
	Package Size(W x H x D)		1720x1110x240mm		
	Net Weight		39kg		
	Packed Weight		54kg		
	Housing Material		"Front shell: Aluminum Rear shell: Blister"		
	Housing Color		Black		
	VESA		400*400mm, 4-M8 screw		
Standard Certification		Standard certification		CB,CE,ERP	
Accessories	Basic		User Manual × 1 Pen × 2 Remote Control × 1 Wireless Cast × 1 Power Cable × 4 Battery × 2 Wall Mount Bracket × 1 Audio Cable × 1		
	Optional		"Mobile Cart OPS"		