
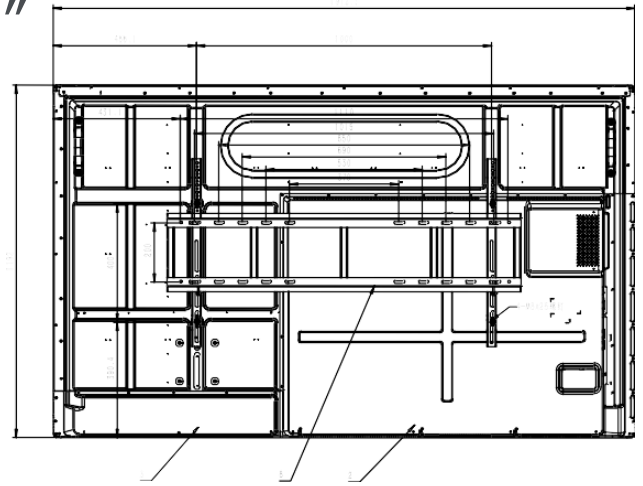



# Hisense Interactive Board 86"

1972 x 1192 x 90mm

74.2 kg

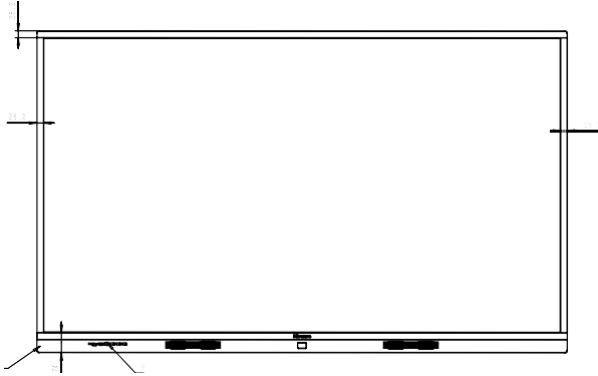

		Model	86WR60AE
Panel	LCD Size		86"
	Backlight Type		D-LED
	Resolution		3840x2160(pixels)
	Brightness		360cd/m <sup>2</sup> (typ.)
	Contrast Ratio		1200:1(typ.)
	Response Time		8ms (typ.)
	Refreshing Frequency		60Hz
	Viewing Angle		178°(H) / 178°(V)
	Life Time		30,000 hrs (min.)
	Color Gamut(X% NTSC)		85%
	Display Colors		1.07B(10bit)
System	Chipset		Hi3751V811
	CPU	ARM A73+A53	ARM A73+A53
		1.7GHz	1.7GHz
		8 Core	8 Core
	GPU		MaliG51
	RAM		3GB
	ROM		32GB
OS		Android 8.0	
Connectivity	Input	x2	x2
		x1	x1
		x1	x1
		/	/
		/	/
		x1	x1
		x1	x1
		x4	x4
		x1	x1
		x1	x1
	Output	/	/
		x1	x1
		/	/
	x1	x1	

		Model	86WR60AE
Power	Power Requirements		AC 100 V ~ 240 V, 50/60 Hz
	Power Consumption Without OPS		460W
	Standby Condition		<0.5W
	Audio Output Power		2x15W/8Ω
Touch	Sensing Type		Infrared Touch Frame
	Surface Protection		4mm Anti-Glare Glass
	Infrared Touch		≤20 points
	Touch Accuracy		90%(±1mm)
	Response Time		≤8ms
	Theory Clicks		Unlimited
	Minimum Touch Object		≥2mm
	Connect Type		USB2.0 Full Speed
	Voltage		DC+5V±5%
	Power Consumption		≤2W
	Windows 10/8/7,Android		Multi Touch
Windows XP,Linux,Mac OS X,Chrome		Single Touch	
Physical	Product Size(W x H x D)		1972*1192*90mm
	Package Size(W x H x D)		2171*1382*341mm
	Net Weight		74.2kg
	Packed Weight		102kg
	Housing Material		"Front shell: Aluminum Rear shell: Blister"
	Housing Color		Black
	VESA		1000*400mm, 4-M8 screw
Standard Certification	Standard certification		CB,CE,ERP
Accessories	Basic		User Manual × 1 Pen × 2 Remote Control × 1 Wireless Cast × 1 Power Cable × 4 Battery × 2 Wall Mount Bracket × 1 Audio Cable × 1
	Optional		"Mobile CartOPS"