
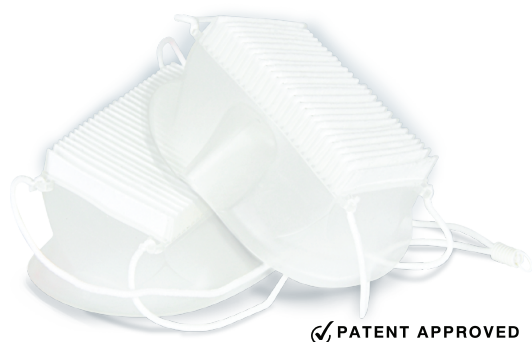


# FILTER MASK

Filtration  $\geq 95\%$  at 0.3 microns particles


Designed to be compliant with multiple international standards (N95 and FFP2)

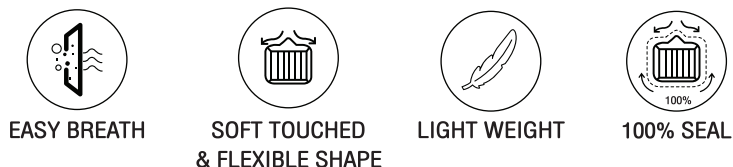

**USE FOR :** Designed to help provide reliable respiratory protection of at least 95 percent filtration efficiency against certain non-oil based particles such as those released from grinding, sanding, sweeping sawing, or other dusty operations



## FITTING INSTRUCTION

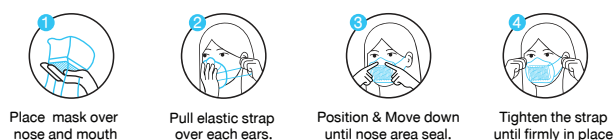

**WARNING :** This mask helps protect certain particles. Misuse may result in sickness or death.

## MASK PERFORMANCE

Test result from  
Nelson Lab, U.S.A



### 0.3 microns Efficiency Test

Test Article Number	Filtration Efficiency (%)
1	95.35
2	95.54
3	95.19
4	95.36
5	95.70
6	95.49
7	95.12
8	95.86
9	95.98
10	96.07

### Bacteria Filtration Efficiency Test (3 microns)

Test Article Number	Filtration Efficiency (%)
1	99.53
2	97.90
3	99.96
4	99.95
5	99.96
6	99.92
7	99.83
8	99.88
9	99.92
10	99.96

Test Article Number	Inhalation Resistance (mm H <sub>2</sub> O)	Exhalation Resistance (mm H <sub>2</sub> O)
1	3.9	3.0
2	3.5	2.6
3	3.6	2.8