

FLOOR & CEILING TYPE

AIR CONDITIONING



FLOOR & CEILING TYPE

MODEL: DCR / CR



FILTER
 AUTO FAN SPEED
 FAN 3 LEVELS
 SLEEP MODE
 TIMER

FLOOR & CEILING TYPE

INDOOR UNIT MODEL			DCR-400	DCR-600	DCR-800	DCR-1000	DCR-1000
AIR FLOW	CFM		400	600	800	1,000	1,000
POWER SUPPLY	V / Ph / Hz		220/1/50				
FAN	TYPE		CENTRIFUGUL DOUBLE INLET , DOBLE WIDTH				
	QTY		2	2	2	4	4
MOTOR	TYPE		PERMANENT SPLIT CAPACITOR				
	QTY		1	1	1	1	1
CONNECTION	SUCTION	INCH	1/2	1/2	5/8	5/8	5/8
	LIQUID	INCH	1/4	1/4	1/4	1/4	1/4
DIMENSION	WIDTH	CM	101.00	101.00	131.00	131.00	131.00
	HEIGHT	CM	64.00	64.00	64.00	64.00	64.00
	DEPTH	CM	21.00	24.00	24.00	27.00	27.00
APPROX WEIGHT	KG		47.00	47.00	48.00	45.00	45.00
OUTDOOR UNIT MODEL			CR-12	CR-18	CR-25	CR-30	CR-30-3
COOLING CAPACITY	BTU/HR.		13,000	18,100	25,000	30,000	30,000
	WATT		3,800	5,300	7,300	8,800	8,800
POWER INPUT	WATT		1,220	1,710	2,350	2,840	2,840
EER	BTU/WATT		10.58	10.58	10.58	10.58	10.58
COMPRESSOR	TYPE		ROTARY				
CONDENSER COIL	TYPE		COPPER TUBE AND ALUMINIUM FIN				
REFRIGERANT	TYPE		R32				
POWER SUPPLY	V / Ph / Hz		220/1/50				
MOTOR	TYPE		PERMANENT SPLIT CAPACITOR				
CONNECTION	SUCTION	INCH	1/2	1/2	5/8	5/8	5/8
	LIQUID	INCH	1/4	1/4	1/4	1/4	1/4
DIMENSION	WIDTH	CM	85.00	95.00	95.00	95.00	95.00
	HEIGHT	CM	54.50	69.50	69.50	69.50	69.50
	DEPTH	CM	28.50	37.00	37.00	37.00	37.00
APPROX WEIGHT	KG		36.00	55.00	56.00	62.00	62.00



Note : Cooling capacity base on 27 °C D.B., 19 °C W.B., Air on evaporator coil and 35 °C Ambient air for outdoor unit.
Specification subject to change without notice.

FLOOR & CEILING TYPE

AIR CONDITIONING




FLOOR & CEILING TYPE

MODEL: DCR / CR



MODEL: DCR

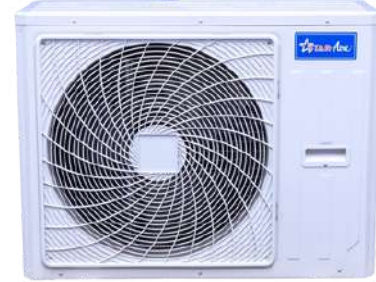

MODEL: CR



FILTER



AUTO FAN SPEED



FAN 3 LEVELS



SLEEP MODE



TIMER

FLOOR & CEILING TYPE

INDOOR UNIT MODEL		DCR-1100	DCR-1100	DCR-1200	DCR-1200	DCR-1400	DCR-1400	DCR-1500	DCR-1600	DCR-2000	
AIR FLOW	CFM	1,100	1,100	1,300	1,300	1,400	1,400	1,500	1,600	2,000	
POWER SUPPLY	V / Ph / Hz	220/1/50									
FAN	TYPE	CENTRIFUGUL DOUBLE INLET , DOBLE WIDTH									
	QTY	4	4	4	4	4	4	4	4	4	
MOTOR	TYPE	PERMANENT SPLIT CAPACITOR									
	QTY	1	1	1	1	1	1	2	2	2	
CONNECTION	SUCTION INCH	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	3/4	
	LIQUID INCH	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	
DIMENSION	WIDTH CM	131.00	131.00	191.00	191.00	191.00	191.00	161.00	191.00	191.00	
	HEIGHT CM	64.00	64.00	64.00	64.00	64.00	64.00	64.00	64.00	64.00	
	DEPTH CM	27.00	27.00	24.00	24.00	27.00	27.00	24.00	24.00	27.00	
APPROX WEIGHT	KG	45.00	45.00	65.00	65.00	53.00	53.00	58.00	62.00	75.00	
OUTDOOR UNIT MODEL		CR-33	CR-33-3	CR-36	CR-36-3	CR-40	CR-40-3	CR-45	CR-48	CR-60	
COOLING CAPACITY	BTU/HR.	32,400	32,400	36,200	36,200	40,300	40,300	45,000	48,000	60,900	
	WATT	9,500	9,500	10,600	10,600	11,800	11,800	-	-	-	
POWER INPUT	WATT	3,060	3,060	3,420	3,420	3,810	3,810	4,400	4,700	6,160	
EER	BTU/WATT	10.58	10.58	10.58	10.58	10.58	10.58	10.24	10.24	9.89	
COMPRESSOR	TYPE	ROTARY						SCROLL			
CONDENSER COIL	TYPE	COPPER TUBE AND ALUMINIUM FIN									
REFRIGERANT	TYPE	R32									
POWER SUPPLY	V / Ph / Hz	220/1/50	380/3/50	220/1/50	380/3/50	220/1/50	380/3/50	380/3/50	380/3/50	380/3/50	
MOTOR	TYPE	PERMANENT SPLIT CAPACITOR									
CONNECTION	SUCTION INCH	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	3/4	
	LIQUID INCH	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	
DIMENSION	WIDTH CM	95.00	95.00	98.00	98.00	98.00	98.00	110.00	110.00	110.00	
	HEIGHT CM	69.50	69.50	79.50	79.50	79.50	79.50	110.50	110.50	110.50	
	DEPTH CM	37.00	37.00	39.00	39.00	39.00	39.00	40.00	40.00	40.00	
APPROX WEIGHT	KG	62.00	62.00	70.00	70.00	75.00	75.00	85.00	85.00	95.00	



Note : Cooling capacity base on 27 °C D.B., 19 °C W.B., Air on evaporator coil and 35 °C Ambient air for outdoor unit.
Specification subject to change without notice.