



WALL TYPE

AIR CONDITIONING

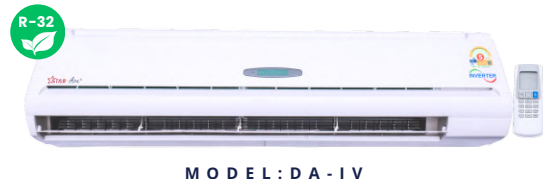

MODEL: DM-IV, DA-IV / CM-IV, CR-IV

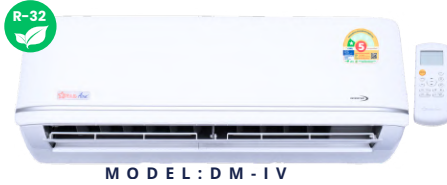

INDOOR UNIT MODEL			DM-095-IV	DM-125-IV	DM-185-IV	DM-245-IVA	DM-305-IV	DA-365-IV	DA-365-3IV	
STANDARD NO.5										
AIR FLOW	CFM		350	400	600	800	1,000	850	850	
POWER SUPPLY	V / Ph / Hz		220 / 1 / 50							
FAN	TYPE		CROSS FLOW FAN							
	QTY		1	1	1	1	1	1	1	
MOTOR	TYPE		DC MOTOR				PERMENT SPLIT CAPACITOR			
	QTY		1	1	1	1	1	1	1	
CONNECTION	SUCTION	INCH	3/8	1/2	1/2	5/8	5/8	5/8	5/8	
	LIQUID	INCH	1/4	1/4	1/4	3/8	3/8	3/8	3/8	
DIMENSION	WIDTH	CM	80.20	80.20	96.50	108.20	125.90	145.00	145.00	
	HEIGHT	CM	29.70	29.70	31.90	33.70	36.20	36.50	36.50	
	DEPTH	CM	18.90	18.90	21.50	23.40	28.20	23.00	23.00	
APPROX WEIGHT	KG		8.70	8.90	11.20	13.30	19.50	27.00	27.00	
OUTDOOR UNIT MODEL			CM-095-IV	CM-125-IV	CM-185-IV	CM-245-IVA	CM-305-IV	CR-365-IV	CR-365-3IV	
COOLING CAPACITY	BTU/HR.		9,736	13,549	18,755	25,257	31,002	35,378	36,214	
POWER INPUT	WATT		2,700	3,500	5,300	7,100	8,800	10,600	10,600	
CURRENT	AMP.		2.36	4.50	6.70	8.87	11.80	6.5-18	2.5-8	
NO.5 มอก. 2134-2553	WATT		2,700	3,500	5,300	7,100	8,800	10,600	10,600	
NO.5 มอก. 1529-2561	WATT		750	1,220	1,472	2,030	2,565	3,420	3,420	
SEER	BTU/WATT		21.19	21.67	20.06	18.55	17.81	16.49	17.01	
COMPRESSOR	TYPE		ROTARY			TWIN ROTARY				
CONDENSER COIL	TYPE		COPPER TUBE AND ALUMINIUM FIN							
REFRIGERANT	TYPE		R32							
POWER SUPPLY	V / Ph / Hz		220/1/50	220/1/50	220/1/50	220/1/50	220/1/50	220/1/50	380/3/50	
MOTOR	TYPE		DC MOTOR				DC MOTOR		AC MOTOR	
	QTY		1	1	1	1	1	1	1	
CONNECTION	SUCTION	INCH	3/8	1/2	1/2	5/8	5/8	5/8	5/8	
	LIQUID	INCH	1/4	1/4	1/4	3/8	3/8	3/8	3/8	
DIMENSION	WIDTH	CM	68.10	77.00	80.00	89.00	94.60	98.00	98.00	
	HEIGHT	CM	43.40	55.50	55.40	67.30	81.00	79.50	79.50	
	DEPTH	CM	28.50	30.00	33.30	34.20	41.00	39.00	39.00	
APPROX WEIGHT	KG		18.90	23.20	30.10	43.30	64.50	55.00	55.00	

Note : Cooling capacity base on 27 °C D.B., 19 °C W.B., Air on evaporator coil and 35 °C Ambient air for outdoor unit.
Specification subject to change without notice.