


# CONCEALED TYPE

## AIR CONDITIONING



### CONCEALED TYPE NUMBER 5

MODEL: DHD5 / CM-A, CR, CR-A

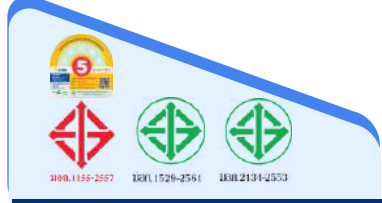

			CONCEALED TYPE							
INDOOR UNIT MODEL			DHD5-403	DHD5-603	DHD5-803	DHD5-1000	DHD5-1201	DHD5-1202	DHD5-1350	DHD5-1350
AIR FLOW	CFM		400	600	800	1,000	1,300	1,350	1,400	1,400
POWER SUPPLY	V / Ph / Hz		220/1/50							
FAN	TYPE		CENTRIFUGAL DOUBLE INLET , DOUBLE WIDTH							
	QTY		2	2	2	2	4	4	4	4
MOTOR	TYPE		AC MOTOR				BLDC MOTOR			
	QTY		1	1	1	1	2	2	2	2
CONNECTION	SUCTION	INCH	1/2	1/2	5/8	5/8	5/8	5/8	5/8	5/8
	LIQUID	INCH	1/4	1/4	3/8	1/4	3/8	3/8	3/8	3/8
DIMENSION	WIDTH	CM	92.00	98.00	123.00	128.60	184.00	184.00	186.50	186.50
	HEIGHT	CM	21.00	25.00	23.50	25.00	25.00	25.00	25.00	25.00
	DEPTH	CM	47.00	53.00	50.50	55.50	52.00	52.00	54.70	54.70
APPROX WEIGHT	KG		18.00	21.00	24.00	50.00	72.00	72.00	78.00	78.00
OUTDOOR UNIT MODEL			CM-125-A	CM-185-A	CM-255-A	CR-305-A	CR-365-A	CR-365-3	CR-405	CR-405-3
COOLING CAPACITY	BTU/HR.		13,814	18,783	26,107	31,100	36,000	36,300	40,150	40,200
	WATT		3,600	5,300	7,300	8,800	10,600	10,600	11,800	11,800
POWER INPUT	WATT		1,000	1,472	2,023	2,599	2,818	2,883	3,172	3,279
SEER	BTU/WATT		14.17	13.56	13.26	13.19	13.60	13.25	12.86	12.93
COMPRESSOR	TYPE		ROTARY						SCROLL	ROTARY
REFRIGERANT	TYPE		R32							
POWER SUPPLY	V / Ph / Hz		220/1/50				380/3/50	220/1/50	380/3/50	
MOTOR	TYPE		PERMANENT SPLIT CAPACITY							
CONNECTION	SUCTION	INCH	1/2	1/2	5/8	5/8	5/8	5/8	5/8	5/8
	LIQUID	INCH	1/4	1/4	3/8	1/4	3/8	3/8	3/8	3/8
DIMENSION	WIDTH	CM	80.50	80.50	94.60	98.00	110.00	110.00	110.00	110.00
	HEIGHT	CM	55.50	55.50	81.00	79.50	110.50	110.50	110.50	110.50
	DEPTH	CM	33.00	33.00	41.00	39.00	40.00	40.00	40.00	40.00
APPROX WEIGHT	KG		32.00	40.00	61.00	67.00	80.00	80.00	90.00	90.00



Note : Cooling capacity base on 27 °C D.B., 19 °C W.B., Air on evaporator coil and 35 °C Ambient air for outdoor unit. Specification subject to change without notice.

# CONCEALED TYPE

## AIR CONDITIONING



### CONCEALED TYPE NUMBER 5

MODEL: DHD5 / CR



MODEL: DHD5



MODEL: CR



REMOTE CONTROL



TIMER



BLUE FIN



SERVICE VALVE

#### CONCEALED TYPE

INDOOR UNIT MODEL			DHD5-1500	DHD5-1600	DHD5-1800	DHD5-2000
AIR FLOW	CFM		1,500	1,600	1,800	2,000
POWER SUPPLY	V / Ph / Hz		220/1/50			
FAN	TYPE		CENTRIFUGAL DOUBLE INLET , DOUBLE WIDTH			
	QTY		4	4	4	4
MOTOR	TYPE		AC MOTOR			
	QTY		2	2	2	2
CONNECTION	SUCTION	INCH	5/8	5/8	3/4	3/4
	LIQUID	INCH	3/8	3/8	3/8	3/8
DIMENSION	WIDTH	CM	183.40	172.00	183.70	187.70
	HEIGHT	CM	24.80	25.30	25.00	27.70
	DEPTH	CM	52.00	54.80	53.60	61.30
APPROX WEIGHT	KG		40.00	45.00	47.00	52.00
OUTDOOR UNIT MODEL			CR-455-3	CR-485-3	CR-565-3	CR-605-3
COOLING CAPACITY	BTU/HR.		47,021	48,084	56,161	61,416
POWER INPUT	WATT มอก. 1529		4,400	4,700	5,470	6,160
SEER	BTU/WATT		10.48	10.58	10.48	10.51
COMPRESSOR	TYPE		SCROLL			
REFRIGERANT	TYPE		R32			
POWER SUPPLY	V / Ph / Hz		380/3/50			
MOTOR	TYPE		PERMANENT SPLIT CAPACITY			
CONNECTION	SUCTION	INCH	5/8	5/8	3/4	3/4
	LIQUID	INCH	3/8	3/8	3/8	3/8
DIMENSION	WIDTH	CM	110.00	110.00	110.00	110.00
	HEIGHT	CM	110.50	110.50	110.50	110.50
	DEPTH	CM	40.00	40.00	40.00	40.00
APPROX WEIGHT	KG		85.00	85.00	98.00	105.00



Note : Cooling capacity base on 27 °C D.B., 19 °C W.B., Air on evaporator coil and 35 °C Ambient air for outdoor unit.  
Specification subject to change without notice.