




LED Floodlight Eco


Brand new series LED Floodlight has a wider power option from 20W to 100W. Comes with bracket light weight design. Optimal lighting, IP65 rating, suitable for indoor and outdoor lighting fixtures to give you a bright and safe night. Fit for landscape lighting, garden, building lighting, hotels and residential, and other outdoor place for atmosphere decorate.



DIMENSION

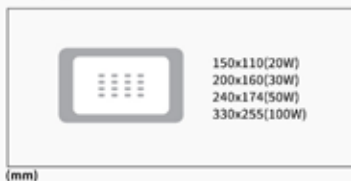

EQUIVALENT



ENERGY SAVING



Product code	Voltage (V)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Colour Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Weight (Kg)	Lifespan (Hrs.)
RLCFC02030CTH1	220-240	20	1,600	80	3000K	≥80	0.9	120°	0.3	30,000h
RLCFC02065CTH1	220-240	20	1,700	85	6000K	≥80	0.9	120°	0.3	30,000h
RLCFC03030CTH1	220-240	30	2,400	80	3000K	≥80	0.9	120°	0.6	30,000h
RLCFC03065CTH1	220-240	30	2,550	85	6000K	≥80	0.9	120°	0.6	30,000h
RLCFC05030CTH1	220-240	50	4,250	85	3000K	≥80	0.9	120°	0.8	30,000h
RLCFC05065CTH1	220-240	50	4,500	90	6000K	≥80	0.9	120°	0.8	30,000h
RLCFC10030CTH1	220-240	100	8,500	85	3000K	≥80	0.9	120°	2.1	30,000h
RLCFC10065CTH1	220-240	100	9,000	90	6000K	≥80	0.9	120°	2.1	30,000h

Operation temperature : -20°C to 45°C