



SHINING



LED Downlight slim



Uniform light levels – the suitable job description for this high-performance downlight for the retail sector. With its simple, minimalist shape and flush mounting, it integrates excellently with your design concept. Available in Square and Round shape.

PRODUCT FEATURES

- ➔ Modern look design LED anti-glare downlight.
- ➔ Light weight, Slim size and easy installation.
- ➔ External driver with safety connector.
- ➔ Instantly start, no flash, no abnormal noise.
- ➔ Long life 25,000 hrs.
- ➔ Environmentally friendly (no mercury, no UV).
- ➔ Indoor use only.



Dimension

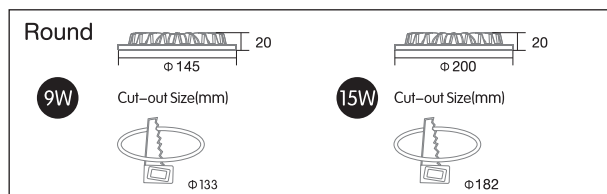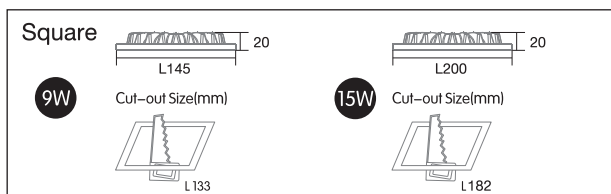

	Voltage (V)	Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temp. (K)	CRI (Ra)	Power Factor	Beam Angle (°)	Lifetime (hrs.)	Operation Temperature (°C)
Square										
LCTDSP0901PW	220-240	9	585	65	6,500	>70	>0.5	110	25,000	-20~40°C
LCTDSP0901WW	220-240	9	495	55	2,700	>70	>0.5	110	25,000	-20~40°C
LCTDSP1501PW	220-240	15	980	65	6,500	>70	>0.5	110	25,000	-20~40°C
LCTDSP1501WW	220-240	15	830	55	2,700	>70	>0.5	110	25,000	-20 40 C
Round										
LCTDRSP0901PW	220-240	9	585	65	6,500	>70	>0.5	110	25,000	-20~40°C
LCTDRSP0901WW	220-240	9	495	55	2,700	>70	>0.5	110	25,000	-20~40°C
LCTDRSP1501PW	220-240	15	980	65	6,500	>70	>0.5	110	25,000	-20~40°C
LCTDRSP1501WW	220-240	15	830	55	2,700	>70	>0.5	110	25,000	-20 40 C