



มาตรฐาน 1955-2551

LED Downlight slim



Uniform light levels - the suitable job description for this high-performance downlight for the retail sector. With its simple, minimalist shape and flush mounting, it integrates excellently with your design concept. Available in Square and Round shape.

PRODUCT FEATURES

- ➔ Modern look design LED anti-glare downlight.
- ➔ Light weight, Slim size and easy installation.
- ➔ External driver with safety connector.
- ➔ Instantly start, no flash, no abnormal noise.
- ➔ Long life 25,000 hrs.
- ➔ Environmentally friendly (no mercury, no UV).
- ➔ Indoor use only.



Dimension

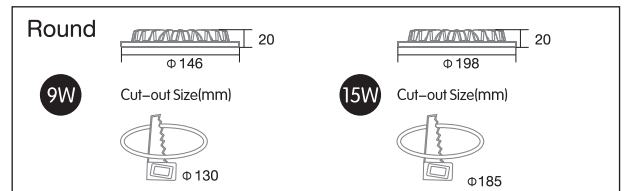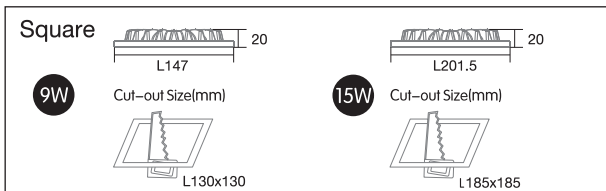

	Voltage (V)	Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temp. (K)	CRI (Ra)	Power Factor	Beam Angle (°)	Lifetime (hrs.)	Operation Temperature (°C)
Square										
LCDLSG2SQ09W27	220-240	9	500	55	2,700	>80	>0.5	110	25,000	-20~40°C
LCDLSG2SQ09W65	220-240	9	600	66	6,500	>80	>0.5	110	25,000	-20~40°C
LCDLSG2SQ15W27	220-240	15	900	60	2,700	>80	>0.5	110	25,000	-20~40°C
LCDLSG2SQ15W65	220-240	15	1050	70	6,500	>80	>0.5	110	25,000	-20 40 C
Round										
LCDLSG2RO09W27	220-240	9	500	55	2,700	>80	>0.5	110	25,000	-20~40°C
LCDLSG2RO09W65	220-240	9	600	66	6,500	>80	>0.5	110	25,000	-20~40°C
LCDLSG2RO15W27	220-240	15	900	60	2,700	>80	>0.5	110	25,000	-20~40°C
LCDLSG2RO15W65	220-240	15	1050	70	6,500	>80	>0.5	110	25,000	-20 40 C

Operation temperature : -20°C to 40°C / Non-Dimmable