



## LED Fixture

- Spotlight
- Downlight
- Panel Light
- Modern Line Panel
- Tube Full Set
- T5 Batten Extra Slim
- Ceiling Lamp
- Smart Ceiling Lamp
- T-Decor
- Track Light Fixture
- Surface Downlight Fixture
- Strip Light
- Table Lamp
- Work Light




Round Type

Square Type


## LED Spotlight

LED Spotlight provide artificial light with beam angle of 38 degrees. The innovative design allows the outer ring to be fitted and attached to the ceiling. It can be easily adjusted to illuminate any area or object with excellent efficiency.

### DIMENSION

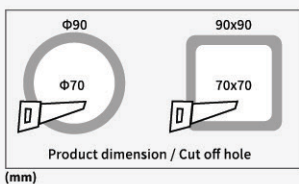

### EQUIVALENT



### ENERGY SAVING



Product code	Voltage (Vac)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Lifespan (Hrs.)
LCSC00727WTH1RO	220-240	7	560	80	2700K	80	0.5	38°	20,000
LCSC00740WTH1RO	220-240	7	560	80	4000K	80	0.5	38°	20,000
LCSC00765WTH1RO	220-240	7	560	80	6500K	80	0.5	38°	20,000
LCSC00727WTH1SQ	220-240	7	560	80	2700K	80	0.5	38°	20,000
LCSC00740WTH1SQ	220-240	7	560	80	4000K	80	0.5	38°	20,000
LCSC00765WTH1SQ	220-240	7	560	80	6500K	80	0.5	38°	20,000


Operation temperature : -15°C to 45°C




## LED Downlight Modern Slim Square type

Elegant with compact design, fully brightness 100% front lighting performance, good quality material, advantage cooling system, more safety with driver connected with wire, friendly eyes care and efficiency brightness for you.


### DIMENSION

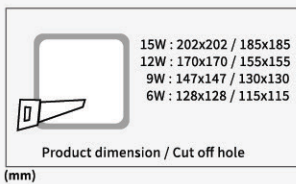

### EQUIVALENT



### ENERGY SAVING



Non-Dimmable



NBN 1955-2551  
 TTLCC



Surge Protection  
 0.5KV

Product code	Voltage (Vac)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Lifespan (Hrs.)
LCDSL3SQ06W30	220-240	6	400	66	3000K	80	0.5	120°	20,000
LCDSL3SQ06W65	220-240	6	400	66	6500K	80	0.5	120°	20,000
LCDSL3SQ09W30	220-240	9	600	66	3000K	80	0.5	120°	20,000
LCDSL3SQ09W65	220-240	9	630	70	6500K	80	0.5	120°	20,000
LCDSL3SQ12W30	220-240	12	830	69	3000K	80	0.5	120°	20,000
LCDSL3SQ12W65	220-240	12	880	73	6500K	80	0.5	120°	20,000
LCDSL3SQ15W30	220-240	15	1100	73	3000K	80	0.5	120°	20,000
LCDSL3SQ15W65	220-240	15	1150	76	6500K	80	0.5	120°	20,000


Operation temperature : -20°C to 40°C




## LED Downlight Modern Slim Round type

Elegant with compact design, fully brightness 100% front lighting performance, good quality material, advantage cooling system, more safety with driver connected with wire, friendly eyes care and efficiency brightness for you.


### DIMENSION



### EQUIVALENT



### ENERGY SAVING



Product code	Voltage (Vac)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Lifespan (Hrs.)
LCDSL3G3RO06W30	220-240	6	400	66	3000K	80	0.5	120°	20,000
LCDSL3G3RO06W65	220-240	6	400	66	6500K	80	0.5	120°	20,000
LCDSL3G3RO09W30	220-240	9	600	66	3000K	80	0.5	120°	20,000
LCDSL3G3RO09W65	220-240	9	630	70	6500K	80	0.5	120°	20,000
LCDSL3G3RO12W30	220-240	12	830	69	3000K	80	0.5	120°	20,000
LCDSL3G3RO12W65	220-240	12	880	73	6500K	80	0.5	120°	20,000
LCDSL3G3RO15W30	220-240	15	1100	73	3000K	80	0.5	120°	20,000
LCDSL3G3RO15W65	220-240	15	1150	76	6500K	80	0.5	120°	20,000


Operation temperature : -20°C to 40°C





## LED Panel Light


LED Panel Light is the perfect choice, the sleek design make this panel light attractive for your ceiling. There are 6500K colour temperature. High efficacy 111lm/W and easy to installed with external driver.

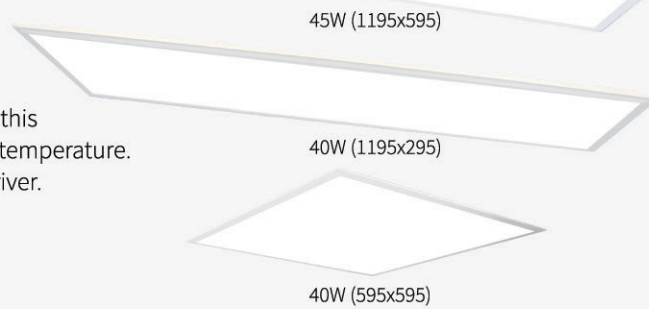

### DIMENSION



### EQUIVALENT



### ENERGY SAVING



Non-Dimmable



TTLC 1955-2551




Surge Protection 1kV

Product code	Voltage (Vac)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Lifespan (Hrs.)
S-PN04065C-1S(P)	220-240	40	4,000	100	6500K	80	0.9	120°	30,000
S-PN04040C-1R(P)	220-240	40	4,000	100	4000K	80	0.9	120°	30,000
S-PN04065C-1R(P)	220-240	40	4,000	100	6500K	80	0.9	120°	30,000
S-PN04565C-1R(P)	220-240	45	5,000	111	6500K	80	0.9	120°	30,000

Operation temperature : -20°C to 40°C






## LED Modern Line Panel

Outstanding, modern style with new innovation design under practical concept, provide brightness directly to area, friendly with eyes during work or rest, light weight, low heat and saving energy. Suitable for ceiling, T-Bar ceiling and hanging

### DIMENSION



### EQUIVALENT



Compare to fluorescent lamp with conventional fixtures

### ENERGY SAVING



Non-Dimmable




1955-2551  
TTL



Surge Protection  
1kV

Product code	Voltage (Vac)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Lifespan (Hrs.)
RLCPNC0430CTH1	220-240	40	4,000	100	3000K	80	0.9	120°	30,000
RLCPNC0465CTH1	220-240	40	4,000	100	6500K	80	0.9	120°	30,000

Operation temperature : -20°C to 45°C

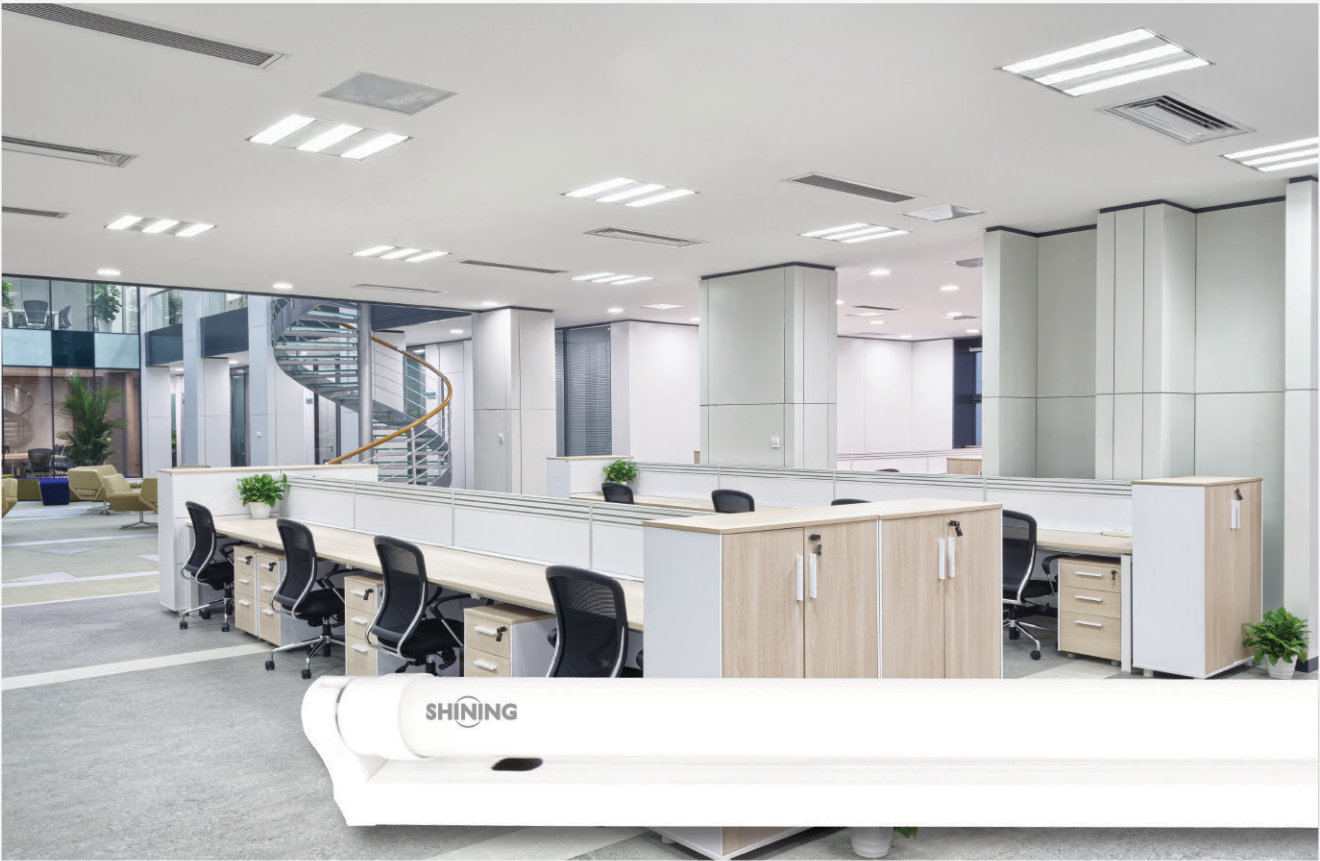

## LED Tube Full Set


LED Tube Set lets you perfectly up wide range of the applications such as office, factory and public space. It will ensure bright light and a low energy consumption as well as long life.

### IEC standard

IEC 62776 : Double-capped LED lamps designed to retrofit linear fluorescent lamps. – Safety specifications.

IEC 62471 : Photobiological safety

### DIMENSION

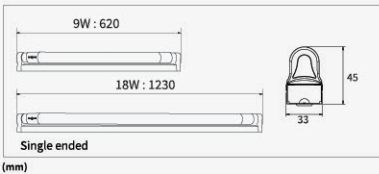

### EQUIVALENT

18W/36W

↓  
9W/18W

Compare to conventional fixture with fluorescent lamp

### ENERGY SAVING



Non-Dimmable



NON 2779-2562  
TTLIC



NON 1955-2551  
TTLIC



Surge Protection  
0.5 kV

Product code	Voltage (Vac)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Wiring Diagram	Lifespan (Hrs.)
S-TS00965K-1GL	185-250	9	900	100	6500K	80	0.5	200°	Single Ended	15,000
S-TS01865K-1GL	185-250	18	1800	100	6500K	80	0.5	200°	Single Ended	15,000





## LED T5 Batten Extra Slim

LED T5 batten is a slim-line T5-shaped LED batten luminaire for indoor applications. Functional with seamless design, the luminaires can be used individually or as a continuous light strip.




Max. connected  
12 Set (9W)  
6 Set (18W)


### DIMENSION



### EQUIVALENT



### ENERGY SAVING



Product code	Voltage (Vac)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Lifespan (Hrs.)
RLCTBG00927ITH3	220-240	9	855	95	2700K	80	0.5	180°	20,000
RLCTBG00940ITH3	220-240	9	900	100	4000K	80	0.5	180°	20,000
RLCTBG00965ITH3	220-240	9	900	100	6500K	80	0.5	180°	20,000
RLCTBG01827ITH3	220-240	18	1,710	95	2700K	80	0.5	180°	20,000
RLCTBG01840ITH3	220-240	18	1,800	100	4000K	80	0.5	180°	20,000
RLCTBG01865ITH3	220-240	18	1,800	100	6500K	80	0.5	180°	20,000

Operation temperature : -20°C to 45°C







## LED Ceiling Lamp

LED Ceiling lamp is perfect for traditional ceiling lighting, wall lighting. With its advantages of unique design and internal driver, It allow you to install easily at anywhere you like. This LED ceiling lamp are offer uniform light distribution and adds beautiful ambient light to any space.

S-CE02465C-1A

RLCTI03665DTH



S-CE03065-1P

S-CE03065-1F

**DIMENSION**

**ENERGY SAVING**

	S-CE02465C-1A Φ380x70	S-CE03065-1P Φ388x85
	RLCTI03665DTH Φ 380x65	S-CE03065-1F Φ 385x90



(mm)



Non-Dimmable



Meanwell 1955-2551  
TTLC





Surge Protection  
1kV

Product code	Voltage (V)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Lifespan (Hrs.)
S-CE02465C-1A	185-265V	24	1800	75	6500K	80	0.5	120°	25,000
S-CE03065-1F	185-265V	30	2250	75	6500K	80	0.5	120°	20,000
S-CE03065-1P	185-265V	30	2250	75	6500K	80	0.5	120°	20,000
RLCTI03665DTH	185-265V	36	2780	77.2	6500K	80	0.5	120°	30,000

Operation temperature : -10° C to 35° C





## LED Ceiling Lamp

LED Ceiling lamp is perfect for traditional ceiling lighting, wall lighting. With its advantages of unique design and internal driver, It allow you to install easily at anywhere you like. This LED ceiling lamp are offer uniform light distribution and adds beautiful ambient light to any space. Currently available in four cover design Blossom, Skyline, Circle blink, Benjamas.

S-CE04065C-1

S-CE04065C-2




S-CE04065C-3



S-CE04565C-1

### DIMENSION

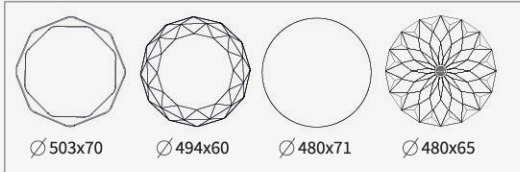

(mm)

### ENERGY SAVING



Non-Dimmable



IEC 1955-2551  
TTLT



Surge Protection  
1kV

Product code	Voltage (V)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Lifespan (Hrs.)
S-CE04065C-1	220-240V	40	2800	70	6500K	80	0.5	120°	15,000
S-CE04065C-2	220-240V	40	2800	70	6500K	80	0.5	120°	15,000
S-CE04065C-3	220-240V	40	3000	75	6500K	80	0.5	120°	15,000
S-CE04565C-1	220-240V	45	3600	80	6500K	80	0.5	120°	25,000

Operation temperature : -15° C to 40° C



## LED Ceiling Lamp 3 Step Colour Click

Crystal ceiling lamp 3 lights in one lamp model 36W  
3060 lumen, the edge of the lamp is beautiful like crystal.  
Easy installation, no ballast required. Change the light with a switch.



Daylight

Warm White

Cool White

S-CE03600C-201

S-CE03600C-202

S-CE03600C-203




S-CE03600C-204(O)



S-CE03600C-1CC

### DIMENSION

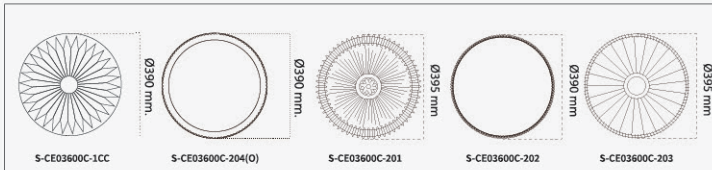

(mm)

### ENERGY SAVING



Non-Dimmable




IEEE 1955-2551  
TTLT



Surge Protection

Product code	Voltage (Vac)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Lifespan (Hrs.)
S-CE03600C-201	185-265	36	3060	85	3000K/4000K/6500K	80	0.5	120°	20,000
S-CE03600C-202	185-265	36	3060	85	3000K/4000K/6500K	80	0.5	120°	20,000
S-CE03600C-203	185-265	36	3060	85	3000K/4000K/6500K	80	0.5	120°	20,000
S-CE03600C-204(O)	185-265	36	3060	85	3000K/4000K/6500K	80	0.5	120°	20,000
S-CE03600C-1CC	185-265	36	3060	85	3000K/4000K/6500K	80	0.5	120°	20,000

Operation temperature : -15° C to 40° C






## LED Smart Ceiling Lamp

LED Smart Ceiling lamp let you easily control your lights from remote control compatible to controls and create the right ambiance for your every moment. Combines sleep mode and colour change in one, which gives brightness down to reduces glare and mitigates eyestrain.



3 CCT All In One

**DIMENSION**



**ENERGY SAVING**



Set 30 min OFF



NON 1955-2551  
TTLC



Surge Protection  
1kV

Product code	Voltage (Vac)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Lifespan (Hrs.)
S-CE03600C-2RM	220-240	36	2880	80	3000K/4000K/6500K	80	0.5	120°	25,000

Operation temperature : -15° C to 40° C






## LED T-Decor

Increase the prominence with a special focus light in your room with LED T-DECOR. Create an atmosphere from the special angle of light with a 120 degree angle and unique design lamp.

### DIMENSION

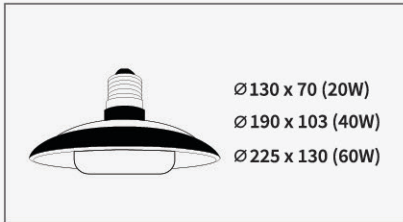

(mm)

### ENERGY SAVING



Product code	Voltage (Vac)	Rated Wattage (W)	Luminous Flux (lm)	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	Power Factor	Beam Angle	Lifespan (Hrs.)
S-BT2065C-E27-3	220-240	20	1,400	70	6500K	80	0.95	120°	20,000
S-BT4065C-E27-3	220-240	40	2,800	70	6500K	80	0.95	120°	20,000
S-BT6065C-E27-3	220-240	60	4,200	70	6500K	80	0.95	120°	20,000






## Track Light Fixture


SHINING Track Light can increase the brightness. Excellent spot Comes with a beautiful design. The angle of light can be adjusted freely. which can be used together with lamp. Suitable for home decoration and different areas.



### DIMENSION

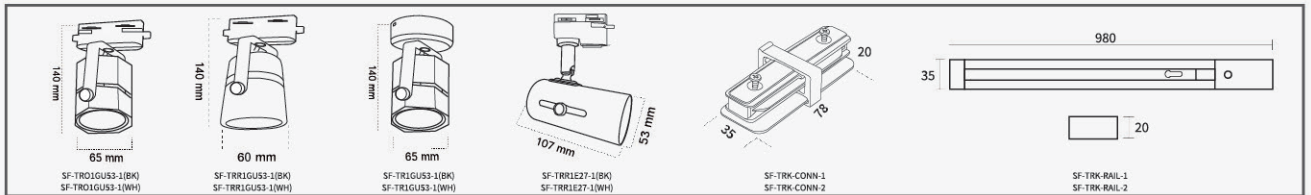

Product code	Voltage (Vac)	Maximun Wattage (W)	Main Material	Light Source	Body Color	IP Level	Rotation Adjustable Angle	Working Temperature
SF-TRO1GU53-1(BK)	220-240	50	Iron	MR16 GU5.3	Black	20	360°	-20° C - + 50° C
SF-TRO1GU53-1(WH)	220-240	50	Iron	MR16 GU5.3	White	20	360°	-20° C - + 50° C
SF-TRR1GU53-1(BK)	220-240	50	Iron	MR16 GU5.3	Black	20	360°	-20° C - + 50° C
SF-TRR1GU53-1(WH)	220-240	50	Iron	MR16 GU5.3	White	20	360°	-20° C - + 50° C
SF-TR1GU53-1(BK)	220-240	50	Iron	MR16 GU5.3	Black	20	360°	-20° C - + 50° C
SF-TR1GU53-1(WH)	220-240	50	Iron	MR16 GU5.3	White	20	360°	-20° C - + 50° C
SF-TRR1E27-1(BK)	220-240	50	Iron	E27 Lamp	Black	20	360°	-20° C - + 50° C
SF-TRR1E27-1(WH)	220-240	50	Iron	E27 Lamp	White	20	360°	-20° C - + 50° C
SF-TRK-CONN-1	220-240	900W/1 current input	Iron	For Track Light	Black	20	n/a	-20° C - + 50° C
SF-TRK-CONN-2	220-240	900W/1 current input	Iron	For Track Light	White	20	n/a	-20° C - + 50° C
SF-TRK-RAIL-1	220-240	900W/1 current input	Aluminium	For Track Light	Black	20	n/a	-20° C - + 50° C
SF-TRK-RAIL-2	220-240	900W/1 current input	Aluminium	For Track Light	White	20	n/a	-20° C - + 50° C






## Surface Downlight Fixture

Surface Downlight Fixture fit with E27 cap modern design compatible everywhere good heat dissipation lamp and can distribute light evenly and easy to install

### DIMENSION




(mm)

### FIT



Product code	Voltage (V)	Maximun Wattage (W)	Main Material	Light Source	Body Color	IP Level	Working Temperature
SF-DLR1E274I-1	220-240	12	Iron	E27 Lamp	Black	20	-20° C - + 50° C





S-STP04030-1(O)  
(Warm White)

S-STP040XX-1RM(O)  
(RGB with remote)

## LED Strip Light

LED Strip Light is a flexible circuit board that is populated with LEDs that you can stick almost anywhere you want to add powerful lighting in a variety of brightness. Comfortable and easy for installation. Suitable for living room bed room and meeting room.



โทร 1965-2551  
TTLIC

Product code	Voltage (V)	Rated Wattage (W)	Luminous Flux (lm)	Color Temperature	Power Factor	Length	Beam Angle	Lifespan (Hrs.)
S-STP04030-1(O)	220-240V	40	2200	3000K	0.9	5m	120°	15,000
S-STP040XX-1RM(O)	220-240V	40	-	RGB Color	0.9	5m	120°	15,000






## Table Lamp

Simple design and modern style. Create a warm and comfortable home environment. Button switch, convenient and practical. strong metal lamp holder and flexible to adjust lighth angle, Eye protection light, durable, comfortable and suitable for eyes. Comes with standard type and Premium type. widely use area such as living room, study, bedroom, office.




### DIMENSION



(mm)

### FIT



E27



E27 base



Flexibility



Non-Dimmable

Product code	Colour	Voltage (V)	Rated Wattage (W)	Base cap	Dimmable
LCTBL-P203	Pink ●	220-240	Max 40W	E27	No
LCTBL-B203	Blue ●	220-240	Max 40W	E27	No
LCTBL-R203	Red ●	220-240	Max 40W	E27	No






## LED Table Lamp

LED Table lamp with modern design. Create a warm and comfortable home environment. Button switch on cable line, convenient and practical. Strong metal lamp holder and flexible to adjust light angle 180 degree. Eye protection light, durable, comfortable and suitable for eyes comes with pastel colors "Pastely" and "Misty" model. Widely use area such as living room, bedroom, office and study room.



\*Free LED Bulb 4W Daylight

### DIMENSION



(mm)



E27 base



Flexibility




Non-Dimmable

Product code	Colour	Voltage (V)	Rated Wattage (W)	Base cap	Dimmable
SF-TL1E27-1(GY)	Light Gray ●	220-240	Max 25W	E27	No
SF-TL1E27-1(GN)	Light Green ●	220-240	Max 25W	E27	No



## LED Flexi Table Lamp

Shining Flexi table lamp modern shape reading lamp. Simple to use in every room. Can adjust the level of the luminaire independently. Comes with a built-in LED light. Daylight, 6500K light at 500 LUX brightness provides comfortable light.

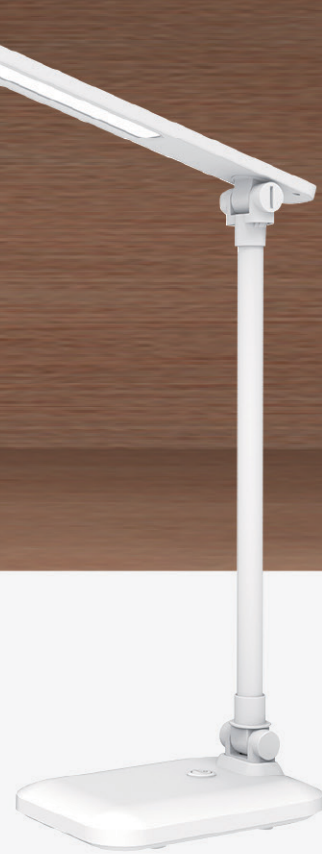

### DIMENSION



(mm)



Product code	Voltage (Vdc)	Rated Wattage (W)	Luminous Flux	Color Temperature	Color Rendering Index (Ra)	Beam Angle	Lifespan (Hrs.)
S-DSK02-DL	5V/1A	5W	500 LUX	6500K	70	160°	20,000





## LED Multi Table Lamp

Get more experience a special table lamp with LED Multi Table Lamp 9W. Modern shape design that comes with 3 colors in 1 lamp, Daylight Cool White and Warm White. And can adjust the brightness level



Daylight Warm White Cool White



3 Color in 1 lamp

### DIMENSION



(mm)



10 min. Auto Off



Reading Mode



USB Charger



Dimmable



Touch Control



Adjustable

Product code	Voltage (Vdc)	Rated Wattage (W)	Luminous Flux	Battery	Color Temperature	Color Rendering Index (Ra)	Beam Angle	Lifespan (Hrs.)
S-DSK01B-MLT	5V/1A	9W	900 LUX	Li-ion Battery 3.7V/1800mAh	3000K-6000K	76	160°	20,000




## LED Table Lamp Wireless Charge

LED table lamp with wireless charge modern design  
3 colors in one lamp Warm White , Cool White , Daylight  
and you can adjust the brightness level. Easy to use with  
touch control.

Wireless  
Charging  
Qi Standard  
\*Suitable for mobile phone  
that support wireless charging



DIMENSION

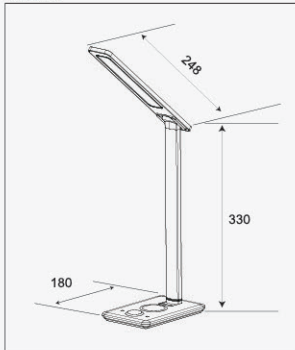

(mm)



Product code	Rated Wattage (W)	Illuminance (Lux)	Rated Voltage ( V )	Color Temperature	Color Rendering Index (Ra)	Lifespan (Hrs.)
S-DSK03-00WLC	5	600	Input DC5V/3A	3000K/4000K/6500K	80	20,000





## Table Lamp

Table lamp with minimal design. Create a warm and comfortable home environment. Button switch on cable line, convenient and practical. Strong metal lamp holder and flexible to adjust light angle. Comes with wood stand minimal style. Widely use area such as living room, bedroom, office and study room.



### DIMENSION



(mm)



E27 base




Flexibility



Non-Dimmable

Product code	Colour	Voltage (V)	Rated Wattage (W)	Base cap	Dimmable
SF-TL1E27-2(WH)	White ○	220-240	Max 40W	E27	No
SF-TL1E27-2(BK)	Black ●	220-240	Max 40W	E27	No



## LED Work Light

The LED portable worklight is very convenient to handle and carry everywhere you go and can use outdoor well with waterproof IP standard, made of heavy-duty ABS material, adjustable to 0-360 degree. It is suitable for any occasion. Rechargeable and long lasting light includes a built-in Lithium-ion battery pack.







RLCKG01065WTH1L

S-WLF01B

S-WLF02B

### DIMENSION



180 Degree Rotation

Product code	Rated Wattage (W)	Luminous Flux (lm)	LiFePO4 Battery	Efficacy (lm/W)	Color Temperature	Color Rendering Index (Ra)	IP Level	Beam Angle	Lifespan (Hrs.)
RLCKG01065WTH1L	10	700	3.7V 4000mAh	70	6500K	70	54	120°	30,000
S-WLF01B	20	1100	3.7V 5000mAh	55	6500K	70	54	120°	30,000
S-WLF02B	10	600	3.6V 2200mAh	60	6500K	70	44	120°	15,000