

The image features a grayscale industrial scene with two robotic arms, one white and one red, positioned around a complex metal machine. The machine has several red-colored internal components. A large red circle is superimposed on the upper right portion of the image, containing the text 'Quality Air Solution'. The background is filled with concentric white circles, suggesting motion or a signal. The overall aesthetic is clean and professional, emphasizing precision and quality in manufacturing.

**Quality Air  
Solution**

**People. Passion. Performance.**

 **Chicago  
Pneumatic**

# IMPROVE YOUR BUSINESS, PRODUCTIVITY, QUALITY AND EFFICIENCY.

**Quality air solutions will allow you to prevent corrosion, leakages, pollution and rust.**

A compressor takes humidity and contamination from the intake air, during the compression process. These particles combine with the oil used in the compressor. All these impurities can cause wear and corrosion to the downstream equipments, with potential costly interruption to production, and reduction in the efficiency and service life of the equipment used. To reduce this negative impact, a whole range of Quality Air Solution products have been developed to ensure air quality, increase efficiency and productivity and lengthen the life span of your equipment and tools. In sum, with a range from dryers to filters, you can tackle several quality air problems at once, making them highly recommended components for every successful business.



**Moisture**



**Particles**



**Oil**




**Hydrocarbons**



**Viruses**



**Bacteria**

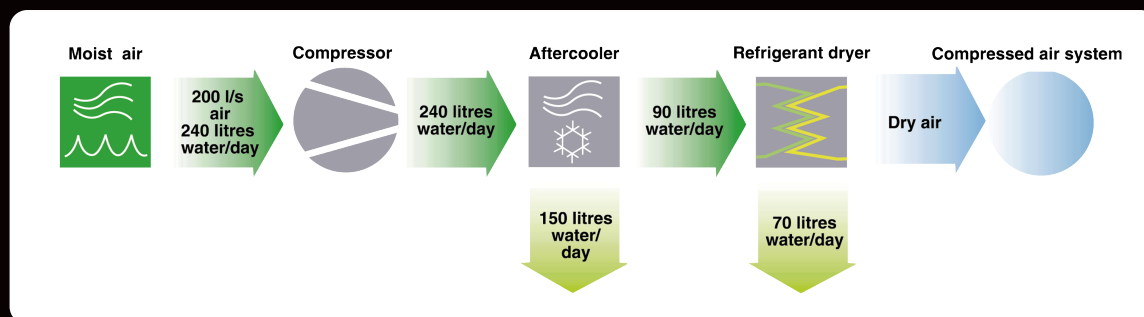

A compressor that delivers 200 litres of air per second, also supplies approx. 240 litres of water per day if working with air at 20°C. To avoid problems and disturbances due to water precipitation in the pipes and connected equipment the compressed air must be dried. This drying can be achieved by using a reliable Chicago Pneumatic CPX Refrigerant Dryer.

Whichever is your compressed air need, Chicago Pneumatic can successfully help you to achieve the proper air quality class.

Compressed air according to ISO 8573-1:2010						
Purity class	Solid particles			Water		Total Oil*
	Number of particles per m <sup>3</sup>			Pressure dew point		Concentration
	0.1-0.5 m	0.5-1.0 m	1.0-5.0 m	°C	°F	mg/m <sup>3</sup>
0	As specified by the equipment user or supplier and more stringent					
1	≤ 20.000	≤ 400	≤ 40	≤ -70	≤ -94	≤ 0.01
2	≤ 400.000	≤ 6.000	≤ 100	≤ -40	≤ -40	≤ 0.1
3	-	≤ 90.000	≤ 1000	≤ -20	≤ -4	≤ 1
4	-	≤ 20.000	≤ 10.000	≤ 3	≤ 37.4	≤ 5
5	-	-	≤ 100.000	≤ 7	≤ 44.6	-
6	-	≤ 5 m-m3	-	≤ 10	≤ 50	-

\*Liquid, aerosol and vapour

## A glimpse of some application areas


Conveying	Pharmaceuticals	Metalwork	Food industry
 <p>By using Chicago Pneumatic air treatment products you will be able to increase the lifetime of your production plant. Avoid expensive emergency maintenance and ensure easy, fast and reliable production chain.</p>	 <p>For very sensitive applications where top air quality is indispensable, we can provide compressed air at the correct dew point and without solid contaminants giving you peace of mind regarding your production processes. Superior air treatment for superior quality products.</p>	 <p>Avoiding water in compressed air and corrosion in the air network or tools is of key importance in the metal industry. Consequently, customers' air quality requirements are ever more strict. Anticipating this trend, we are close to you to always be a step ahead in the market with our innovative solutions.</p>	 <p>Zero risk at product contamination is a key focus in the food industry which also applies to the compressed air if it is in direct contact with the food itself. For this reason customers need to foresee a proper and complete air treatment system which allows for superior products.</p>

# HOW DOES CPX DRYER WORK?

## Refrigerant circuit


The refrigerant circuit compresses and expands the refrigerant medium in a circular system in order to efficiently transfer heat from the wet compressed air to the atmosphere. The CPX dryer refrigerant circuit is designed as a whole and only uses components of high and reliable quality, supplied by globally recognized manufacturers.

- 1 Refrigerant Separator**  
Ensures that only refrigerant gas can enter the compressor, as liquid would cause damage.
- 2 Refrigerant Compressor**  
Brings the gaseous refrigerant to a high pressure and a high temperature.
- 3 Digital controller**  
To show operation status and inform alarm information to users.
- 4 Max. Pressure Switch**  
Protects by ensuring that the refrigerant gas never exceeds the maximal pressure.
- 5 Condenser Fan**  
Efficiently provides constant flow of ambient air to the air condenser (only for air cooled).
- 6 Condenser**  
Cools the refrigerant slightly so that it can change from gas to liquid; refrigerant is more effective in the liquid state.
- 7 Capillary Filter**  
Protects the expansion device from harmful particles.
- 8 Capillary Tube**  
Reduces the refrigerant's pressure, thereby lowering its temperature and increasing its cooling capacity; the refrigerant is now almost all liquid, with some residual gas. Capillary tubes are expansion devices that are extremely reliable, and stabilize the dewpoint of the dryer.

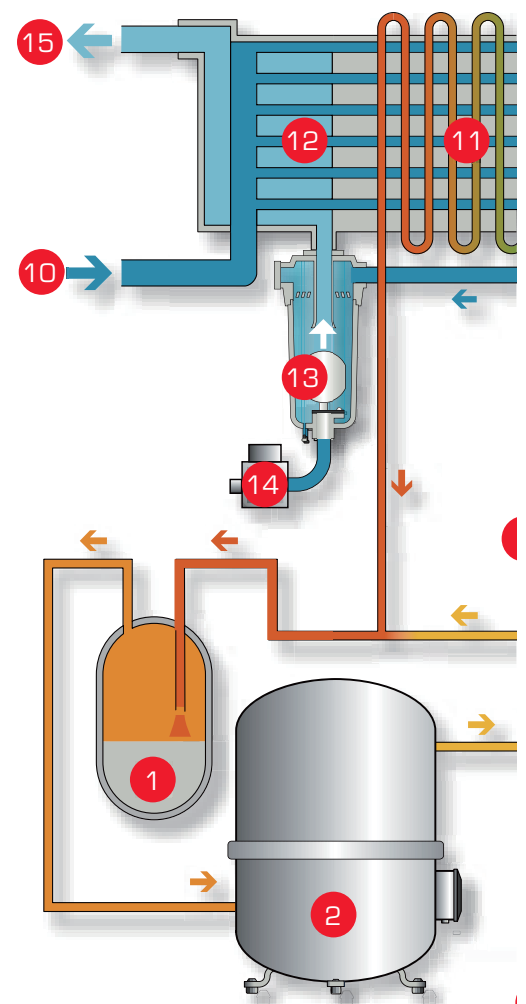

## Air circuit

Wet compressed air flows directly through the CPX dryer's internal 3-in-1 heat exchanger, where in the 3 key dryer functions are combined. Firstly the wet compressed air is cooled down to condensate the moisture, secondly this condensed moisture will be collected and drained out. Finally the dried compressed air is re-heated before it enters the factory's pipework.

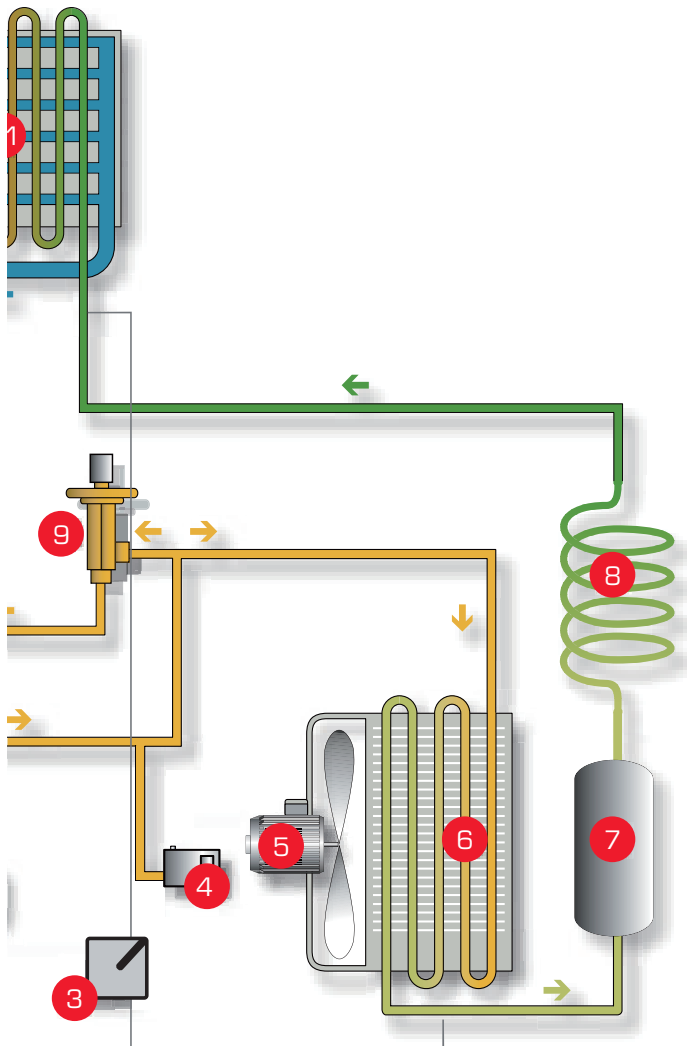

### Hot Gas Bypass

9

Regulates the amount of refrigerant passing through the air-to-refrigerant heat exchanger, ensuring a stable pressure dewpoint, and eliminating the chance of the condensate freezing.

### Air Inlet

10

Hot saturated air enters the dryer.

### Air-To-Refrigerant Heat Exchanger

11

Transfers heat from the compressed air to the cold refrigerant, forcing water vapor in the compressed air to condense.

### Air-To-Air Heat Exchanger

12

Cools down the air inlet whilst re-heating the outlet air.

### Water Separator

13

Collects and drains out condensate from the cooled air flow. 3-in-1 aluminum heat exchangers combine above points 11, 12 and 13 making them highly efficient and reliable..

### Automatic Drain

14


Removes the free water collected in the water separator.

### Air Outlet

15

Re-heats the outgoing air to prevent condensation on the factory's pipework.

# PROFESSIONAL AIR QUALITY FOR PROTECTION OF EQUIPMENT & PROCESSES

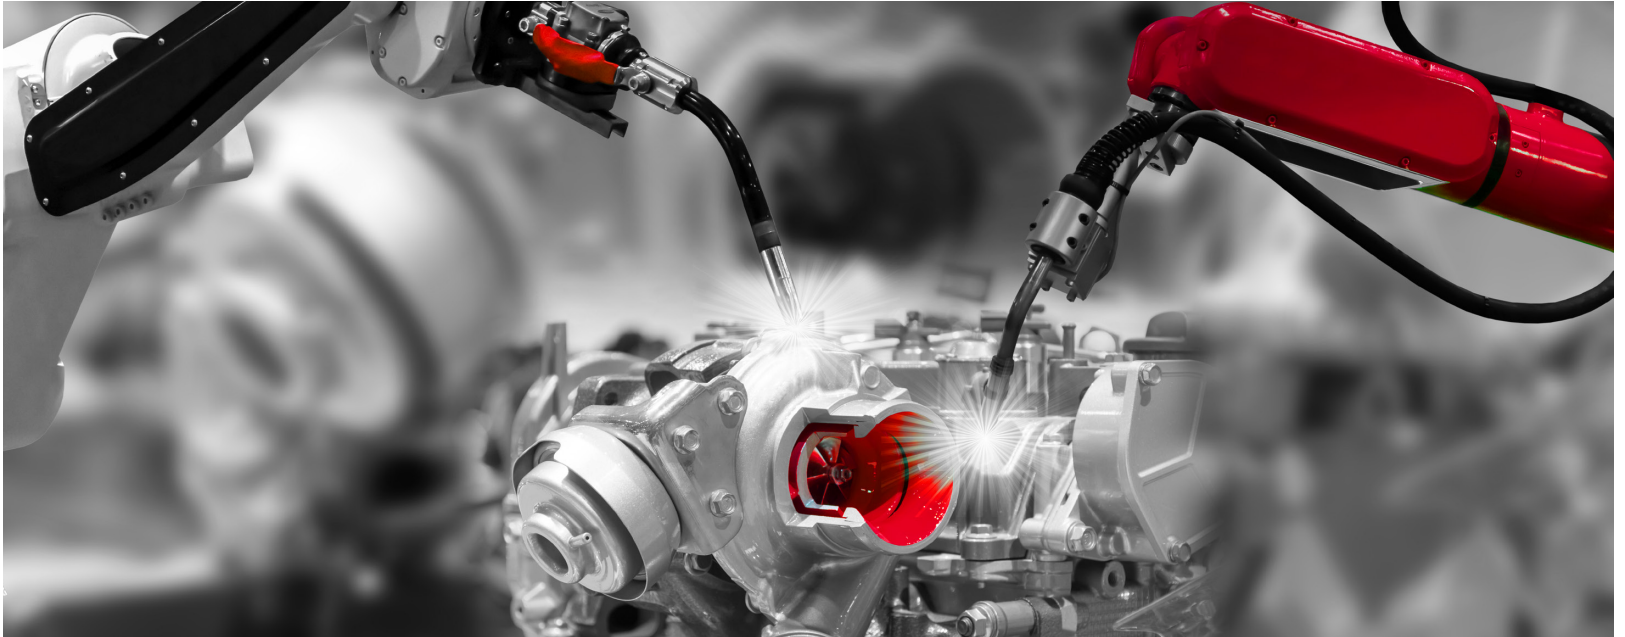

The CPX refrigerant dryers guarantee dry and qualitative compressed air which prolongs the lifetime of your equipment and ensures a superior production quality. Water vapour is eliminated, avoiding corrosion in your compressed air network and tools. All in all this lowers your maintenance costs and improves your overall production process for complete peace of mind.

## Pressure Dew Point 7-10°C

- High efficiency plate-fin heat exchanger
- Low relative humidity in outlet air
- Professional water removing function

## Professional Energy Efficiency

- 50% less energy consumption compared to shell and tube type dryers
- Optimized refrigeration system

## Environment Safety

- Low (GWP) global warming potential
- Low (ODP) ozone depletion potential
- Energy saving

## Reliable







- Industrial grade refrigeration compressor
- Digital controller & PDP display
- Optimised piping with 3 stage leak test









# REFRIGERANT DRYER

## CPX 30-2650 50HZ, CPX 30-850 60HZ


### 50Hz

Model									Refrigerant
	l/min	cfm	m³/h						
CPX 30	1000	35	60	13	230/1/50	G3/4"	30	352x430x445	R134A
CPX 50	1500	53	90	13	230/1/50	G1"	32	550x370x800	R134A
CPX 75	2100	74	126	13	230/1/50	G1"	36	550x370x800	R134A
CPX 115	3500	124	210	13	230/1/50	G1.5"	60	520x500x800	R410A
CPX 160	4500	159	270	13	230/1/50	G1.5"	68	550x600x980	R410A
CPX 200	6000	212	360	13	230/1/50	G2"	75	550x600x980	R410A
CPX 250	7500	265	450	13	230/1/50	G2"	85	550x600x980	R410A
CPX 300	9000	318	540	13	230/1/50	G2"	120	900x750x1000	R410A
CPX 380	11500	406	690	13	230/1/50	G2.5"	138	1025x660x1120	R410A
CPX 480	15000	530	900	13	230/1/50	G2.5"	156	1025x660x1120	R410A
CPX 600	17500	618	1050	13	230/1/50	G2.5"	168	1025x660x1120	R410A
CPX 700	22500	794	1350	13	230/1/50	G2.5"	175	1025x660x1120	R410A
CPX 870	24600	869	1476	10	230/1/50	G2.5"	215	1025x660x1120	R410A
CPX 1270	36000	1272	2160	10	400/3/50	DN100	400	1220x1000x1700	R410A
CPX 1560	45000	1590	2700	10	400/3/50	DN100	410	1220x1000x1700	R410A
CPX 1800	51000	1802	3060	10	400/3/50	DN100	425	1220x1000x1700	R410A
CPX 2120	60000	2120	3600	10	400/3/50	DN150	580	1670x1000x1900	R410A
CPX 2650	75000	2650	4500	10	400/3/50	DN150	600	1670x1000x1900	R410A

### 60Hz

Model									Refrigerant
	l/min	cfm	m³/h						
CPX 30	1000	35	60	13	230/1/50	G3/4"	30	432x354x445	R134A
CPX 50	1500	53	90	13	230/1/50	G1"	36	550x370x800	R134A
CPX 75	2100	74	126	13	230/1/50	G1"	38	550x370x800	R134A
CPX 115	3300	116	198	13	230/1/50	G1.5"	60	520x500x800	R410A
CPX 160	4500	159	270	13	230/1/50	G2"	85	550x600x980	R410A
CPX 200	5700	201	342	13	230/1/50	G2"	85	550x600x980	R410A
CPX 250	7200	254	432	13	230/1/50	G2"	85	550x600x980	R410A
CPX 300	8400	297	504	13	230/1/50	G2.5"	135	1025x660x1120	R410A
CPX 380	10800	381	648	13	230/1/50	G2.5"	135	1025x660x1120	R410A
CPX 480	13800	487	828	13	230/1/50	G2.5"	135	1025x660x1120	R410A
CPX 600	17000	600	1020	13	230/1/50	G2.5"	155	1025x660x1120	R410A
CPX 700	20000	706	1200	13	230/1/50	G2.5"	155	1025x660x1120	R410A
CPX 850	24000	847	1440	13	220/1/60	G2.5"	155	1025x660x1120	R410A

# QUALITY AIR FOR HIGH END EQUIPMENT AND PROCESS

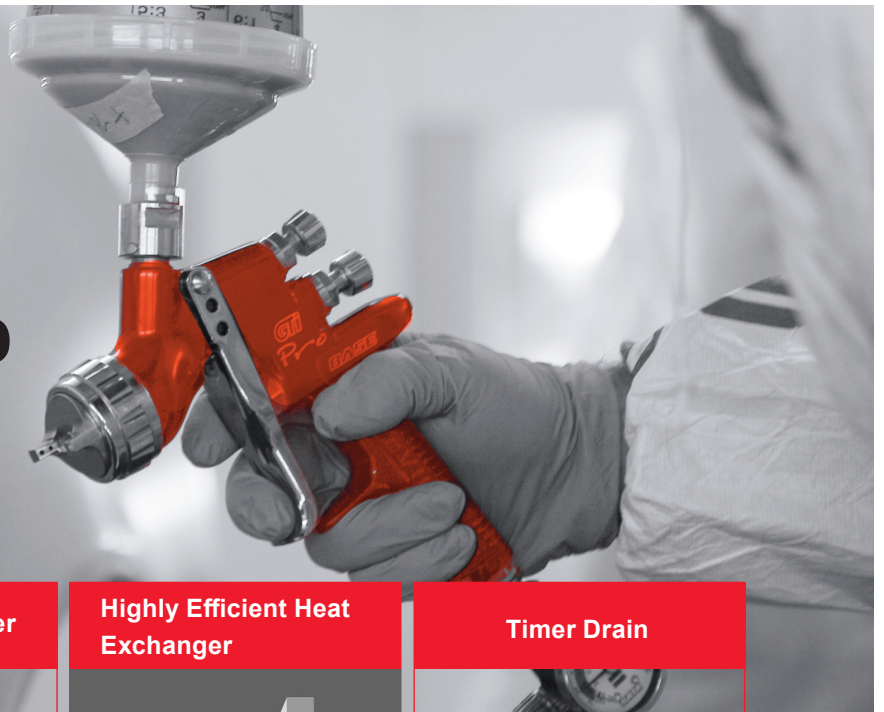

## Robust Structure



Reliable structure due to a robust canopy ensuring a safe installation independently of the environment.

## Electronic Controller



Monitor the operations and dew point of your CPX dryer with the electronic controller.

## Highly Efficient Heat Exchanger



The highly efficient heat exchanger safeguards your optimized cooling power and lowers pressure drops.

## Timer Drain



Reliable timer drain with adjustable drain interval and discharge time.

## Correction Factor for conditions differing from the project $K = A \times B \times C$

### CPX 30-850

Room temperature (A)										
Ambient Temperature (°C)	25	30	35	40	45					
Multiplication Factor	1	0.91	0.81	0.72	0.62					
Operating Temperature (B)										
Inlet Temperature (°C)	25	30	35	40	45	50	55			
Multiplication Factor	1	1	1	0.82	0.69	0.58	0.49			
Operating Pressure (C)										
Pressure (bar)	5	6	7	8	9	10	11	12	13	
Correction Factor	0.90	0.96	1.00	1.03	1.06	1.08	1.10	1.12	1.13	

### CPX 870-2650

Room temperature (A)										
Ambient Temperature (°C)	25	30	35	40	45					
Multiplication Factor	1	0.93	0.87	0.8	0.7					
Operating Temperature (B)										
Inlet Temperature (°C)	25	30	35	40	45	50	55			
Multiplication Factor	1	1	1	0.82	0.67	0.55	0.44			
Operating Pressure (C)										
Pressure (bar)	2	3	4	5	6	7	8	9	10	
Correction Factor	0.375	0.5	0.625	0.75	0.875	1	1.08	1.15	1.22	

Design Condition		Limit Conditions	
Operating Pressure:	7 bar(100psi)	Max Operating Pressure	13 bar (188psi)
Operating Temperature:	35°C	Max Operating Temperature	55°C
Room Temperature:	25°C	Min/Max Room Temperature	5°C/45°C





# CP FILTERS

## 43-2430M<sup>3</sup>/h


### Thorough filtration for complete peace of mind

A unique combination of robustness and efficiency allows our high performance filters to purify your compressed air for complete peace of mind.

Whichever your required purity, CP filters come in different variants offering a tailored solution for each situation.



### Typical Installations

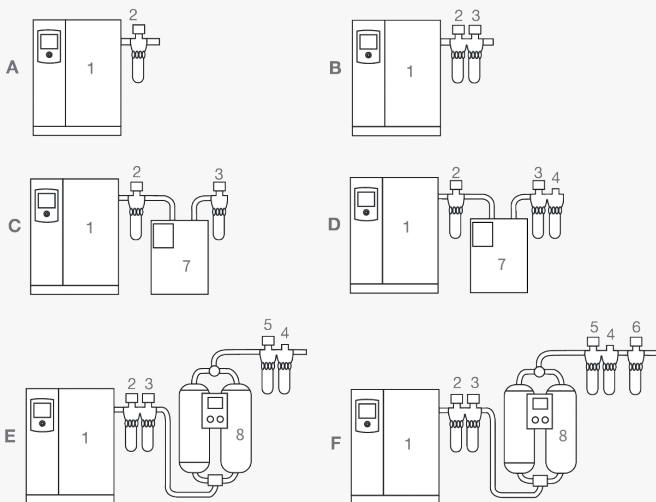

- |                                 |                      |
|---------------------------------|----------------------|
| 1. Compressor with after-cooler | 5. S filter          |
| 2. G filter                     | 6. D filter          |
| 3. C filter                     | 7. Refrigerant dryer |
| 4. V filter                     | 8. Adsorption dryer  |

**A. General purpose protection**  
(air purity to ISO 8573-1: G filter class 2:-:3 & P filter class 4:-:3)

**B. General purpose protection and reduced oil concentration**  
(air purity to ISO 8573-1: class 1:-:2)

**C. High quality air with reduced dew point**  
(air purity to ISO 8573-1: class 1:4:2)

**D. High quality air with reduced dew point and oil concentration**  
(air purity to ISO 8573-1: class 1:4:1)

**E. High quality air with extremely low dew point**  
(air purity to ISO 8573-1: class 2:2:1)

**F. High quality air with extremely low dew point**  
(air purity to ISO 8573-1: class 1:2:1)

# CP FILTERS

## 43-2430M<sup>3</sup>/h

### Five filter types to cover all purity requirements

**G**

Coalescing filters for general purpose protection, removing solid particles, liquid water and oil aerosol. Total Mass Efficiency: 99%.

For optimum filtration, a G filter should be preceded by a water separator.

**S**

Particulate filters for dust protection. Count Efficiency: 99,81% at Most Penetrating Particle Size (MPPS = 0,1 micron).

An S filter should be preceded by a dryer at all times.

**C**

High-efficiency coalescing filters, removing solid particles, liquid water and oil aerosol. Total Mass Efficiency: 99,9 %.

For optimum filtration, a C filter should be preceded by a G filter at all times.

**D**

High-efficiency particulate filters for dust protection. Count Efficiency: 99,97 % at Most Penetrating Particle Size (MPPS = 0,06 micron).

A D filter should be preceded by an S filter at all times and is commonly fitted after an adsorption dryer.

**V**

Activated carbon filter for removal of oil vapour and hydrocarbon odors with a maximum

remaining oil content of 0,003 mg/m<sup>3</sup> (0,003 ppm). 1000 hour lifetime.



Model	Nominal Capacity*			Maximum Pressure		Connection	Dimension (mm)			Weight
	l/min	m <sup>3</sup> /h	cfm	bar	psi		D	A (For Disassembling)	B	
FILTER 9	720	43	25	16	232	3/4"	312	237	90	0.76
FILTER 18	1500	90	53	16	232	3/4"	312	237	90	0.77
FILTER 25	2100	126	74	16	232	3/4"	367	292	90	0.89
FILTER 35	3000	180	106	16	232	1"	380	305	110	1.39
FILTER 60	4800	288	170	16	232	1.5"	435	360	126	1.67
FILTER 105	8400	504	297	16	232	2"	565	465	155	3.29
FILTER 140	11400	684	403	16	232	2"	600	500	155	3.63
FILTER 175	15600	936	551	16	232	2"	645	545	155	3.86
FILTER 260	21600	1296	763	16	232	2.5"	767	617	193	6.12
FILTER 380	31500	1890	1112	16	232	3"	920	720	210	8.76
FILTER 490	40500	2430	1430	16	232	3"	1090	890	210	10.3

\* Reference condition: pressure 7 bar (102 psi). Maximum operating temperature of 66°C, and 35°C, only for V series. Minimum operating temperature of 1°C. For partnumbers please contact your local customer center

## Automatic Drains

Model	Inlet	Outlet	Max Pressure	Min Temp	Max Temp	Nominal Discharge	Capacity
CFD 85	1/2"	6mm	16bar	1.5°C	85°C	22ml	84L/Hr
CZD 100	1/2"	1/2"	16bar	1.5°C	85°C	92ml	800L/Hr

Model	Inlet	Outlet	Max Pressure	Min Temp	Max Temp	Voltage
CED 320	1/2"	6mm	15bar	1.5°C	55°C	230V/1P/50-60Hz

Supply with 1.2 meter lead



CFD 85



CZD 100




CZD 320

## Oil Water Separators

Model	Nominal Flow			Inlet	Outlet	Dimension
	l/min	m <sup>3</sup> /h	cfm			
OSD 20	2000	120	71	1/4"	10	140x140x240
OSD 35	3500	210	124	1/2"	20	215x257x500
OSD 105	10500	630	371	1/2"	20	345x282x654
OSD 255	25500	1530	901	1/2"	20	432x495x989
OSD 365	36500	2190	1289	1/2"	20	432x495x989
OSD 510	51000	3060	1801	1/2"	20	990x520x989
OSD 710	71000	4260	2507	1/2"	20	990x520x989



## Complete Compressor Room Solutions

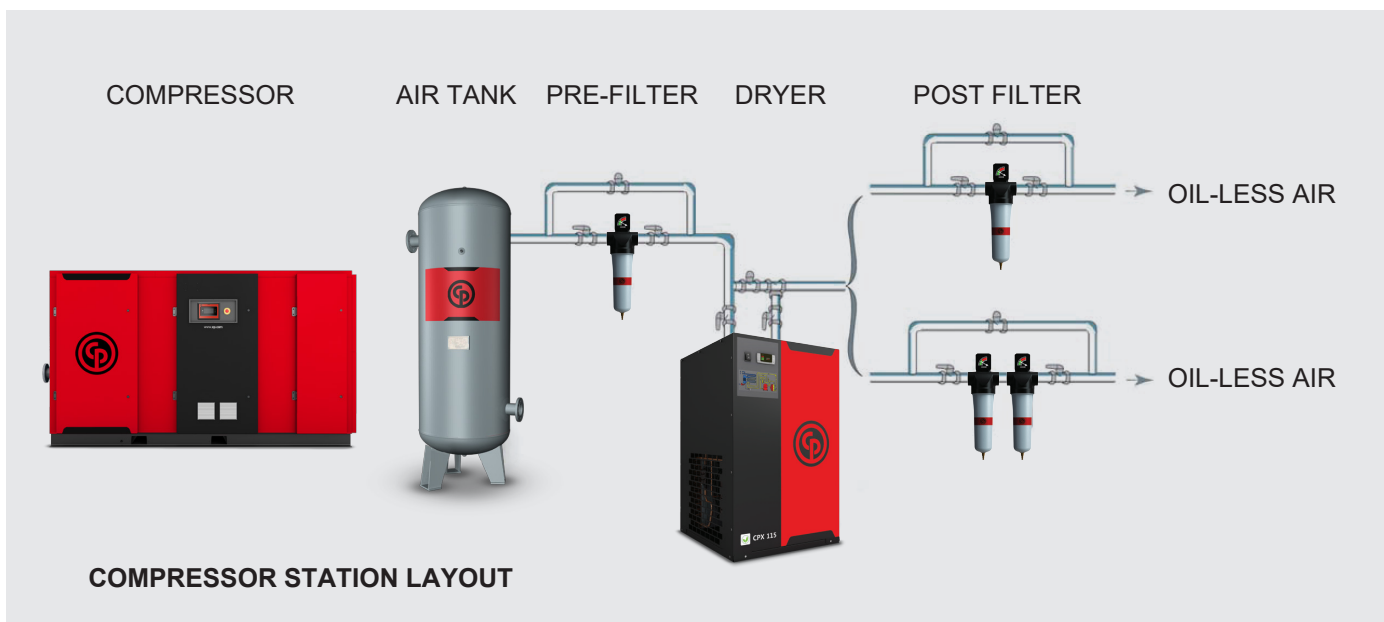



At Chicago Pneumatic we have a passion for performance and long-lasting partnerships. Since 1901, we have been committed to reliability based on technology and trust.

A large, stylized red fingerprint graphic composed of numerous curved lines, positioned behind the central text.

**People. Passion. Performance.**

For more information, please contact your CP partner:

Use only authorized parts. Any damage or malfunction caused by the use of unauthorized parts is not covered by Warranty or Product Liability.

[www.cp.com](http://www.cp.com)

© 2023 Chicago Pneumatic. Subject to technical modifications.