

# DUKSAN

## High Purity Solvents

LC-MS

Ultimate

Pesticide

HPLC

DNA Biosynthesis

Ultra Dry



## Greetings

**S**ince Its Establishment In 1970, DUKSAN Pure Chemicals has served customers as a supplier of analytical lab reagents for more than 45 years to contribute to the basic and fine chemicals industry.

We began our business by providing organic solvent recovery service and industrial grade raw materials. With our extensive knowledge and expertise in the field, we have successfully branched out into manufacture in first and special grade chemical reagents, food additives, pharmaceutical raw materials, high purity analytical reagents, electronic solvents, and ultra dry solvents for molecular biology.

As for chemical reagents, we provide the high purity reagents by organic and inorganic syntheses, and critical point organic solvent recovery technology. In result of continuous effort of R&D, our products are produced with genuine domestic technology. As for domestic consumption, Duksan products are competing shoulder to shoulder with foreign reagents in major corporations, small and large scale laboratories, and many Universities. Currently High Purity Solvents are sold in over 20 countries including South Asia, Middle East, Nortn/South America and Europe as our own brand. We also export our products as an OEM to global major corporations and received outstanding reputations throughout the field.

We believe the expansion will allow us to elevate already-at-the-peak product quality further, to improve production processes, and to develop new products. With this plan Duksan family will re-assure ourselves of our motto "Customer Satisfaction" and will try our best to continue our presence at the top of Korean and furthermore of the world reagent industry.

Duksan Pure Chemicals CO., Ltd.



# Duksan High Purity Solvents

As a major manufacturer of high purity solvents in Korea, having a specialties in solvent purification, DUKSAN Pure Chemicals is working hard toward achieving 'High Quality, High Customer-satisfaction' by enforcing strict quality management and new product development.

Since the development of Solvents for HPLC in 1996, DUKSAN has been producing a series of High Purity Solvents.

<b>LC-MS</b>	for LC-MS analysis
<b>Ultimate</b>	Multi purpose solvents for trace organic residue analysis, HPLC
<b>HPLC</b>	Solvents for HPLC and ACS experiments
<b>Pesticide</b>	for Pesticide Residue Analysis
<b>BIO</b>	Solvents for Bio-synthesis
<b>Ultra Dry</b>	for requiring Low water application

## Certification



ISO 9001/ISO 14001 Qualified Company  
BGMP Qualified Company  
Innovation-Business [INNO-BIZ]

REAGENTS  
**DUKSAN**

DUKSAN  
PURE CHEMICALS

# Contents

## General Products Guide

- 002 LC-MS
- 003 Ultimate solvents
- 004 Pesticide solvents
- 006 HPLC solvents
- 007 BIO solvents
- 008 Ultra Dry solvents

## Solvent Specifications

- 010 Solvent name Synonyms
- 012 LC-MS
- 018 Ultimate solvents
- 038 Pesticide solvents
- 052 HPLC solvents
- 108 BIO solvents
- 120 Ultra Dry solvents

## Supplementary Reference Information

- 128 Physical properties
- 137 Solvent Miscibility Chart
- 138 Transport information
- 139 Units Conversion Tables
- 140 GHS Symbols and their meanings
- 141 Solvent Quick Search Guide



# General Product Guide

---

**LC-MS  
ULTIMATE  
PESTICIDE  
HPLC  
BIO  
ULTRA DRY**

# LC-MS

---

## Features

- No LC-MS TIC signals higher than 50ppb Reserpine (ESI+mode)
- 50ppb 4-Nitrophenol(ESI-mode)
- Very low metal concentration
- Low particles

## Applications

- LC-MS
- HPLC
- Spectrophotometry

## Package

- 1ℓ, 4ℓ Glass bottle
- 

## ITEM

---

Acetonitrile

---

Methanol

---

Water

---

# Ultimate solvents

## Features

- Multi purpose grade for HPLC, Trace organic analysis by GC-ECD/GC-FID & Spectrophotometry
- Minimal UV absorbance
- Low water, residue after evaporation
- Low organic impurities

## Applications

- HPLC
- Trace organic analysis by GC-ECD/ GC-FID
- spectrophotometry
- Applications requiring ACS reagent-grade solvent

## Package

- 1ℓ, 4ℓ Glass bottle



## ITEM

---

Acetone

---

Acetonitrile

---

Benzene

---

Chloroform (stabilized with Amylene)

---

Chloroform (stabilized with Ethanol)

---

Dichloromethane

---

Ethyl Acetate

---

Ethyl Ether (stabilized with Ethanol)

---

n-Heptane 97%

---

n-Heptane 99%

---

n-Hexane 95%

---

Isooctane

---

Methanol

---

Methyl t-Butyl Ether

---

n-Pentane

---

Petroleum Ether(35~60°C)

---

2-Propanol

---

Toluene

---

# Pesticide solvents

## Features


- Meets Extraction-Concentration Suitability test (GC-ECD)
- Low water content and residue after evaporation

## Applications

- Pesticide Multi residue Analysis by GC-ECD
- Gas chromatography

## Package

- 1ℓ, 4ℓ Glass bottle

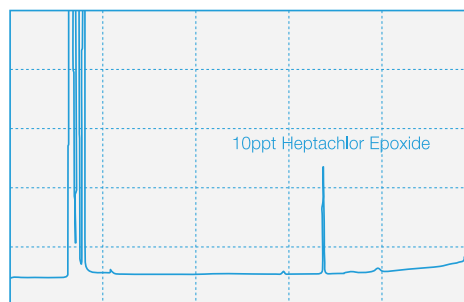

## ITEM

Acetone

Acetonitrile

Benzene

1-Butanol

Chloroform (stabilized with Amylene)

Chloroform (stabilized with Ethanol)

Cyclohexane

Dichloromethane

Ethyl Acetate

Ethyl Ether (stabilized with Ethanol)

n-Heptane 97%

n-Heptane 99%

n-Hexane 95%

Isooctane

Methanol

Methyl t-Butyl Ether

n-Pentane

Petroleum Ether(35~60°C)

2-Propanol

Sodium sulfate, Anhydrous

Toluene



# HPLC solvents

## Features

- ACS Certified
- Low UV absorbance, High GC assay
- Low water content and residue after evaporation
- Packaged with Nitrogen & Sub-micron filtration

## Applications

- HPLC
- Spectrophotometry
- Applications requiring ACS reagent-grade solvent

## Package

- 1ℓ, 2.5ℓ, 4ℓ Glass bottle



## ITEM

---

Acetic acid, glacial

---

Acetone

---

Acetonitrile

---

Acetonitrile, isocratic

---

Benzene

---

1-Butanol

---

n-Butyl acetate

---

Chlorobenzene

---

Chloroform (stabilized with Amylene)

---

Chloroform (stabilized with Ethanol)

---

Cyclohexane

---

o-Dichlorobenzene

---

1,2-Dichloroethane

---

Dichloromethane

---

N,N-Dimethyl Acetamide

---

N,N-Dimethylformamide

---

Dimethyl Sulfoxide

---

1,4-Dioxane

---

Ethanol

---

# HPLC solvents

---

## ITEM

---

Ethyl Acetate

---

Ethyl Ether (stabilized with Ethanol)

---

n-Heptane 97%

---

n-Heptane 99%

---

n-Hexane 95%

---

Isooctane

---

Methanol

---

Methanol, isocratic

---

Methyl-t-Butyl Ether

---

Methyl Ethyl Ketone

---

Methyl Isobutyl Ketone

---

N-Methyl-2-Pyrrolidone

---

n-Pentane

---

Petroleum Ether(35-60°C)

---

1-Propanol

---

2-Propanol

---

Pyridine

---

Tetrahydrofuran

---

Tetrahydrofuran(stabilized with BHT)

---

Toluene

---

1,2,4-Trichlorobenzene

---

Water

---

## Acid & Buffers for HPLC

---

### ITEM

---

Ammonium acetate

---

Ammonium carbonate

---

Ammonium phosphate, monobasic

---

Phosphoric acid 85%

---

Potassium phosphate, monobasic

---

Sodium acetate trihydrate

---

Sodium bicarbonate

---

## Ion-Pair Reagents

---

### ITEM

---

1-Dodecane Sulfonic acid Sodium salt

---

1-Heptane Sulfonic acid Sodium salt

---

1-Hexane Sulfonic acid Sodium salt

---

1-Octane Sulfonic acid Sodium salt

---

1-Pentane Sulfonic acid Sodium salt

---

# BIO solvents

---

## Features

- Specially purified for Bio synthesis
- Minimal water contents to optimize the yields in Bio synthesis
- Low water content and non-volatile residue

## Applications

- Biosynthesis
  - : nucleic acid & peptide synthesis
- Spectrophotometry
- Applications requiring Low-water solvent

## Package

- 1ℓ, 4ℓ Glass bottle
- 

## ITEM

---

Acetonitrile

---

Dichloromethane (stabilized with Amylene)

---

N,N-Dimethylformamide

---

Dimethyl Sulfoxide

---

Methanol

---

N-Methyl-2-Pyrrolidone

---

Pyridine

---

Tetrahydrofuran

---

Triethylamine

---

# Ultra Dry solvents

---

## Features

- Specially designed process for low water content
- Minimal water contents from 10 ppm to 50 ppm

## Applications

- Biosynthesis
- Applications requiring Low-water solvent

## Package

- 1ℓ, 4ℓ Glass bottle
- 

## ITEM

---

Acetonitrile (water10)

---

Acetonitrile (water30)

---

Chloroform (stabilized with Ethanol)

---

1,4-Dioxane

---

Ethyl Acetate

---

Ethyl ether (stabilized with Ethanol)

---

n-Hexane 95%

---

Methanol

---

Pyridine

---

Toluene

---

# Solvent Specifications

---

## Solvent Name Synonyms

**LC-MS**

ULTIMATE

PESTICIDE

HPLC

BIO

ULTRA DRY

# Solvent name synonyms

Solvent name	DUKSAN Product	CAS No.
Ammonium dihydrogen Phosphate	Ammonium Phosphate, monobasic	7722-76-1
n-Butyl Alcohol	1-Butanol	71-36-3
2-Butanone	Methyl Ethyl Ketone	78-93-3
tert-Butyl Methyl Ether	Methyl t-Butyl Ether	1634-04-4
DCM	Dichloromethane	75-09-02
DMAC	N,N-Dimethylacetamide	127-19-5
DMF	N,N-Dimethylformamide	68-12-2
DMSO	Dimethyl Sulfoxide	67-68-5
1,2-Dichlorobenzene	o-Dichlorobenzene	95-50-1
Diethyl ether	Ethyl Ether	60-29-7
Diethylene Dioxide	1,4-Dioxane	123-91-1
Diethylene Ether	1,4-Dioxane	123-91-1
Ether	Ethyl Ether	60-29-7
Ethyl Alcohol	Ethanol	64-17-5
Ethyl Methyl Ketone	Methyl Ethyl Ketone	78-93-3
Ethylene Dichloride	1,2-Dichloroethane	107-06-2
Isopropanol	2-Propanol	67-63-0
Isopropyl Alcohol	2-Propanol	67-63-0
MEK	Methyl Ethyl Ketone	78-93-3
MIBK	Methyl Isobutyl Ketone	108-10-1
MTBE	Methyl t-Butyl Ether	1634-04-4
Methyl Alcohol	Methanol	67-56-1
Methyl Cyanide	Acetonitrile	75-05-8
Methylene Chloride	Dichloromethane	75-09-2
4-Methyl-2-Pentanone	Methyl Isobutyl Ketone	108-10-1
1-Methyl-2-Pyrrolidinone	N-Methyl-2-Pyrrolidone	872-50-4
N-Methyl-2-Pyrrolidinone	N-Methyl-2-Pyrrolidone	872-50-4
N-Methylpyrrolidone	N-Methyl-2-Pyrrolidone	872-50-4
1-Methyl-2-Pyrrolidone	N-Methyl-2-Pyrrolidone	872-50-4
Methyl Sulfoxide	Dimethyl Sulfoxide	67-68-5
Monochlorobenzene	Chlorobenzene	108-90-7
NMP	N-Methyl-2-Pyrrolidinone	872-50-4
n-Propyl Alcohol	1-Propanol	71-23-8

Solvent name	DUKSAN Product	CAS No.
n-Propanol	1-propanol	71-23-8
Potassium dihydrogen phosphate	Potassium phosphate, monobasic	7778-77-0
Sodium hydrogen carbonate	Sodium bicarbonate	144-55-8
TEA	Triethylamine	121-44-8
THF	Tetrahydrofuran	109-99-9
TMP	Isooctane	540-84-1
2,2,4-Trimethylpentane	Isooctane	540-84-1

# LC-MS Grade

Item	LC-MS Suitability		Metal impurities		
	ESI + Reserpine (max, ppb)	ESI -, 4-Nitrophenol (max, ppb)	Na (ppb)	Al, Ca, Mg, K (ppb)	Ba, Cd, Cr, Co, Cu, Fe, Pb, Li, Ni, Sn, Zn (ppb)
Acetonitrile	50	50	50	25	5
Methanol	50	50	50	25	5
Water	50	50	50	25	5



# Acetonitrile

## Specifications and Max. impurities

### LC-MS Suitability

ESI+ mode (as Reserpine)	50ppb
ESI- mode (as 4-Nitrophenol)	50ppb
Assay (by GC)	min. 99.9%
Color (APHA)	10
Water	0.01%
Residue after evaporation	1 ppm
Titration acid	0.008 meq/g
Titration base	0.0006 meq/g

### UltraViolet Spectrophotometry

Maximum UV Absorbance	
190nm	1.00
195nm	0.15
200nm	0.05
205nm	0.04
210nm	0.02
220nm	0.01
254nm	0.005
LC Gradient Suitability	To pass test

### Metal impurities

Aluminum(Al)	25 ppb
Barium(Ba)	5 ppb
Cadmium(Cd)	5 ppb
Calcium(Ca)	25 ppb
Chromium(Cr)	5 ppb
Cobalt(Co)	5 ppb
Copper(Cu)	5 ppb
Iron(Fe)	5 ppb
Lead(Pb)	5 ppb
Magnesium(Mg)	25 ppb
Manganese(Mn)	5 ppb
Lithium(Li)	5 ppb
Nickel(Ni)	5 ppb
Potassium(K)	25 ppb
Silver(Ag)	5 ppb
Sodium(Na)*	50 ppb
Tin(Sn)	5 ppb
Zinc(Zn)	5 ppb

\* May change over time

Formula  
CH<sub>3</sub>CN

F.W  
41.05

CAS  
75-05-8

Product No.  
3040

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

LC-MS Grade



Packaged under Nitrogen and sub-micron filtered.  
or use in LC-MS, HPLC

013

# Methanol

**Formula**  
CH<sub>3</sub>OH

**F.W**  
32.04

**CAS**  
67-56-1

**Product No.**  
3041

**Package**

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

LC-MS Grade

014

## Specifications and Max. impurities

### LC-MS Suitability

ESI+ mode (as Reserpine)	50 ppb
ESI- mode (as 4-Nitrophenol)	50 ppb
Assay (by GC)	min 99.9%
Color (APHA)	10
Water	0.05%
Residue after evaporation	10 ppm
Titration acid	0.0003 meq/g
Titration base	0.0002 meq/g

### UltraViolet Spectrophotometry

Maximum UV Absorbance	
205nm	1.00
220nm	0.25
230nm	0.15
254nm	0.02
280nm	0.01
LC Gradient Suitability	To pass test

### Metal impurities

Aluminum(Al)	25 ppb
Barium(Ba)	5 ppb
Cadmium(Cd)	5 ppb
Calcium(Ca)	25 ppb
Chromium(Cr)	5 ppb
Cobalt(Co)	5 ppb
Copper(Cu)	5 ppb
Iron(Fe)	5 ppb
Lead(Pb)	5 ppb
Magnesium(Mg)	25 ppb
Manganese(Mn)	5 ppb
Lithium(Li)	5 ppb
Nickel(Ni)	5 ppb
Potassium(K)	25 ppb
Silver(Ag)	5 ppb
Sodium(Na)*	50 ppb
Tin(Sn)	5 ppb
Zinc(Zn)	5 ppb

\* May change over time



Packaged under Nitrogen and sub-micron filtered.  
For use in LC-MS, HPLC

# Water

## Specifications and Max. impurities

### LC-MS Suitability

ESI+ mode (as Reserpine) .....	50 ppb
ESI- mode (as 4-Nitrophenol) .....	50 ppb
Color (APHA) .....	10
Residue after evaporation .....	10ppm

### UltraViolet Spectrophotometry

Maximum UV Absorbance	
190nm .....	0.01
200nm .....	0.01
250~400nm .....	0.005
LC Gradient Suitability .....	To pass test

### Metal impurities

Aluminum(Al) .....	25 ppb
Barium(Ba) .....	5 ppb
Cadmium(Cd) .....	5 ppb
Calcium(Ca) .....	25 ppb
Chromium(Cr) .....	5 ppb
Cobalt(Co) .....	5 ppb
Copper(Cu) .....	5 ppb
Iron(Fe) .....	5 ppb
Lead(Pb) .....	5 ppb
Magnesium(Mg) .....	25 ppb
Manganese(Mn) .....	5 ppb
Lithium(Li) .....	5 ppb
Nickel(Ni) .....	5 ppb
Potassium(K) .....	25 ppb
Silver(Ag) .....	5 ppb
Sodium(Na)* .....	50 ppb
Tin(Sn) .....	5 ppb
Zinc(Zn) .....	5 ppb

\* May change over time

Formula  
H<sub>2</sub>O

F.W  
18.01

CAS  
7732-18-5

Product No.  
3042

Package  
1ℓ × 10 Btl/Box  
4ℓ × 4 Btl/Box

LC-MS Grade

Packaged under Nitrogen and sub-micron filtered.  
For use in LC-MS, HPLC

015



# Solvent Specifications

---

Solvent Name Synonyms

LC-MS

**ULTIMATE**

PESTICIDE

HPLC

BIO

ULTRA DRY


# Ultimate Grade

Item	Extraction-Concentration Suitability		UV Cutoff (max.nm)	Assay (min. %)	Water (max. %)	Residue aft. Evaporation (max. ppm)
	ECD (max. ppt)	FID (max. ppb)				
Acetone	10	5	330	99.9	0.2	1
Acetonitrile	10	5	<190	99.9	0.01	1
Benzene	10		280	99.9	0.03	1
Chloroform w/ Amylene	10	5	245	99.9	0.02	1
Chloroform w/ Ethanol	10	5	245	99.9	0.02	1
Dichloromethane	10	5	233	99.9	0.02	1
Ethyl Acetate	10	5	255	99.9	0.02	1
Ethyl Ether w/ Ethanol	10	5	218	99.9	0.01	1
n-Heptane 97%	10	5	197	97.0	0.02	1
n-Heptane 99%	10	5	197	99.9	0.02	1
n-Hexane 95%	10	5	195	95.0	0.01	1
Isooctane	10	5	205	99.8	0.02	1
Methanol	10	5	205	99.9	0.05	1
Methyl t-Butyl Ether	10	5	210	99.5	0.05	1
n-Pentane	10	5	190	98.0	0.02	1
Petroleum Ether(35~60°C)	10	5	-	-	0.01	1
2-Propanol	10	5	205	99.9	0.05	1
Toluene	10	5	286	99.9	0.02	1

# Acetone

## Physical Data

Eluotropic value (E°)(on Alumina) ···	0.56
Polarity Index (P')	5.1
Viscosity (cP, 25°C) ·········	0.306
Density (g/ml, 25°C) ·········	0.785
Boiling Point (°C) ·········	56
Solubility of water (% , 20°C) ···	Miscible
Refractive Index (25°C) ·········	1.357

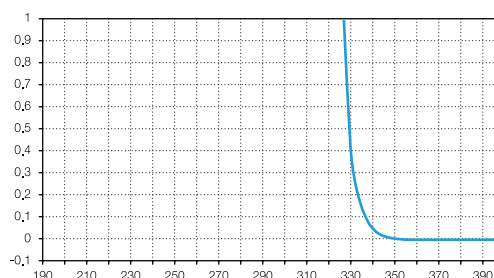

**Formula**  
(CH<sub>3</sub>)<sub>2</sub>CO

**F.W**  
58.08

**CAS**  
67-64-1

**Product No.**  
1761

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) ·········	max. 10 ppt
FID Detectable residue (as 2-Octanol) ·········	max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
330 nm ·········	1.00
340 nm ·········	0.06
350 nm ·········	0.01
UV Cutoff ·········	max. 330 nm
Assay (by GC) ·········	min. 99.9%
Color (APHA) ·········	10
Water ·········	0.20%
Residue after Evaporation ·········	1 ppm
Fluorescence Background ·········	To pass test
Titration acid ·········	0.0003 mEq/g
Titration base ·········	0.0006 mEq/g
Solubility in water ·········	To pass test
Substances reducing permanganate ·········	To pass test
Aldehyde (as HCHO) ·········	0.002%
Methanol (as CH <sub>3</sub> OH) ·········	0.05%
Isopropyl Alcohol (as (CH <sub>3</sub> ) <sub>2</sub> CHOH) ·········	0.05%



Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

Ultimate Grade

019

# Acetonitrile

**Formula**  
CH<sub>3</sub>CN

**F.W**  
41.05

**CAS**  
75-05-8

**Product No.**  
2675

## Package

1ℓ × 10 Btl/Box


4ℓ × 4 Btl/Box

Ultimate Grade

020

## Physical Data

Eluotropic value (E°)(on Alumina) ...	0.65
Polarity Index (P')	5.8
Viscosity (cP, 25°C) .....	0.369
Density (g/ml, 25°C) .....	0.779
Boiling Point (°C) .....	82
Solubility of water (% , 20°C) ...	Miscible
Refractive Index (25°C) .....	1.342

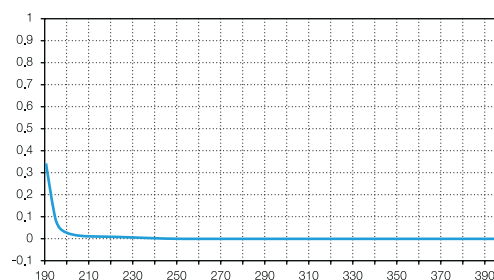

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
190 nm .....	1.00
195 nm .....	0.15
200 nm .....	0.05
205 nm .....	0.04
210 nm .....	0.02
220 nm .....	0.01
254 nm .....	0.009
UV Cutoff .....	max. 190 nm

### LC Gradient Suitability

Gradient Elution test .....	To pass test
Assay (by GC) .....	min. 99.9%
Color (APHA) .....	10
Water .....	0.01%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Titration acid .....	0.008 mEq/g
Titration base .....	0.0006 mEq/g




Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis



# Benzene

## Physical Data

Eluotropic value (E°)(on Alumina) ...	0.32
Viscosity (cP, 25°C) .....	0.604
Density (g/mL, 25°C) .....	0.872
Boiling Point (°C) .....	80
Solubility of water (% , 20°C) .....	0.063
Refractive Index (25°C) .....	1.498

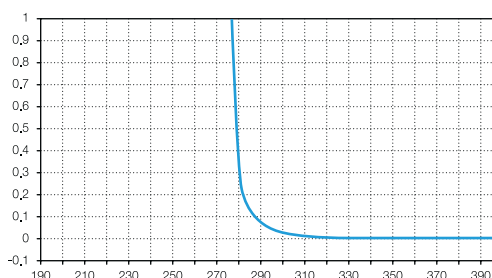

## Formula

C<sub>6</sub>H<sub>6</sub>

## F.W

78.10

## CAS

71-43-2

## Product No.

1828

## Package

1L × 10 Btl/Box

4L × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) ..... max. 10 ppt

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

280 nm ..... 1.00

290 nm ..... 0.15

300 nm ..... 0.05

330 nm ..... 0.01

350 nm ..... 0.005

UV Cutoff ..... max. 280 nm

Assay (by GC) ..... min. 99.9%

Color (APHA) ..... 10

Water ..... 0.03%

Residue after Evaporation ..... 1 ppm

Fluorescence Background ..... To pass test

Substances darkened by sulfuric acid ..... To pass test

Thiophene (limit about 1 ppm) ..... To pass test

Sulfur compounds (as S) ..... 0.005%



Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

Ultimate Grade

021

# Chloroform

## (Stabilized with Amylene)

**Formula**  
CHCl<sub>3</sub>

**F.W**  
119.38

**CAS**  
67-66-3

**Product No.**  
1779

Stabilized with  
15~200 ppm  
Amylene


**Package**  
1ℓ × 10 Btl/Box  
4ℓ × 4 Btl/Box

Ultimate Grade

022

### Physical Data

Elutropic value (E°)(on Alumina) .....	0.40
Polarity Index (P') .....	4.1
Viscosity (cP, 25°C) .....	0.537
Density (g/ml, 25°C) .....	1.480
Boiling Point (°C) .....	61
Solubility of water (% , 20°C) .....	0.056
Refractive Index (25°C) .....	1.444

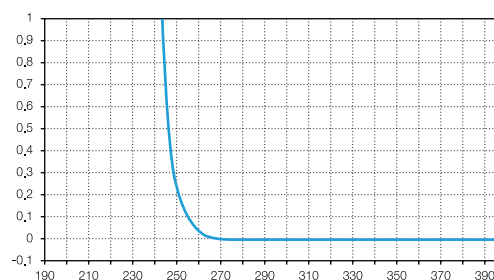

### Specifications and Max. impurities

#### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

#### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
245 nm .....	1.00
250 nm .....	0.33
254 nm .....	0.15
270 nm .....	0.02
280 nm .....	0.01
UV Cutoff .....	max. 245 nm
Assay (by GC) .....	min. 99.9 %
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Lead (Pb) .....	0.05 ppm
Acid and Chloride .....	To pass test
Free Chlorine .....	To pass test
Suitability for use in Dithizone test .....	To pass test
Acetone and Aldehyde .....	0.005%
Contains Stabilizer (Amylene) 15~200 ppm	




Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

# Chloroform

## (Stabilized with Ethanol)

### Physical Data

Eluotropic value (E°)(on Alumina) .....	0.40
Polarity Index (P') .....	4.1
Viscosity (cP, 25°C) .....	0.537
Density (g/ml, 25°C) .....	1.480
Boiling Point (°C) .....	61
Solubility of water (% , 20°C) .....	0.056
Refractive Index (25°C) .....	1.444

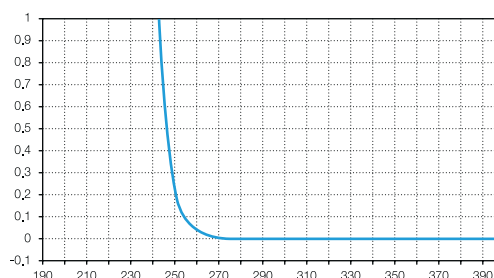

**Formula**  
CHCl<sub>3</sub>

**F.W**  
119.38

**CAS**  
67-66-3

**Product No.**  
1782

Stabilized  
with 0.5~1.0%  
Ethanol

**Package**  
**1ℓ** × **10** Btl/Box  
**4ℓ** × **4** Btl/Box

### Specifications and Max. impurities

#### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

#### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
245 nm .....	1.00
250 nm .....	0.33
254 nm .....	0.15
270 nm .....	0.02
280 nm .....	0.01
UV Cutoff .....	max. 245 nm
Assay (by GC, Excluding preservative) .....	min. 99.9 %
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Lead (Pb) .....	0.05 ppm
Acid and Chloride .....	To pass test
Free Chlorine .....	To pass test
Substances darkened by sulfuric acid .....	To pass test
Suitability for use in Dithizone test .....	To pass test
Acetone and Aldehyde .....	0.005%
Contains Stabilizer (Ethanol) 0.5~1.0 %	



Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

Ultimate Grade

023

# Dichloromethane

## (Stabilized with Amylene)

### Formula

CH<sub>2</sub>Cl<sub>2</sub>

### F.W

84.93

### CAS

75-09-2

### Product No.

1667

Stabilized with  
15~200ppm  
Amylene

### Package

1ℓ × 10 Btl/Box


4ℓ × 4 Btl/Box

Ultimate Grade

024

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.42
Polarity Index (P') .....	3.1
Viscosity (cP, 25°C) .....	0.413
Density (g/ml, 25°C) .....	1.318
Boiling Point (°C) .....	40
Solubility of water (% , 20°C) .....	0.24
Refractive Index (25°C) .....	1.421

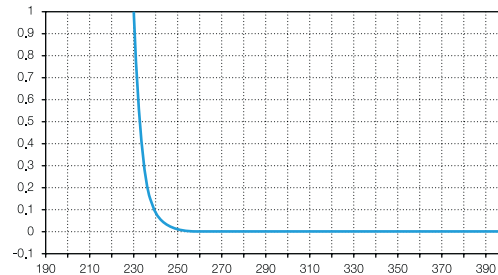

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
233 nm .....	1.00
235 nm .....	0.50
240 nm .....	0.15
254 nm .....	0.01
280 nm .....	0.01
UV Cutoff .....	max. 233 nm
Assay (by GC) .....	min. 99.9%
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Titration acid .....	0.0003 mEq/g
Free Halogens .....	To pass test
Contains Stabilizer (Amylene) 15~200 ppm	




Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

# Ethyl Acetate

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.58
Polarity Index (P')	4.4
Viscosity (cP, 25°C) .....	0.423
Density (g/mL, 25°C) .....	0.894
Boiling Point (°C) .....	77
Solubility of water (% , 20°C) .....	3.3
Refractive Index (25°C) .....	1.370

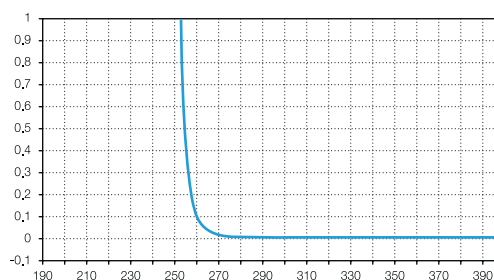

### Formula

CH<sub>3</sub>COOC<sub>2</sub>H<sub>5</sub>

### F.W

88.11

### CAS

141-78-6

### Product No.

2697

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) ..... max. 10 ppt

FID Detectable residue (as 2-Octanol) ..... max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

255 nm ..... 1.00

260 nm ..... 0.15

270 nm ..... 0.025

UV Cutoff ..... max. 255 nm

Assay (by GC) ..... min. 99.9%

Color (APHA) ..... 10

Water ..... 0.02%

Residue after Evaporation ..... 1 ppm

Fluorescence Background ..... To pass test

Titration acid ..... 0.0009 mEq/g

Substances darkened by sulfuric acid ..... To pass test



Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

Ultimate Grade

025

# Ethyl Ether, Anhydrous

(Stabilized with Ethanol)

## Formula

$C_2H_5OC_2H_5$

## F.W

74.12

## CAS

60-29-7

## Product No.

2691

Stabilized  
with 1.5~2.5%  
Ethanol

## Package

1ℓ × 10 Btl/Box


4ℓ × 4 Btl/Box

Ultimate Grade

026

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.38
Polarity Index (P') .....	2.8
Viscosity (cP, 25°C) .....	0.24
Density (g/mL, 25°C) .....	0.708
Boiling Point (°C) .....	4
Solubility of water (% , 20°C) .....	1.26
Refractive Index (25°C) .....	1.352

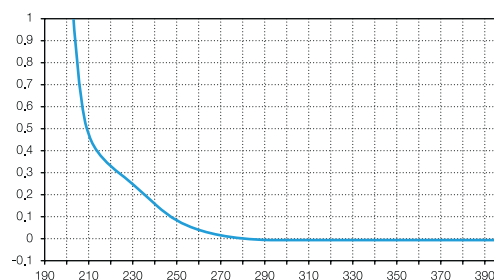

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
218 nm .....	1.00
254 nm .....	0.07
280 nm .....	0.02
350 nm .....	0.01
UV Cutoff .....	max. 218 nm
Assay (by GC, Excluding preservative) .....	min. 99.9 %
Color (APHA) .....	10
Water .....	0.01%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Titration acid .....	0.0002 mEq/g
Peroxide (as $H_2O_2$ , at time of packaging) .....	max. 5 ppm
Carbonyl compound (as HCHO) .....	0.001%
Substances darkened by sulfuric acid .....	To pass test
Contains Stabilizer (Ethanol) 1.5~2.5 %	




Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

# n-Heptane 97%

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.01
Polarity Index (P') .....	0.1
Viscosity (cP, 25°C) .....	0.40
Density (g/mL, 25°C) .....	0.681
Boiling Point (°C) .....	98
Solubility of water (% , 20°C) .....	0.01
Refractive Index (25°C) .....	1.385

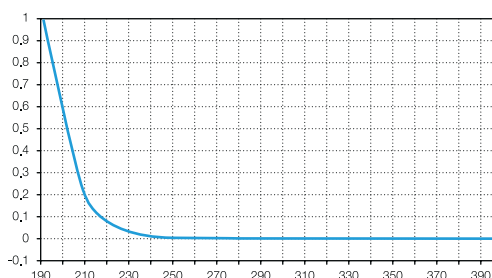

### Formula

$\text{CH}_3(\text{CH}_2)_5\text{CH}_3$

### F.W

100.21

### CAS

142-82-5

### Product No.

2052

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
197 nm .....	1.00
200 nm .....	0.75
215 nm .....	0.20
254 nm .....	0.014
UV Cutoff .....	max. 197 nm
Assay (by GC, n-Heptane) .....	min. 97.0%
(total C7 Hydrocarbons) .....	min. 99.9%
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Substances darkened by sulfuric acid .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

Ultimate Grade

027

# n-Heptane 99%

## Formula

$\text{CH}_3(\text{CH}_2)_5\text{CH}_3$

## F.W

100.21

## CAS

142-82-5

## Product No.

2702

## Package

1ℓ × 10 Btl/Box


4ℓ × 4 Btl/Box

Ultimate Grade

028

## Physical Data

Eluotropic value ( $E^\circ$ ) (on Alumina) .....	0.01
Polarity Index ( $P'$ ) .....	0.1
Viscosity (cP, 25°C) .....	0.40
Density (g/mL, 25°C) .....	0.681
Boiling Point (°C) .....	98
Solubility of water (% , 20°C) .....	0.01
Refractive Index (25°C) .....	1.385

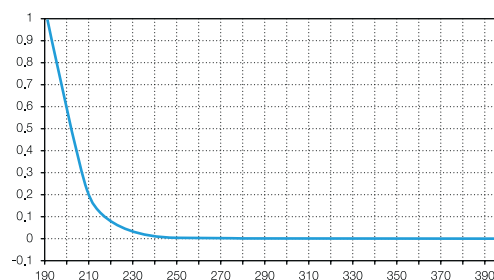

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
197 nm .....	1.00
200 nm .....	0.75
215 nm .....	0.20
254 nm .....	0.014
UV Cutoff .....	max. 197 nm
Assay (by GC, n-Heptane) .....	min. 99.0%
(total C7 Hydrocarbons) .....	min. 99.9%
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Substances darkened by sulfuric acid .....	To pass test




Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis



# n-Hexane 95%

## Physical Data

Eluotropic value (E°)(on Alumina) ...	0.01
Polarity Index (P').....	0.1
Viscosity (cP, 25°C) .....	0.300
Density (g/mL, 25°C).....	0.656
Boiling Point (°C) .....	69
Solubility of water (% , 20°C) .....	0.01
Refractive Index (25°C) .....	1.372

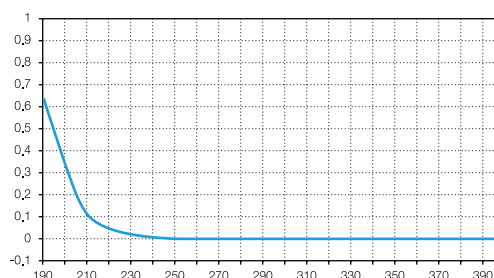

### Formula

$\text{CH}_3(\text{CH}_2)_4\text{CH}_3$

### F.W

86.18

### CAS

110-54-3

### Product No.

1666

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
195 nm .....	1.00
210 nm .....	0.25
220 nm .....	0.075
254 nm .....	0.005
UV Cutoff .....	max. 195 nm
Assay (by GC, n-Hexane) .....	min. 95.0 %
(total C6 Hydrocarbons) .....	min. 99.8 %
Color (APHA) .....	10
Water .....	0.01%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Water soluble titrable acid .....	0.0003 mEq/g
Sulfur compounds (as S) .....	0.005%
Thiophene .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

Ultimate Grade

029

# Isooctane (2,2,4-Trimethylpentane)

## Formula

$(\text{CH}_3)_2\text{CHCH}_2\text{C}(\text{CH}_3)_3$

## F.W

114.23

## CAS

540-84-1

## Product No.

1188


## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.01
Polarity Index (P') .....	0.1
Viscosity (cP, 22°C) .....	0.51
Density (g/mL, 20°C) .....	0.691
Boiling Point (°C) .....	99
Solubility of water (% , 20°C) .....	0.006
Refractive Index (25°C) .....	1.389

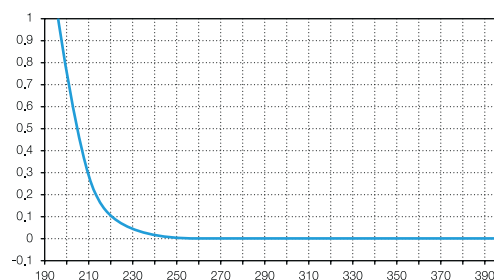

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
205 nm .....	1.00
225 nm .....	0.10
254 nm .....	0.014
UV Cutoff .....	max. 205 nm
Assay (by GC) .....	min. 99.8%
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Water soluble titrable acid .....	0.0003 mEq/g
Sulfur compounds (as S) .....	0.005%

Ultimate Grade

030




Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

# Methanol

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.95
Polarity Index (P')	5.1
Viscosity (cP, 25°C) .....	0.544
Density (g/ml, 25°C) .....	0.787
Boiling Point (°C) .....	65
Solubility of water (% , 20°C) ..	Miscible
Refractive Index (25°C) .....	1.326

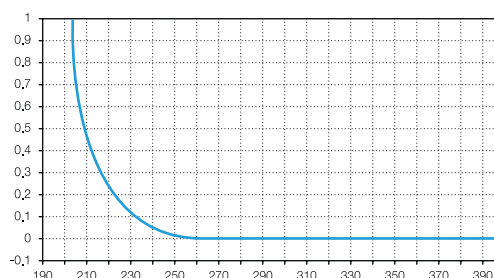

**Formula**  
CH<sub>3</sub>OH

**F.W**  
32.04

**CAS**  
67-56-1

**Product No.**  
2721

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
205 nm .....	1.00
220 nm .....	0.25
230 nm .....	0.15
254 nm .....	0.02
280 nm .....	0.01
UV Cutoff .....	max. 205 nm

### LC Gradient Suitability

Gradient Elution test .....	To pass test
Assay (by GC) .....	min. 99.9 %
Color (APHA) .....	10
Water .....	0.05%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Titration acid .....	0.0003 mEq/g
Titration base .....	0.0002 mEq/g
Carbonyl compounds .....	0.001%
(each of Acetone, Formaldehyde and Acetaldehyde)	
Substances darkened by sulfuric acid .....	To pass test
Substances reducing permanganate .....	To pass test
Solubility in water .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

Ultimate Grade

031

# Methyl t-Butyl Ether

**Formula**  
(CH<sub>3</sub>)<sub>3</sub>COCH<sub>3</sub>

**F.W**  
88.14

**CAS**  
1634-04-4

**Product No.**  
2764

## Package

1ℓ × 10 Btl/Box


4ℓ × 4 Btl/Box

Ultimate Grade

032

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.35
Polarity Index (P') .....	2.5
Viscosity (cP, 25°C) .....	0.28
Density (g/mL, 20°C) .....	0.740
Boiling Point (°C) .....	55
Solubility of water (% , 20°C) .....	1.5
Refractive Index (25°C) .....	1.366

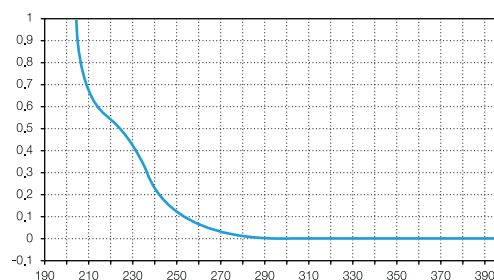

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
210 nm .....	1.00
225 nm .....	0.50
254 nm .....	0.10
300 nm .....	0.01
350 nm .....	0.01
UV Cutoff .....	max. 210 nm
Assay (by GC) .....	min. 99.5 %
Color (APHA) .....	10
Water .....	0.05%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Peroxide (as H <sub>2</sub> O <sub>2</sub> , at time of packaging) .....	max. 1 ppm




Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

# n-Pentane

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.00
Polarity Index (P')	0.00
Viscosity (cP, 25°C) .....	0.22
Density (g/mL, 25°C) .....	0.621
Boiling Point (°C) .....	36
Solubility of water (% , 20°C) .....	0.009
Refractive Index (25°C) .....	1.355

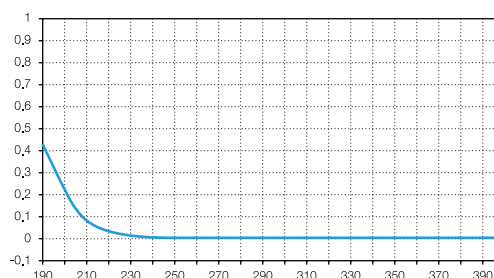

### Formula

$\text{CH}_3(\text{CH}_2)_3\text{CH}_3$

### F.W

72.15

### CAS

109-66-0

### Product No.

2291

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

EECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
190 nm .....	1.00
200 nm .....	0.30
210 nm .....	0.10
254 nm .....	0.01
UV Cutoff .....	max. 190 nm
Assay (by GC, n-Pentane) .....	min. 98.0%
(total C5 Hydrocarbons) .....	min 99.9%
Color (APHA) .....	5
Water .....	0.02%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Substances darkened by sulfuric acid .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

Ultimate Grade

033

# Petroleum Ether (35~60°C)

## CAS

8032-32-4

## Product No.

1593

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Physical Data

Density (g/mL, 20°C) ..... 0.64

Boiling Point (°C) ..... 35~60

Refractive Index (20°C) ..... 1.365

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) ..... max. 10 ppt

FID Detectable residue (as 2-Octanol) ..... max. 5 ppb

Boiling range (Initial to dry point) ..... 35~60°C

Color (APHA) ..... 10

Water ..... 0.01%

Residue after Evaporation ..... 1 ppm

Fluorescence Background ..... To pass test

Acidity ..... To pass test

Ultimate Grade

034




Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

# 2-Propanol

## (Isopropyl Alcohol)

### Physical Data

Eluotropic value (E°)(on Alumina) .....	0.82
Polarity Index (P')	3.9
Viscosity (cP, 25°C) .....	2.038
Density (g/ml, 25°C) .....	0.782
Boiling Point (°C) .....	82
Solubility of water (% , 20°C) ...	Miscible
Refractive Index (25°C) .....	1.375

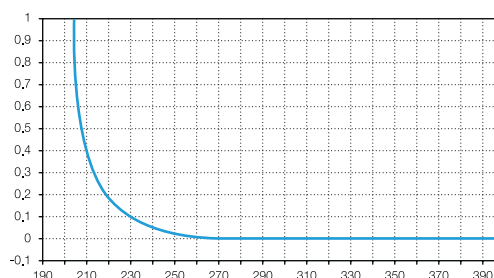

**Formula**  
(CH<sub>3</sub>)<sub>2</sub>CHOH

**F.W**  
60.10

**CAS**  
67-63-0

**Product No.**  
2377

**Package**  
1ℓ × 10 Btl/Box  
4ℓ × 4 Btl/Box

### Specifications and Max. impurities

#### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10ppt
FID Detectable residue (as 2-Octanol) .....	max. 5ppb

#### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
205 nm .....	1.00
220 nm .....	0.25
230 nm .....	0.13
254 nm .....	0.02
UV Cutoff .....	max. 205 nm
Assay (by GC) .....	min. 99.9%
Color (APHA) .....	10
Water .....	0.05%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Titration acid or Base .....	0.0001 mEq/g
Solubility in water .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis

Ultimate Grade

035

# Toluene

## Formula

$C_6H_5CH_3$

## F.W

92.14

## CAS

108-88-3

## Product No.

1722

## Package

1ℓ × 10 Btl/Box


4ℓ × 4 Btl/Box

Ultimate Grade

036

## Physical Data

Eluotropic value ( $E^{\circ}$ ) (on Alumina) .....	0.29
Polarity Index ( $P'$ ) .....	2.4
Viscosity (cP, 25°C) .....	0.560
Density (g/mL, 25°C) .....	0.864
Boiling Point (°C) .....	111
Solubility of water (% , 25°C) .....	0.033
Refractive Index (25°C) .....	1.494

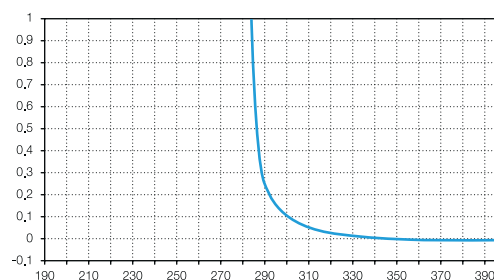

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
FID Detectable residue (as 2-Octanol) .....	max. 5 ppb

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
286 nm .....	1.00
288 nm .....	0.40
300 nm .....	0.10
350 nm .....	0.01
UV Cutoff .....	max. 286 nm
Assay (by GC) .....	min. 99.9%
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	1 ppm
Fluorescence Background .....	To pass test
Sulfur compounds (as S) .....	0.003%
Substances darkened by sulfuric acid .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
Multi purpose grade for HPLC, GC & Spectrophotometry  
For use in Trace organic residue analysis



# Solvent Specifications

---

Solvent Name Synonyms

LC-MS

ULTIMATE

**PESTICIDE**

HPLC

BIO

ULTRA DRY

# Pesticide Grade

Item	Extraction-Concentration Suitability - ECD (max. ppt)	Assay (min. %)	Water (max. %)	Residue aft. Evaporation (max. ppm)
Acetone	10	99.8	0.25	5
Acetonitrile	10	99.8	0.05	5
Benzene	10	99.7	0.03	5
1-Butanol	20	99.5	0.1	5
Chloroform w/ Amylene	10	99.8	0.02	2
Chloroform w/ Ethanol	10	99.8	0.02	2
Cyclohexane	10	99.7	0.01	5
Dichloromethane	10	99.7	0.02	5
Ethyl Acetate	10	99.8	0.02	5
Ethyl Ether w/ Ethanol	10	99.5	0.08	3
n-Heptane 97%	10	97.0	0.02	3
n-Heptane 99%	10	99.0	0.02	3
n-Hexane 95%	10	95.0	0.01	5
Isooctane	10	99.0	0.01	5
Methanol	10	99.8	0.1	5
Methyl t-Butyl Ether	10	99.0	0.05	5
n-Pentane	10	98.0	0.02	5
Petroleum Ether (35~60°C)	10	-	0.05	5
2-propanol	10	99.7	0.1	5
Sodium Sulfate, Anhydrous	-	99.0	-	-
Toluene	10	99.8	0.03	5

# Acetone

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
Assay (by GC) .....	min. 99.5 %
Color (APHA) .....	10
Water .....	0.5%
Residue after Evaporation .....	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

**Formula**  
(CH<sub>3</sub>)<sub>2</sub>CO

**F.W**  
58.08

**CAS**  
67-64-1

**Product No.**  
518

**Package**  
1ℓ × 10 Btl/Box  
4ℓ × 4 Btl/Box

**Pesticide Grade**

# Acetonitrile

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
Assay (by GC) .....	min. 99.8 %
Color (APHA) .....	10
Water .....	0.05%
Residue after Evaporation .....	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

**Formula**  
CH<sub>3</sub>CN

**F.W**  
41.05

**CAS**  
75-05-8

**Product No.**  
1791

**Package**  
1ℓ × 10 Btl/Box  
4ℓ × 4 Btl/Box

**Pesticide Grade**

**039**

# Benzene

Pesticide Grade

## Formula

$C_6H_6$

## F.W

78.10

## CAS

71-43-2

## Product No.

981

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.03%
Residue after Evaporation	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

# 1-Butanol

(n-Butyl Alcohol)

Pesticide Grade

## Formula

$CH_3(CH_2)_3OH$

## F.W

74.12

## CAS

71-36-3

## Product No.

1877

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.5 %
Color (APHA)	10
Water	0.10%
Residue after Evaporation	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

# Chloroform

(Stabilized with Amylene)

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.02%
Residue after Evaporation	2 ppm
Chloride (Cl)	10 ppm
Contains Stabilizer (Amylene)	15~200 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

**Formula**  
CHCl<sub>3</sub>

**F.W**  
119.38

**CAS**  
67-66-3

**Product No.**  
1780

Stabilized with  
15~200 ppm  
Amylene

**Package**  
1ℓ × 10 Btl/Box  
4ℓ × 4 Btl/Box

Pesticide Grade

# Chloroform

(Stabilized with Ethanol)

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC, Excluding preservative)	min. 99.8 %
Color (APHA)	10
Water	0.02%
Residue after Evaporation	2 ppm
Contains Stabilizer (Ethanol)	0.5~1.0 %



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

**Formula**  
CHCl<sub>3</sub>

**F.W**  
119.38

**CAS**  
67-66-3

**Product No.**  
1272

Stabilized  
with 0.5~1.0%  
Ethanol

**Package**  
1ℓ × 10 Btl/Box  
4ℓ × 4 Btl/Box

Pesticide Grade

041

# Cyclohexane

Pesticide Grade

## Formula

$C_6H_{12}$

## F.W

84.16

## CAS

110-82-7

## Product No.

1332

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.01%
Residue after Evaporation	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

# Dichloromethane

(Stabilized with Amylene)

Pesticide Grade

## Formula

$CH_2Cl_2$

## F.W

84.93

## CAS

75-09-2

## Product No.

580

Stabilized with  
15~200ppm  
Amylene

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.02%
Residue after Evaporation	5 ppm
Chloride (Cl)	10 ppm
Contains Stabilizer (Amylene)	15~200 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

# Ethyl Acetate

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.02%
Residue after Evaporation	5 ppm
Titration acid	0.0009 mEq/g



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

### Formula

$\text{CH}_3\text{COOC}_2\text{H}_5$

### F.W

88.11

### CAS

141-78-6

### Product No.

11

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

Pesticide Grade

# Ethyl Ether, Anhydrous (Stabilized with Ethanol)

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC, Excluding preservative)	min. 99.5 %
Color (APHA)	10
Water	0.08%
Residue after Evaporation	3 ppm
Peroxide (as $\text{H}_2\text{O}_2$ , at time of packaging)	5 ppm
Titration acid	0.0002 mEq/g
Contains Stabilizer (Ethanol)	1.5~2.5 %



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

### Formula

$\text{C}_2\text{H}_5\text{OC}_2\text{H}$

### F.W

74.12

### CAS

60-29-7

### Product No.

567

Stabilized  
with 1.5~2.5%  
Ethanol

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

Pesticide Grade

043

# n-Heptane 97%

Pesticide Grade

## Formula

$\text{CH}_3(\text{CH}_2)_5\text{CH}_3$

## F.W

100.21

## CAS

142-82-5

## Product No.

2053

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC, n-Heptane)	min. 97.0 %
(total C7 Hydrocarbons)	min. 99.9 %
Color (APHA)	10
Water	0.02%
Residue after Evaporation	3 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

# n-Heptane 99%

Pesticide Grade

## Formula

$\text{CH}_3(\text{CH}_2)_5\text{CH}_3$

## F.W

100.21

## CAS

142-82-5

## Product No.

2703

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC, n-Heptane)	min. 99.0 %
(total C7 Hydrocarbons)	min. 99.9 %
Color (APHA)	10
Water	0.02%
Residue after Evaporation	3 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD



# n-Hexane 95%

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
Assay (by GC, n-Hexane) .....	min. 95.0 %
(total C6 Hydrocarbons) .....	min. 99.8 %
Color (APHA) .....	10
Water .....	0.01%
Residue after Evaporation .....	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

### Formula

$\text{CH}_3(\text{CH}_2)_4\text{CH}_3$

### F.W

86.18

### CAS

110-54-3

### Product No.

821

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

Pesticide Grade

# Isooctane (2,2,4-Trimethylpentane)

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
Assay (by GC) .....	min. 99.0 %
Color (APHA) .....	10
Water .....	0.01%
Residue after Evaporation .....	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

### Formula

$(\text{CH}_3)_2\text{CHCH}_2\text{C}(\text{CH}_3)_3$

### F.W

114.23

### CAS

540-84-1

### Product No.

1187

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

Pesticide Grade

045

# Methanol

Pesticide Grade

**Formula**  
CH<sub>3</sub>OH

**F.W**  
32.04

**CAS**  
67-56-1

**Product No.**  
63

**Package**  
1ℓ × 10 Btl/Box  
4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.1%
Residue after Evaporation	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

# Methyl t-Butyl Ether

Pesticide Grade

**Formula**  
(CH<sub>3</sub>)<sub>3</sub>COCH<sub>3</sub>

**F.W**  
88.14

**CAS**  
1634-04-4

**Product No.**  
2765

**Package**  
1ℓ × 10 Btl/Box  
4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.0 %
Color (APHA)	10
Water	0.05%
Residue after Evaporation	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

# n-Pentane

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
Assay (by GC, n-Pentane) .....	min. 98.0 %
(total C5 Hydrocarbons) .....	min. 99.9 %
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

### Formula

$\text{CH}_3(\text{CH}_2)_3\text{CH}_3$

### F.W

72.15

### CAS

109-66-0

### Product No.

1576

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

Pesticide Grade

# Petroleum Ether (35~60°C)

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
Boiling range (Initial to dry) .....	35~60°C
Color (APHA) .....	10
Water .....	0.05%
Residue after Evaporation .....	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

### CAS

8032-32-4

### Product No.

1592

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

Pesticide Grade

047

# 2-Propanol

## (Isopropyl Alcohol)

**Pesticide Grade**

**Formula**  
 $(\text{CH}_3)_2\text{CHOH}$

**F.W**  
60.10

**CAS**  
67-63-0

**Product No.**  
861

---

**Package**  
1ℓ × 10 Btl/Box  
4ℓ × 4 Btl/Box

### Specifications and Max. impurities

#### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.1%
Residue after Evaporation	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

# Sodium Sulfate, Anhydrous

**Pesticide Grade**

**Formula**  
 $\text{Na}_2\text{SO}_4$

**F.W**  
142.04

**CAS**  
7757-82-6

**Product No.**  
315

---

**Package**  
500g × 20 Btl/Box  
1kg × 10 Btl/Box

### Specifications and Max. impurities

*Meets ACS Specification*

#### Extraction-Concentration Suitability

Extraction-Concentration Suitability	To pass test
Assay ( $\text{Na}_2\text{SO}_4$ )	min. 99.0 %
Calcium (Ca)	0.01%
Chloride (Cl)	0.001%
Heavy Metals (Pb)	5 ppm
Insoluble matters	0.01%
Iron (Fe)	0.001%
Loss on Ignition	0.5%
Magnesium (Mg)	0.001%
Nitrogen compound (as N)	5 ppm
pH of a 5% Solution at 25°C	5.2 ~ 9.2
Phosphate ( $\text{PO}_4$ )	0.001%
Potassium (K)	0.01%

For use in Pesticide Residue analysis & general lab experiments.

# Toluene

## Specifications and Max. impurities

### Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide) .....	max. 10 ppt
Assay (by GC) .....	min. 99.8 %
Color (APHA) .....	10
Water .....	0.03%
Residue after Evaporation .....	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in Pesticide Residue analysis by GC-ECD

### Formula

$C_6H_5CH_3$

### F.W

92.14

### CAS

108-88-3

### Product No.

184

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

Pesticide Grade



# Solvent Specifications

---

Solvent Name Synonyms

LC-MS

ULTIMATE

PESTICIDE

**HPLC**

BIO

ULTRA DRY

# HPLC Grade

## Solvents

Item	UV Cutoff (max.nm)	Assay (min. %)	Water (max. %)	Residue aft. Evaporation (max. ppm)
Acetic acid, glacial	254	99.7	0.1	5
Acetone	330	99.7	0.25	1
Acetonitrile	<190	99.9	0.01	1
Acetonitrile, isocratic	-	99.8	0.02	5
Benzene	280	99.7	0.03	5
1-Butanol	215	99.5	0.1	5
n-Butyl acetate	254	99.5	0.05	5
Chlorobenzene	288	99.9	0.03	5
Chloroform w/ Amylene	245	99.8	0.02	2
Chloroform w/ Ethanol	245	99.8	0.02	2
Cyclohexane	202	99.7	0.01	5
o-Dichlorobenzene	296	98.0	0.02	5
1,2-Dichloroethane	226	99.5	0.02	5
Dichloromethane	233	99.9	0.02	2
N,N-Dimethylacetamide	270	99.8	0.03	5
N,N-Dimethylformamide	270	99.9	0.03	5
Dimethyl Sulfoxide	263	99.9	0.05	5
1,4-Dioxane	215	99.8	0.02	5
Ethanol	205	99.9	0.1	5
Ethyl Acetate	255	99.9	0.02	5
Ethyl Ether w/ Ethanol	218	99.8	0.01	5
n-Heptane 97%	197	97.0	0.02	3
n-Heptane 99%	197	99.0	0.02	3
n-Hexane 95%	195	95.0	0.01	3
Isooctane	205	99.0	0.02	4
Methanol	205	99.9	0.05	3
Methanol, isocratic	-	99.7	0.05	5
Methyl t-Butyl Ether	210	99.0	0.05	5
Methyl Ethyl Ketone	329	99.6	0.03	3
Methyl Isobutyl Ketone	334	99.0	0.05	5
N-Methyl-2-Pyrrolidone	285	99.7	0.02	10
n-Pentane	190	98.0	0.02	5



Item	UV Cutoff (max.nm)	Assay (min. %)	Water (max. %)	Residue aft. Evaporation (max. ppm)
Petroleum Ether (35~60°C)	210	-	0.01	5
1-Propanol	210	99.8	0.05	3
2-Propanol	205	99.9	0.05	2
Pyridine	330	99.5	0.02	5
Tetrahydrofuran	210	99.9	0.02	5
Tetrahydrofuran w/BHT	-	99.5	0.02	-
Toluene	286	99.8	0.02	5
1,2,4-Trichlorobenzene	310	99.0	0.01	5
Water	190	-	-	10

## Acid & Buffers for HPLC

Item	UV Absorbance (max., 254nm, 1.0M)	Assay (min. %)	Insoluble matter (max. %)
Ammonium acetate	0.02	99.0	0.005
Ammonium carbonate	0.02	30.0 (as NH <sub>3</sub> )	0.005
Ammonium phosphate, monobasic	0.03	98.0	0.005
Phosphoric acid 85%	0.04	85.0	0.001
Potassium phosphate, monobasic	0.04	99.0	0.01
Sodium acetate trihydrate	0.02	99.0	0.005
Sodium bicarbonate	0.05	99.7	0.015

## Ion-Pair Reagents

Item	UV Absorbance (max., 200nm, 0.005M)	UV Transmittance (min., 200nm, 0.005M)	Assay (min. %)	pH value
1-Dodecane Sulfonic acid Sodium salt	0.15	-	98.0	5.5 ~ 7.5 (1%, sol)
1-Heptane Sulfonic acid Sodium salt	-	70.0	99.0	5.5 ~ 7.5 (10%, sol)
1-Hexane Sulfonic acid Sodium salt	-	70.0	99.0	5.5 ~ 7.5 (10%, sol)
1-Octane Sulfonic acid Sodium salt	-	70.0	99.0	5.5 ~ 7.5 (10%, sol)
1-Pentane Sulfonic acid Sodium salt	-	70.0	99.0	5.5 ~ 7.5 (10%, sol)

# Acetic acid, glacial

**Formula**  
CH<sub>3</sub>COOH

**F.W**  
60.05

**CAS**  
64-19-7

**Product No.**  
1755

## Package


1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Physical Data

Eluotropic value (E°)(on Alumina) ...	>0.73
Polarity Index (P')	6.2
Viscosity (cP, 25°C) .....	1.10
Density (g/ml, 25°C) .....	1.049
Boiling Point (°C) .....	117
Solubility of water (% , 20°C) .....	Miscible
Refractive Index (25°C) .....	1.370

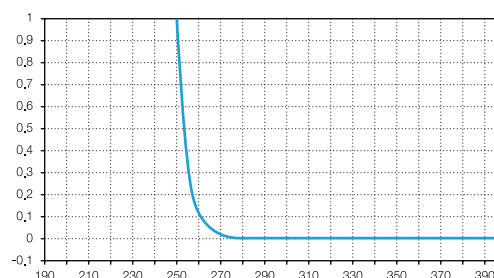

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
254 nm .....	1.00
256 nm .....	0.80
280 nm .....	0.05
350 nm .....	0.02
UV Cutoff .....	max. 254 nm
Assay (by GC) .....	min. 99.7 %
Color (APHA) .....	10
Water .....	0.1%
Residue after Evaporation .....	5 ppm
Titration base .....	0.0004 mEq/g
Dilution test .....	To pass test
Acetic anhydride .....	0.01%
Chloride (Cl) .....	1 ppm
Sulfate (SO <sub>4</sub> ) .....	1 ppm
Heavy Metals (as Pb) .....	0.5 ppm
Iron (Fe) .....	0.2 ppm
Substances reducing dichromate .....	To pass test
Substances reducing permanganate .....	To pass test

HPLC Grade

054




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# Acetone

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.56
Polarity Index (P')	5.1
Viscosity (cP, 25°C) .....	0.306
Density (g/mL, 25°C) .....	0.785
Boiling Point (°C) .....	56
Solubility of water (% , 20°C) ...	Miscible
Refractive Index (25°C) .....	1.357

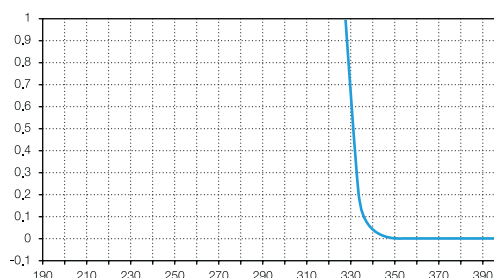

**Formula**  
(CH<sub>3</sub>)<sub>2</sub>CO

**F.W**  
58.08

**CAS**  
67-64-1

**Product No.**  
515

## Package

**1ℓ × 10** Btl/Box

**2.5ℓ × 4** Btl/Box

**4ℓ × 4** Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
330 nm .....	1.00
340 nm .....	0.06
350 nm .....	0.01
UV Cutoff .....	max. 330 nm
Assay (by GC) .....	min 99.7%
Color (APHA) .....	10
Water .....	0.25%
Residue after Evaporation .....	1 ppm
Titration acid .....	0.0003 mEq/g
Titration base .....	0.0006 mEq/g
Solubility in water .....	To pass test
Substances reducing permanganate .....	To pass test
Aldehyde (as HCHO) .....	0.002%
Methanol (as CH <sub>3</sub> OH) .....	0.05%
Isopropyl Alcohol (as (CH <sub>3</sub> ) <sub>2</sub> CHOH) .....	0.05%



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

055

# Acetonitrile

**Formula**  
CH<sub>3</sub>CN

**F.W**  
41.05

**CAS**  
75-05-8

**Product No.**  
549

## Package


**1ℓ** × **10** Btl/Box  
**2.5ℓ** × **4** Btl/Box  
**4ℓ** × **4** Btl/Box

HPLC Grade

056

## Physical Data

Eluotropic value (E°)(on Alumina) ..... 0.65  
Polarity Index (P') ..... 5.8  
Viscosity (cP, 25°C) ..... 0.369  
Density (g/ml, 25°C) ..... 0.779  
Boiling Point (°C) ..... 82  
Solubility of water (% , 20°C) ..... Miscible  
Refractive Index (25°C) ..... 1.342

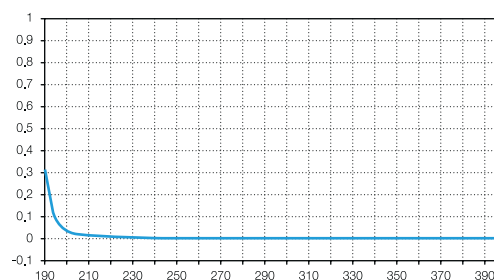

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

190 nm ..... 1.00  
195 nm ..... 0.15  
200 nm ..... 0.05  
205 nm ..... 0.04  
210 nm ..... 0.02  
220 nm ..... 0.01  
254 nm ..... 0.009  
UV Cutoff ..... max. 190 nm

### LC Gradient Suitability

Gradient Elution test ..... To pass test  
Assay (by GC) ..... min. 99.9 %  
Color (APHA) ..... 10  
Water ..... 0.01%  
Residue after Evaporation ..... 1 ppm  
Titrable acid ..... 0.008 mEq/g  
Titrable base ..... 0.0006 mEq/g



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# Acetonitrile, isocratic

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.65
Polarity Index (P) .....	5.8
Viscosity (cP, 25°C) .....	0.369
Density (g/ml, 25°C) .....	0.779
Boiling Point (°C) .....	82
Percent water soluble in Solvent ...	Miscible
Refractive Index (25°C) .....	1.342

**Formula**  
CH<sub>3</sub>CN

**F.W**  
41.05

**CAS**  
75-05-8

**Product No.**  
4761

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
200 nm .....	0.30
220 nm .....	0.15
240 nm .....	0.05
Identification .....	IR Spectrometry
Assay (by GC) .....	Min. 99.8 %
Water .....	0.02%
Density (20°C) .....	0.779 ~ 0.783
Residue after Evaporation .....	5 ppm
Titration acid .....	0.008 mEq/g
Titration base .....	0.0006 mEq/g

### Package

**2.5ℓ × 4** Btl/Box

**4ℓ × 4** Btl/Box

HPLC Grade



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

057

# Ammonium acetate

**Formula**  
 $\text{CH}_3\text{CO}_2\text{NH}_4$

**F.W**  
77.08

**CAS**  
631-61-8

**Product No.**  
3033

**Package**  
500g × 20 Btl/Box  
1kg × 10 Btl/Box

HPLC Grade / Acid & Buffers

058

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)	
254 nm	0.02
280 nm	0.01
350 nm	0.01
Assay	min. 97.0%
pH of a 5% solution (25°C)	6.7 ~ 7.3
Insoluble matter	0.005%
Residue after ignition	0.01%
Chloride (Cl)	5 ppm
Nitrate (NO <sub>3</sub> )	0.001%
Sulfate (SO <sub>4</sub> )	0.001%
Heavy metals (as Pb)	5 ppm
Iron (Fe)	5 ppm



For use in HPLC & ACS experiments

# Ammonium carbonate

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)	
254 nm	0.02
280 nm	0.01
350 nm	0.01
Assay (as NH <sub>3</sub> )	min. 30.0%
Insoluble matter	0.005%
Chloride (Cl)	5 ppm
Sulfur compounds (as SO <sub>4</sub> )	0.002%
Heavy metals (as Pb)	5 ppm
Iron (Fe)	5 ppm
Nonvolatile matter	0.01%

**Formula**  
(NH<sub>4</sub>)<sub>2</sub>CO<sub>3</sub>

**F.W**  
96.09

**CAS**  
506-87-6

**Product No.**  
3034

**Package**  
500g × 20 Btl/Box  
1kg × 10 Btl/Box

HPLC Grade / Acid & Buffers



For use in HPLC & ACS experiments

059

# Ammonium phosphate, monobasic

**Formula**  
 $\text{NH}_4\text{H}_2\text{PO}_4$

**F.W**  
115.03

**CAS**  
7722-76-1

**Product No.**  
3035

**Package**  
500g × 20 Btl/Box  
1kg × 10 Btl/Box

HPLC Grade / Acid & Buffers

060

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)

254 nm	0.03
280 nm	0.02
350 nm	0.01

Assay	min. 98.0%
pH of a 5% solution (25°C)	3.8 ~ 4.4
Insoluble matter	0.005%
Chloride (Cl)	5 ppm
Nitrate ( $\text{NO}_3$ )	0.001%
Sulfate ( $\text{SO}_4$ )	0.01%
Heavy metals (as Pb)	5 ppm
Iron (Fe)	0.001%
Potassium (K)	0.005%
Sodium (Na)	0.005%
Calcium (Ca)	0.001%
Magnesium (Mg)	0.0005%




For use in HPLC & ACS experiments



# Benzene

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.32
Viscosity (cP, 25°C) .....	0.604
Density (g/mL, 25°C) .....	0.872
Boiling Point (°C) .....	80
Solubility of water (% , 25°C) .....	0.063
Refractive Index (25°C) .....	1.498

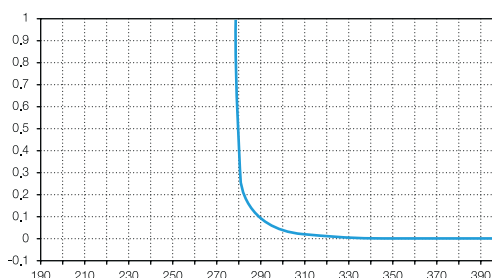

### Formula

C<sub>6</sub>H<sub>6</sub>

### F.W

78.10

### CAS

71-43-2

### Product No.

980

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
3280 nm .....	1.00
290 nm .....	0.15
300 nm .....	0.05
330 nm .....	0.01
350 nm .....	0.005
UV Cutoff .....	max. 280 nm
Assay (by GC) .....	min. 99.7%
Color (APHA) .....	10
Water .....	0.03%
Residue after Evaporation .....	5 ppm
Substances darkened by sulfuric acid .....	To pass test
Thiophene (limit about 1 ppm) .....	To pass test
Sulfur compounds (as S) .....	0.005%

### Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

061

# 1-Butanol (n-Butyl Alcohol)

## Formula

$\text{CH}_3(\text{CH}_2)_3\text{OH}$

## F.W

74.12

## CAS

71-36-3

## Product No.

1047

## Package


1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Physical Data

Eluotropic value ( $E^\circ$ ) (on Alumina) .....	0.7
Polarity Index (P') .....	3.9
Viscosity (cP, 25°C) .....	2.544
Density (g/mL, 25°C) .....	0.806
Boiling Point (°C) .....	118
Solubility of water (% , 20°C) .....	20.07
Refractive Index (25°C) .....	1.397

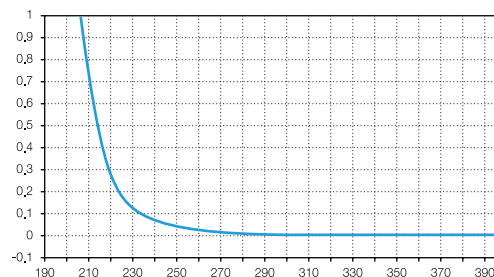

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
215 nm .....	1.00
220 nm .....	0.50
230 nm .....	0.20
254 nm .....	0.025
UV Cutoff .....	max. 215 nm
Assay (by GC) .....	min. 99.5%
Color (APHA) .....	10
Water .....	0.1%
Residue after Evaporation .....	5 ppm
Titration acid .....	0.0008 mEq/g
Carbonyl compounds (as butyraldehyde) .....	0.01%
Butyl ether .....	0.2%

HPLC Grade

062




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# n-Butyl acetate

## Physical Data

Eluotropic value (E°)(on Alumina) .....	4.0
Viscosity (cP, 25°C) .....	0.685
Density (g/ml, 25°C) .....	0.876
Boiling Point (°C) .....	126
Solubility of water (% , 20°C) .....	1.86
Refractive Index (25°C) .....	1.392

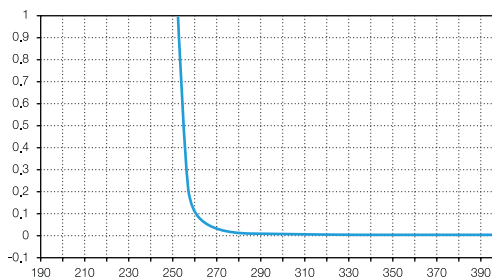

### Formula

$\text{CH}_3\text{CO}_2(\text{CH}_2)_3\text{CH}_3$

### F.W

116.16

### CAS

123-86-4

### Product No.

1038

### Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
254 nm .....	1.00
260 nm .....	0.20
275 nm .....	0.04
300 nm .....	0.02
320 nm .....	0.01
UV Cutoff .....	max. 254 nm
Assay (by GC) .....	min. 99.5 %
Color (APHA) .....	10
Water .....	0.05%
Residue after Evaporation .....	5 ppm
Titration acid .....	0.0016 mEq/g
Substances darkened by sulfuric acid .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

063

# Chlorobenzene

## Formula

$C_6H_5Cl$

## F.W

112.56

## CAS

108-90-7

## Product No.

2229

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Physical Data


Eluotropic value ( $E^o$ ) (on Alumina) ..... 4.0

Polarity Index ( $P'$ ) ..... 2.7

Density (g/mL, 25°C) ..... 1.107

Boiling Point (°C) ..... 132

Refractive Index (20°C) ..... 1.525

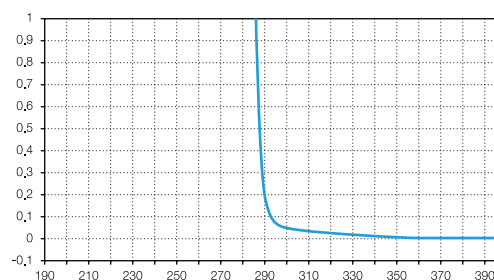

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

288 nm ..... 1.00

300 nm ..... 0.05

325 nm ..... 0.04

350 nm ..... 0.02

400 nm ..... 0.01

UV Cutoff ..... max. 288 nm

Assay (by GC) ..... min. 99.9%

Color (APHA) ..... 30

Water ..... 0.03%

Residue after Evaporation ..... 5 ppm

Titrate acid ..... 0.004 mEq/g

HPLC Grade

064




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# Chloroform

(Stabilized with Amylene)

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.40
Polarity Index (P') .....	4.1
Viscosity (cP, 25°C) .....	0.537
Density (g/mL, 25°C) .....	1.480
Boiling Point (°C) .....	61
Solubility of water (% , 20°C) .....	0.056
Refractive Index (25°C) .....	1.444

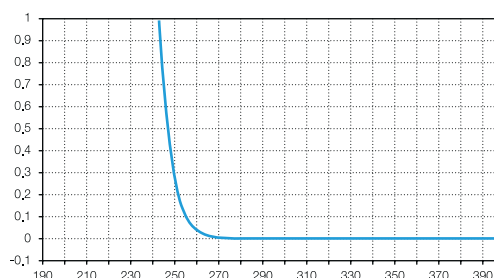

**Formula**  
CHCl<sub>3</sub>

**F.W**  
119.38

**CAS**  
67-66-3

**Product No.**  
1781

Stabilized with  
15~200 ppm  
Amylene

## Package

**1ℓ** × **10** Btl/Box  
**2.5ℓ** × **4** Btl/Box  
**4ℓ** × **4** Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
245 nm .....	1.00
250 nm .....	0.33
254 nm .....	0.15
270 nm .....	0.02
280 nm .....	0.01
UV Cutoff .....	max. 245 nm
Assay (by GC) .....	min. 99.8%
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	2 ppm
Lead (Pb) .....	0.05 ppm
Acid and Chloride .....	To pass test
Free Chlorine .....	To pass test
Suitability for use in Dithizone test .....	To pass test
Acetone and Aldehyde .....	0.005%
Contains Stabilizer (Amylene) 15~200 ppm	



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

065

# Chloroform

(Stabilized with Ethanol)

**Formula**  
CHCl<sub>3</sub>

**F.W**  
119.38

**CAS**  
67-66-3

**Product No.**  
1271

Stabilized  
with 0.5~1.0%  
Ethanol

**Package**


1ℓ × 10 Btl/Box  
2.5ℓ × 4 Btl/Box  
4ℓ × 4 Btl/Box

HPLC Grade

066

## Physical Data

Elutropic value (E°)(on Alumina) .....	0.40
Polarity Index (P <sup>i</sup> ) .....	4.1
Viscosity (cP, 25°C) .....	0.537
Density (g/ml, 25°C) .....	1.480
Boiling Point (°C) .....	61
Solubility of water (% , 20°C) .....	0.056
Refractive Index (25°C) .....	1.444

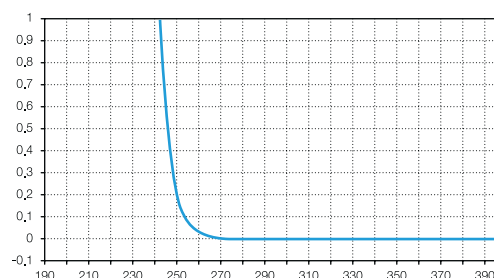

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
245 nm .....	1.00
250 nm .....	0.33
254 nm .....	0.15
270 nm .....	0.02
280 nm .....	0.01
UV Cutoff .....	max. 245 nm
Assay (by GC, Excluding preservative) .....	min. 99.8%
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	2 ppm
Lead (Pb) .....	0.05 ppm
Acid and Chloride .....	To pass test
Free Chlorine .....	To pass test
Substances darkened by sulfuric acid .....	To pass test
Suitability for use in Dithizone test .....	To pass test
Acetone and Aldehyde .....	0.005%
Contains Stabilizer (Ethanol) 0.5 ~ 1.0%	




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# Cyclohexane

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.04
Polarity Index (P')	0.2
Viscosity (cP, 25°C) .....	0.894
Density (g/mL, 25°C) .....	0.773
Boiling Point (°C) .....	81
Solubility of water (% , 20°C) .....	0.01
Refractive Index (25°C) .....	1.424

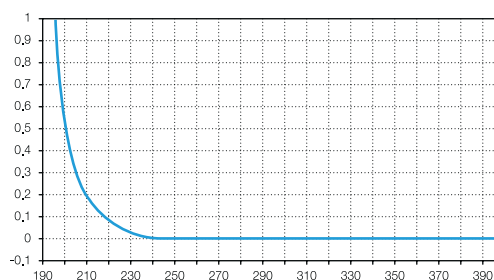

### Formula

C<sub>6</sub>H<sub>12</sub>

### F.W

84.16

### CAS

110-82-7

### Product No.

1331

### Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
202 nm .....	1.00
205 nm .....	0.88
210 nm .....	0.67
254 nm .....	0.01
UV Cutoff .....	max. 202 nm
Assay (by GC) .....	min. 99.7%
Color (APHA) .....	10
Water .....	0.01%
Residue after Evaporation .....	5 ppm
Substances darkened by sulfuric acid .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

067

# o-Dichlorobenzene

## Formula

$C_6H_4Cl_2$

## F.W

147.00

## CAS

95-50-1

## Product No.

1680

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box


## Physical Data

Viscosity (cP, 25°C) ..... 1.32

Density (g/mL, 20°C) ..... 1.3058

Boiling Point (°C) ..... 180.5

Refractive Index (20°C) ..... 1.5514

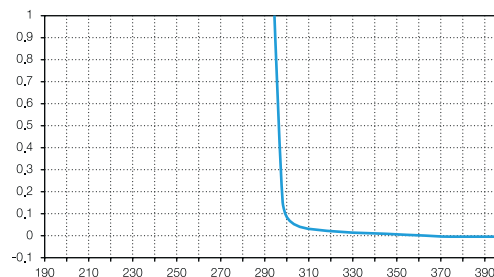

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

296 nm ..... 1.00

300 nm ..... 0.30

325 nm ..... 0.10

350 nm ..... 0.05

400 nm ..... 0.01

UV Cutoff ..... max. 296 nm

Assay (by GC) ..... min. 98.0%

Color (APHA) ..... 30

Water ..... 0.02%

Residue after Evaporation ..... 5 ppm

Acidity (as HCl) ..... 0.005%

HPLC Grade

068




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry



# 1,2-Dichloroethane

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.44
Polarity Index (P')	3.5
Viscosity (cP, 25°C) .....	0.779
Density (g/ml, 25°C) .....	1.245
Boiling Point (°C) .....	84
Solubility of water (% , 20°C) .....	0.15
Refractive Index (25°C) .....	1.444

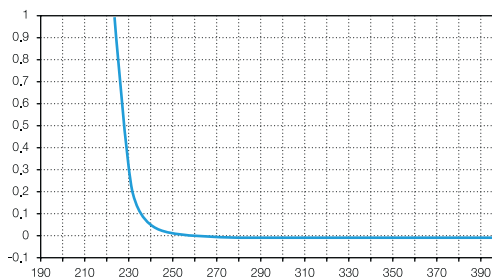

**Formula**  
ClCH<sub>2</sub>CH<sub>2</sub>Cl

**F.W**  
98.96

**CAS**  
107-06-2

**Product No.**  
425

**Package**  
**1ℓ** × **10** Btl/Box  
**2.5ℓ** × **4** Btl/Box  
**4ℓ** × **4** Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
226 nm .....	1.00
230 nm .....	0.50
235 nm .....	0.20
240 nm .....	0.10
245 nm .....	0.05
250 nm .....	0.02
255 nm .....	0.01
400 nm .....	0.01
UV Cutoff .....	max. 226 nm
Assay (by GC) .....	min. 99.5%
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	5 ppm
Titration acid .....	0.0003 mEq/g



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

069

# Dichloromethane

(Stabilized with Amylene)

## Formula

CH<sub>2</sub>Cl<sub>2</sub>

## F.W

84.93

## CAS

75-09-2

## Product No.

577

Stabilized with  
15~200ppm  
Amylene

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box


4ℓ × 4 Btl/Box

HPLC Grade

070

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.42
Polarity Index (P') .....	3.1
Viscosity (cP, 25°C) .....	0.413
Density (g/ml, 25°C) .....	1.318
Boiling Point (°C) .....	40
Solubility of water (% , 20°C) .....	0.24
Refractive Index (25°C) .....	1.421

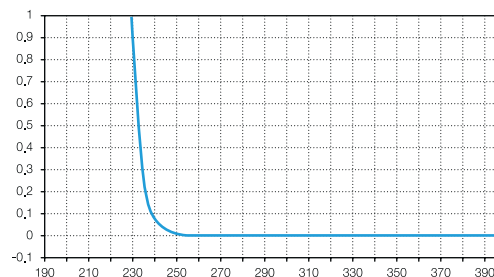

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
233 nm .....	1.00
235 nm .....	0.50
240 nm .....	0.15
254 nm .....	0.01
280 nm .....	0.01
UV Cutoff .....	max. 233 nm
Assay (by GC) .....	min. 99.9%
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	2 ppm
Titration acid .....	0.0003 mEq/g
Free Halogens .....	To pass test
Contains Stabilizer (Amylene) 15~200 ppm	




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# N,N-Dimethylacetamide

## Physical Data

Polarity Index (P')	6.5
Viscosity (cP, 20°C)	2.14
Density (g/mL, 25°C)	0.937
Boiling Point (°C)	165~166
Solubility of water (% , 20°C)	Miscible
Refractive Index (20°C)	1.4384

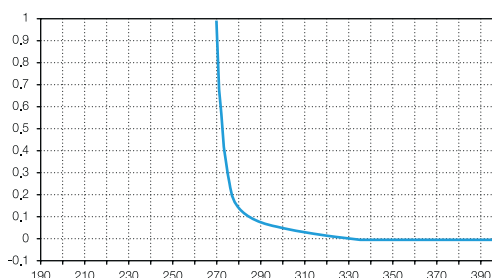

### Formula

$\text{CH}_3\text{CON}(\text{CH}_3)_2$

### F.W

87.12

### CAS

127-19-5

### Product No.

2964

### Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
270 nm	1.00
280 nm	0.30
290 nm	0.15
310 nm	0.05
320 nm	0.03
360 nm	0.01
400 nm	0.01
UV Cutoff	max. 270 nm
Assay (by GC)	min. 99.8%
Water	0.03%
Residue after Evaporation	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC & Spectrophotometry

HPLC Grade

071

# N,N-Dimethylformamide

**Formula**  
HCON(CH<sub>3</sub>)<sub>2</sub>

**F.W**  
73.09

**CAS**  
68-12-2

**Product No.**  
1371

## Package


**1ℓ** × **10** Btl/Box  
**2.5ℓ** × **4** Btl/Box  
**4ℓ** × **4** Btl/Box

HPLC Grade

072

## Physical Data

Eluotropic value (E°)(on C18)	7.6
Polarity Index (P')	6.4
Viscosity (cP, 25°C)	0.794
Density (g/mL, 25°C)	0.944
Boiling Point (°C)	153
Solubility of water (% , 20°C)	Miscible
Refractive Index (25°C)	1.427

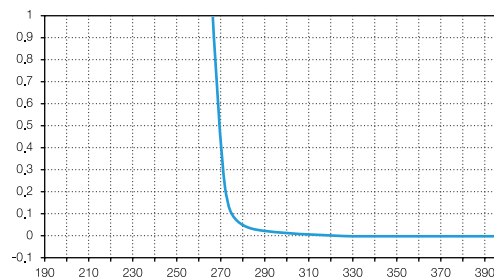

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
270 nm	1.00
275 nm	0.30
295 nm	0.10
310 nm	0.05
340 nm	0.01
UV Cutoff	max. 270 nm
Assay (by GC)	min. 99.9%
Color (APHA)	10
Water	0.03%
Residue after Evaporation	5 ppm
Titration acid	0.0005 mEq/g
Titration base	0.003 mEq/g




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# Dimethyl Sulfoxide

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.62
Polarity Index (P')	7.2
Viscosity (cP, 25°C) .....	1.987
Density (g/ml, 25°C) .....	1.096
Boiling Point (°C) .....	189
Solubility of water (% , 20°C) ...	Miscible
Refractive Index (25°C) .....	1.476

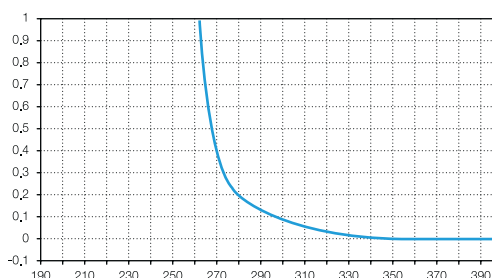

**Formula**  
(CH<sub>3</sub>)<sub>2</sub>SO

**F.W**  
78.13

**CAS**  
67-68-5

**Product No.**  
2762

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
263 nm .....	1.00
270 nm .....	0.40
290 nm .....	0.18
310 nm .....	0.06
330 nm .....	0.02
350 nm .....	0.01
UV Cutoff .....	max. 263 nm
Assay (by GC) .....	min. 99.9%
Color (APHA) .....	10
Water .....	0.05%
Residue after Evaporation .....	5 ppm
Titrate acid .....	0.001 mEq/g

### Package

**1ℓ** × **10** Btl/Box

**2.5ℓ** × **4** Btl/Box

**4ℓ** × **4** Btl/Box

HPLC Grade

Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

073

# 1,4-Dioxane

**Formula**  
(CH<sub>2</sub>)<sub>4</sub>O<sub>2</sub>

**F.W**  
88.11

**CAS**  
123-91-1

**Product No.**  
1356

## Package


**1ℓ** × **10** Btl/Box  
**2.5ℓ** × **4** Btl/Box  
**4ℓ** × **4** Btl/Box

HPLC Grade

074

## Physical Data

Eluotropic value (E°)(on Alumina) ..... 0.56  
Polarity Index (P') ..... 4.8  
Viscosity (cP, 25°C) ..... 1.177  
Density (g/ml, 25°C) ..... 1.028  
Boiling Point (°C) ..... 101.0  
Solubility of water (% , 20°C) ... Miscible  
Refractive Index (25°C) ..... 1.420

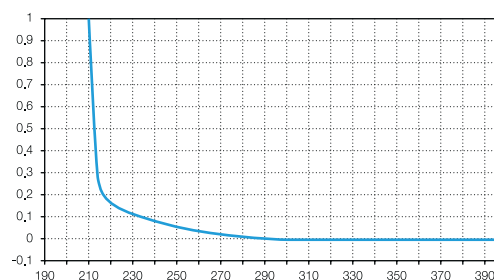

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

215 nm	1.00
225 nm	0.50
250 nm	0.24
270 nm	0.10
300 nm	0.01
UV Cutoff	max. 215 nm

Assay (by GC) ..... min. 99.8 %  
Color (APHA) ..... 10  
Water ..... 0.02 %  
Residue after Evaporation ..... 5 ppm  
Titration acid ..... 0.0016 mEq/g  
Peroxide (as H<sub>2</sub>O<sub>2</sub>, at time of packaging) ..... 0.003 %  
Carbonyl (as CHO) ..... 0.01 %  
Freezing point ..... Not below 11.0 °C



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# 1-Dodecane Sulfonic acid Sodium salt

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

UV Absorbance (0.005M, Water)	
200 nm .....	Max. 0.15
220 nm .....	Max. 0.05
Assay.....	Min. 98.0%
pH value (1%, sol) .....	5.5 ~ 7.5
Loss on drying (at 120°C, vacuum) .....	Max. 2.0%

### Formula

$C_{12}H_{25}NaO_3S$

### F.W

272.38

### CAS

2386-53-0

### Package

25g × 10Btl/Box

HPLC Grade / Ion-Pair Reagents

# Ethanol

## Formula

C<sub>2</sub>H<sub>5</sub>OH

## F.W

46.07

## CAS

64-17-5

## Product No.

76

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box


4ℓ × 4 Btl/Box

HPLC Grade

076

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.88
Polarity Index (P') .....	4.3
Viscosity (cP, 25°C) .....	1.074
Density (g/mL, 25°C) .....	0.787
Boiling Point (°C) .....	78
Solubility of water (% , 20°C) ...	Miscible
Refractive Index (25°C) .....	1.359

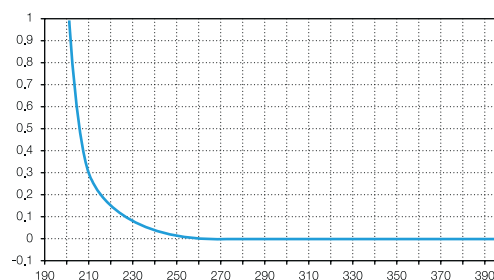

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
205 nm .....	1.00
210 nm .....	0.65
220 nm .....	0.35
254 nm .....	0.04
UV Cutoff .....	max. 205 nm
Assay (by GC) .....	min. 99.9%
Color (APHA) .....	10
Water .....	0.1%
Residue after Evaporation .....	5 ppm
Titration acid .....	0.0003 mEq/g
Titration base .....	0.0002 mEq/g
Acetone, isopropyl alcohol .....	To pass test
Methanol (CH <sub>3</sub> OH) .....	0.1%
Solubility in water .....	To pass test
Substances darkened by sulfuric acid .....	To pass test
Substances reducing permanganate .....	To pass test




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry



# Ethyl Acetate

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.58
Polarity Index (P') .....	4.4
Viscosity (cP, 25°C) .....	0.423
Density (g/mL, 25°C) .....	0.894
Boiling Point (°C) .....	77
Solubility of water (% , 20°C) .....	3.3
Refractive Index (25°C) .....	1.370

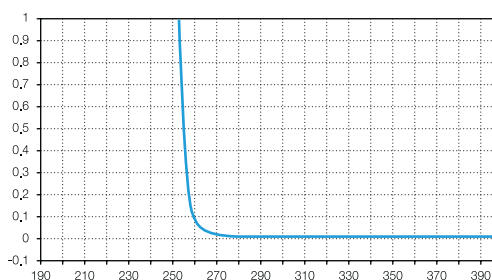

### Formula

CH<sub>3</sub>COOC<sub>2</sub>H<sub>5</sub>

### F.W

88.11

### CAS

141-78-6

### Product No.

3083

### Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
255 nm .....	1.00
260 nm .....	0.15
270 nm .....	0.025
UV Cutoff .....	max. 255 nm
Assay (by GC) .....	min. 99.9%
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	5 ppm
Titration acid .....	0.0009 mEq/g
Substances darkened by sulfuric acid .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

077

# Ethyl Ether, Anhydrous

(Stabilized with Ethanol)

## Formula

$C_2H_5OC_2H_5$

## F.W

74.12

## CAS

60-29-7

## Product No.

558

Stabilized  
with 1.5~2.5%  
Ethanol

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box


4ℓ × 4 Btl/Box

HPLC Grade

078

## Physical Data

Eluotropic value ( $E^{\circ}$ ) (on Alumina) .....	0.38
Polarity Index ( $P'$ ) .....	2.8
Viscosity (cP, 25°C) .....	0.24
Density (g/mL, 25°C) .....	0.708
Boiling Point (°C) .....	34
Solubility of water (% , 20°C) .....	1.26
Refractive Index (25°C) .....	1.352

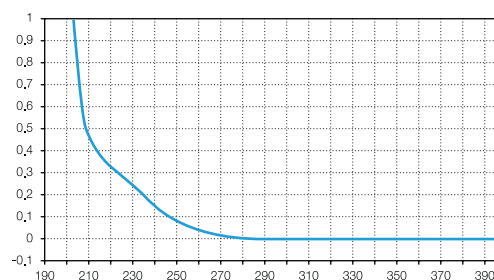

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
218 nm .....	1.00
254 nm .....	0.07
280 nm .....	0.02
350 nm .....	0.01
UV Cutoff .....	max. 218 nm
Assay (by GC, Excluding preservative) .....	min. 99.8 %
Color (APHA) .....	10
Water .....	0.03 %
Residue after Evaporation .....	5 ppm
Titrate acid .....	0.0002 mEq/g
Peroxide (as $H_2O_2$ , at time of packaging) .....	max. 1 ppm
Carbonyl compounds (as HCHO) .....	0.001 %
Contains Stabilizer (Ethanol) 1.5~2.5 %	




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# n-Heptane 97%

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.01
Polarity Index (P') .....	0.1
Viscosity (cP, 25°C) .....	0.40
Density (g/ml, 25°C) .....	0.681
Boiling Point (°C) .....	98
Solubility of water (% , 25°C) .....	0.01
Refractive Index (25°C) .....	1.385

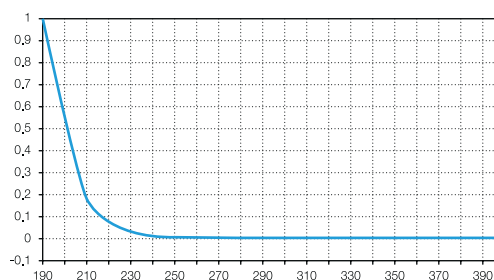

### Formula

$\text{CH}_3(\text{CH}_2)_5\text{CH}_3$

### F.W

100.21

### CAS

142-82-5

### Product No.

2054

### Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
197 nm .....	1.00
200 nm .....	0.75
215 nm .....	0.20
254 nm .....	0.014
UV Cutoff .....	max. 197 nm
Assay (by GC, n-Heptane).....	min. 97.0 %
(total C7 Hydrocarbons) .....	min. 99.9 %
Color (APHA) .....	10
Water .....	0.02 %
Residue after Evaporation .....	3 ppm
Substances darkened by sulfuric acid .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

079

# n-Heptane 99%

## Formula

$\text{CH}_3(\text{CH}_2)_5\text{CH}_3$

## F.W

100.21

## CAS

142-82-5

## Product No.

2704

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box


4ℓ × 4 Btl/Box

HPLC Grade

080

## Physical Data

Elutropic value (E°)(on Alumina) .....	0.01
Polarity Index (P') .....	0.1
Viscosity (cP, 25°C) .....	0.40
Density (g/ml, 25°C) .....	0.681
Boiling Point (°C) .....	98
Solubility of water (% , 25°C) .....	0.01
Refractive Index (25°C) .....	1.385

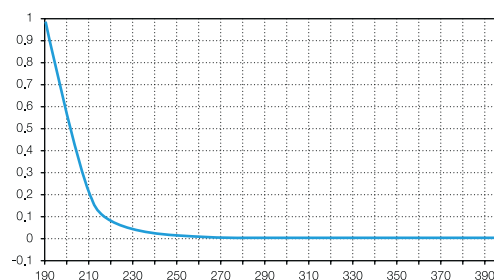

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
197 nm .....	1.00
200 nm .....	0.75
215 nm .....	0.20
254 nm .....	0.014
UV Cutoff .....	max. 197 nm
Assay (by GC, n-Heptane) .....	min. 99.0 %
(total C7 Hydrocarbons) .....	min. 99.9 %
Color (APHA) .....	10
Water .....	0.02 %
Residue after Evaporation .....	3 ppm
Substances darkened by sulfuric acid .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# 1-Heptane Sulfonic acid Sodium salt

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

UV Transmittance (0.005M, Water)	
200 nm .....	Min. 70.0%
220 nm .....	Min. 90.0%
250 nm .....	Min. 99.0%
Assay .....	Min. 99.0%
pH value (10%, sol) .....	5.5 ~ 7.5
Loss on drying (at 120°C, vacuum) .....	Max. 2.0%

### Formula

$C_7H_{15}NaO_3S$

### F.W

202.25

### CAS

22767-50-6

### Package

25g × 10 Btl/Box

HPLC Grade / Ion-Pair Reagents

# n-Hexane 95%

## Formula

$\text{CH}_3(\text{CH}_2)_4\text{CH}_3$

## F.W

86.18

## CAS

110-54-3

## Product No.

820

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box


4ℓ × 4 Btl/Box

HPLC Grade

082

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.01
Polarity Index (P') .....	0.1
Viscosity (cP, 25°C) .....	0.300
Density (g/ml, 25°C) .....	0.656
Boiling Point (°C) .....	69
Solubility of water (% , 20°C) .....	0.01
Refractive Index (25°C) .....	1.372

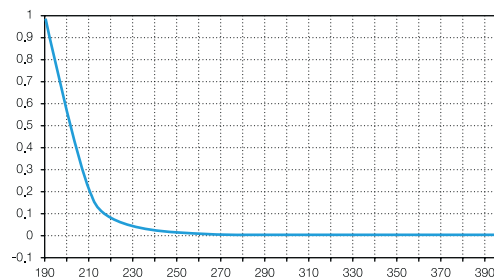

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
195 nm .....	1.00
210 nm .....	0.25
220 nm .....	0.075
254 nm .....	0.005
UV Cutoff .....	max. 195 nm
Assay (by GC, n-Hexane) .....	min. 95.0 %
(total C6 Hydrocarbons) .....	min. 99.8 %
Color (APHA) .....	10
Water .....	0.01%
Residue after Evaporation .....	3 ppm
Water soluble titrable acid .....	0.0003 mEq/g
Sulfur compounds (as S) .....	0.005%
Thiophene .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# 1-Hexane Sulfonic acid Sodium salt

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

UV Transmittance (0.005M, Water)	
200 nm .....	Min. 70.0%
220 nm .....	Min. 90.0%
250 nm .....	Min. 98.0%
Assay .....	Min. 99.0%
pH value (10%, sol) .....	5.5 ~ 7.5
Loss on drying (at 120°C, vacuum) .....	Max. 2.0%

### Formula

$C_6H_{13}NaO_3S$

### F.W

188.22

### CAS

2832-45-3

### Product No.

4591

### Package

25g × 10 Btl/Box

HPLC Grade / Ion-Pair Reagents

# Isooctane (2,2,4-Trimethylpentane)

## Formula

$(\text{CH}_3)_2\text{CHCH}_2\text{C}(\text{CH}_3)_3$

## F.W

114.23

## CAS

540-84-1

## Product No.

1186

## Package


1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.01
Polarity Index (P') .....	0.1
Viscosity (cP, 22°C) .....	0.51
Density (g/mL, 20°C) .....	0.691
Boiling Point (°C) .....	99
Solubility of water (% , 20°C) .....	0.006
Refractive Index (25°C) .....	1.389

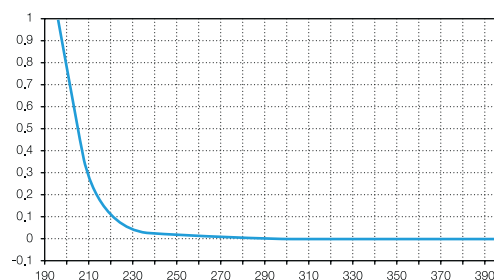

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
205 nm .....	1.00
225 nm .....	0.10
254 nm .....	0.014
UV Cutoff .....	max. 205 nm
Assay (by GC) .....	min. 99.0 %
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	4 ppm
Water soluble titrable acid .....	0.0003 mEq/g
Sulfur compounds (as S) .....	0.005%

HPLC Grade

084




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry



# Methanol

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.95
Polarity Index (P')	5.1
Viscosity (cP, 25°C) .....	0.544
Density (g/ml, 25°C) .....	0.787
Boiling Point (°C) .....	65
Solubility of water (% , 20°C) ...	Miscible
Refractive Index (25°C) .....	1.326

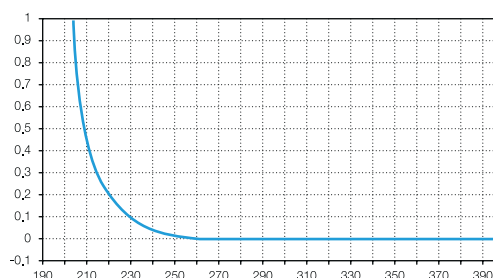

**Formula**  
CH<sub>3</sub>OH

**F.W**  
32.04

**CAS**  
67-56-1

**Product No.**  
62

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

205 nm ..... 1.00

220 nm ..... 0.25

230 nm ..... 0.15

254 nm ..... 0.02

280 nm ..... 0.01

UV Cutoff ..... max. 205 nm

### LC Gradient Suitability

Gradient Elution test ..... To pass test

Assay (by GC) ..... min. 99.9 %

Color (APHA) ..... 10

Water ..... 0.05%

Residue after Evaporation ..... 3 ppm

Titration acid ..... 0.0003 mEq/g

Titration base ..... 0.0002 mEq/g

Carbonyl compounds ..... 0.001%

(each of Acetone, Formaldehyde and Acetaldehyde)

Substances darkened by sulfuric acid ..... To pass test

Substances reducing permanganate ..... To pass test

Solubility in water ..... To pass test



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

085

# Methanol, isocratic

## Formula

CH<sub>3</sub>OH

## F.W

32.04

## CAS

67-56-1

## Product No.

4978

## Package

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

HPLC Grade

086

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.95
Polarity Index (P') .....	5.1
Viscosity (cP, 25°C) .....	0.544
Density (g/mL, 25°C) .....	0.787
Boiling Point (°C) .....	65
Percent water soluble in Solvent .....	Miscible
Refractive Index (25°C) .....	1.326

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
212 nm .....	0.70
220 nm .....	0.30
243 nm .....	0.05
Identification .....	IR Spectrometry
Assay (by GC) .....	Min. 99.7 %
Water .....	0.05%
Density (25°C) .....	0.790 ~ 0.792
Residue after Evaporation .....	5 ppm
Titration acid .....	0.0003 mEq/g
Titration base .....	0.0002 mEq/g




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# Methyl t-Butyl Ether

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.35
Polarity Index (P')	2.5
Viscosity (cP, 25°C) .....	0.28
Density (g/mL, 20°C) .....	0.740
Boiling Point (°C) .....	55
Solubility of water (% , 20°C) .....	1.5
Refractive Index (25°C) .....	1.366

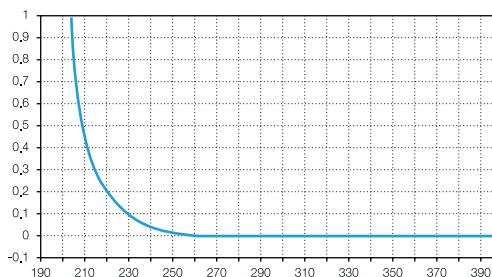

**Formula**  
(CH<sub>3</sub>)<sub>3</sub>COCH<sub>3</sub>

**F.W**  
88.14

**CAS**  
1634-04-4

**Product No.**  
1070

**Package**  
1ℓ × 10 Btl/Box  
2.5ℓ × 4 Btl/Box  
4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
210 nm .....	1.00
225 nm .....	0.50
254 nm .....	0.10
300 nm .....	0.01
350 nm .....	0.01
UV Cutoff .....	max. 210 nm
Assay (by GC) .....	min. 99.0 %
Color (APHA) .....	10
Water .....	0.05%
Residue after Evaporation .....	5 ppm
Peroxide (as H <sub>2</sub> O <sub>2</sub> , at time of packaging) .....	1 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

087

# Methyl Ethyl Ketone

**Formula**  
 $C_2H_5OCH_3$

**F.W**  
72.11

**CAS**  
78-93-3

**Product No.**  
610

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box


4ℓ × 4 Btl/Box

HPLC Grade

088

## Physical Data

Elutropic value ( $E^{\circ}$ ) (on Alumina) .....	0.51
Polarity Index (P') .....	4.7
Viscosity (cP, 25°C) .....	0.38
Density (g/ml, 25°C) .....	0.799
Boiling Point (°C) .....	80
Solubility of water (% , 20°C) .....	10.0
Refractive Index (25°C) .....	1.377

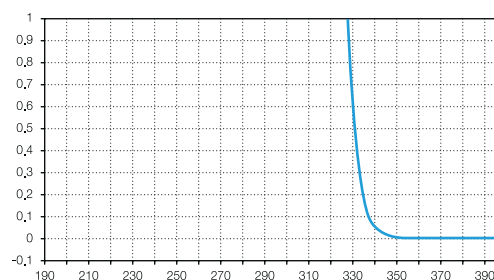

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
329 nm .....	1.00
335 nm .....	0.30
340 nm .....	0.07
350 nm .....	0.01
400 nm .....	0.01
UV Cutoff .....	max. 329 nm
Assay (by GC) .....	Min. 99.6%
Color (APHA) .....	10
Water .....	0.03%
Residue after Evaporation .....	3 ppm
Titration acid .....	0.0005 mEq/g
Substances darkened by sulfuric acid .....	To pass test




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# Methyl Isobutyl Ketone

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.43
Polarity Index (P')	4.2
Viscosity (cP, 25°C) .....	0.58
Density (g/mL, 20°C) .....	0.801
Boiling Point (°C) .....	117~118
Refractive Index (20°C) .....	1.3957

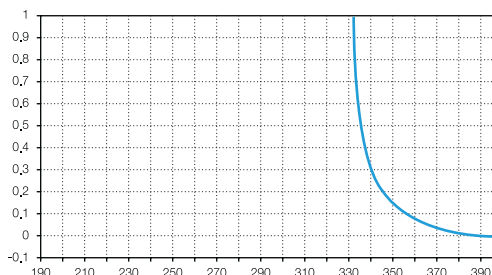

## Formula

$(CH_3)_2CHCH_2COCH_3$

## F.W

100.16

## CAS

108-10-1

## Product No.

634

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
334 nm .....	1.00
340 nm .....	0.50
350 nm .....	0.25
360 nm .....	0.15
400 nm .....	0.01
UV Cutoff .....	max. 334 nm
Assay (by GC) .....	min. 99.0 %
Color (APHA) .....	10
Water .....	0.05%
Residue after Evaporation .....	5 ppm
Titrate acid .....	0.002 mEq/g



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

089

# N-Methyl-2-Pyrrolidone

## Formula

C<sub>5</sub>H<sub>9</sub>NO

## F.W

99.13

## CAS

872-50-4

## Product No.

674

## Package


1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Physical Data

Polarity Index (P')	6.7
Viscosity (cP, 25°C)	1.65
Density (g/mL, 25°C)	1.025
Boiling Point (°C)	202
Solubility of water (% , 20°C)	Miscible
Refractive Index (25°C)	1.469

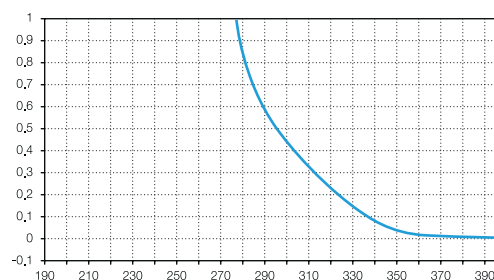

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
285 nm	1.00
300 nm	0.50
325 nm	0.10
350 nm	0.03
400 nm	0.01
UV Cutoff	max. 285 nm
Assay (by GC)	Min. 99.7%
Color (APHA)	10
Water	0.02%
Residue after Evaporation	10 ppm
Free Amines (as CH <sub>3</sub> NH <sub>2</sub> )	0.01%
Chloride (Cl)	1 ppm

HPLC Grade

090



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# 1-Octane Sulfonic acid Sodium salt

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

UV Transmittance (0.005M, Water)	
200 nm .....	Min. 70.0%
220 nm .....	Min. 90.0%
250 nm .....	Min. 98.0%
Assay .....	Min. 99.0%
pH value (10%, sol) .....	5.5 ~ 7.5
Loss on drying (at 120°C, vacuum) .....	Max. 2.0%

### Formula

$C_8H_{17}NaO_3S$

### F.W

216.28

### CAS

5324-84-5

### Product No.

4592

### Package

25g × 10 Btl/Box

HPLC Grade / Ion-Pair Reagents

# n-Pentane

## Formula

$\text{CH}_3(\text{CH}_2)_3\text{CH}_3$

## F.W

72.15

## CAS

109-66-0

## Product No.

1575

## Package


1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.00
Polarity Index (P') .....	0.00
Viscosity (cP, 25°C) .....	0.22
Density (g/ml, 25°C) .....	0.621
Boiling Point (°C) .....	36
Solubility of water (% , 20°C) .....	0.009
Refractive Index (25°C) .....	1.355

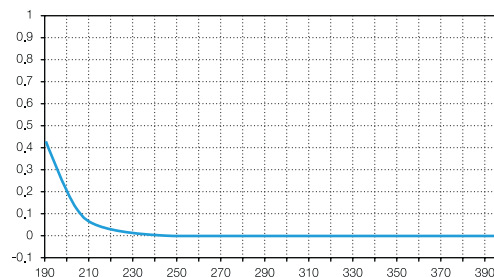

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
190 nm .....	1.00
200 nm .....	0.30
210 nm .....	0.10
254 nm .....	0.01
UV Cutoff .....	max. 190 nm
Assay (by GC, n-Pentane) .....	min. 98.0 %
(total C5 Hydrocarbons) .....	min 99.9 %
Color (APHA) .....	5
Water .....	0.02%
Residue after Evaporation .....	5 ppm
Substances darkened by sulfuric acid .....	To pass test

HPLC Grade

092



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry



# 1-Pentane Sulfonic acid Sodium salt

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

UV Transmittance (0.005M, Water)	
200 nm .....	Min. 70.0%
220 nm .....	Min. 90.0%
250 nm .....	Min. 98.0%
Assay .....	Min. 99.0%
pH value (10%, sol) .....	5.5 ~ 7.5
Loss on drying (at 120°C, vacuum) .....	Max. 2.0%

### Formula

$C_5H_{11}NaO_3S$

### F.W

174.20

### CAS

22767-49-3

### Product No.

5430

### Package

25g × 10 Btl/Box

HPLC Grade / Ion-Pair Reagents

# Petroleum Ether (35~60°C)


**CAS**  
8032-32-4

**Product No.**  
1591

**Package**  
1ℓ × 10 Btl/Box  
2.5ℓ × 4 Btl/Box  
4ℓ × 4 Btl/Box

## Physical Data

Polarity Index (P') ..... 0.1  
Density (g/ml, 20°C) ..... 0.64  
Boiling Point (°C) ..... 35~60  
Refractive Index (20°C) ..... 1.365

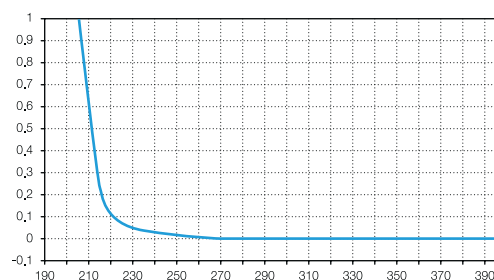

## Specifications and Max. impurities

*Meets ACS Specification*

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

220 nm	1.00
230 nm	0.20
250 nm	0.05
270 nm	0.01
400 nm	0.01
UV Cutoff	max. 220 nm

Boiling range (Initial to dry point) ..... 35~60°C  
Color (APHA) ..... 10  
Water ..... 0.01%  
Residue after Evaporation ..... 0.001%  
Acidity ..... To pass test

HPLC Grade

094



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# Phosphoric acid 85%

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)	
220 nm	0.05
254 nm	0.04
300 nm	0.02
Assay	min. 85.0%
Color (APHA)	10
Insoluble matter	0.001%
Chloride (Cl)	3 ppm
Nitrate (NO <sub>3</sub> )	5 ppm
Sulfate (SO <sub>4</sub> )	0.003%
Volatile acids (as CH <sub>3</sub> COOH)	0.001%
Antimony (Sb)	0.002%
Calcium (Ca)	0.002%
Magnesium (Mg)	0.002%
Potassium (K)	0.005%
Sodium (Na)	0.025%
Arsenic (As)	1 ppm
Heavy metals (as Pb)	0.001%
Iron (Fe)	0.003%
Manganese (Mn)	0.5 ppm
Reducing substances	To pass test

### Formula

H<sub>3</sub>PO<sub>4</sub>

### F.W

98.00

### CAS

7664-38-2

### Product No.

3036

### Package

500g × 20 Btl/Box

1kg × 10 Btl/Box

HPLC Grade / Acid & Buffers



For use in HPLC & ACS experiments

095

# Potassium phosphate, monobasic

## Formula

$\text{KH}_2\text{PO}_4$

## F.W

136.09

## CAS

7778-77-0

## Product No.

1755

## Package

500g × 20 Btl/Box

1kg × 10 Btl/Box

HPLC Grade / Acid & Buffers

096

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)

254 nm	0.04
Assay	min. 99.0%
pH of a 5% solution (25°C)	4.1 ~ 4.5
Insoluble matter	0.01%
Loss on drying (at 105°C)	0.2%
Chloride (Cl)	0.001%
Nitrogen compounds (as N)	0.001%
Sulfate ( $\text{SO}_4$ )	0.003%
Heavy metals (as Pb)	0.001%
Iron (Fe)	0.002%
Sodium (Na)	0.005%




For use in HPLC & ACS experiments

# 1-Propanol (n-Propyl Alcohol)

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.82
Polarity Index (P') .....	4.0
Viscosity (cP, 25°C) .....	1.95
Density (g/mL, 25°C) .....	0.802
Boiling Point (°C) .....	97
Solubility of water (% , 20°C) ...	Miscible
Refractive Index (25°C) .....	1.383

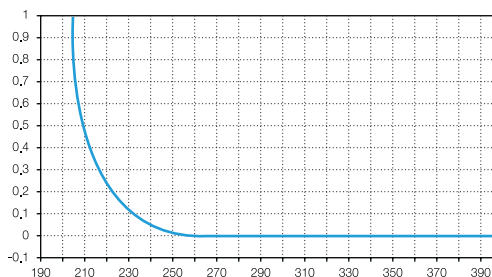

### Formula

CH<sub>3</sub>CH<sub>2</sub>CH<sub>2</sub>OH

### F.W

60.10

### CAS

71-23-8

### Product No.

623

### Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
210 nm .....	1.00
225 nm .....	0.50
250 nm .....	0.05
300 nm .....	0.01
UV Cutoff .....	max. 210 nm
Assay (by GC) .....	min. 99.8 %
Color (APHA) .....	10
Water .....	0.05%
Residue after Evaporation .....	3 ppm
Titrate acid .....	0.0003 mEq/g
Carbonyl compounds (as C <sub>2</sub> H <sub>5</sub> CHO) .....	0.03%
Ethanol (CH <sub>3</sub> CH <sub>2</sub> OH) .....	0.01%
Methanol (CH <sub>3</sub> OH) .....	0.01%
Isopropyl Alcohol (CH <sub>3</sub> CHOHCH <sub>3</sub> ) .....	0.05%
Solubility in water .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

097

# 2-Propanol (Isopropyl Alcohol)

**Formula**  
(CH<sub>3</sub>)<sub>2</sub>CHOH

**F.W**  
60.10

**CAS**  
67-63-0

**Product No.**  
859

## Package


**1ℓ** × 10 Btl/Box  
**2.5ℓ** × 4 Btl/Box  
**4ℓ** × 4 Btl/Box

HPLC Grade

098

## Physical Data

Eluotropic value (E°)(on Alumina) ..... 0.82  
Polarity Index (P') ..... 3.9  
Viscosity (cP, 25°C) ..... 2.038  
Density (g/mL, 25°C) ..... 0.782  
Boiling Point (°C) ..... 82  
Solubility of water (% , 20°C) ..... Miscible  
Refractive Index (25°C) ..... 1.375

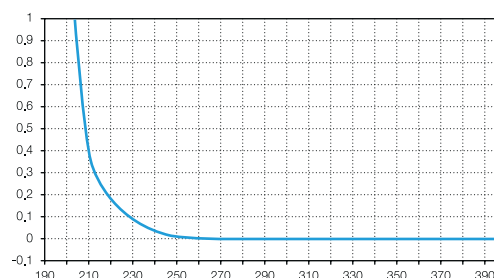

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

205 nm	1.00
220 nm	0.25
230 nm	0.13
254 nm	0.02

UV Cutoff ..... max. 205 nm

Assay (by GC) ..... min. 99.9 %

Color (APHA) ..... 10

Water ..... 0.05%

Residue after Evaporation ..... 2 ppm

Titration acid or Base ..... 0.0001 mEq/g

Carbonyl compounds ..... 0.002%  
(as propionaldehyde or acetone)

Solubility in water ..... To pass test




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# Pyridine

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.71
Polarity Index (P') .....	5.3
Viscosity (cP, 25°C) .....	0.88
Density (g/ml, 25°C) .....	0.978
Boiling Point (°C) .....	115
Solubility of water (% , 20°C) .....	Miscible
Refractive Index (25°C) .....	1.507

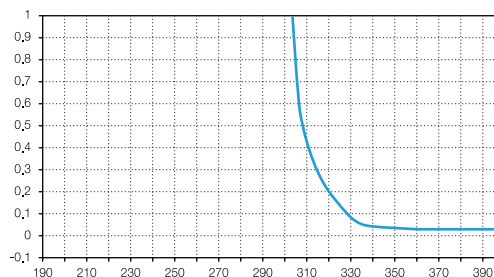

### Formula

C<sub>5</sub>H<sub>5</sub>N

### F.W

79.10

### CAS

110-86-1

### Product No.

877

### Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
330 nm .....	1.00
340 nm .....	0.10
350 nm .....	0.01
400 nm .....	0.005
UV Cutoff .....	max. 330 nm
Assay (by GC) .....	min. 99.5%
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	5 ppm
Ammonia (as NH <sub>3</sub> ) .....	0.002%
Chloride (Cl) .....	0.0005%
Sulfate (SO <sub>4</sub> ) .....	0.001%
Copper (Cu) .....	5 ppm
Solubility in water .....	To pass test
Reducing substances .....	To pass test



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

HPLC Grade

099

# Sodium acetate trihydrate

## Formula

$\text{CH}_3\text{COONa} \cdot 3\text{H}_2\text{O}$

## F.W

136.08

## CAS

6131-90-4

## Product No.

3039

## Package

**500g** × 20 Btl/Box

**1kg** × 10 Btl/Box

HPLC Grade / Acid & Buffers

100

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)

254 nm	0.02
Assay	9.0 ~ 101.0%
pH of a 5% solution (25°C)	7.5 ~ 9.2
Substances reducing permanganate	To pass test
Insoluble matter	0.005%
Chloride (Cl)	0.001%
Phosphate (PO <sub>4</sub> )	5 ppm
Sulfate (SO <sub>4</sub> )	0.002%
Heavy metals (as Pb)	5 ppm
Iron (Fe)	5 ppm
Calcium (Ca)	0.005%
Magnesium (Mg)	0.002%
Potassium (K)	0.005%

For use in HPLC & ACS experiments



# Sodium bicarbonate

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)	
254 nm	0.05
280 nm	0.02
350 nm	0.01
Assay (dried basis)	99.7 ~ 100.3%
Insoluble matter	0.015%
Chloride (Cl)	0.003%
Phosphate (PO <sub>4</sub> )	0.001%
Sulfur compounds (as SO <sub>4</sub> )	0.003%
Ammonium (NH <sub>4</sub> )	5 ppm
Heavy metals (as Pb)	5 ppm
Iron (Fe)	0.001%
Calcium (Ca)	0.02%
Magnesium (Mg)	0.005%
Potassium (K)	0.005%

**Formula**  
NaHCO<sub>3</sub>

**F.W**  
84.01

**CAS**  
144-55-8

**Product No.**  
3038

**Package**  
500g × 20 Btl/Box  
1kg × 10 Btl/Box

HPLC Grade / Acid & Buffers

# Tetrahydrofuran

## Formula

C<sub>4</sub>H<sub>8</sub>O

## F.W

72.11

## CAS

109-99-9

## Product No.

218

No Stabilizer

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box


4ℓ × 4 Btl/Box

HPLC Grade

102

## Physical Data

Elutropic value (E°)(on Alumina) .....	0.45
Polarity Index (P') .....	4.0
Viscosity (cP, 25°C) .....	0.456
Density (g/ml, 25°C) .....	0.880
Boiling Point (°C) .....	65
Solubility of water (% , 20°C) .....	Miscible
Refractive Index (25°C) .....	1.404

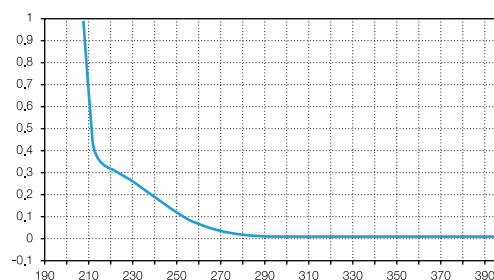

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
210 nm .....	1.00
215 nm .....	0.60
230 nm .....	0.30
254 nm .....	0.10
UV Cutoff .....	max. 210 nm
Assay (by GC) .....	min. 99.9%
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	5 ppm
Peroxides (as H <sub>2</sub> O <sub>2</sub> , at time of packaging) .....	0.015%



Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# Tetrahydrofuran

(Stabilized with BHT)

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.45
Polarity Index (P') .....	4.0
Viscosity (cP, 25°C) .....	0.456
Density (g/mL, 25°C) .....	0.880
Boiling Point (°C) .....	65
Solubility of water (% , 20°C) .....	Miscible
Refractive Index (25°C) .....	1.404

## Specifications and Max. impurities

### Meets ACS Specification

Assay (by GC) .....	min. 99.5 %
Color (APHA) .....	10
Water .....	0.02%
Peroxides (as H <sub>2</sub> O <sub>2</sub> , at time of packaging) .....	0.015%
Stabilizer (BHT) .....	200 ~ 300 ppm

### Formula

C<sub>4</sub>H<sub>8</sub>O

### F.W

72.11

### CAS

109-99-9

### Product No.

219

Stabilized with  
200~300 ppm  
BHT

### Package

**1ℓ** × **10** Btl/Box

**2.5ℓ** × **4** Btl/Box

**4ℓ** × **4** Btl/Box

HPLC Grade



Packaged under Nitrogen and sub-micron filtered.  
For use in GPC experiments

103

# Toluene

## Formula

$C_6H_5CH_3$

## F.W

92.14

## CAS

108-88-3

## Product No.

187

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box


4ℓ × 4 Btl/Box

HPLC Grade

104

## Physical Data

Elutropic value (E°)(on Alumina) .....	0.29
Polarity Index (P') .....	2.4
Viscosity (cP, 25°C) .....	0.560
Density (g/ml, 25°C) .....	0.864
Boiling Point (°C) .....	111
Solubility of water (% , 25°C) .....	0.033
Refractive Index (25°C) .....	1.494

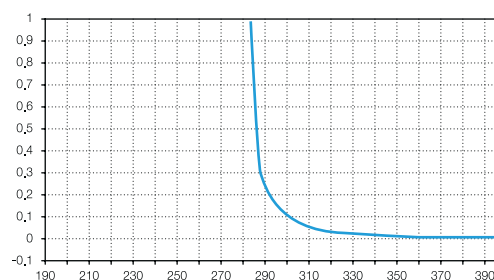

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
286 nm .....	1.00
288 nm .....	0.40
300 nm .....	0.10
350 nm .....	0.01
UV Cutoff .....	max. 286 nm
Assay (by GC) .....	min. 99.8 %
Color (APHA) .....	10
Water .....	0.02%
Residue after Evaporation .....	5 ppm
Sulfur compounds (as S) .....	0.003%
Substances darkened by sulfuric acid .....	To pass test




Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC, GC, ACS experiments & Spectrophotometry

# 1,2,4-Trichlorobenzene

## Physical Data

Density (g/ml, 25°C) .....	1.454
Boiling Point (°C) .....	213.5
Solubility of water (% , 20°C) .....	0.03
Refractive Index (20°C) .....	1.571

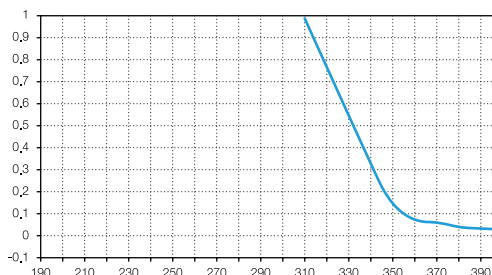

### Formula

$C_6H_3Cl_3$

### F.W

181.46

### CAS

120-82-1

### Product No.

4579

### Package

3.8ℓ×4 Btl/Box

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
310 nm .....	1.00
350 nm .....	0.15
375 nm .....	0.05
400 nm .....	0.01
UV Cutoff .....	max. 310 nm
Assay (by GC) .....	min. 99.0 %
Water .....	0.01%
Residue after Evaporation .....	5 ppm
Density (20°C) .....	1.452 ~ 1.458
Refractive Index (20°C) .....	1.569 ~ 1.574



Packaged under Nitrogen and sub-micron filtered.  
For use in GPC, ACS experiments

HPLC Grade

105

# Water

## Formula

H<sub>2</sub>O

## F.W

18.01

## CAS

7732-18-5

## Product No.

119

## Package

1ℓ × 10 Btl/Box

2.5ℓ × 4 Btl/Box


4ℓ × 4 Btl/Box

HPLC Grade

106

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.99
Polarity Index (P') .....	10.2
Viscosity (cP, 25°C) .....	0.89
Density (g/ml, 20°C) .....	0.998
Boiling Point (°C) .....	100
Refractive Index (25°C) .....	1.333
Surface tension (20°C, dyne/cm) ...	72.7

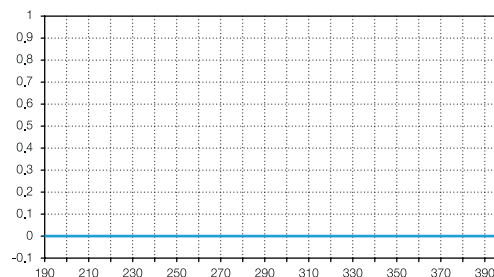

## Specifications and Max. impurities

Meets ACS Specification

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

190 nm ..... 0.01

200 nm ..... 0.01

250 ~ 400 nm ..... 0.005

UV Cutoff ..... max. 190 nm

### LC Gradient Suitability

Gradient Elution test ..... To pass test

Color (APHA) ..... 5

Residue after Evaporation (at time of packaging) ..... 10 ppm

Packaged under Nitrogen and sub-micron filtered.  
For use in HPLC & Spectrophotometry

# Solvent Specifications

---

Solvent Name Synonyms

LC-MS

ULTIMATE

PESTICIDE

HPLC

**BIO**

ULTRA DRY

# BIO Grade


Item	UV Cutoff (max. nm)	Water (max. ppm)	Other
Acetonitrile	<190	10	
Dichloromethane w/Amylene	233	30	Chloride < 10 ppm Acidity < 0.0003 mEq/g
N,N Dimethylformamide	270	300	Amines < 5 ppm
Dimethyl Sulfoxide	263	250	
Methanol	205	300	Acetone < 0.001 %
N-Methyl-2-Pyrrolidone	285	200	Amines < 5 ppm
Pyridine	330	100	Amines < 10 ppm
Tetrahydrofuran	210	50	
Triethyl Amine	-	0.1%	



# Acetonitrile

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.65
Polarity Index (P')	5.8
Viscosity (cP, 25°C) .....	0.369
Density (g/ml, 25°C) .....	0.779
Boiling Point (°C) .....	82
Solubility of water (% ,20°C) .....	Miscible
Refractive Index (25°C) .....	1.342

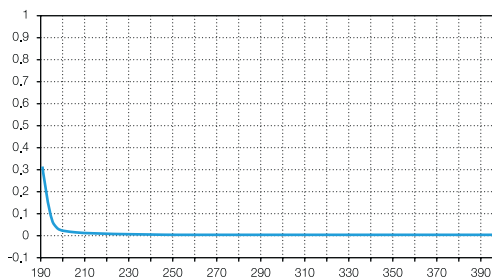

**Formula**  
CH<sub>3</sub>CN

**F.W**  
41.05

**CAS**  
75-05-8

**Product No.**  
3362

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

190 nm .....	1.00
195 nm .....	0.15
200 nm .....	0.07
205 nm .....	0.05
210 nm .....	0.04
220 nm .....	0.02
254 nm .....	0.01
UV Cutoff .....	max. 190 nm

### LC Gradient Suitability

Gradient Elution test .....	To pass test
Assay (by GC) .....	min. 99.9%
Color (APHA) .....	10
Water .....	10 ppm
Residue after Evaporation .....	1 ppm
Titration acid .....	0.008 mEq/g
Titration base .....	0.0006 mEq/g



Packaged under Nitrogen and sub-micron filtered.  
For use in Bio synthesis and requiring low water applications

**BIO Grade**

**109**

# Dichloromethane

(Stabilized with Amylene)

## Formula

CH<sub>2</sub>Cl<sub>2</sub>

## F.W

84.93

## CAS

75-09-2

## Product No.

597

Stabilized with  
15~200ppm  
Amylene

## Package

1ℓ × 10 Btl/Box


4ℓ × 4 Btl/Box

BIO Grade

110

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.42
Polarity Index (P') .....	3.1
Viscosity (cP, 25°C) .....	0.413
Density (g/ml, 25°C) .....	1.318
Boiling Point (°C) .....	40
Solubility of water (% , 20°C) .....	0.24
Refractive Index (25°C) .....	1.421

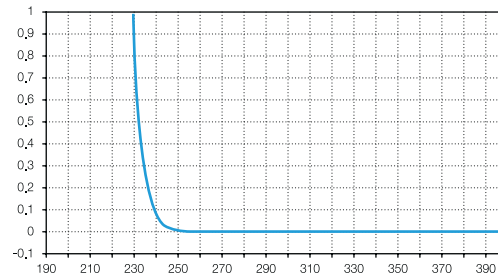

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
233 nm .....	1.00
240 nm .....	0.12
254 nm .....	0.01
UV Cutoff .....	max. 233 nm
Chloride (Cl) .....	10 ppm
Titrate acid .....	0.0003 mEq/g
Assay (by GC) .....	min. 99.9%
Color (APHA) .....	10
Water .....	30 ppm
Residue after Evaporation .....	3 ppm
Contains Stabilizer (Amylene) 15~200 ppm	




Packaged under Nitrogen and sub-micron filtered.  
For use in Bio synthesis and requiring low water applications

# N,N-Dimethylformamide

## Physical Data

Eluotropic value (E°)(on Alumina) .....	7.6
Polarity Index (P') .....	6.4
Viscosity (cP, 25°C) .....	0.794
Density (g/mL, 25°C) .....	0.944
Boiling Point (°C) .....	153
Solubility of water (% , 20°C) .....	Miscible
Refractive Index (25°C) .....	1.427

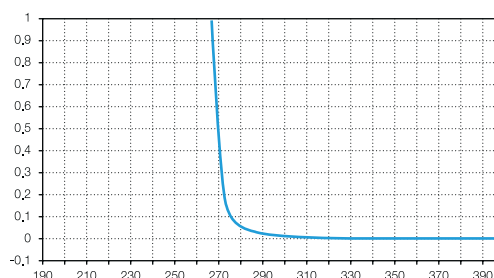

**Formula**  
HCON(CH<sub>3</sub>)<sub>2</sub>

**F.W**  
73.09

**CAS**  
68-12-2

**Product No.**  
1373

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

270 nm .....	1.00
275 nm .....	0.30
295 nm .....	0.10
310 nm .....	0.05
340 nm .....	0.01
UV Cutoff .....	max. 270 nm

**Amines (as Dimethylamine) .....** 5 ppm

Assay (by GC) .....

Color (APHA) .....

Water .....

Residue after Evaporation .....

### Package

**1ℓ × 10** Btl/Box

**4ℓ × 4** Btl/Box



Packaged under Nitrogen and sub-micron filtered.  
For use in Bio synthesis and requiring low water applications

**BIO Grade**

**111**

# Dimethyl Sulfoxide

**Formula**  
(CH<sub>3</sub>)<sub>2</sub>SO

**F.W**  
78.13

**CAS**  
67-68-5

**Product No.**  
1381

## Package

1ℓ × 10 Btl/Box


4ℓ × 4 Btl/Box

BIO Grade

112

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.62
Polarity Index (P') .....	7.2
Viscosity (cP, 25°C) .....	1.987
Density (g/ml, 25°C) .....	1.096
Boiling Point (°C) .....	189
Solubility of water (% , 20°C) ...	Miscible
Refractive Index (25°C) .....	1.476

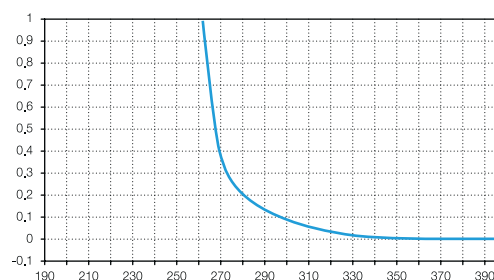

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry


Maximum UV Absorbance	
263 nm .....	1.00
270 nm .....	0.40
275 nm .....	0.20
280 nm .....	0.15
335 nm .....	0.02
400 nm .....	0.01
UV Cutoff .....	max. 263 nm
Assay (by GC) .....	min. 99.7%
Color (APHA) .....	10
Water .....	0.025%
Residue after Evaporation .....	5 ppm

Packaged under Nitrogen and sub-micron filtered.  
For use in Bio synthesis and requiring low water applications

# Methanol

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.95
Polarity Index (P')	5.1
Viscosity (cP, 25°C) .....	0.544
Density (g/ml, 25°C) .....	0.787
Boiling Point (°C) .....	65
Solubility of water (% , 20°C) ...	Miscible
Refractive Index (25°C) .....	1.326

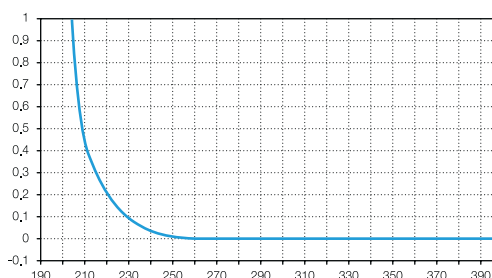

**Formula**  
CH<sub>3</sub>OH

**F.W**  
32.04

**CAS**  
67-56-1

**Product No.**  
2722

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

205 nm ..... 1.00

220 nm ..... 0.25

230 nm ..... 0.15

254 nm ..... 0.02

280 nm ..... 0.01

UV Cutoff ..... max. 205 nm

**Acetone** ..... **To pass test (about 0.001%)**

Assay (by GC)..... min. 99.9%

Color (APHA) ..... 10

Water ..... 0.03%

Residue after Evaporation ..... 3 ppm

Titrate acid ..... 0.0003 mEq/g

Titrate base ..... 0.0002 mEq/g

Substances reducing permanganate ..... To pass test

Solubility in water ..... To pass test



Packaged under Nitrogen and sub-micron filtered.  
For use in Bio synthesis and requiring low water applications

**BIO Grade**

**113**

# N-Methyl-2-Pyrrolidone

## Formula

C<sub>5</sub>H<sub>9</sub>NO

## F.W

99.13

## CAS

872-50-4

## Product No.

2220


## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Physical Data

Polarity Index (P')	6.7
Viscosity (cP, 25°C)	1.65
Density (g/mL, 25°C)	1.025
Boiling Point (°C)	202
Solubility of water (% , 20°C)	Miscible
Refractive Index (25°C)	1.469

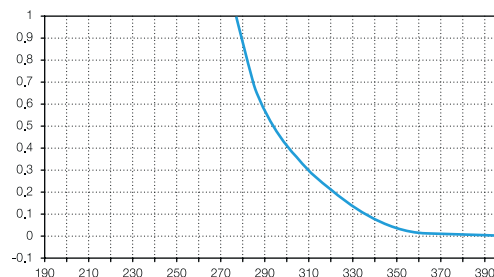

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

285 nm	1.00
300 nm	0.50
325 nm	0.10
350 nm	0.03
400 nm	0.01
UV Cutoff	max. 285 nm

Amines (as Dimethylamine) ..... 5 ppm

Assay (by GC) ..... min. 99.5 %

Color (APHA) ..... 20

Water ..... 200 ppm

Residue after Evaporation ..... 10 ppm

BIO Grade

114




Packaged under Nitrogen and sub-micron filtered.  
For use in Bio synthesis and requiring low water applications

# Pyridine

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.71
Polarity Index (P')	5.3
Viscosity (cP, 25°C) .....	0.88
Density (g/ml, 25°C) .....	0.978
Boiling Point (°C) .....	115
Solubility of water (% , 20°C) .....	Miscible
Refractive Index (25°C) .....	1.507

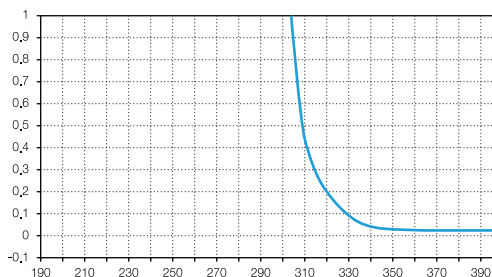

### Formula

C<sub>5</sub>H<sub>5</sub>N

### F.W

79.10

### CAS

110-86-1

### Product No.

2396

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

Maximum UV Absorbance

330 nm ..... 1.00

340 nm ..... 0.10

350 nm ..... 0.01

400 nm ..... 0.005

UV Cutoff ..... max. 330 nm

Amines (as Ninhydrin test) ..... 10 ppm

Assay (by GC) ..... min. 99.0%

Color (APHA) ..... 10

Water ..... 0.01%

Residue after Evaporation ..... 5 ppm

Chloride (Cl) ..... 0.001%

Sulfate (SO<sub>4</sub>) ..... 0.001%

Copper (Cu) ..... 5 ppm

Solubility in water ..... To pass test

Reducing substances ..... To pass test



Packaged under Nitrogen and sub-micron filtered.  
For use in Bio synthesis and requiring low water applications

BIO Grade

115

# Tetrahydrofuran

## Formula

C<sub>4</sub>H<sub>8</sub>O

## F.W

72.11

## CAS

109-99-9

## Product No.

221

No Stabilizer

## Package

1ℓ × 10 Btl/Box


4ℓ × 4 Btl/Box

BIO Grade

116

## Physical Data

Eluotropic value (E°)(on Alumina) .....	0.45
Polarity Index (P') .....	4.0
Viscosity (cP, 25°C) .....	0.456
Density (g/ml, 25°C) .....	0.880
Boiling Point (°C) .....	65
Solubility of water (% , 20°C) .....	Miscible
Refractive Index (25°C) .....	1.404

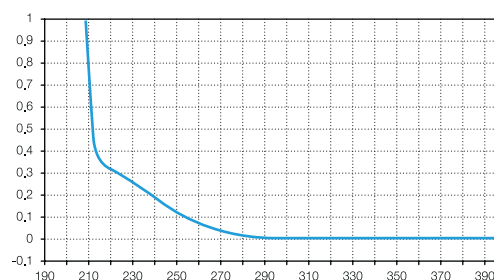

## Specifications and Max. impurities

### Ultraviolet Spectrophotometry

Maximum UV Absorbance	
210 nm .....	1.00
215 nm .....	0.60
230 nm .....	0.30
254 nm .....	0.10
UV Cutoff .....	max. 210 nm
Assay (by GC) .....	min. 99.8 %
Color (APHA) .....	10
Water .....	50 ppm
Residue after Evaporation .....	5 ppm
Peroxides (as H <sub>2</sub> O <sub>2</sub> , at time of packaging) .....	0.015%



Packaged under Nitrogen and sub-micron filtered.  
For use in Bio synthesis and requiring low water applications



# Triethylamine

## Physical Data

Density (g/mL, 20°C) ..... 0.73  
Boiling Point (°C) ..... 88.8  
Refractive Index (20°C) ..... 1.4

**Formula**  
(C<sub>2</sub>H<sub>5</sub>)<sub>3</sub>N

**F.W**  
101.19

**CAS**  
121-44-8

**Product No.**  
2766

## Specifications and Max. impurities

Assay (by GC) ..... min. 99.5%  
Color (APHA) ..... 10  
Water ..... 0.1%

### Package

**1ℓ** × **10** Btl/Box  
**4ℓ** × **4** Btl/Box

**BIO Grade**



Packaged under Nitrogen and sub-micron filtered.  
For use in Bio synthesis and requiring low water applications

**117**



# Solvent Specifications

---

Solvent Name Synonyms

LC-MS

ULTIMATE

PESTICIDE

HPLC

BIO

**ULTRA DRY**

# Ultra Dry Grade

Item	Water (max. ppm)	Assay (min. %)	Residue aft. Evaporation (max. ppm)
Acetonitrile (water10)	10	99.8	5
Acetonitrile (water30)	30	99.8	5
Chloroform w/Ethanol	50	99.8	3
1,4-Dioxane	30	99.8	3
Ethyl Acetate	50	99.8	5
Ethyl Ether w/Ethanol	50	99.8	5
n-Hexane 95%	20	95.0	5
Methanol	50	99.8	3
Pyridine	50	99.8	5
Toluene	50	99.8	5

# Acetonitrile (Water10)

## Specifications and Max. impurities

Assay (by GC).....	min. 99.8%
Color (APHA) .....	10
Water .....	10 ppm
Residue after Evaporation .....	5 ppm

**Formula**  
CH<sub>3</sub>CN

**F.W**  
41.05

**CAS**  
75-05-8

**Product No.**  
556

**Package**  
**1ℓ × 10** Btl/Box  
**4ℓ × 4** Btl/Box

Ultra Dry Grade



Packaged under Nitrogen and sub-micron filtered.  
For use in requiring low water applications

# Acetonitrile (Water30)

## Specifications and Max. impurities

Assay (by GC).....	min. 99.8%
Color (APHA) .....	10
Water .....	30 ppm
Residue after Evaporation .....	5 ppm

**Formula**  
CH<sub>3</sub>CN

**F.W**  
41.05

**CAS**  
75-05-8

**Product No.**  
559

**Package**  
**1ℓ × 10** Btl/Box  
**4ℓ × 4** Btl/Box

Ultra Dry Grade



Packaged under Nitrogen and sub-micron filtered.  
For use in requiring low water applications

# Chloroform

(Stabilized with Ethanol)

Ultra Dry Grade

**Formula**  
CHCl<sub>3</sub>

**F.W**  
119.38

**CAS**  
67-66-3

**Product No.**  
1274

Stabilized  
with 0.5~1.0%  
Ethanol

**Package**  
1ℓ × 10 Btl/Box  
4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Assay (by GC, Excluding preservative)	min. 99.8%
Color (APHA)	10
Water	50 ppm
Residue after Evaporation	3 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in requiring low water applications

# 1,4-Dioxane

Ultra Dry Grade

**Formula**  
(CH<sub>2</sub>)<sub>4</sub>O<sub>2</sub>

**F.W**  
88.11

**CAS**  
123-91-1

**Product No.**  
1358

**Package**  
1ℓ × 10 Btl/Box  
4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Assay (by GC)	min. 99.8%
Color (APHA)	10
Water	30 ppm
Residue after Evaporation	3 ppm
Peroxides (as H <sub>2</sub> O <sub>2</sub> , at time of packaging)	0.003%



Packaged under Nitrogen and sub-micron filtered.  
For use in requiring low water applications

# Ethyl Acetate

## Specifications and Max. impurities

Assay (by GC) .....	min. 99.8%
Color (APHA) .....	10
Water .....	50 ppm
Residue after Evaporation .....	5 ppm

**Formula**  
 $\text{CH}_3\text{COOC}_2\text{H}_5$

**F.W**  
88.11

**CAS**  
141-78-6

**Product No.**  
1406

**Package**  
**1ℓ × 10** Btl/Box  
**4ℓ × 4** Btl/Box

Ultra Dry Grade



Packaged under Nitrogen and sub-micron filtered.  
For use in requiring low water applications

# Ethyl Ether, Anhydrous (Stabilized with Ethanol)

## Specifications and Max. impurities

Assay (by GC) .....	min. 99.8%
Color (APHA) .....	10
Water .....	50 ppm
Residue after Evaporation .....	5 ppm
Peroxides (as $\text{H}_2\text{O}_2$ , at time of packaging) .....	max. 5 ppm

**Formula**  
 $\text{C}_2\text{H}_5\text{OC}_2\text{H}_5$

**F.W**  
74.12

**CAS**  
60-29-7

**Product No.**  
570

Stabilized  
with 1.5~2.5%  
Ethanol

**Package**  
**1ℓ × 10** Btl/Box  
**4ℓ × 4** Btl/Box

Ultra Dry Grade



Packaged under Nitrogen and sub-micron filtered.  
For use in requiring low water applications

123

# n-Hexane 95%

Ultra Dry Grade

## Formula

$\text{CH}_3(\text{CH}_2)_4\text{CH}_3$

## F.W

86.18

## CAS

110-54-3

## Product No.

823

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Assay (by GC, n-Hexane) .....	min. 95.0 %
(total C6 Hydrocarbons) .....	min. 99.5 %
Color (APHA) .....	10
Water .....	20 ppm
Residue after Evaporation .....	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in requiring low water applications

# Methanol

Ultra Dry Grade

## Formula

$\text{CH}_3\text{OH}$

## F.W

32.04

## CAS

67-56-1

## Product No.

66

## Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

## Specifications and Max. impurities

Assay (by GC) .....	min. 99.8%
Color (APHA) .....	10
Water .....	50 ppm
Residue after Evaporation .....	3 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in requiring low water applications



# Pyridine

## Specifications and Max. impurities

Assay (by GC).....	min. 99.8%
Color (APHA) .....	10
Water .....	50 ppm
Residue after Evaporation .....	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in requiring low water applications

### Formula

$C_5H_5N$

### F.W

79.10

### CAS

110-86-1

### Product No.

878

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

Ultra Dry Grade

## Specifications and Max. impurities

Assay (by GC).....	min. 99.8%
Color (APHA) .....	10
Water .....	50 ppm
Residue after Evaporation .....	5 ppm



Packaged under Nitrogen and sub-micron filtered.  
For use in requiring low water applications

# Toluene

### Formula

$C_6H_5CH_3$

### F.W

92.14

### CAS

108-88-3

### Product No.

186

### Package

1ℓ × 10 Btl/Box

4ℓ × 4 Btl/Box

Ultra Dry Grade

125



# Supplementary Reference Information

---

**Physical Properties**  
**Solvent Miscibility Chart**  
**Transport Information**  
**Units Conversion Tables**  
**GHS Symbols and their meaning**  
**Solvent Quick Search Guide**

# Physical properties

## Eluotropic Strength of Solvents on Various Sorbents

Solvent	$\epsilon^\circ$ (Alumina)	$\epsilon^\circ$ (SiO <sub>2</sub> )	$\epsilon^\circ$ (C <sub>18</sub> )
n-Pentane	0.00 <sup>1)</sup>	0.00 <sup>1)</sup>	-
n-Hexane	0.00 - 0.01	0.00 - 0.01	-
Isooctane	0.01	0.01	-
Cyclohexane	0.04	0.03	-
Toluene	0.20 - 0.30	0.22	-
Chlorobenzene	0.30 - 0.31	0.23	-
Benzene	0.32	0.25	-
Ethyl ether	0.38	0.38 - 0.43	-
Dichloromethane	0.36 - 0.42	0.30 - 0.42	-
Chloroform	0.36 - 0.40	0.26	-
1,2-Dichloroethane	0.44 - 0.49	-	-
Methyl ethyl ketone	0.51	-	-
Acetone	0.56 - 0.58	0.47 - 0.53	8.8
1,4-Dioxane	0.56 - 0.61	0.49 - 0.51	11.7
Tetrahydrofuran	0.45 - 0.62	0.53	3.7
Methyl t-butyl ether	0.3 - 0.62	0.48	-
Ethyl acetate	0.58 - 0.62	0.38 - 0.48	-
Dimethyl sulfoxide	0.62 - 0.75	-	-
Acetonitrile	0.52 - 0.65	0.50 - 0.52	3.1
1-Butanol	0.70	-	-
Pyridine	0.71	-	-
1-Propanol	0.78 - 0.82	-	10.1
2-Propanol	0.78 - 0.82	0.60	8.3
Ethanol	0.88	-	3.1
Methanol	0.95	0.70 - 0.73	1.0 <sup>1)</sup>
Dimethylformamide	-	-	7.6

1) Defined value

# Physical properties

## Polarity Index(P<sup>o</sup>)

Solvent	P <sup>o</sup>
n-Pentane	0.0
n-Heptane	0.1
n-Hexane	0.1
Isooctane	0.1
Petroleum Ether	0.1
Cyclohexane	0.2
Toluene	2.4
Methyl t-Butyl Ether	2.5
Chlorobenzene	2.7
Ethyl Ether	2.8
Dichloromethane	3.1
1,2-Dichloroethane	3.5
1-Butanol	3.9
2-Propanol	3.9
n-Butyl acetate	4.0
1-Propanol	4.0
Tetrahydrofuran	4.0
Chloroform	4.1
Methyl Isobutyl Ketone	4.2
Ethyl Acetate	4.4
Methyl Ethyl Ketone	4.7
1,4-Dioxane	4.8
Acetone	5.1
Methanol	5.1
Pyridine	5.3
Acetonitrile	5.8
Acetic acid	6.2
N,N-Dimethylformamide	6.4
N,N-Dimethylacetamide	6.5
N-Methyl-2-Pyrrolidone	6.7
Dimethyl Sulfoxide	7.2
Water	10.2

# Physical properties

## Viscosity (cP)

Solvent	cP (25°C)
n-Pentane	0.22
Ethyl ether	0.24
Methyl t-butyl ether	0.28
n-Hexane	0.3
Acetone	0.306
Acetonitrile	0.369
Methyl ethyl ketone	0.38
n-Heptane	0.4
Dichloromethane	0.413
Ethyl acetate	0.423
Tetrahydrofuran	0.456
Isooctane	0.51 <sup>1)</sup>
Chloroform	0.537
Methanol	0.544
Toluene	0.56
Methyl Isobutyl ketone	0.58
Benzene	0.604
n-Butyl acetate	0.685
1,2-Dichloroethane	0.779
Dimethylformamide	0.794
Pyridine	0.88
Water	0.89
Cyclohexane	0.894
Ethanol	1.074
Acetic acid	1.10
1,4-Dioxane	1.177
o-Dichlorobenzene	1.32
N-Methyl-2-Pyrrolidone	1.65
1-propanol	1.95
N,N-Dimethylacetamide	1.956
Dimethyl sulfoxide	1.987
2-Propanol	2.038
1-Butanol	2.544

1) measured at 22°C

# Physical properties

## Density

Solvent	Density (g/ml, 25°C)
n-Pentane	0.621
n-Heptane	0.681
Petroleum Ether (35~60°C)	0.64 <sup>1)</sup>
n-Hexane	0.656
Isooctane	0.691 <sup>1)</sup>
Ethyl Ether	0.708
Triethylamine	0.73 <sup>1)</sup>
Methyl t-Butyl Ether	0.740 <sup>1)</sup>
Cyclohexane	0.773
Acetonitrile	0.779
2-Propanol	0.782
Acetone	0.785
Methanol	0.787
Ethanol	0.787
Methyl Ethyl Ketone	0.799
Methyl Isobutyl Ketone	0.801 <sup>1)</sup>
1-Propanol	0.802
1-Butanol	0.806
Toluene	0.864
Benzene	0.872
n-Butyl acetate	0.876
Tetrahydrofuran	0.880
Ethyl Acetate	0.894
N,N-Dimethylacetamide	0.937
N,N-dimethylformamide	0.944
Pyridine	0.978
Water	0.998 <sup>1)</sup>
N-Methyl-2-Pyrrolidone	1.025
1,4-Dioxane	1.028
Acetic acid, glacial	1.049
Dimethyl Sulfoxide	1.096
Chlorobenzene	1.107
1,2-Dichloroethane	1.245

Solvent	Density (g/ml, 25°C)
o-Dichlorobenzene	1.3058 <sup>1)</sup>
Dichloromethane	1.318
1,2,4-Trichlorobenzene	1.454
Chloroform	1.480

1) measured at 20°C

# Physical properties

## Solubility of water in solvent

Solvent	Solubility (% <sub>v/v</sub> , 20°C)
1,2,4-Trichlorobenzene	0.0025
Isooctane	0.006
n-Pentane	0.009
Cyclohexane	0.01
n-Heptane	0.01 <sup>1)</sup>
n-Hexane	0.01
Toluene	0.033 <sup>1)</sup>
Chloroform	0.056
Benzene	0.063 <sup>1)</sup>
1,2-Dichloroethane	0.15
Dichloromethane	0.24
Ethyl Ether	1.26
Methyl t-Butyl Ether	1.5
n-Butyl acetate	1.86
Ethyl Acetate	3.3
Methyl Ethyl Ketone	10
1-Butanol	20.07
Acetic acid, glacial	Miscible <sup>2)</sup>
Acetone	Miscible
Acetonitrile	Miscible
N,N-Dimethylacetamide	Miscible
N,N-Dimethylformamide	Miscible
Dimethyl Sulfoxide	Miscible
1,4-Dioxane	Miscible
Ethanol	Miscible
Methanol	Miscible
N-Methyl-2-Pyrrolidone	Miscible
1-Propanol	Miscible
2-Propanol	Miscible
Pyridine	Miscible
Tetrahydrofuran	Miscible

1) measured at 25°C

2) Miscible : two components can be mixed together in all proportions without forming two separate phases



# Physical properties

## Refractive Index

Solvent	Refractive Index (25°C)
Methanol	1.326
Water	1.333 <sup>1)</sup>
Acetonitrile	1.342
Ethyl Ether	1.352
n-Pentane	1.355
Acetone	1.357
Ethanol	1.359
Petroleum Ether (35~60°C)	1.365
Methyl t-Butyl Ether	1.366
Acetic acid, glacial	1.370 <sup>1)</sup>
Ethyl Acetate	1.370
n-Hexane	1.372
2-Propanol	1.375
Methyl Ethyl Ketone	1.377
1-propanol	1.383
n-Heptane	1.385
Isooctane	1.389
n-Butyl acetate	1.392
Methyl Isobutyl Ketone	1.3957 <sup>1)</sup>
1-Butanol	1.397
Tetrahydrofuran	1.404
1,4-Dioxane	1.420
Dichloromethane	1.421
Cyclohexane	1.424
N,N-Dimethylformamide	1.427
N,N-Dimethylacetamide	1.4384 <sup>1)</sup>
Chloroform	1.444
1,2-Dichloroethane	1.444
1,2,4-Trichlorobenzene	1.454
N-Methyl-2-Pyrrolidone	1.469
Dimethyl Sulfoxide	1.476
Toluene	1.494
Benzene	1.498

Solvent	Refractive Index (25°C)
Pyridine	1.507
Chlorobenzene	1.525 <sup>1)</sup>
o-Dichlorobenzene	1.5514 <sup>1)</sup>

<sup>1)</sup>measured at 20°C

# Physical properties

## Boiling point

Solvent	Boiling point (°C)
Ethyl Ether	34
n-Pentane	36
Dichloromethane	40
Methyl t-Butyl Ether	55
Acetone	56
Petroleum Ether (35~60°C)	35~60
Chloroform	61
Methanol	65
Tetrahydrofuran	65
n-Hexane	69
Ethyl Acetate	77
Ethanol	78
Benzene	80
Methyl Ethyl Ketone	80
Cyclohexane	81
Acetonitrile	82
2-Propanol	82
1,2-Dichloroethane	84
1-Propanol	97
n-Heptane	98
Isooctane	99
Water	100
1,4-Dioxane	101
Toluene	111
Pyridine	115
Acetic acid, glacial	117
Methyl Isobutyl Ketone	117~118
1-Butanol	118
n-Butyl acetate	126
Chlorobenzene	132
N,N-Dimethylformamide	153
N,N-Dimethylacetamide	165~166
o-Dichlorobenzene	180.5

Solvent	Boiling point (°C)
Dimethyl Sulfoxide	189
N-Methyl-2-Pyrrolidone	202
1,2,4-Trichlorobenzene	213.5

# Physical properties

## Freezing point

Solvent	Freezing point (°C)
n-Pentane	-129.7
1-Propanol	-126.2
Ethyl Ether	-117.4
Ethanol	-114.1
Methyl t-Butyl Ether	-108.6
Tetrahydrofuran	-108.5
Isooctane	-107.4
Methanol	-97.7
n-Hexane	-95.3
Dichloromethane	-95.1
Toluene	-95.0
Acetone	-94.7
n-Heptane	-90.6
1-Butanol	-88.6
2-Propanol	-88.0
Methyl Ethyl Ketone	-86.7
Methyl Isobutyl Ketone	-84
Ethyl Acetate	-84.0
n-Butyl acetate	-73.5
Chloroform	-63.5
N,N-Dimethylformamide	-60.4
Chlorobenzene	-45.6
Acetonitrile	-43.8
Pyridine	-41.5
N-Methyl-2-Pyrrolidone	-24.4
N,N-Dimethylacetamide	-20
o-Dichlorobenzene	-17.0
Water	0
Cyclohexane	6.5
1,4-Dioxane	11.8
Acetic Acid, glacial	16~17
1,2,4-Trichlorobenzene	16.9
Dimethyl Sulfoxide	18.5

# Physical properties

## UV Cutoff

Solvent	UV Cutoff (nm)
Acetonitrile	<190
n-Pentane	190
Water	190
n-Hexane	195
n-Heptane	197
Cyclohexane	202
Ethanol	205
Isooctane	205
Methanol	205
2-Propanol	205
Methyl t-Butyl Ether	210
Petroleum Ether	210
1-Propanol	210
Tetrahydrofuran	210
1-Butanol	215
1,4-Dioxane	215
Ethyl Ether	218
1,2-Dichloroethane	226
Dichloromethane	233
Chloroform	245
Acetic acid, glacial	254
n-Butyl acetate	254
Ethyl Acetate	255
Dimethyl Sulfoxide	263
N,N-Dimethylacetamide	270
N,N-Dimethylformamide	270
Benzene	280
N-Methyl-2-Pyrrolidone	285
Toluene	286
Chlorobenzene	288
o-Dichlorobenzene	296
1,2,4-Trichlorobenzene	310
Methyl Ethyl Ketone	329

Solvent	UV Cutoff (nm)
Acetone	330
Pyridine	330
Methyl Isobutyl Ketone	334



# Transport Information<sup>1)</sup>

Solvent	Class <sup>2)</sup>	Subsidiary risk <sup>2)</sup>	Packing group	UN NO.	Flash point <sup>3)</sup> (°C)
Acetic acid	8	3	II	UN 2789	40
Acetone	3	-	II	UN 1090	-20 ~ -18
Acetonitrile	3	-	II	UN 1648	2
Benzene	3	-	II	UN 1114	-11
1-Butanol	3	-	III	UN 1120	37
n-Butyl Acetate	3	-	II	UN 1123	27
Chlorobenzene	3	-	III	UN 1134	29
Chloroform	6.1	-	III	UN 1888	non-flammable
Cyclohexane	3	-	II	UN 1145	-18
o-Dichlorobenzene	6.1	-	III	UN 1591	66
1,2-Dichloroethane	3	6.1	II	UN1184	13
Dichloromethane	6.1	-	III	UN1593	-
N,N-Dimethylacetamide	6.1	-	III	UN 2810	70
N,N-Dimethylformamide	3	-	III	UN 2265	58
Dimethyl Sulfoxide	Not regulated	Not regulated	Not regulated	Not regulated	89
1,4-Dioxane	3	-	II	UN 1165	12
Ethanol	3	-	II	UN 1170	13
Ethyl Acetate	3	-	II	UN 1173	-4
Ethyl Ether	3	-	I	UN 1155	-40
n-Heptane	3	-	II	UN 1206	-4
n-Hexane	3	-	II	UN 1208	-22
Isooctane	3	-	II	UN 1262	-12
Methanol	3	6.1	II	UN 1230	12
Methyl Ethyl Ketone	3	-	II	UN 1193	-1
Methyl Isobutyl Ketone	3	-	II	UN 1245	14
Methyl t-butyl ether	3	-	II	UN 2398	below -18
N-Methyl-2-Pyrrolidone	Not regulated	Not regulated	Not regulated	Not regulated	96 <sup>4)</sup>
n-Pentane	3	-	I	UN 1265	below -40
Petroleum Ether (35~60°C)	3	-	I	UN 1268	-49
1-Propanol	3	-	III	UN 1274	23
2-Propanol	3	-	II	UN 1219	12
Pyridine	3	-	II	UN 1282	17
Tetrahydrofuran	3	-	II	UN 2056	below -18
Toluene	3	-	II	UN 1294	7
1,2,4-Trichlorobenzene	6.1	-	III	UN 2321	105
Triethylamine	3	8	II	UN 1296	-11

1) Reference : International Maritime Dangerous Goods Code, Volume 2, 2014

2) Class & Subsidiary risk

3. Flammable liquids

6.1 Toxic substances

8. Corrosive substances

3) Measured by closed cup method

4) Measured by open cup method

# Units Conversion Tables

## Units of Measure Conversion Factors

Percent	Parts per Million	Parts per Billion	Parts per Trillion
.001%=	10 ppm	-	-
.0001%=	1 ppm=	1,000 ppb=	1,000,000 ppt
.00001%=	.1 ppm=	100 ppb=	100,000 ppt
.000001%=	.01 ppm=	10 ppb=	10,000 ppt
-	.001 ppm=	1 ppb=	1,000 ppt
-	.0001 ppm=	.1 ppb=	100 ppt
-	-	.01 ppb=	10 ppt
-	-	.001 ppb=	1 ppt

## Temperature Conversion Formulas

°C to °F	°F to °C
$(^{\circ}\text{C} \times 9/5) + 32 = ^{\circ}\text{F}$	$(^{\circ}\text{F} - 32) \times 5/9 = ^{\circ}\text{C}$

Perfix	Factor	Fraction
centi	$10^{-2}$	1/100 (part per hundred)
milli	$10^{-3}$	1/1,000 (part per thousand)
micro	$10^{-6}$	1/1,000,000 (ppm, part per million)
nano	$10^{-9}$	1/1,000,000,000 (ppb, part per billion)
pico	$10^{-12}$	1/1,000,000,000,000 (ppt, part per trillion)
femto	$10^{-15}$	1/1,000,000,000,000,000 (ppq, part per quadrillion)
atto	$10^{-18}$	1/1,000,000,000,000,000,000 (part per quintillion)

## Weight Conversion Table<sup>1</sup>

From/To	g	kg	metric ton	grain	oz	lb
g	1	0,001	$1 \times 10^{-6}$	15,43	0,03527	0,00220
kg	1000	1	0,001	$1,54 \times 10^4$	35,27	2,205
metric ton	$1 \times 10^6$	1000	1	$1,54 \times 10^7$	$3,53 \times 10^4$	2205
grain	$6,48 \times 10^{-2}$	$6,48 \times 10^{-5}$	$6,48 \times 10^{-3}$	1	$2,29 \times 10^{-3}$	$1,43 \times 10^{-4}$
oz	28,35	0,2835	$2,83 \times 10^{-3}$	437,5	1	0,06250
lb	453,6	0,4536	$4,54 \times 10^4$	7000	16	1

<sup>1</sup>. To convert from a unit shown in the left column, multiply by the factor listed in the column for the desired unit.

## Volume Conversion Table<sup>1</sup> (metric and U.S. liquid measures)

From/To	cm <sup>3</sup>	liter	m <sup>3</sup>	in <sup>3</sup>	ft <sup>3</sup>	yd <sup>3</sup>	fl oz	fl pt	fl qt	gal
cm <sup>3</sup>	1	0,001	$1 \times 10^{-6}$	0,06102	$3,53 \times 10^{-5}$	$1,31 \times 10^{-6}$	0,03381	0,00211	0,00106	$2,64 \times 10^{-4}$
liter	1000	1	0,001	61,02	0,03532	0,00131	33,81	2,113	1,057	0,2642
m <sup>3</sup>	$1 \times 10^6$	1000	1	$6,10 \times 10^1$	35,31	1,308	$3,38 \times 10^1$	2113	1057	264,2
in <sup>3</sup>	16,39	0,01639	$1,64 \times 10^{-5}$	1	$5,79 \times 10^{-1}$	$2,14 \times 10^{-2}$	0,5541	0,03463	0,01732	0,00433
ft <sup>3</sup>	$2,83 \times 10^1$	28,32	0,02832	1728	1	0,03704	957,5	69,84	29,92	7,481
yd <sup>3</sup>	$7,65 \times 10^5$	764,5	0,7646	$4,67 \times 10^1$	27	1	$2,59 \times 10^1$	1616	807,9	202,0
fl oz	29,57	0,02957	$2,96 \times 10^{-5}$	1,805	0,00104	$3,87 \times 10^{-2}$	1	0,06250	0,03125	0,00781
fl pt	473,2	0,4732	$4,73 \times 10^{-4}$	28,88	0,01671	$6,19 \times 10^{-1}$	16	1	0,6000	0,1250
fl qt	946,4	0,9463	$9,46 \times 10^{-4}$	57,75	0,03342	0,00124	32	2	1	0,2500
gal	3785	3,786	0,00379	231,0	0,1337	0,00495	128	8	4	1

<sup>1</sup>. To convert from a unit shown in the left column, multiply by the factor listed in the column for the desired unit.

## Length Conversion Table<sup>1</sup>

From/To	cm	m	km	in	ft	mile
cm	1	0,01	$1 \times 10^{-5}$	0,3937	0,03281	$6,214 \times 10^{-6}$
m	100	1	0,001	39,37	3,281	$6,214 \times 10^{-4}$
km	$1 \times 10^5$	1000	1	$3,94 \times 10^4$	3281	0,6214
in	2,540	0,02540	$2,540 \times 10^{-5}$	1	0,08333	$1,578 \times 10^{-5}$
ft	30,48	0,3048	$3,048 \times 10^{-4}$	12	1	$18,94 \times 10^{-4}$
mile	$1,609 \times 10^5$	1609	1,609	$6,336 \times 10^4$	5280	1

<sup>1</sup>. To convert from a unit shown in the left column, multiply by the factor listed in the column for the desired unit.

# GHS<sup>1)</sup> Symbols and their meaning

	Explosive Self Reactive Organic Peroxides	
	Flammable Self Reactive Pyrophorics	Self-Heating Emits Flammable Gas Organic Peroxide
	Acute Toxicity (severe)	
	Carcinogen Respiratory Sensitizer Reproductive Toxicity	Target Organ Toxicity Mutagenicity Aspiration Toxicity
	Environmental Toxicity	
	Oxidizer	
	Gasses Under Pressure	
	Corrosives	
	Irritant Dermal Sensitizer Acute Toxicity (harmful)	Narcotic Effects Respiratory Tract Irritation

## 1) GHS : Globally Harmonized System

The use of chemical products to enhance and improve life is a widespread practice worldwide. But alongside the benefits of these products, there is also the potential for adverse effects to people or the environment. As a result, a number of countries or organizations have developed laws or regulations over the years that require information to be prepared and transmitted to those using chemicals, through labels or Material Safety Data Sheets (MSDS). While these existing laws or regulations are similar in many respects, their differences are significant enough to result in different labels or MSDS for the same product in different countries. Given the reality of the extensive global trade in chemicals, and the need to develop national programs to ensure their safe use, transport, and disposal, it was recognized that a Globally harmonization system of classification and labeling of chemicals(GHS) would provide the foundation for such programs.



# Solvent Quick Search Guide

Solvent	Page
<b>Acetic acid, glacial</b>	
HPLC	054
<b>Acetone</b>	
Ultimate	019
Pesticide	039
HPLC	055
<b>Acetonitrile</b>	
LC-MS	013
Ultimate	020
Pesticide	039
HPLC	056
HPLC, isocratic	057
Bio	109
Ultra Dry	121
<b>Ammonium acetate</b>	
HPLC	058
<b>Ammonium carbonate</b>	
HPLC	059
<b>Ammonium phosphate, monobasic</b>	
HPLC	060
<b>Benzene</b>	
Ultimate	021
Pesticide	040
HPLC	061
<b>1-Butanol</b>	
Pesticide	040
HPLC	062
<b>n-Butyl acetate</b>	
HPLC	063
<b>Chlorobenzene</b>	
HPLC	064

Solvent	Page
<b>Chloroform, Amylene</b>	
Ultimate	022
Pesticide	041
HPLC	065
<b>Chloroform, Ethanol</b>	
Ultimate	023
Pesticide	041
HPLC	066
Ultra Dry	122
<b>Cyclohexane</b>	
Pesticide	042
HPLC	067
<b>o-Dichlorobenzene</b>	
HPLC	068
<b>1,2-Dichloroethane</b>	
HPLC	069
<b>Dichloromethane</b>	
Ultimate	024
Pesticide	042
HPLC	070
Bio	110
<b>N,N-Dimethylacetamide</b>	
HPLC	071
<b>N,N-Dimethylformamide</b>	
HPLC	072
Bio	111
<b>Dimethyl Sulfoxide</b>	
HPLC	073
Bio	112

# Solvent Quick Search Guide

Solvent	Page
<b>1,4-Dioxane</b>	
HPLC	074
Ultra Dry	122
<b>1-Dodecane Sulfonic acid Sodium salt</b>	
HPLC	075
<b>Ethanol</b>	
HPLC	076
<b>Ethyl Acetate</b>	
Ultimate	025
Pesticide	043
HPLC	077
Ultra Dry	123
<b>Ethyl Ether, Ethanol</b>	
Ultimate	026
Pesticide	043
HPLC	078
Ultra Dry	123
<b>n-Heptane 97%</b>	
Ultimate	027
Pesticide	044
HPLC	079
<b>n-Heptane 99%</b>	
Ultimate	028
Pesticide	044
HPLC	080
<b>1-Heptane Sulfonic acid Sodium salt</b>	
HPLC	081
<b>n-Hexane 95%</b>	
Ultimate	029
Pesticide	045
HPLC	082
Ultra Dry	124

Solvent	Page
<b>1-Hexane Sulfonic acid Sodium salt</b>	
HPLC	083
<b>Isooctane</b>	
Ultimate	030
Pesticide	045
HPLC	084
<b>Methanol</b>	
LC-MS	014
Ultimate	031
Pesticide	046
HPLC	085
HPLC, isocratic	086
Bio	113
Ultra Dry	124
<b>Methyl t-Butyl Ether</b>	
Ultimate	032
Pesticide	046
HPLC	087
<b>Methyl Ethyl Ketone</b>	
HPLC	088
<b>Methyl Isobutyl Ketone</b>	
HPLC	089
<b>N-Methyl-2-pyrrolidone</b>	
HPLC	090
Bio	114
<b>1-Octane Sulfonic acid Sodium salt</b>	
HPLC	091
<b>n-Pentane</b>	
Ultimate	033
Pesticide	047
HPLC	092

Solvent	Page
<b>1-Pentane Sulfonic acid Sodium salt</b>	
HPLC	093
<b>Petroleum Ether (35~60°C)</b>	
Ultimate	034
Pesticide	047
HPLC	094
<b>Phosphoric acid 85%</b>	
HPLC	095
<b>Potassium Phosphate, monobasic</b>	
HPLC	096
<b>1-propanol</b>	
HPLC	097
<b>2-propanol</b>	
Ultimate	035
Pesticide	048
HPLC	098
<b>Pyridine</b>	
HPLC	099
Bio	115
Ultra Dry	125
<b>Sodium acetate trihydrate</b>	
HPLC	100
<b>Sodium bicarbonate</b>	
HPLC	101
<b>Sodium sulfate</b>	
HPLC	048
<b>Tetrahydrofuran</b>	
HPLC	102
Bio	116
<b>Tetrahydrofuran, BHT</b>	
HPLC	103

Solvent	Page
<b>Toluene</b>	
Ultimate	036
Pesticide	049
HPLC	104
Ultra Dry	125
<b>1,2,4-Trichlorobenzene</b>	
HPLC	105
<b>Triethylamine</b>	
Bio	117
<b>Water</b>	
LC-MS	015
HPLC	106

# DUKSAN

## High Purity Solvents

11th Edition  
CV 18-05

DUKSAN  
PURE CHEMICALS

URL Address <http://www.duksan.kr>  
E-mail Address [Webmaster@duksan.kr](mailto:Webmaster@duksan.kr)

**HEAD OFFICE** : 53, Sinwon-ro 133beongil, Danwon-gu, Ansan-si, Gyeonggi-do, Korea  
TEL : +82-31-495-4055 FAX : +82-31-495-4058