

# SPECIALTY PAPERS

Qualitative Filter Papers	32
Quantitative Filter Papers	33
Pure Nitrocellulose	35
Blotting/Chromatography Paper	36
Products for Food Analysis	37
Gridded and Ruled Papers	37
Special Purpose Filters for Food Analysis	38
Phase Separating Filters	38
Products for Industrial Hygiene	39
Products for Air Pollution Monitoring	40
37 mm Monitors	41
Extraction Thimbles	42
Filter Badge – NO <sub>2</sub>	43
Nobuto Blood Filter Strips	43
pH Paper	44
Blaine Test Paper	44



## Qualitative Filter Papers

- **100% alpha cotton cellulose**
- **pH tolerant** 0 to 12
- **Temperature maximum** 120°C
- **Wide selection** – seven types
- **Higher ash** than quantitative

## APPLICATIONS

- Clarify and remove precipitates
- Preparation for qualitative analysis

## ORDERING INFORMATION

See page 34



Seven grades of qualitative filter papers are available in 7 standard diameters.

## CHARACTERISTICS AND APPLICATIONS: CONVERSIONS – QUALITATIVE PAPERS

Type	Comments	Weight (g/m <sup>2</sup> )	Thickness (mm)	Flow Time <sup>1</sup> (sec)	Absorption speed <sup>2</sup> (cm)	Wet Strength <sup>3</sup> (cm H <sub>2</sub> O)	Retention Character- istic (μm)	Collection Efficiency (%, 0.3 μm DOP)	Conversion <sup>4</sup>	
									Whatman	Schleicher & Schuell
No. 1	Retains large crystalline particles and gelatinous precipitates. Fast flow rate, smooth surface, normal hardness	90	0.20	45	9.0	15	6 Coarse	65	4	604
No. 2	Retains medium crystalline precipitates, fast flow rate, smooth surface, normal hardness	125	0.26	80	8.0	18	5 Medium	80	1	591-A or 597
No. 231	Retains crystalline precipitates, moderate flow rate, smooth surface, normal hardness	95	0.18	130	7.5	-	Medium	-	1	-
No. 232	Retains medium to medium-fine particulates, slow flow rate, smooth, normal hardness	90	0.18	250	5.0	-	Med./Med.-Fine	-	-	-
No. 131	High retention efficiency for fine crystalline precipitates like barium sulfate, slow flow rate, smooth surface, normal hardness	140	0.25	240	6.0	20	3 Med.-Fine	90	3 or 6	593-a
No. 235	Highest retention efficiency, retains very fine particulates, very slow flow rate, smooth	95	0.17	1200	4.0	-	Very Fine	-	5	-
No. 101	Seed germination, retains large particles	80	0.21	50	8.0	15	6-7 Coarse and gelatinous	-	1	-

1. Flow time is the time in seconds required to filter 100 ml of distilled water at 20°C under pressure supplied by a 10 cm water column through a 10 cm<sup>2</sup> section of filter paper.

2. Absorption speed is the distance in cm that water will travel in an upright strip of filter paper in ten (10) minutes at 20°C.

3. Wet strength is the height in cm of a water column that will rupture a 10 cm<sup>2</sup> section of filter paper.

4. Conversions between manufacturers are not absolute. Use these conversions as a guideline.

## Quantitative Filter Papers

- **Highest quality** alpha cotton cellulose
- **Low ash**
- **Acid washed:** Double acid washed in hydrochloric then hydrofluoric acid (No. 3, 5A, 5B, 5C, 6), then rinsed with ultrapure water to neutralize. No. 4A is further treated with nitric acid before washing

## APPLICATIONS

- Gravimetric analysis
- Environmental monitoring



Seven quantitative filter papers are available in 7 different diameters.

## CHARACTERISTICS AND APPLICATIONS: CONVERSIONS – QUANTITATIVE PAPERS

Type	Comments	Weight (g/m <sup>2</sup> )	Thickness (mm)	Flow Time <sup>1</sup> (sec)	Absorption speed <sup>2</sup> (cm)	Wet Strength <sup>3</sup> (cm H <sub>2</sub> O)	Retention Character- istic (µm)	Collection Efficiency (%, 0.3 µm DOP)	Conversion <sup>4</sup>	
									Whatman	Schleicher & Schuell
No. 3 Ashless	Medium retention (5-10 µm), fast flow rate Analysis of soils, fertilizers, cement, and minerals	113	0.23	130	7.5	20	Medium	80	6	593-A
No. 5A Ashless	Fast flow rate, retains coarse particulates and gelatinous precipitates (>10 µm). Filter hydroxides and metallic aerosols, environmental monitoring, determine silica content in steel	97	0.22	60	9.5	15	Coarse and gelatinous	75	41	589 Black
No. 5B Ashless	Retains medium particles (5-10 µm) such as CaCO <sub>3</sub> , PbSO <sub>4</sub> , CaCO <sub>4</sub> , MnCO <sub>3</sub> , ZnCO <sub>3</sub> , ZnS, AgCl	108	0.21	195	7.0	20	Medium	90	40	598 White
No. 5C Ashless	Collect fine precipitates (<5 µm) such as SrSO <sub>4</sub> , BaSO <sub>4</sub> , HgCrO <sub>4</sub> , and colloidal dispersions; gravimetric analysis	118	0.22	570	6.0	25	Fine	93	42	589 Red
No. 6 Ashless	Retains medium-fine particulates (2-10 µm), trace and precious metals	103	0.20	300	6.0	15	Medium Fine	90	44	589 Blue
No. 7 Ashless	Highest purity for retaining medium particles (5-10 µm), precise gravimetric analysis	87	0.18	200	7.0	12	Medium	85	43	589 Green
No. 4A Hardened Ashless	High wet strength, suitable for use under high pressure, high chemical and pH resistance, retains fine crystalline precipitates (<5 µm), slow flow	96	0.12	915	4.0	90	Very Fine	90	50	576 or 577

Footnotes: See facing page

**Ash content of Quantitative Papers (mg per disk)**

cm	No.3	No.5A	No.5B	No.5C	No.6	No.7
5.5	0.03	0.02	0.03	0.03	0.02	0.02
7.0	0.04	0.04	0.04	0.05	0.04	0.03
9.0	0.07	0.06	0.07	0.08	0.07	0.06
11.0	0.11	0.09	0.10	0.11	0.10	0.08
12.5	0.14	0.12	0.13	0.15	0.13	0.11
15.0	0.20	0.17	0.19	0.21	0.18	0.15
18.5	0.30	0.26	0.29	0.32	0.28	0.23

**ORDERING INFORMATION: QUALITATIVE PAPERS**

Available in disks in the following diameters (cm): 4.25, 5.5, 7.0, 9.0, 11.0, 12.5, 15.0, 18.5
Additional sizes available upon request.
Order by specifying first the type of filter then the diameter, e.g. No.1125CM (No.1, 12.5 cm) No.23255CM (No. 232, 5.5 cm)
Package of 100

**ORDERING INFORMATION: QUANTITATIVE PAPERS**

Available in disks in the following diameters (cm): 5.5, 7.0, 9.0, 11.0, 12.5, 15.0, 18.5
Additional sizes available upon request.
Order by specifying first the type of filter then the diameter, e.g. No.1125CM (No.1, 12.5 cm), No.23255CM (No. 232, 5.5 cm)
Package of 100



**COSMOS SUPPLY CO.,LTD**  
บริษัท ดาวสมพล ซัพพลาย จำกัด

202 ซอย ลาดพร้าว 96 ถนน ลาดพร้าว แขวง พลับพลา เขต วังทองหลาง กรุงเทพฯ 10310

E\_mail : [cosmos\\_supply@yahoo.co.th](mailto:cosmos_supply@yahoo.co.th) , [cosmos\\_supply@hotmail.com](mailto:cosmos_supply@hotmail.com)

Tel. 0-2931-8232-3 , Fax. 0-2931-8234 Website : [www.cosmos-supply.com](http://www.cosmos-supply.com)

## Pure Nitrocellulose for Blotting and Hybridization

- **Pure esters of nitrocellulose**, free of acetate and other esters
- **Maximal protein/nucleic acid binding**, up to 80-100  $\mu\text{g}/\text{cm}^2$
- **Low background**
- **Two pore sizes** available: 0.45  $\mu\text{m}$  is suitable for most blotting applications, 0.2  $\mu\text{m}$  sizes for lower molecular weights

### ORDERING INFORMATION: NITROCELLULOSE

	Quantity per package	0.20 $\mu\text{m}$	0.45 $\mu\text{m}$
Sheets (Dimensions in cm)			
20 x 20	10	A020A204D	A045A204D
30 x 30	10	A020A304D	A045A304D
Rolls			
33 cm x 3 M	1	A020A330R	A045A330R
Circles (Diameter in mm)			
82	25	A020A082C	A045A082C
137	25	-	A045A137C



Pure Nitrocellulose and Blotting Paper

## Blotting/Chromatography Paper

- **High quality papers** are carefully tested for spot formation, capillary action, water flow rate and absorption speed to assure uniformity and reproducibility
- **Better resolution** with slower flow rate papers

### APPLICATIONS

- Chromatography
- Electrophoresis and blotting
- Separation of heavily loaded solutes

### SPECIFICATIONS AND CONVERSION GUIDE

Grade	Weight (g/m <sup>2</sup> )	Thickness (cm)	Absorption Speed <sup>1</sup> (cm)	Wet Strength (cm H <sub>2</sub> O)	Ash (mg/g)	Whatman equivalent
50	140	0.25	6.0	20	0.1	-
51A	87	0.18	7.5	15	0.01	-
151B	87	0.17	7.0	15	0.06	1 Chr
1514A	185	0.32	7.5	25	0.06	3MMChr
526	325	0.70	11.0	50	0.1	17 Chr

1. Absorption speed is the distance in cm that water will travel in an upright strip of filter paper in ten (10) minutes at 20°C.

### ORDERING INFORMATION

All grades above are available in the following dimensions (cm) and quantities:

2 x 40	100/pkg
20 x 20	50/pkg
46 x 57	100/pkg
60 x 60	50/pkg

151B is also available in 6 x 23 cm, 50/pkg

1514A is also available in 33 cm x 3 M rolls

526 is also available in 40 x 40 cm, 50/pkg

Order by specifying first the grade of paper then the dimensions, e.g. No.51A20X20CM, No.1514A33X3M.

## Products for Food Analysis

### SUGAR PAPER

- **Fast flow rate**
- **Creped surface** available

### APPLICATION

- Clarify sugar and syrup solutions prior to polarimetric determination of sucrose concentration

### SPECIFICATIONS

Grade	Weight (g/m <sup>2</sup> )	Thickness (mm)	Water Flow Time <sup>1</sup> (sec)	Dry Burst Strength (kg/cm <sup>2</sup> )	Wet Burst Strength (kg/cm <sup>2</sup> )	Ash content (%)	Particle Retention (µm)	Surface	Wet Strengthened
106	60	0.14	42.5	1.0	0.3	0.1	-	Smooth	No
102	100	0.30	28	0.7	-	-	3	Creped	No
107	80	0.21	50	1.0	-	-	-	Creped	No
60	125	0.56	7	0.5	-	-	-	Smooth	No
1591	64	0.165	30	1.1	2	0.1	-	Creped	Yes

1. Flow time is the time in seconds required to filter 100 ml of distilled water at 20°C under pressure supplied by a 10 cm water column through a 10 cm<sup>2</sup> section of filter paper.

### ORDERING INFORMATION

- Available in disks in the following diameters (cm): 15.0, 18.5, 20.0
- Available in sheets: 8 x 8 inches, 60 x 60 cm
- Packages of 100 or 1000
- Order by specifying first the grade of paper then the diameter, e.g. No.106150CM, No.608X8IN

## Gridded and Ruled Papers for Extraneous Materials

- **Green grid or ruled lines** (5 mm) are resistant to aqueous and non-aqueous solutions
- **Characteristics:** High wet strength, rapid flow rate

### APPLICATION

- Microscopic examination of extracted samples for the presence of extraneous materials or particulates


### SPECIFICATIONS

- Weight: 60 g/m<sup>2</sup>
- Thickness: 0.14 mm
- Particle retention: 8 µm

### ORDERING INFORMATION

- Grades available: No. 1405G (gridded) and No. 1405R (ruled)
- Both grades are available in disks in the following diameters: 5.5, 7.0, 7.5, 9.0 cm
- Packages of 100

Order by specifying first the grade of paper then the diameter, e.g. No.1405G9.0CM.

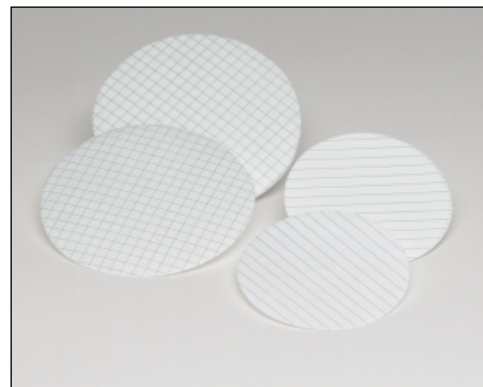

Both gridded and ruled papers are available in disks.

## Special Purpose Filters for Food Analysis

### THIMBLES FOR SOXHLET TYPE EXTRACTIONS

Type 84 is often used for food analysis including Soxhlet-type gravimetric determinations of fats and oils from foods, feeds, or oil seeds. It is also used to extract and concentrate non-aqueous chemicals or additives from a solid sample for analysis (such as HPLC or gas chromatography for PCB and pesticides).

Ordering information and specifications on page 42.

### Phase Separating Filters

- **Separate** aqueous and non-aqueous phases of mixtures
- **Hydrophobic** filters retain aqueous phase while non-aqueous phase passes through
- **Choice of materials:** Grade 2S is silicon treated cellulose  
Polyflon is pure PTFE (Teflon)

### SPECIFICATIONS

Grade code	Substrate	Weight (g/m <sup>2</sup> )	Thickness (mm)	Retentive Particle (µm)
2S	Silicone treated cellulose	120	0.26	5
PF020	PTFE	500	0.54	2
PF040	PTFE	500	0.95	4
PF050	PTFE	210	0.36	5
PF060	PTFE	240	0.50	6
PF100	PTFE	500	1.00	10

### ORDERING INFORMATION

#### Grade 2S:

- Available in disks in the following diameters (cm): 5.5, 7.0, 9.0, 11.0, 12.5, 15.0, 18.5, 24.0, 27.0
- Available in sheets: 28 x 46 cm
- Packages of 100

#### Polyflon – all grades:

- Available in disks in the following diameters (mm): 13, 25, 47, 55
- Available in sheets: 8 x 10 inches
- Packages of 10

Order by specifying first the grade of paper then the diameter, e.g. PF04025MM.



**COSMOS SUPPLY CO., LTD**  
บริษัท ดาวมอส ซัพพลาย จำกัด

202 ซอย ลาดพร้าว 96 ถนน ลาดพร้าว แขวง พลับพลา เขต วังทองหลาง กรุงเทพฯ 10310

E\_mail : [cosmos\\_supply@yahoo.co.th](mailto:cosmos_supply@yahoo.co.th) , [cosmos\\_supply@hotmail.com](mailto:cosmos_supply@hotmail.com)

Tel. 0-2931-8232-3 , Fax. 0-2931-8234 Website : [www.cosmos-supply.com](http://www.cosmos-supply.com)



## Products for Industrial Hygiene

Advantec MFS provides a selection of products for industrial hygiene applications including asbestos monitoring. Mixed Cellulose Esters and PVC membrane can be used with cellulose support pads in standard 25 and 37 mm cassette type filter holders. Fully assembled 37 mm cassettes are available in addition to the units without membrane, see page 41.

### Cellulose Support Pads

Type 25S cellulose support pads fit standard 25 and 37 mm cassette type filter holders.

### MCE (Mixed Cellulose Ester) Membrane

- **Standard** 0.8  $\mu$ m pore size, white plain membrane fits standard 25 and 37 mm cassette type filter holders
- **High quality** raw materials used in manufacture
- **Low contamination:** Cutting and packaging operations are carried out under clean room conditions to keep non-asbestos fiber contamination to an absolute minimum

**Note:** Filters may be cleared using either the acetone vapor method or the dimethylphthalate diethyloxalate method.

### PVC for Industrial Hygiene Monitoring

- **Characteristics:** naturally hydrophobic, excellent weight stability
- **Silica free,** contain no additives or modifiers
- **Suitable** for particulate analysis

Description	Size	Surface	Qty/Pkg	Catalog No.
0.8 $\mu$ m MCE	25 mm disk	White Plain	100	A080X025A
	25 mm disk	White Grid	100	A080X025B
	37 mm disk	White Plain	100	A080X037A
	37 mm disk	White Grid	100	A080X037B
0.5 $\mu$ m PVC	25 mm disk	White Plain	50	P050A025A
0.8 $\mu$ m PVC	25 mm disk	White Plain	50	P080A025A
	37 mm disk	White Plain	100	P080A037A
	47 mm disk	White Plain	50	P080A047A
	8 x 10 in sheet	White Plain	10	P0808x10IN
5.0 $\mu$ m PVC	25 mm disk	White Plain	50	P500A025A
	37 mm disk	White Plain	100	P500A037A
	8 x 10 in sheet	White Plain	10	P5008x10IN
Cellulose Pads	25 mm disk	White Plain	100	TYPE25S25MM
	37 mm disk	White Plain	100	TYPE25S37MM
Cassettes, 2-piece	37 mm diameter	-	50	370S200ON
Cassettes, 3-piece	37 mm diameter	-	50	370S300ON

Advantec MFS continually works with customers to develop special filter media to suit their specific application needs. Direct inquiries to our Technical Services Department.

## Products for Air Pollution Monitoring

Several products from Advantec MFS have been developed especially to meet the needs of persons concerned with air pollution monitoring.

### QUARTZ FIBER FILTER – QR100

- Increased chemical and thermal resistance compared to GB100R
- Prefired at 1000°C for 2 hours to reduce organic contamination
- Available in sheets and disks

Specifications and ordering information on pages 27–29.

### PURE FIBROTIC PTFE FILTERS – POLYFLON PF050

- Polyflon filters neither adsorb acid gases nor do they contribute any trace metal contamination during assay procedures
- Superior handling characteristics compared to either glass or quartz
- Available in sheets and disks

Specifications and ordering information on page 30.

## Thimbles

Thimbles are available in the following materials:

Material	Type
Cellulose	84
Glass	86R
Silica	88R
High Temperature Silica	88RH
PTFE	89
PTFE/Silica	89S

For detailed specifications and ordering information, see page 42.

Advantec MFS continually works with customers to develop special filter media to suit their specific application needs. Direct inquiries to our Technical Services Department.



Four grades of fibrous filter media are available in sheets, discs, and thimble form for air pollution monitoring.

### 37 MM MONITORS FOR MICROBIAL AND CONTAMINATION ANALYSIS

Preassembled devices contain a membrane filter (Mixed Cellulose Ester) and a pure cotton cellulose support pad in a styrene housing. Available as a two- or three-piece unit for ease in sampling, collecting, and transporting samples from the field to the laboratory. Sample collected on the press fit membrane surface can be cultured in place or removed for further analysis or study.

Applications	Recommended product	
	Unit:	Membrane:
Microbiology – bacterial	2- or 3-piece	0.45 µm, white grid or black grid
Microbiology – yeast and mold	2- or 3-piece	0.80 µm, white grid or black grid
Aerosol analysis	2-piece	0.45 µm or 0.80 µm, white plain
Contamination analysis	2- or 3-piece	0.45 µm or 0.80 µm, white plain or grid

0.8 µm MF is green grid lines on white background, 0.45 and 0.65 µm have black grid lines.



MFS 37

### SPECIFICATIONS

- Housing Material: styrene acrylonitrile
- Filtration Area: 9.0 cm<sup>2</sup> (6.7cm<sup>2</sup> for Hydrophobic Edge types)
- Dimensions: 42 mm diameter, 28.7 mm height
- Weight: 1.2 kg (2.5 lbs)

### ORDERING INFORMATION

#### Two-Piece Units with Mixed Cellulose Ester Membrane

Pore Size (µm)	Color	Surface	Hydrophobic edge	Quantity per package	Catalog No.	
					Sterile	Nonsterile
0.45	White	Plain	Yes	50	-	37AS245AN-HE
0.45	White	Grid	Yes	50	37AS245BS-HE	-
0.45	Black	Grid	Yes	50	37AS245PS-HE	-
0.80	White	Plain	No	50	37AS280AS	37AS280AN
0.80	White	Grid	No	50	37AS280BS	-

#### Three-Piece Units with Mixed Cellulose Ester Membrane

Pore Size (µm)	Color	Surface	Hydrophobic edge	Quantity per package	Catalog No.	
					Sterile	Nonsterile
0.45	White	Plain	No	50	-	37AS345AN
0.45	White	Grid	No	50	37AS345BS	-
0.45	Black	Grid	No	50	37AS345PS	-
0.80	White	Plain	No	50	-	37AS380AN
0.80	White	Grid	No	50	37AS380BS	37AS380BN
0.80	Black	Grid	No	50	-	37AS380PN

#### Units without Membrane

Assembly type	Quantity per package	Catalog No.
2 Piece, with plugs	50	37OS200ON
3 piece, with plugs	50	37OS300ON

## Extraction Thimbles

High purity, seamless filters with a characteristic thimble shape. Applications include analysis of fats, oils, grease, pesticides, pollutants, other organics and additives in plastics and rubber materials.

### Cellulose Thimbles – No. 84

- Suitable for Soxhlet extractions of organic components
- Dust sampling
- Lipid content <0.1% by weight

### Glass Fiber Thimbles – No. 86R

- Borosilicate glass
- High temperature extractions or dust monitoring ( $\leq 500^{\circ}\text{C}$ )
- Acid resistant (except hydrofluoric)
- Acid washed for minimum trace metal content

### Silica Fiber Thimbles – No. 88R and 88RH

- Use up to  $1000^{\circ}\text{C}$
- No. 88RH is treated at  $900^{\circ}\text{C}$  for 4 hours to stabilize the weight prior to use
- Both 88R and 88RH are tapered for ease in loading into stack samplers

### PTFE Fiber and PTFE/Silica Fiber Thimbles – No. 89 and 89S

- Durable, temperature-resistant
- Non-adsorptive with respect to acid gases
- PTFE is inherently hydrophobic
- Little or no trace metal contamination



Thimbles

## SPECIFICATIONS

Type	Material	Nominal rating ( $\mu\text{m}$ )	Thickness (mm)	Weight (g per 25 x 90 thimble)	Pressure drop (mm $\text{H}_2\text{O}$ / 5 cm / sec)	Efficiency %	Max operating temp ( $^{\circ}\text{C}$ )	Heating loss rate (%)	Conversion	
									Whatman	S&S
84	Cellulose	8	1.5	3.6	25	89	120	-	2800	603
86R	Glass Fiber	1	1.6	1.8	30	>99.9	500	0.2	2814	603G
88R	Silica Fiber	-	1.6	2.2	45	>99.9	1000	-	-	-
88RH	Silica Fiber	-	1.6	2.2	45	>99.9	1000	0.1	2813	-
89	PTFE Fiber	-	1.8	11.0	450	>99.9	260	-	-	-
89S	PTFE/Silica Fiber	-	1.6	6	55	>99.9	400	0.07	-	-

## ORDERING INFORMATION

Sizes are expressed as internal diameter ( $\pm 3\%$ ) x height ( $\pm 1.5\%$ ).

### Type 84 (diameter x height, mm), 25 thimbles per package

-	22 x 65	25 x 60	-	-	-	-
-	22 x 80	25 x 80	-	30 x 80	33 x 80	-
19 x 90	-	25 x 90	-	-	33 x 94	-
-	-	25 x 100	28 x 100	30 x 100	33 x 100	43 x 123

### Type 86R (diameter x height, mm), 25 thimbles per package

19 x 90	-	25 x 90	-	30 x 80	-	43 x 123
-	-	25 x 100	-	30 x 100	-	-

### Type 88R (diameter x height, mm), 25 thimbles per package

19 x 90	-	25 x 100	30 x 80	30 x 100	33 x 80	43 x 123
---------	---	----------	---------	----------	---------	----------

### Types 88R, 88RH, 89, and 89S

Available in 25 x 90 mm size, 10 thimbles per package.

**1-800-334-7132**

## Filter Badge – NO<sub>2</sub>

- Monitor ambient levels of nitrogen dioxide with this passive, portable sampler
- Attach to subject's clothing or mount on a stationary object
- Plastic case contains an adsorbent pad saturated with triethanolamine and a fibrous PTFE filter to control wind effects
- Use enclosed foil pouch or other hermetic container to transport to the laboratory where NO<sub>2</sub> levels can be determined spectrophotometrically

### SPECIFICATIONS

- Dimensions: 5 cm x 4 cm x 1 cm
- Sampling method: passive diffusion
- Sensitivity: 66 ppb.hr
- Accuracy:  $\pm 30\%$
- Maximum exposure: 1 month in ambient air
- Relative humidity range: 40 – 80%
- Weight: 16 g (0.56 oz)

### ORDERING INFORMATION

	Catalog No.
Filter Badge – NO <sub>2</sub>	800600



Filter Badge – NO<sub>2</sub>

## Nobuto Blood Filter Strips

- Collect blood on the narrow end of the strip and allow to dry on the convenient drying rack for easy and efficient sample handling
- Strip holds approximately 0.1 ml of blood or 0.04 ml of serum
- High purity cellulose paper yields a fine, textile like structure ideal for uniform sampling
- Dried samples can be analyzed, stored, or mailed without refrigeration

### Typical blood collection applications:

- Toxoplasmosis (HA)
- Hanta Virus
- New Castles Disease (HI)
- Canine Distemper (VN)
- Measles (Rubeola) (HI)
- Japanese Encephalitis (HI, VN)
- Mycoplasmosis (AG)
- Hog Cholera (VN)

### ORDERING INFORMATION

		Catalog No.
Nobuto Blood Filter Strips	100/package	800700
Filter Strip Drying Rack	Each	800701




Nobuto Blood Filter Strips and Drying Rack.

### pH Indicator and Acid Alkali Test Papers

- Determine pH easily and inexpensively, without instrumentation
- Color changes instantaneously, compare to chart for determination
- Two convenient formats: Booklet of 20 strips, 7 x 70 mm  
Roll, 9 mm wide in dispenser

#### ORDERING INFORMATION

Type	pH range	Packaging	Catalog No.
Universal	1 – 11	Booklet	UNIV-B
Universal	1 – 11	Roll (9 mm x 6 m)	UNIV-R
Whole Range	0 – 14	Roll (9 mm x 5.5 m)	W-R
Congo Red	3 – 5	Booklet	07810073
Litmus Blue	Qualitative	Booklet	07020010
Litmus Red	Qualitative	Booklet	07020020

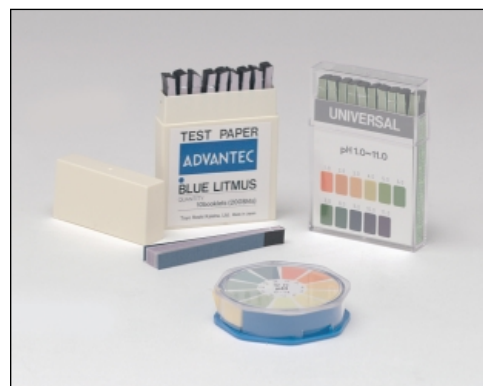

pH and Test Paper

### Blaine Test Papers

- Standard for testing cement using the Blaine air permeation test
- 12.7 mm diameter disks

#### ORDERING INFORMATION

		Catalog No.
Blaine Test paper	250/package	01511012



Blaine Test Filter Paper



**COSMOS SUPPLY CO., LTD**  
บริษัท ดอสมอส ซัพพลาย จำกัด

202 ซอย ลาดพร้าว 96 ถนน ลาดพร้าว แขวง หลักทอง เขต หลักทอง กรุงเทพมหานคร 10310

E\_mail : [cosmos\\_supply@yahoo.co.th](mailto:cosmos_supply@yahoo.co.th) , [cosmos\\_supply@hotmail.com](mailto:cosmos_supply@hotmail.com)

Tel. 0-2931-8232-3 , Fax. 0-2931-8234 Website : [www.cosmos-supply.com](http://www.cosmos-supply.com)



6723 Sierra Court, Suite A  
Dublin, California  
94568 U.S.A.  
1 (800) 334-7132  
(925) 479-0625  
Fax: (925) 479-0630  
[www.advantecmfs.com](http://www.advantecmfs.com)



**COSMOS SUPPLY CO., LTD**  
บริษัท คอสโมส ซัพพลาย จำกัด


202 ซอย ลาดพร้าว 96 ถนน ลาดพร้าว แขวง พลับพลา เขต วังทองหลาง กรุงเทพฯ 10310

E\_mail : [cosmos\\_supply@yahoo.co.th](mailto:cosmos_supply@yahoo.co.th) , [cosmos\\_supply@hotmail.com](mailto:cosmos_supply@hotmail.com)

Tel. 0-2931-8232-3 , Fax. 0-2931-8234 Website : [www.cosmos-supply.com](http://www.cosmos-supply.com)

# MEMBRANE FILTERS

Membranes	2
Properties of Membrane Filters	3
Mixed Cellulose Esters (MCE)	4
Cellulose Acetate	7
Coated Cellulose Acetate	9
Hydrophilic PTFE	10
Hydrophobic PTFE	11
Nylon	12
Polycarbonate	13
Polyvinylchloride (PVC)	14
Disposable Syringe Filter Units	15

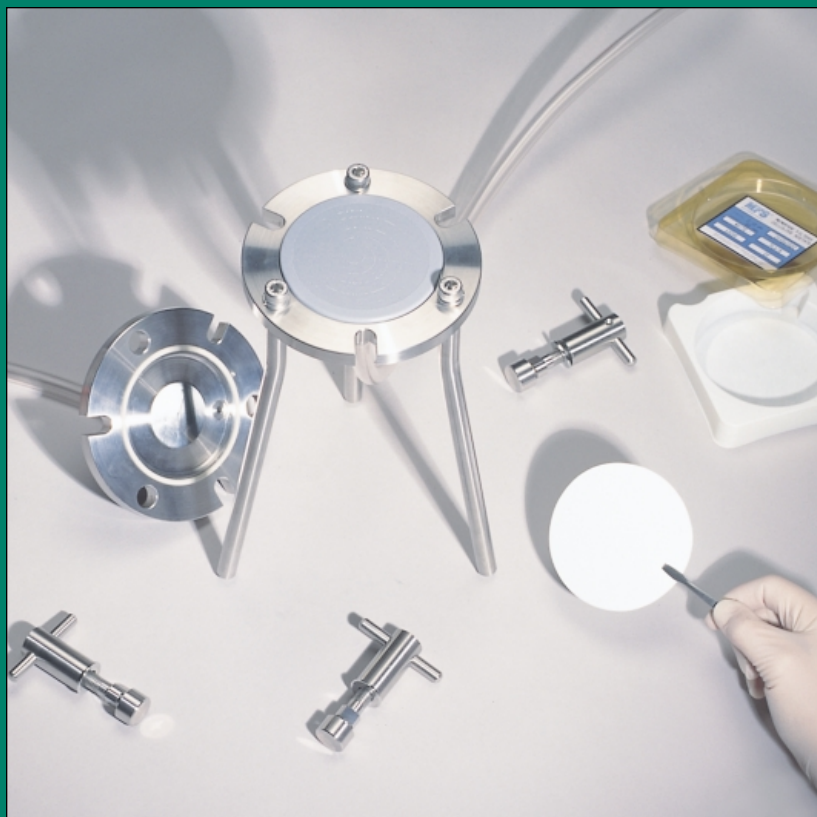



## Membranes

Membrane filters or “membranes” are microporous plastic films with specific pore size ratings. Also known as screen, sieve or microporous filters, membranes retain particles or microorganisms larger than their pore size primarily by surface capture. Some particles smaller than the stated pore size may be retained by other mechanisms.

Advantec MFS membranes are produced by three different processes. Mixed Cellulose Esters, Cellulose Acetate, and Nylon are reverse phase solvent cast membranes, where controlled evaporation or removal of the complex solvent system forms the porous structure. Both hydrophilic and hydrophobic PTFE are made by a patented process where the membranes are stretched biaxially to form the porous structure. PCTE membranes are track etched.

## Performance Characteristics of Advantec MFS Membranes

- **Strong:** Advantec MFS membranes are monitored for both burst (longitudinal) and tensile (lateral) strength. Supported Acetate and Nylon are the strongest reverse phase membranes available from Advantec MFS
- **Chemically and biologically clean:** As part of a comprehensive quality program, only high purity reagents and raw materials are used to produce Advantec MFS membranes. Once cast, the membranes are handled in a class 100 clean room to minimize ambient contamination. While some membranes require a small amount (0.1–3 weight %) of an aqueous wetting agent, Cellulose acetate has the lowest aqueous extractable (0.1 weight %) and Nylon, inherently hydrophilic, contains no added wetting agents or surfactants. All Advantec MFS membranes are Triton- and pyrogen-free (0.005 ng/cm<sup>2</sup> filter area)
- **Thin membranes with high porosity:** Uniformly thin membranes (typically 150 µm) with high porosity (about 80%) provide high gas and liquid flow per unit area. High porosity also provides high surface area for adsorption or binding
- **Thermostable:** All Advantec MFS membranes can be sterilized by autoclaving. Operating temperatures of up to 180°C can be achieved depending upon the membrane polymer (see individual membrane specifications for details). Advantec MFS membranes exhibit minimal shrinkage at elevated temperatures

## Quick Guide to Selecting Membrane Filters

- **Determine** what liquid or gas will be filtered
- **Check** which membranes are chemically compatible (following and appendix)
- **Determine** the maximum pore size required to achieve the results you want
- **Check** the membrane specifications for any unusual process conditions that might otherwise limit your choice of membrane (e.g. temperature)

For more detailed information on how to design a filtration system see the appendix, page 110.



**COSMOS SUPPLY CO., LTD**  
บริษัท ดาวสมวส ซัพพลาย จำกัด

202 ซอย ลาดพร้าว 96 ถนน ลาดพร้าว แขวง คลับพลา เขต วังทองหลาง กรุงเทพฯ 10310

E\_mail : [cosmos\\_supply@yahoo.co.th](mailto:cosmos_supply@yahoo.co.th) , [cosmos\\_supply@hotmail.com](mailto:cosmos_supply@hotmail.com)

Tel. 0-2931-8232-3 , Fax. 0-2931-8234 Website : [www.cosmos-supply.com](http://www.cosmos-supply.com)

## Properties of Membrane Filters

### MEMBRANE COMPARISON

Membrane polymer	Sample applications	General compatibility	Hydrophilic	Hydrophobic	Pore size range available (µm)									
					0.1	0.2	0.45	0.8	1.0	3.0	5.0	8.0	10	
Mixed cellulose esters (MCE)	General purpose Microbiology Particle Analysis	Aqueous solutions	✓											
Cellulose Acetate	General filtration Cytology Binding studies	Aqueous solutions	✓											
Coated Cellulose Acetate	Clarify solutions Prefilter	Aqueous solutions	✓											
Hydrophilic PTFE	HPLC solutions Clarify or sterilize aqueous/organic mixtures	Aqueous and organic solutions	✓											
Hydrophobic PTFE	Gas venting Clarify or sterilize strong acids or solvents	Non-aqueous solvents		✓										
Nylon	Filter sterilization Vacuum degassing HPLC solutions	Aqueous and organic solutions	✓											
Polycarbonate	Microscopy Beverage testing	Aqueous solutions	✓											
PVC	Particulate analysis Industrial hygiene	Aqueous solutions		✓										

### ORDERING INFORMATION: MEMBRANE FILTER NOMENCLATURE

A	020	A	293	C	EXAMPLE	The membrane filter nomenclature specifies the required information for correctly ordering membranes. The nine digit code specifies type, pore size, surface/type, diameter and packaging as illustrated below.																			
						Quantity per Package																			
						A = 100			E = 5			R = 1 roll													
						B = 50			H = 25 with 60 mm center hole			Y = 200													
						C = 25			K = HE ind pack WG, 100			W = 1000													
						D = 10																			
						Diameter (mm)										Sheets/Rolls (cm)									
						13 = 013			47 = 047			90 = 090			142 = 142			15 x 15 = 154			33 x 56 = 356				
						20 = 020			50 = 050			100 = 100			293 = 293			15 x 9.2 = 159			30 x 30 = 304				
						25 = 025			82 = 082			102 = 102						20 x 20 = 204			33 cm x 3m = 330				
37 = 037			85 = 085			137 = 137																			
Surface/Type																									
Non-Sterile Packages										Pre-Sterilized Packages															
Packaging						10x10-A Autoclavable		10x10-S		Individually Wrapped															
Surface				Plain Grid		Plain Grid		Plain Grid		Plain Grid				No Pad		No Pad									
White				A, X**		B		S		T		C		D		G									
White HE*				J		K										F									
Black				N		P										H									
Green				U		V										Q									
																M									
																R									
																W									
*HE = Hydrophobic Edge										**Opticlear MF															
Membrane Pore Size (µm)										CMF (nominal µm)															
5.0 = 500			1.0 = 100			0.50 = 050			0.22 = 022			10 = 100													
3.0 = 300			0.8 = 080			0.45 = 045			0.20 = 020			2 = 020													
1.2 = 120			0.65 = 065			0.3 = 030			0.1 = 010			0.8 = 008													
Type of Filter																									
A = Mixed Cellulose Ester					H = Hydrophilic PTFE					K = Polycarbonate															
B = Cellulose pads					J = Hydrophobic PTFE, polypropylene backing					N = Nylon, supported															
C = Cellulose acetate										P = Polyvinylchloride															
										Y = Coated cellulose acetate															

## Mixed Cellulose Esters (MCE)

- **Composition:** Mixed cellulose esters including cellulose nitrate and cellulose acetate, also known as nitrocellulose
- **High porosity** provides superior flow rates
- **High protein binding** can be blocked by pretreatment or utilized in applications
- **High purity:** Triton-free and non reactive to pyrogens
- **Autoclavable:** Withstands autoclaving temperatures up to 130°C without adversely affecting bubble point, flow rate or microbiological recovery
- **Rapid wetting time:** < 3 seconds to wet a 47 mm diameter disc with aqueous 1% methylene blue

## APPLICATIONS

- Standard membranes for many laboratory applications including filter sterilizing biological fluids, microbiology, contamination analysis and air monitoring
- Can be transparentized to view collected particles
  - using compatible liquid (immersion oil, toluene),

OR

- select Opticlear membranes for the “hot block” acetone vapor method
- Gridded filters available for quantifying microbial growth
- Available non-sterile or sterilized by ethylene oxide (EtO)

## SPECIFICATIONS FOR MIXED CELLULOSE ESTER (MCE), CODE A

Pore Size µm	Color	Surface	Bubble Point <sup>1</sup>		Flow Rate <sup>2</sup>		Porosity <sup>3</sup> %	Thickness µm
			MPa	psi	Water ml/min/cm <sup>2</sup>	Air L/min/cm <sup>2</sup>		
0.10	White	Plain	≥0.24	≥35.3	2.7	0.67	65	110
0.20	White	Plain	≥0.37	≥54.5	17.5	2.4	73	133
0.30	White	Plain	≥0.28	≥41.2	30	3.7	75	140
0.45	White	Plain	≥0.24	≥35.0	45	5.0	78	145
0.45	White	Grid	≥0.16	≥24.2	80	8.0	79	142
0.65	White	Plain	≥0.14	≥21.3	120	11.2	79	150
0.80	White	Plain	≥0.11	16.4	165	15.0	80	150
1.00	White	Plain	≥0.096	≥13.9	220	20.4	80	150
3.00	White	Plain	≥0.070	≥10.2	300	28.3	81	155
5.00	White	Plain	≥0.058	≥8.5	400	40.9	81	160
0.45	Black	Grid	≥0.22	≥32.7	50	5.0	78	135
0.80	Black	Grid	≥0.10	≥14.9	170	15	80	145
0.45	Green	Grid	≥0.22	≥32.7	50	5.0	78	135
0.80	Green	Grid	≥0.10	≥14.9	170	15	80	145

- Refractive index 1.50
- Maximum operating temperature 130°C

### Definitions:

1. Bubble point is the minimum pressure required to force air through a membrane which has been prewet with water (0.1 µm membranes prewet with isopropanol)
2. Flow Rate indicates initial flow rate at 10 psi using a KGS 47 filter holder
  - Water: using water prefiltered to 0.1 µm pore size
  - Air: using prefiltered nitrogen at 10 psi
3. Porosity refers to the percent open area

## Protein Binding of Membrane Filters


Membrane	Catalog code	Protein Adsorbed (µg/cm <sup>2</sup> )		
		Ovalbumin	γ-globulin	Total
Mixed Cellulose Esters, 0.2 µm	A020...	7.8	116.9	124.7
Cellulose Acetate, 0.2 µm	C020...	21.3	11.0	32.3

**Ash Content of White Plain MCE Membrane Filters (ppm)**

<b>Al</b>	<2.0	<b>K</b>	6.0	<b>Ni</b>	<5.0
<b>Ca</b>	140.0	<b>Li</b>	<1.0	<b>Pb</b>	<1.0
<b>Cd</b>	<0.5	<b>Mg</b>	10.0	<b>Si</b>	<20.0
<b>Cr</b>	8.0	<b>Mn</b>	<0.5	<b>Sn</b>	<5.0
<b>Cu</b>	<1.0	<b>Mo</b>	<1.0	<b>Ti</b>	<1.0
<b>Fe</b>	<5.0	<b>Na</b>	10.0	<b>Zn</b>	<1.0

**ORDERING INFORMATION: MIXED CELLULOSE ESTER – NONSTERILE****Plain White, package of 100 disks**

Pore Size (µm)	13 mm	25 mm	47 mm	50 mm
0.10	A010A013A	A010A025A	A010A047A	-
0.20	A020A013A	A020A025A	A020A047A	A020A050A
0.30	A030A013A	A030A025A	A030A047A	-
0.45	A045A013A	A045A025A	A045A047A	A045A050A
0.65	A065A013A	A065A025A	A065A047A	A065A050A
0.80	A080A013A	A080A025A	A080A047A	A080A050A
1.00	A100A013A	A100A025A	A100A047A	A100A050A
3.00	A300A013A	A300A025A	A300A047A	A300A050A
5.00	A500A013A	A500A025A	A500A047A	A500A050A

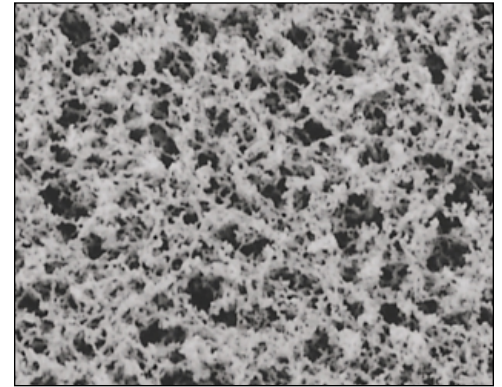

Mixed Cellulose Esters

**Plain White, package of 25 disks**

Pore Size (µm)	90 mm	100 mm	102 mm	142 mm	293 mm	293/60 mm*
0.10	A010A090C	-	-	A010A142C	A010A293C	A010A293H
0.20	A020A090C	A020A100C	-	A020A142C	A020A293C	A020A293H
0.30	A030A090C	-	-	A030A142C	A030A293C	-
0.45	A045A090C	A045A100C	A045A102C	A045A142C	A045A293C	A045A293H
0.65	A065A090C	-	-	A065A142C	A065A293C	A065A293H
0.80	A080A090C	-	-	A080A142C	A080A293C	A080A293H
1.00	A100A090C	-	-	A100A142C	A100A293C	A100A293H
3.00	A300A090C	-	-	A300A142C	A300A293C	A300A293H
5.00	A500A090C	-	-	A500A142C	A500A293C	A500A293H

\*60 mm center hole

**ORDERING INFORMATION (CONTINUED): MIXED CELLULOSE ESTER – NONSTERILE****Gridded White, package of 100 disks**

Pore Size (µm)	13 mm	25 mm	37 mm	47 mm	50 mm
0.45	A045B013A	A045B025A	A045B037A	A045B047A	A045B050A
0.65	A065B013A	A065B025A	-	A065B047A	A065B050A
0.80	A080B013A	A080B025A	A080B037A	A080B047A	A080B050A

0.8 µm MF is green grid lines on white background, 0.45 and 0.65 µm have black grid lines.

**Roll, Plain White**

Pore Size (µm)	Qty/pkg	33 cm x 3 m
0.10	1	A010A330R

**Sheets, Gridded White**

Pore Size (µm)	Qty/pkg	30 mm x 30 mm
0.45	25	A045B304C

**Hydrophobic Edge, 47 mm disks, package of 100 disks**

Pore Size (µm)	Plain	Grid
0.20	A020J047A	A020K047A
0.45	A045J047A	A045K047A

**Opticlear, package of 100 disks**

Pore Size (µm)	25 mm	37 mm	47 mm
0.80	A080X025A	A080X037A	A080X047A

**Black, package of 100 disks**

Pore Size (µm)	Surface	13 mm	25 mm	37 mm	47 mm	137 mm (25/pkg)
0.45	Plain	A045N013A	A045N025A	A045N037A	A045N047A	-
0.45	Grid	A045P013A	A045P025A	A045P037A	A045P047A	A045P137C
0.80	Plain	A080N013A	A080N025A	-	A080N047A	-
0.80	Grid	A080P013A	A080P025A	-	A080P047A	-

0.45 µm 47 mm black grid membrane also available presterilized: A045P047S

**Green, package of 100 disks**

Pore Size (µm)	Surface	13 mm	25 mm	47 mm
0.45	Plain	A045U013A	A045U025A	A045U047A
0.45	Grid	A045V013A	A045V025A	A045V047A
0.80	Grid	-	-	A080V047A

Additional sizes available by special order.

Also available in:

- Sterile packaging for microbiology.
- Disposable syringe units.

For Pure Nitrocellulose for Blotting, see page 35.

MSDS available for this product.



MCE membrane assortment



**COSMOS SUPPLY CO., LTD**  
บริษัท ดาวสมพล จำกัด


202 ซอย ลาดพร้าว 96 ถนน ลาดพร้าว แขวง พลับพลา เขต วังทองหลาง กรุงเทพฯ 10310

E\_mail : [cosmos\\_supply@yahoo.co.th](mailto:cosmos_supply@yahoo.co.th) , [cosmos\\_supply@hotmail.com](mailto:cosmos_supply@hotmail.com)

Tel. 0-2931-8232-3 , Fax. 0-2931-8234 Website : [www.cosmos-supply.com](http://www.cosmos-supply.com)

## Cellulose Acetate

- **Composition:** Mixture of cellulose triacetate and diacetate
- **Characteristics:** Low static charge and high strength
- **Sterilizable:** May be repeatedly sterilized without loss of integrity or change in bubble point
- **Clean:** Lowest aqueous extractibles (0.1 wt%) of all Advantec MFS membranes
- Relative to MCE (Mixed Cellulose Ester, Nitrocellulose):
  - improved solvent resistance to low molecular weight alcohols
  - better heat resistance
  - lower protein binding (see page 4)

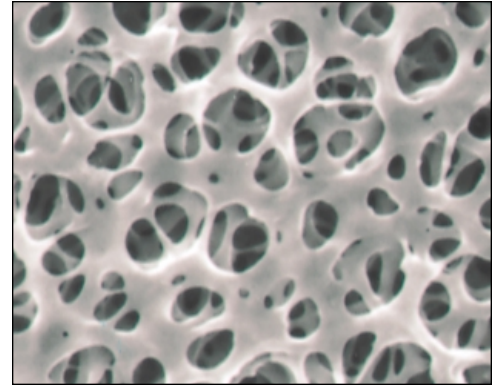

Cellulose Acetate

## APPLICATIONS

- Enhanced recovery of fastidious gram positive organisms
- Filtration of enzyme solutions
- Diagnostic cytology
- Receptor binding studies

**Note:** Should be prewet prior to loading into a holder and autoclaving.

## SPECIFICATIONS: WHITE PLAIN CELLULOSE ACETATE, CODE C

Pore Size ( $\mu\text{m}$ )	Bubble Point <sup>1</sup>		Flow Rate <sup>2</sup>		Porosity <sup>3</sup> (%)	Thickness <sup>4</sup> ( $\mu\text{m}$ )
	MPa	psi	Water (ml/min/cm <sup>2</sup> )	Air (L/min/cm <sup>2</sup> )		
0.20	$\geq 0.25$	$\geq 37.1$	16	2	66	125
0.45	$\geq 0.17$	$\geq 25.9$	35	4	68	125
0.80	$\geq 0.068$	$\geq 10.0$	160	14	72	125
3.00	$\geq 0.034$	$\geq 5.0$	500	54	78	135

- Wetting time: <3 seconds to wet a 47 mm diameter disc with aqueous 1% methylene blue
- Refractive index = 1.47
- Maximum Operating Temperature 180°

### Definitions:

1. Bubble point is the minimum pressure required to force air through a membrane which has been prewet with water
2. Flow Rate indicates initial flow rate at 10 psi using a KGS 47 filter holder
  - Water: using water prefiltered to 0.1  $\mu\text{m}$  pore size
  - Air: using prefiltered nitrogen at 10 psi
3. Porosity refers to the percent open area
4. Average thickness

## Ash Content of White Plain Cellulose Acetate Membrane Filters (ppm)

<b>Al</b>	<5.0	<b>K</b>	2.0	<b>Ni</b>	<0.5
<b>Ca</b>	36.4	<b>Li</b>	<0.5	<b>Pb</b>	<0.5
<b>Cd</b>	<0.1	<b>Mg</b>	1.9	<b>Si</b>	7.8
<b>Cr</b>	2.2	<b>Mn</b>	<0.5	<b>Sn</b>	<0.5
<b>Cu</b>	1.2	<b>Mo</b>	<0.5	<b>Ti</b>	<5.0
<b>Fe</b>	1.6	<b>Na</b>	5.9	<b>Zn</b>	0.6

**ORDERING INFORMATION: CELLULOSE ACETATE – NONSTERILE****Plain White, package of 100 disks**

Pore Size (µm)	13 mm	25 mm	47 mm	50 mm
0.20	C020A013A	C020A025A	C020A047A	-
0.45	C045A013A	C045A025A	C045A047A	C045A050A
0.80	C080A013A	C080A025A	C080A047A	-
3.00	C300A013A	C300A025A	C300A047A	C300A050A

**Plain White, package of 25 disks**

Pore Size (µm)	90 mm	142 mm	293 mm	293/60 mm*
0.20	C020A090C	C020A142C	C020A293C	C020A293H
0.45	C045A090C	C045A142C	C045A293C	C045A293H
0.80	C080A090C	C080A142C	C080A293C	C080A293H
3.00	C300A090C	C300A142C	C300A293C	C300A293H

\*60 mm center hole

**Rolls, Plain White, 33 cm x 3 m**

Pore Size (µm)	Roll
0.20	C020A330R
0.45	C045A330R
0.80	C080A330R

Also available in:

- Cartridge format
- Disposable syringe filter units



**COSMOS SUPPLY CO., LTD**  
บริษัท คอสโมส ซัพพลาย จำกัด

202 ซอย ลาดพร้าว 96 ถนน ลาดพร้าว แขวง พลับพลา เขต วังทองหลาง กรุงเทพฯ 10310

E\_mail : [cosmos\\_supply@yahoo.co.th](mailto:cosmos_supply@yahoo.co.th) , [cosmos\\_supply@hotmail.com](mailto:cosmos_supply@hotmail.com)

Tel. 0-2931-8232-3 , Fax. 0-2931-8234 Website : [www.cosmos-supply.com](http://www.cosmos-supply.com)




## Coated Cellulose Acetate

- **Composition:** Cellulose acetate cast onto a non-woven polyester support
- **Characteristics:** Non-fiber releasing
- **Low protein binding** relative to nitrocellulose
- **Low static charge** matrix with enhanced chemical compatibility to low molecular weight alcohols

### APPLICATION

- Use as a clarifying filter or prefilter

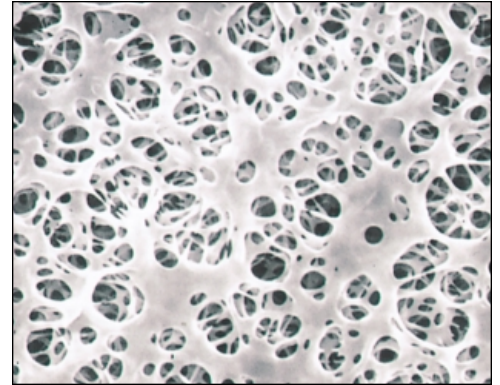

Coated Cellulose Acetate

### SPECIFICATIONS: COATED CELLULOSE ACETATE (CMF) CODE Y

Nominal Rating (µm)	Bubble Point <sup>1</sup>		Flow Rate <sup>2</sup>		% Latex Particle Retention (particle size in µm)							
	MPa	psi	Water (ml/min/cm <sup>2</sup> )	Air (L/min/cm <sup>2</sup> )	0.48	0.65	0.80	1	2	3	5	10
0.80	≥0.088	≥12.8	100	10	99	99	>99.9	-	-	-	-	-
2.00	≥0.049	≥7.1	290	32	96	99	99	99	>99.9	-	-	-
10.00	≥0.017	≥2.6	750	80	-	-	-	-	98	99.9	99.9	>99.9

#### Definitions:

1. Bubble point is the minimum pressure required to force air through a membrane which has been prewet with water.
2. Flow Rate indicates initial flow rate at 10 psi using a KGS 47 filter holder.  
 Water: using water prefiltered to 0.1 µm pore size  
 Air: using prefiltered nitrogen at 10 psi

### ORDERING INFORMATION: COATED CELLULOSE ACETATE – NONSTERILE

#### Plain White, package of 100 disks

Nominal Rating (µm)	35 mm	47 mm	76 mm	90 mm	124 mm	142 mm	257 mm	293 mm
0.80	Y008A035A	Y008A047A	Y008A076A	Y008A090A	Y008A124A	Y008A142A	Y008A257A	Y008A293A
2.00	Y020A035A	Y020A047A	Y020A076A	Y020A090A	Y020A124A	Y020A142A	Y020A257A	Y020A293A
10.00	Y100A035A	Y100A047A	Y100A076A	Y100A090A	Y100A124A	Y100A142A	Y100A257A	Y100A293A

Also available in:

- Cartridge format (TCY and TCYE)




## Hydrophilic PTFE

- **Characteristics:** Maximum chemical and pH resistance
- **High flow rates** with minimal aqueous extractables (<0.3 wt%)
- **Optically clear** when wet with water
- **Non-supported**

### APPLICATION

- Ideal for HPLC and other mixtures of aqueous and organic solvents

**Note:** Autoclaving or allowing membrane to dry will render it hydrophobic.

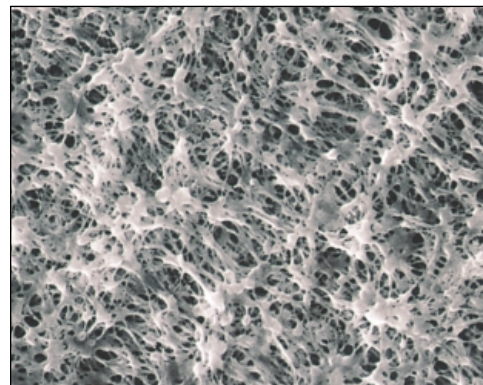

Hydrophilic PTFE

### SPECIFICATIONS: HYDROPHILIC PTFE MEMBRANE, CODE H

Pore Size ( $\mu\text{m}$ )	Bubble Point <sup>1</sup>		Flow Rates <sup>2</sup>		Porosity <sup>3</sup> (%)	Thickness ( $\mu\text{m}$ )	Maximum Operating Temperature (°C)
	MPa	psi	Water (ml/min/cm <sup>2</sup> )	Air (L/min/cm <sup>2</sup> )			
0.10	≥0.38	≥21.3	14	1.6	71	35	100
0.20	≥0.24	≥11.4	21	2.1	71	35	100
0.50	≥0.14	≥5.7	39	2.9	79	35	100
1.00	≥0.083	≥2.1	73	5.7	83	35	100

#### Definitions:

1. Bubble point is the minimum pressure required to force air through a membrane which has been prewet with water
2. Flow rate indicates initial flow rate at 10 psi using a KGS 47 filter holder  
Water: using water prefiltered to 0.1  $\mu\text{m}$  pore size  
Air: using prefiltered nitrogen at 10 psi
3. Porosity refers to the percent open area

#### Trace Metal Content (ppm)

Al	15	K	8
Ca	13	Mg	1
Cr	<1	Mn	0.1
Cu	0.5	Na	20
Fe	<10	Ni	0.9

### ORDERING INFORMATION: HYDROPHILIC PTFE – NONSTERILE

Plain White, package of 100 disks

Pore Size ( $\mu\text{m}$ )	13 mm	25 mm	47 mm	90 mm	142 mm	293 mm
	package of 100			package of 25		
0.10	H010A013A	H010A025A	H010A047A	H010A090C	H010A142C	H010A293C
0.20	H020A013A	H020A025A	H020A047A	H020A090C	H020A142C	H020A293C
0.50	H050A013A	H050A025A	H050A047A	H050A090C	H050A142C	H050A293C
1.00	H100A013A	H100A025A	H100A047A	H100A090C	H100A142C	H100A293C

Also available in:


- Cartridge format
- Capsule format
- Disposable syringe filter units

## Hydrophobic PTFE

- **Properties:** Thin, highly porous, behaves as an absolute retentive membrane
- **Supported:** polypropylene laminated to one side to improve handling
- **Inert** to most chemically aggressive solvents, strong acids and bases
- **Thermostable:** can be used up to 100°C

## APPLICATIONS

- Sterilize gases: traps aqueous aerosols
- Air and gas venting: allows gases to pass freely while blocking aqueous liquids, protect vacuum pumps and critical samples
- Sterilize and clarify strong acids and many other solvents incompatible with other membrane

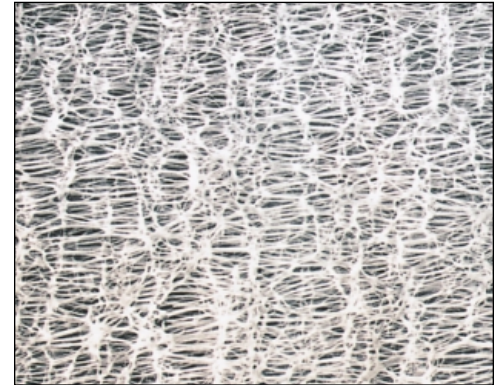

Hydrophobic PTFE

## SPECIFICATIONS: HYDROPHOBIC PTFE MEMBRANE, SUPPORTED, CODE J

Pore Size ( $\mu\text{m}$ )	Bubble Point <sup>1</sup>		Flow Rates <sup>2</sup>		Porosity <sup>3</sup> (%)	Maximum Operating Temperature (°C)	Water Break Through	
	MPa	psi	Acetone (ml/min/cm <sup>2</sup> )	Air (L/min/cm <sup>2</sup> )			MPa	psi
0.20	≥0.097	≥14.1	61.4	4.5	72	120	0.275	40.0
0.50	≥0.058	≥8.5	110	7.5	74	120	0.138	20.1
1.00	≥0.029	≥4.3	445	17	76	120	0.048	7.0

### Definitions:

1. Bubble point is the minimum pressure required to force air through a membrane which has been prewet with methanol
2. Flow rates determined under constant vacuum 0.7 kg/cm<sup>2</sup> (10 psi)
3. Porosity refers to the percent open area

## ORDERING INFORMATION: HYDROPHOBIC PTFE – NONSTERILE

### Plain White disks

Pore Size ( $\mu\text{m}$ )	13 mm	25 mm	47 mm	90 mm	142 mm	293 mm
	Package of 100			Package of 25		Package of 10
0.20	J020A013A	J020A025A	J020A047A	J020A090C	J020A142C	J020A293D
0.50	J050A013A	J050A025A	J050A047A	J050A090C	J050A142C	J050A293D
1.00	J100A013A	J100A025A	J100A047A	J100A090C	J100A142C	J100A293D

Also available in:

- Cartridge format
- Capsule format
- Disposable syringe filter units

## Nylon

- **Composition:** Very strong, heat resistant membranes are manufactured by impregnating a polyester web with the nylon polymer
- **Inherently hydrophilic**
- **Compatible** with aqueous and alcoholic solutions and solvents
- **Pure:** negligible organic extractibles
- **Binds** proteins, DNA and RNA

## APPLICATIONS

- Suitable for HPLC sample preparation
- Filter sterilize and clarify aqueous and organic solvent solutions including buffers, microbiological and tissue culture solutions
- Vacuum degassing

## SPECIFICATIONS: NYLON MEMBRANE, CODE N

Pore Size ( $\mu\text{m}$ )	Bubble Point <sup>1</sup>		Flow Rates <sup>2</sup>	
	MPa	psi	Water (ml/min/cm <sup>2</sup> )	Air (L/min/cm <sup>2</sup> )
0.10	0.48	70	3.5	0.6
0.22	0.31	46	10	1.7
0.45	0.19	29	27	3.2
0.65	0.10	16	60	4.5
0.80	0.089	14	100	14
1.20	0.059	9	190	18
5.00	0.039	6	360	34

Wetting time: <3 seconds to wet a 47 mm diameter disc with aqueous 1% methylene blue  
 Maximum Operating Temperature = 180°C  
 Thickness: 110  $\mu\text{m}$

### Definitions:

1. Bubble point is the minimum pressure required to force air through a membrane which has been prewet with water
2. Flow rate indicates initial flow rate at 10 psi using a KGS 47 filter holder  
 Water: using water prefiltered to 0.1  $\mu\text{m}$  pore size  
 Air: using prefiltered nitrogen at 10 psi

## ORDERING INFORMATION: NYLON – NONSTERILE

### Plain White disks

Pore Size ( $\mu\text{m}$ )	Diameter (mm)					
	13 mm	25 mm	47 mm	90 mm	142 mm	293 mm
	100 per package			25 per package		
0.10	N010A013A	N010A025A	N010A047A	N010A090C	N010A142C	N010A293C
0.22	N022A013A	N022A025A	N022A047A	N022A090C	N022A142C	N022A293C
0.45	N045A013A	N045A025A	N045A047A	N045A090C	N045A142C	N045A293C
0.65	N065A013A	N065A025A	N065A047A	N065A090C	N065A142C	N065A293C
0.80	N080A013A	N080A025A	N080A047A	N080A090C	N080A142C	N080A293C
1.20	N120A013A	N120A025A	N120A047A	N120A090C	N120A142C	N120A293C
5.00	N500A013A	N500A025A	N500A047A	N500A090C	N500A142C	N500A293C

Also available in:


- Disposable syringe filter units

## Polycarbonate

- **Characteristics:** Low non-specific binding and optically translucent, extremely uniform, cylindrical pores
- **Thin screen-type membranes** minimize entrapment within the filter structure; resulting in surface capture of particles on the membrane
- **Stable:** excellent chemical resistance, good thermal stability, non-hygroscopic and extremely weight stable

## APPLICATIONS

- Epifluorescence microscopy: available in black for this method
- Electron microscopy: smooth surface is ideal for observing captured particles
- Light microscopy: easily transparentized for optical illumination
- Beverage and sterility testing

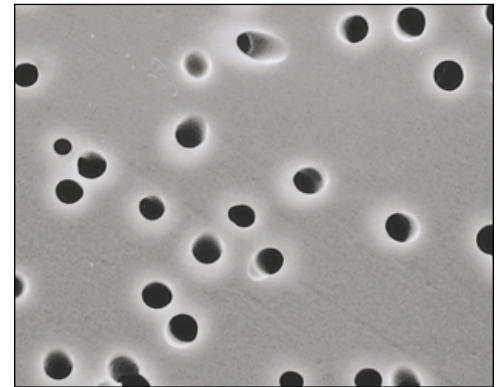

Polycarbonate

## SPECIFICATIONS: POLYCARBONATE MEMBRANE, CODE K

Pore Size ( $\mu\text{m}$ )	Bubble Point <sup>1</sup>		Flow Rates <sup>2</sup>		Nominal Thickness ( $\mu\text{m}$ )
	MPa	psi	Water (ml/min/cm <sup>2</sup> )	Air (L/min/cm <sup>2</sup> )	
0.10	$\geq 0.22$	>100	2	2	6
0.20	$\geq 0.13$	72	17	4	10
0.40	$\geq 0.082$	36	41	10	10
0.80	$\geq 0.048$	18	120	20	9
1.00	$\geq 0.058$	14	170	25	11
3.00	$\geq 0.021$	5	600	50	9
8.00	$\geq 0.0048$	>2	1300	40	7

Maximum operating temperature = 140°C

### Definitions:

1. Bubble point is the minimum pressure required to force air through a membrane which has been prewet with isopropanol
2. Flow rate indicates initial flow rate at 10 psi using a KGS 47 filter holder  
 Water: using water prefiltered to 0.1  $\mu\text{m}$  pore size  
 Air: using prefiltered nitrogen at 10 psi

## ORDERING INFORMATION: POLYCARBONATE – NONSTERILE

### Plain White, package of 100 disks

Pore Size ( $\mu\text{m}$ )	13 mm	25 mm	47 mm
0.10	K010A013A	K010A025A	K010A047A
0.20	K020A013A	K020A025A	K020A047A
0.40	K040A013A	K040A025A	K040A047A
0.80	K080A013A	K080A025A	K080A047A
1.00	-	-	K100A047A
3.00	-	-	K300A047A
8.00	K800A013A	K800A025A	K800A047A

### Plain Black, package of 100 disks

Pore Size ( $\mu\text{m}$ )	13 mm	25 mm	47 mm
0.20	-	K020N025A	K020N047A
0.40	-	K040N025A	K040N047A

## Polyvinylchloride (PVC)

- **Composition:** prepared from homopolymer PVC (polyvinylchloride)
- **Characteristics:** naturally hydrophobic, excellent weight stability
- **Pure:** silica-free, no additives or modifiers

## APPLICATIONS

- Suitable for particulate analysis
- Electron microscopy: smooth surface is ideal for observing captured particles
- Ideal for industrial hygiene monitoring

## ORDERING INFORMATION: POLYVINYLCHLORIDE (PVC) CODE P

Pore Size ( $\mu\text{m}$ )	Available in in these diameters:			8 x 10 inch sheets
	13 mm	25 mm	47 mm	
	50/pkg	100/pkg	50/pkg	
0.50	P050A025A	-	-	-
0.80	P080A025A	P080A037A	P080A047A	P0808X10IN
5.00	P500A025A	P500A037A	P500A047A	P5008X10IN



**COSMOS SUPPLY CO.,LTD**  
บริษัท ดาวสมพล ซัพพลาย จำกัด

202 ซอย ลาดพร้าว 96 ถนน ลาดพร้าว แขวง พลับพลา เขต จันทองหลาง กรุงเทพฯ 10310

E\_mail : [cosmos\\_supply@yahoo.co.th](mailto:cosmos_supply@yahoo.co.th) , [cosmos\\_supply@hotmail.com](mailto:cosmos_supply@hotmail.com)

Tel. 0-2931-8232-3 , Fax. 0-2931-8234 Website : [www.cosmos-supply.com](http://www.cosmos-supply.com)

## Disposable Syringe Filter Units

- **Minimum sample hold-up:** Unit housings are specifically designed to maximize sample recovery
- **High purity:** Non-pigmented housing and integral filter sealing assure that filtrates will not be adulterated due to pigment, dye, or adhesives leaching into the filtrate
- **Convenient:** Each unit is clearly marked with an identifying code to denote pore size, membrane material and housing polymer
- **Sterile:** Units can be purchased presterilized and individually packaged, or nonsterile in bulk pack (all polypropylene can be autoclaved)



MFS 3, 13, 25, and 50 disposable syringe filter units.

## SPECIFICATIONS

		MFS 3	MFS 13	MFS 25		MFS 50
Housing material	-	PP	PP	PP	Acrylic	PP
Housing Diameter	mm	3	13	25	25	50
Filtration Area	cm <sup>2</sup>	0.06	0.9	4.0	4.0	19.6
Hold-up Volume	ml	<0.01	<0.03	<0.1	<0.1	<3.0
Suggested capacity per filter unit	ml	<2 ml	<10 ml	<100 ml	<100 ml	>100 ml
Pressure limit	kg/cm <sup>2</sup>	5.3	4.0	4.0	5.3	3.5
	psi	75	56	56	75	50
Maximum Temperature	°C	60	60	60	45	60
	°F	140	140	140	113	140
Connections	-	inlet: female luer-lock outlet: male luer slip				7-13.5 mm hose barb

### Mixed Cellulose Esters (MCE, Nitrocellulose)

- Properties: A hydrophilic membrane
- Higher protein binding than cellulose acetate for most proteins
- High porosity provides a high flow rate
- Autoclavable: stable to 121°C

### Nylon

- Properties: Strong, hydrophilic membrane
- Compatible with aqueous and alcoholic solutions, as well as most HPLC solvents.
- Convenient: Prewetting not required
- Pure: Minimum extractibles
- High binding capacity for proteins, DNA and RNA
- Autoclavable: stable to 180°C

### Cellulose Acetate (Acetate)

- Standard: A commonly used hydrophilic membrane
- Low protein binding, suitable for aqueous protein solutions
- Nitrate-free, suitable for groundwater filtration
- Housing material: polypropylene (3, 13, 50 mm) or styreneacrylonitrile (25 mm)

### PTFE, hydrophilic

- Versatile: Good chemical resistance
- Compatible with many solvent mixtures used in HPLC, e.g. Acetonitrile/Water

### PTFE, hydrophobic

- Application: use as vent

For ordering information, see page 16.

## ORDERING INFORMATION: DISPOSABLE SYRINGE FILTER UNITS

Diam.	Membrane material	Pore size (µm)	Housing material	Quantity per package	Nonsterile	Sterile
3	Nylon	0.22	Polypropylene	200	03NP022AN	-
		0.45	Polypropylene	200	03NP045AN	-
		5.00	Polypropylene	100	03NP500AN	-
	Cellulose Acetate	0.20	Polypropylene	100	03CP020AN	03CP020AS
		0.45	Polypropylene	100	03CP045AN	03CP045AS
	PTFE, phobic	0.50	Polypropylene	100	03JP050AN	-

MFS 3



13	Nylon	0.22	Polypropylene	100	13NP022AN	-
		0.45	Polypropylene	100	13NP045AN	-
	Cellulose Acetate	0.20	Polypropylene	100	13CP020AN	13CP020AS
		0.45	Polypropylene	100	13CP045AN	13CP045AS
	PTFE, philic	0.20	Polypropylene	100	13HP020AN	-
		0.50	Polypropylene	100	13HP050AN	-
	PTFE, phobic	0.20	Polypropylene	100	13JP020AN	-
		0.50	Polypropylene	100	13JP050AN	-

MFS 13



25	MCE	0.20	Acrylic	50	25AS020AN	25AS020AS
		0.45	Acrylic	50	25AS045AN	25AS045AS
	Nylon	0.10	Polypropylene	100	25NP010AN	-
		0.10	Acrylic	50	25NS010AN	25NS010AS
		0.22	Polypropylene	100	25NP022AN	-
		0.22	Acrylic	100	-	25NS022AS
		0.45	Polypropylene	100	25NP045AN	-
		0.45	Acrylic	100	-	25NS045AS
		1.20	Polypropylene	100	25NP120AN	-
		1.20	Acrylic	50	-	25NS120AS
		5.00	Polypropylene	100	25NP500AN	-
	Cellulose Acetate	0.20	Acrylic	50	25CS020AN	25CS020AS
		0.45	Acrylic	50	25CS045AN	25CS045AS
		0.80	Acrylic	50	25CS080AN	25CS080AS
		0.20	Polypropylene	50	25JP020AN	25JP020AS
	PTFE, phobic	0.20	Polypropylene	50	25JP020AN	25JP020AS
		0.50	Polypropylene	50	25JP050AN	-

MFS 25 PP



MFS 25 Acrylic



50	Cellulose Acetate	0.20	Polypropylene	10	50CP020AN	50CP020AS
	PTFE, phobic	0.20	Polypropylene	10	50JP020AN	50JP020AS
		0.50	Polypropylene	10	50JP050AN	-

MFS 50



**ADVANTEC**  
**MFS, Inc.**

6723 Sierra Court, Suite A  
Dublin, California  
94568 U.S.A.  
1 (800) 334-7132  
(925) 479-0625  
Fax: (925) 479-0630  
[www.advantecmfs.com](http://www.advantecmfs.com)



***COSMOS SUPPLY CO.,LTD***  
***บริษัท ดอสมบวส ซัพพลาย จำกัด***

202 ซอย ลาดพร้าว 96 ถนน ลาดพร้าว แขวง หลักศิลา เขต วังทองหลาง กรุงเทพฯ 10310

E\_mail : [cosmos\\_supply@yahoo.co.th](mailto:cosmos_supply@yahoo.co.th) , [cosmos\\_supply@hotmail.com](mailto:cosmos_supply@hotmail.com)

Tel. 0-2931-8232-3 , Fax. 0-2931-8234 Website : [www.cosmos-supply.com](http://www.cosmos-supply.com)