


GRAM K3 Condor



Effortless weighing of large loads

- Very low platform with access ramps.
- Only 50 mm in height, faster weighing.
- Wide access ramps for stowing without having to manoeuvre.
- EP model, suitable for weighing Euro pallets with pallet truck.
- Check and sort products by weight using our 3-colour display..
- Customisable ticket or label header and footer, also with date and time.

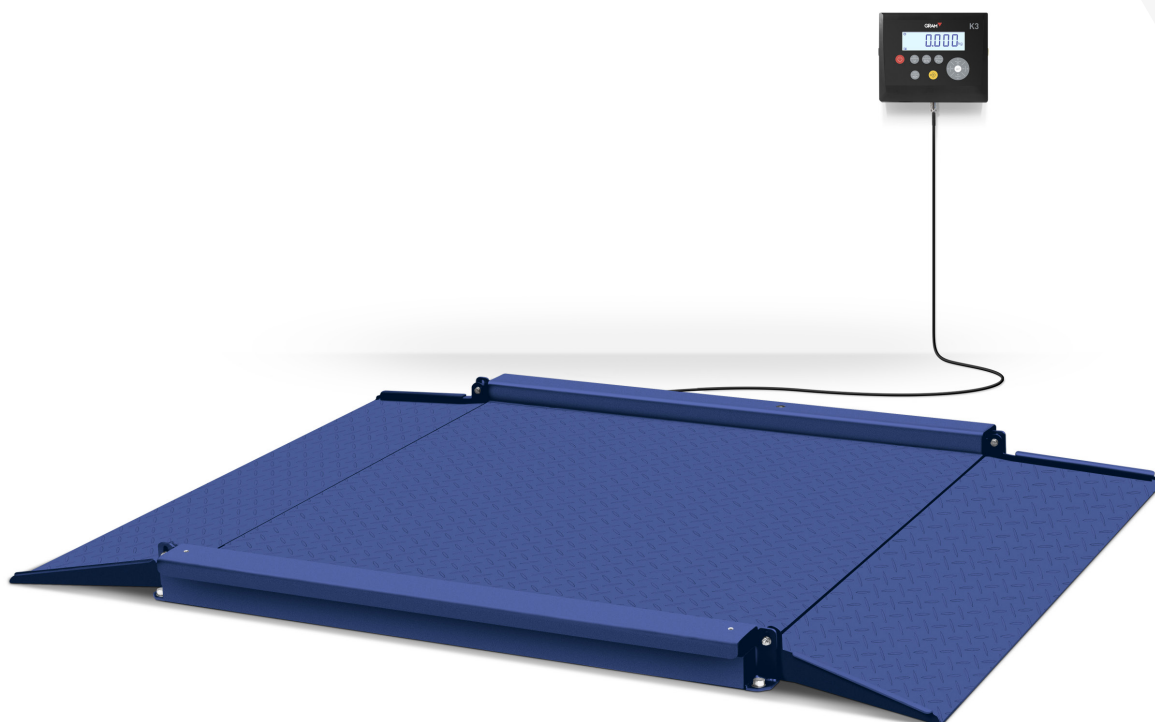

Functions:


- Memory for 20 preset tares.
- Sum of weighings with totalization.
- Memory for 100 items with alphanumerical code.
 - Piece-counting function with unit weight memory, up to 100 items.
- Checkweighing by colour: Set three different colours for easy product sorting by weight.
- Customisable ticket or label header and footer, also with date and time.
 - GMP/GLP, Wireless, USB Direct, EX Link.

Special model for Euro pallets

Our EP model is especially suitable for weighing Euro pallets, with space for the pallet and the pallet truck.

Minimal effort

Thanks to its height of only 50 mm and its wide ramps, you can flexibly load pallets to the scale with no effort.

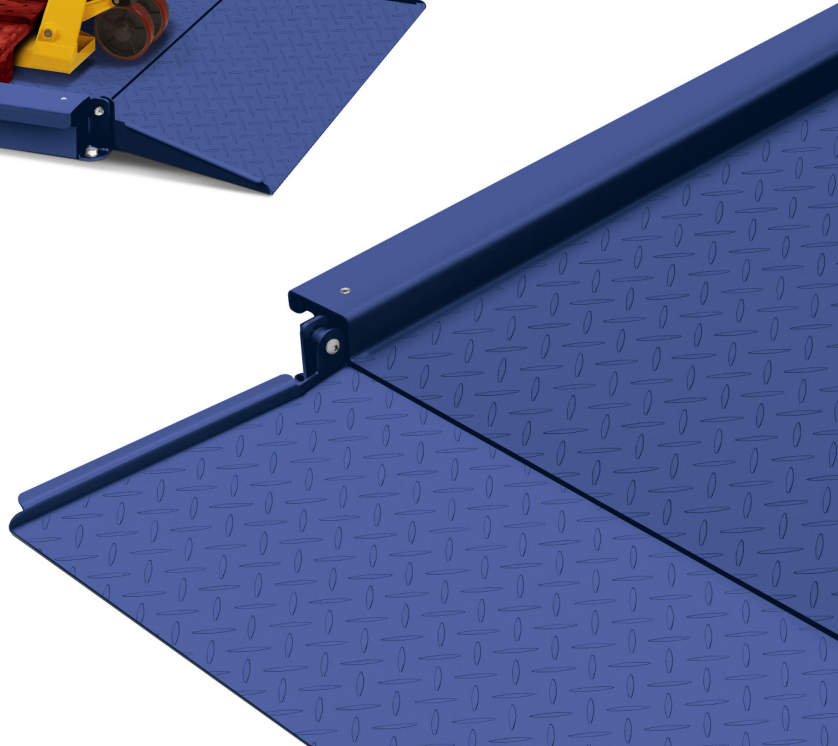


Foldable


Its two access ramps are easy to fold to gain space when not in use.

External dimensions (mm)


K3 Condor 8080




K3 Condor EP

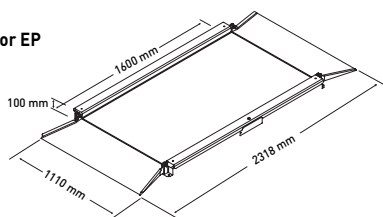

K3 Condor 1212

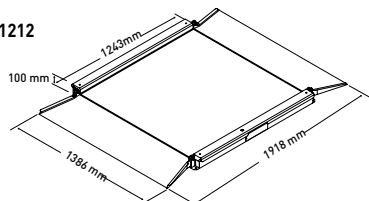

K3 Condor 1515

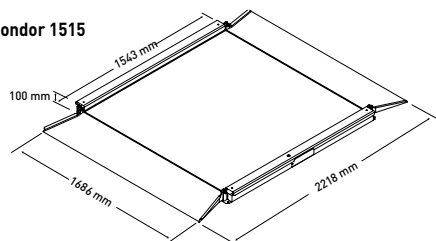

Model	K3 CONDOR 8080-600	K3 CONDOR EP-1,5T	K3 CONDOR EP-3T	K3 CONDOR 1212-1,5T	K3 CONDOR 1212-3T	K3 CONDOR 1515-1,5T	K3 CONDOR 1515-3T
Reference	60757	71156	71157	6354	6355	6356	6357
Capacity	600 kg	1500 kg	3000 kg	1500 kg	3000 kg	1500 kg	3000 kg
Resolution	100 g	500 g	1000 g	500 g	1000 g	500 g	1000 g
Weighing units	g, kg, lb, oz						
Display	Backlit LCD						
Acoustic warning	Yes						
Connectivity	RS 232-C, Wireless (optional)						
Transmission speed	1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 bauds						
Number of bits and parity	8 bits, no parity, 1 bit stop						
Power	230 V / 50 Hz (Euro) 11 V AC						
Battery	6V-5AH; Service time 25/60 hours depending on use						
Working temperature	+5°C / +35°C						
Sheet metal thickness	5 mm						
Structure	Steel coated in kiln-fired epoxy resin						
Load cells	4 stainless steel load cells						
Junction box	Hermetic with IP-68 protection, in AISI 304 stainless steel						
Dim. weighing area (mm)	800 X 800	1600 x 900		1200 x 1200		1500 x 1500	
Dim. when folded (mm)	843 X 986	1648 x 1110		1243 x 1386		1543 x 1686	
Dim. when open (mm)	1518 x 986	2318 x 1110		1918 x 1386		2218 x 1686	
Height when folded (mm)	168 mm						
Height when open (mm)	100 mm						
Platform net weight (kg)	96	165		161		220	
Packaging dim. (mm)	873X1016x372	1678 x 1140 x 372		1273 x 1416 x 372		1573 x 1716 x 372	
Total weight with packaging	105	180		174		236	



► K3i INDICATOR

Ref.	Model	Resolution
6171	K3i	100,000 divisions



► K3i Printer INDICATOR

Ref.	Model	Resolution
60960	K3i Printer	100,000 divisions



► SC2 INDICATOR

Ref.	Model	Resolution
5305	SC2 (*)	30,000 divisions



► K4i INDICATOR

Ref.	Model	Resolution
60136	K4i (*) M	30,000 / 60,000 div.



► K2 INDICATOR

Ref.	Model	Resolution
60018	K2 (*) M	60,000 divisions



► K2E INDICATOR

Ref.	Model	Resolution
60020	K2E (*) M	60,000 divisions



► K2N INDICATOR

Ref.	Model	Resolution
60019	K2N (*) M	60,000 divisions



► K2P INDICATOR

Ref.	Model	Resolution
60022	K2P (*) M	60,000 divisions



► VERIFICATION

Ref.	Certifications
8016	CE verification certificate from 301 kg to 600 kg (*) M
8031	CE verification certificate from 601 kg to 1500 kg (*) M
8032	CE verification certificate from 1501 kg to 3000 kg (*) M

Ref.	Certifications
8025	ISOCAL certificate from 301 kg to 600 kg
8029	ISOCAL certificate from 601 kg to 1500 kg
8030	ISOCAL certificate from 1501 kg to 3000 kg

M (*) For verified units, "M" indicator and Verification certificate have to be included.

► INDICATOR OPTIONS

Ref.	Model
32330	3-relay output (K3, K3i)
32277	Second RS-232 output (K3, K3i)
3776	Wireless K connection (K3, K3i)
60033	RS-232 (K2, SC2)
33772	RTC Board (K3, K3i)

► COLUMN BRACKETS / BASES

Ref.	Model
33207	ABS swivel base
3803	Stainless steel U tube base
32278	Stainless steel U wall support
31661	Wall support in painted steel with ABS swivel joint



Ref.	Model
3804	Painted steel base with column
3805	Stainless steel base with column
71337	Stainless steel base with K4i column



Indicator not included.

► CABLES

Ref.	Model
61084	Direct K USB cable
33205	RS-232 cable to RD3 or PC K, 1.5 m
3738	RS-232 cable to RD3 or PC K, 4 m
32294	RS-232 cable to K Printer
36767	RS-232 cable to PC (K2, SC2)
36766	RS-232 cable to Printer (K2, SC2)
36857	RS-232 cable to PC (K4i)
36858	RS-232 cable to Printer (K4i)



► PERIPHERALS

Ref.	Model
70814	Q2 labelling machine
70034	PR4 printer (RS-232)
70035	PR4W printer (Wireless)



Q2 labelling machine.



PR4 printer.

Ref.	Model
5263	RD3 repeater indicator (RS-232)
6950	RD3W repeater indicator (Wireless)



Ref.	Model
32332	Tare pedal (****)




Ref.	Model
60210	LED traffic light with relay board



► SOFTWARE

Ref.	Model
3792	EX-Link software for PC (**)



Ref.	Model
4877	PW-Link software for PC (***)



(**) Compatible with Z3, K3, K3i, S2, S3-RS, S5i-RS.

(***) Compatible with Z3, K3, K3i, K3i Printer, MK3, MK3 Printer, S2, S3, S5i, S7i.

(****) Compatible with K2, K3, K3i, K3i Printer, MK3, MK3 Printer, S2, S3, S5i, S7i.

gram-group.com