

# GRAM K3 Scorpion



## Maximum ease of loading

- Low-profile platform for weighing European pallets (72 mm height with optional LP feet).
- Weighing without the need for ramps.
- With wide front castors and handle for rapid location transfer.
- Produced in steel hot-coated in epoxy resin.
- Check and sort products by weight using our 3-colour display..
- Customisable ticket or label header and footer, also with date and time.




### Functions:

- Memory for 20 preset tares.
- Accumulation of weighings with aggregation.
- Memory for 100 items with alphanumerical code.
  - Piece-counting function with unit weight memory, up to 100 items.
  - Classification or verification by weight with viewing in 3 bright colours.
  - Customisable ticket or label header and footer, also with date and time.
  - GMP/GLP, Wireless, USB Direct, EX Link.



### Ergonomics

With a wide handle for easy and safe shifting.


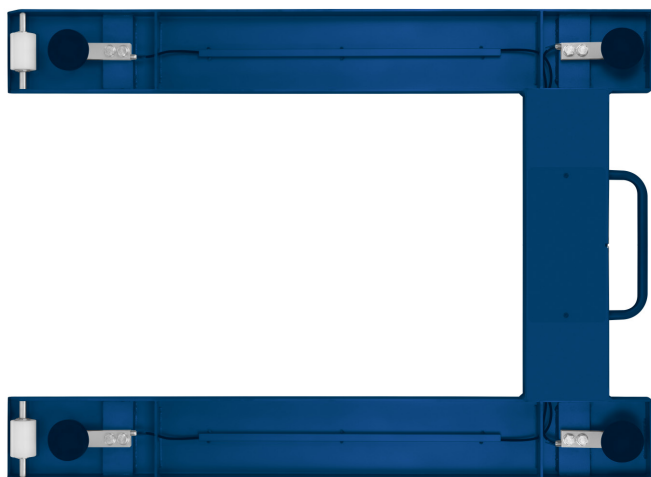


### Durability

Designed with protected cabling for durable use.


### External dimensions (mm)

#### K3 Scorpion

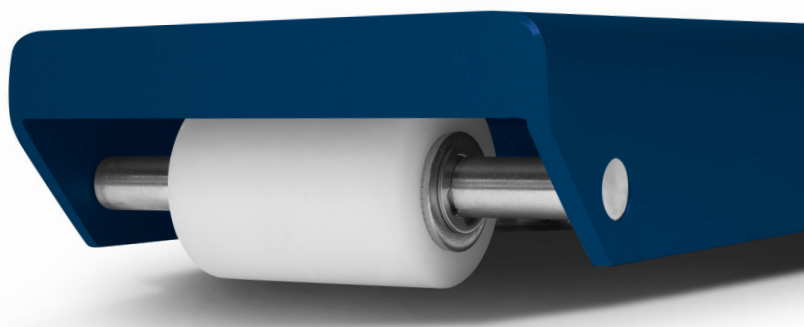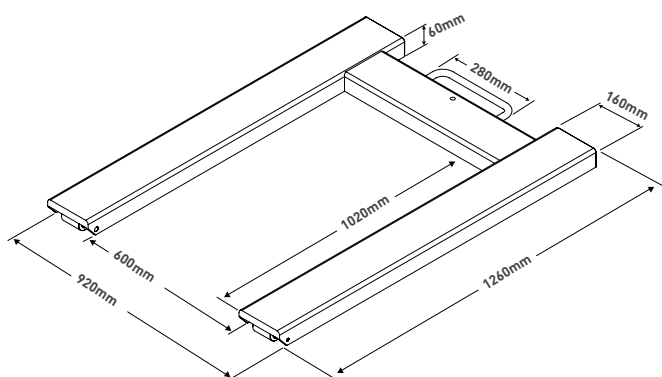

### Mobility

Equipped with wide nylon castors and bearings for smooth location transfer.



### Strength

Produced with a steel structure coated in kiln-fired epoxy resin, plus IP65 nickel-plated steel load cells.

Model	K3 Scorpion 1.5T	K3 Scorpion 3T
Reference	6363	70023
Capacity	1500 kg	3000 kg
Resolution	500g	1000g
Weighing units	g, kg, lb, oz	
Display	Backlit LCD	
Acoustic warning	Yes	
Connectivity	RS 232-C, Wireless (optional)	
Transmission speed	1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 bauds	
Number of bits and parity	8 bits, no parity, 1 bit stop	
Power	230 V / 50 Hz (Euro) 11 V AC	
Battery	6V-5AH; Service time 25/60 hours depending on use	
Working temperature	+5°C / +35°C	
Sheet metal thickness	5 mm	
Structure	Steel coated in kiln-fired epoxy resin	
Load cells	4 IP65 nickel-plated steel load cells	
Junction box	Hermetic with IP68 protection, in AISI 304 stainless steel	
Platform dim. (mm)	920 x 1290	
Minimum height	72 mm with LP feet (84 mm standard)	
Maximum height	86	
Platform net weight (kg)	50	
Packaging dim. (mm)	950 x 1300 x 92	
Total weight with packaging (kg)	71	
RRP (€)	570.00	570.00



## ► K3i INDICATOR

Ref.	Model	Resolution	RRP (€)
6171	K3i	100,000 divisions	+700,00



## ► K3i Printer INDICATOR

Ref.	Model	Resolution	RRP (€)
60960	K3i Printer	100,000 divisions	+240,00



## ► SC2 INDICATOR

Ref.	Model	Resolution	RRP (€)
5305	SC2 (*)	30,000 divisions	+15,00



## ► K4i INDICATOR

Ref.	Model	Resolution	RRP (€)
60136	K4i (*) <b>M</b>	30,000 / 60,000 div.	+140,00



## ► K2 INDICATOR

Ref.	Model	Resolution	RRP (€)
60018	K2 (*) <b>M</b>	60,000 divisions	+15,00



## ► K2E INDICATOR

Ref.	Model	Resolution	RRP (€)
60020	K2E (*) <b>M</b>	60,000 divisions	+15,00



## ► K2N INDICATOR

Ref.	Model	Resolution	RRP (€)
60019	K2N (*) <b>M</b>	60,000 divisions	+15,00



## ► K2P INDICATOR

Ref.	Model	Resolution	RRP (€)
60022	K2P (*) <b>M</b>	60,000 divisions	+15,00



## ► VERIFICATION

Ref.	Certifications	RRP (€)
8031	CE verification certificate from 601 kg to 1500 kg (*) <b>M</b>	90,00
8029	ISOCAL certificate from 601 kg to 1500 kg	90,00
8030	ISOCAL certificate from 1501 kg to 3000 kg	100,00

Ref.	Cells	RRP (€)
36943	C3 cells for Scorpion (*) <b>M</b>	190,00

**M** (\*) For verified equipment, one of the options C3 Cells, "M" indicator and Certificate of verification must be included.

## ► INDICATOR OPTIONS

Ref.	Model
32330	3-relay output (K3, K3i)
32277	Second RS-232 output (K3, K3i)
3776	Wireless K connection (K3, K3i)
60033	RS-232 (K2, SC2)

## ► COLUMN BRACKETS / BASES

Ref.	Model
33207	ABS swivel base
3803	Stainless steel U tube base
32278	Stainless steel U wall support
31661	Wall support in painted steel with ABS swivel joint



Ref.	Model
3804	Painted steel base with column
3805	Stainless steel base with column
71337	Stainless steel base with K4i column



Indicator not included.

## ► CABLES

Ref.	Model
61084	Direct K USB cable
33205	RS-232 cable to RD3 or PC K, 1.5 m
3738	RS-232 cable to RD3 or PC K, 4 m
32294	RS-232 cable to K Printer
36767	RS-232 cable to PC (K2, SC2)
36766	RS-232 cable to Printer (K2, SC2)
36857	RS-232 cable to PC (K4i)
36858	RS-232 cable to Printer (K4i)



## ► PERIPHERALS

Ref.	Model
70814	Q2 labelling machine
70034	PR4 printer (RS-232)
70035	PR4W printer (Wireless)



Q2 labelling machine.

Ref.	Accessories for labelling machines
36904	Q2 70x58mm label roll



PR4 printer.

Ref.	Model
5263	RD3 repeater indicator (RS-232)
6950	RD3W repeater indicator (Wireless)



Ref.	Model
32332	Tare pedal (****)



Ref.	Model
60210	LED traffic light with relay board




## ► PLATFORM ACCESSORIES

Ref.	Model
33763	LP feet low height stainless steel

## ► SOFTWARE

Ref.	Model
3792	EX-Link software for PC (**)



Ref.	Model
4877	PW-Link software for PC (***)



(\*\*) Compatible with Z3, K3, K3i, S2, S3-RS, S5i-RS.

(\*\*\*) Compatible with Z3, K3, K3i, K3i Printer, MK3, MK3 Printer, S2, S3, S5i, S7i.

(\*\*\*\*) Compatible with K2, K3, K3i, K3i Printer, MK3, MK3 Printer, S2, S3, S5i, S7i.

gram-group.com